

siunitx — A comprehensive (SI) units package*

Joseph Wright[†]

Released 2008/10/29

Abstract

Typesetting values with units requires care to ensure that the combined mathematical meaning of the value plus unit combination is clear. In particular, the SI units system lays down a consistent set of units with rules on how these are to be used. However, different countries and publishers have differing conventions on the exact appearance of numbers (and units).

The siunitx provides a set of tools for authors to typeset numbers and units in a consistent way. The package has an extended set of configuration options which make it possible to follow varying typographic conventions with the same input syntax. The package includes automated processing of numbers and units, and the ability to control tabular alignment of numbers.

A number of L^AT_EX packages have been developed in the past for formatting units: Slunits, Slstyle, unitsdef, units, fancyunits and fancynum. Support for users of all of these packages is available as emulation modules in siunitx. In addition, siunitx can carry out many of the functions of the dcolumn, rccol and numprint packages.

Contents		6 Angles	10
I Introduction	3	7 Units and values	11
		7.1 Literal units	11
		7.2 The unit interpreter . .	12
		7.3 Powers of units	12
		7.4 Units with no values . .	13
		7.5 Free-standing units . . .	13
		7.6 Pre-defined units, pre-	
		fixes and powers	13
		7.7 Prefixed and abbrevia-	
		ted units	14
		7.8 Defining new units . . .	18
II Using the siunitx package	4	8 Specialist units	19
1 For the impatient	4	8.1 Binary units (binary) .	19
2 Requirements	5	8.2 Synthetic chemistry	
3 Loading the package	5	(synchem)	20
4 Numbers	5	8.3 High-energy physics (hep)	20
5 Tabular material	7		
5.1 Aligning numbers	7		
5.2 Columns of units	9		

*This file describes version v1.1d, last revised 2008/10/29.

[†]E-mail: joseph.wright@morningstar2.co.uk

8.4	Astronomy (<code>astro</code>) . . .	20	14.5	Entire document in sans serif font	41
9	Font control	21	14.6	Effects of emulation . . .	41
10	Package options	22	14.7	Centring columns on non-decimal input	41
10.1	Font family and style .	22	14.8	Expanding content in tables	42
10.2	Spacing and separators	23	14.9	Adding items after the last column of a tabular	43
10.3	Number formatting . .	24	15	Reporting a problem	44
10.4	Angle formatting	26	16	Feature requests	45
10.5	Tabular material	27	17	Acknowledgements	45
10.6	Units	30	III	Correct application of (SI) units	46
10.7	Symbols	31	18	Background	46
10.8	Colour	32	19	Units	46
10.9	International support .	32	19.1	SI base units	46
10.10	Package control	33	19.2	SI derived units	46
10.11	Back-compatibility options	33	19.3	SI prefixes	47
10.12	Summary of all options	33	19.4	Other units	47
11	Emulation of other packages	37	20	Units and values in print	48
12	Configuration files	37	20.1	Mathematical meaning .	48
13	Common questions	38	20.2	Unit multiplication and division	48
13.1	Why do I need <code>\per</code> more than once?	38	20.3	Repeating units	49
13.2	Why is the order of my units changed?	38	20.4	Clarity in writing values of quantities	49
13.3	Why are compound units not recommended outside of <code>\SI/\si</code> ? . .	38	20.5	Graphs and tables . . .	49
13.4	How do I set superscripts to use lining numbers?	39	IV	Notes	52
13.5	Why do most of the examples use $\text{J mol}^{-1} \text{K}^{-1}$? . .	39	21	Change History	52
13.6	What can <code>numprint</code> do that <code>siunitx</code> cannot? . . .	39	22	Index	52
14	Tricks and known issues	39	23	References	57
14.1	Ensuring maths mode .	39			
14.2	Using . and fixed spaces in units	40			
14.3	Passing unprocessed digits through an <code>S</code> column	40			
14.4	Limitations of <code>\mathrm</code>	40			

Part I

Introduction

The correct application of units of measurement is very important in technical applications. For this reason, carefully-crafted definitions of a coherent units system have been laid down by the *Conférence Générale des Poids et Mesures*¹ (CGPM): this has resulted in the *Système International d'Unités*² (SI). At the same time, typographic conventions for correctly displaying both numbers and units exist to ensure that no loss of meaning occurs in printed matter.

siunitx aims to provide a unified method for L^AT_EX users to typeset units and values correctly and easily. The design philosophy of siunitx is to follow the agreed rules by default, but to allow variation through option settings. In this way, users can use siunitx to follow the requirements of publishers, co-authors, universities, *etc.* without needing to alter the input at all.

siunitx is intended as a complete replacement for Slunits, Slstyle, unitsdef, units, fancyunits and fancynum. As such, emulation modes are provided for all of these packages. Where possible, conventions from the existing solutions have been used here. For example, the macros `\num`, `\ang` and `\SI` act in a very similar fashion to those in existing packages.

¹General Conference on Weights and Measures.

²International System of Units.

Part II

Using the siunitx package

1 For the impatient

siunitx provides the user macros:

- `\SI[⟨options⟩]{⟨value⟩}[⟨pre-unit⟩]{⟨unit⟩}`
- `\si[⟨options⟩]{⟨unit⟩}`
- `\num[⟨options⟩]{⟨number⟩}`
- `\ang[⟨options⟩]{⟨angle⟩}`
- `\sisetup{⟨options⟩}`

plus the `S` and `s` column types for decimal alignments and units in tables. These macros are designed for typesetting units and values with control of appearance and with intelligent processing.

By default, all text is typeset in the current upright, serif maths font. This can be changed by setting the appropriate package options: `obeyall` will use the current font for typesetting.

The package includes a “unit processor”, which allows the use of named units or literal values. Named units are processed to correctly include powers.

10 g
23.4 g cm³
 1×10^{34}
1°2'3''
16.7 m s⁻¹
30 × 10³ Hz
1.2 mm × 3.56 mm × 9.2 mm
−4.5 cm
J mol⁻¹ K⁻¹
 $\frac{\text{J}}{\text{mol K}}$
1.2346
9.8000

Heading
1.3
134.2
3.56
74.7

```
\SI{10}{\gram}\\
\SI{23.4}{g.cm^3}\\
\num{1e34}\\
\ang{1;2;3}\\
\emph{\SI{16,7}{\metre\per\second}}\\
\textbf{\SI{30e3}{\Hz}}\\
\SI{1.2 x 3.56 x 9.2}{\milli\metre}\\
\sisetup{obeyall}
\textbf{\SI{-4.5}{\cm}}\\
\si{\joule\per\mole\per\kelvin}\\
\si[per=frac]{\joule\per\mole\per\kelvin}\\
\num[dp=4]{1.23456}\\
\num[dp=4]{9.8}\\
\begin{tabular}{S[tabformat=3.2]}
\toprule
{Heading}\\
\midrule
1.3 \\
134.2 \\
3.56 \\
74.7 \\
\bottomrule
\end{tabular}
```

2 Requirements

siunitx requires a reasonably up to date \TeX system. The package requires $\varepsilon\text{-}\text{\TeX}$ -extensions, which should be available on most systems.³ The following packages are also needed:

- array and xspace: from the tools bundle, which should be available to everyone;
- xkeyval: this processes the option handling, and needs to be at least v2.5;
- amstext: from the $\mathcal{A}\mathcal{M}\mathcal{S}\text{\TeX}$ support bundle (the $\mathcal{A}\mathcal{M}\mathcal{S}$ fonts are also needed to provide the default upright μ).

Hopefully most people using the package will have access to all of those items.

To use the `fraction=sfrac` option, the `xfrac` package is needed. This needs various experimental \LaTeX 3 packages. As a result, siunitx does not load `xfrac`. If you want to use `fraction=sfrac`, *you* need to load `xfrac` in your preamble before siunitx.⁴ If the package is not loaded, `fraction=sfrac` falls back on a nicefrac-like method. The interested user should look at the `xfrac` documentation for reasons this might not be ideal.⁵

3 Loading the package

siunitx is loaded by the usual \LaTeX method.

```
\usepackage[<options>]{siunitx}
```

As is shown in the example, the package can be loaded with one or more options, using the key–value system. The full range of package options are described in Section 10; some options are described in the along with the appropriate user macros. Most of the user macros accept the same key–value settings as an optional argument.

4 Numbers

`\num` Numbers are automatically formatted by the `\num` macro. This takes one optional and one mandatory argument: `\num[<options>]{<number>}`. The contents of `<number>` are automatically formatted, in a similar method to that used by `numprint`. The formatter removes “hard” spaces (`\`, and `~`), automatically identifies exponents (by default marked using `e` or `d`) and adds the appropriate spacing of large numbers. A leading zero is added before a decimal marker, if needed: both “.” and “,” are recognised as decimal marker.

1 123 1234 12 345	<code>\num{1}</code>	<code>\num{123}</code>	<code>\num{1234}</code>	<code>\num{12345}\</code>
0.1 0.123 0.1234 0.123 45	<code>\num{0.1}</code>	<code>\num{0.123}</code>	<code>\num{0, 1234}</code>	<code>\num{.12345}\</code>
1×10^{10} 3.45×10^{-4} -10^{10}	<code>\num{1e10}</code>	<code>\num{3.45d-4}</code>	<code>\num{-e10}</code>	

³If you have an old \LaTeX try “`elatex`” rather than “`latex`”.

⁴This document has been compiled in this way. You have to load `xfrac` first as otherwise very nasty things happen with `xkeyval`. $\text{MiK}\text{\TeX}$ users should note that the packaged versions of `expl3`, `template` and `xparse` will not work with `xfrac`: download copies from CTAN!

⁵On the other hand, some fractional units will look really bad with `\sfrac`. Use this option with caution.

Various error-checking systems are built into the package, so that if $\langle number \rangle$ does not contain any numeric characters, a warning is issued. Isolated signs are also detected. The package recognises (and) as “extra” characters, which can be used to indicate the error in a number.⁶ The `seperr` causes this data to be given as a separate error value. If the number also contains an exponent, then brackets are re-added after the separation to ensure that meaning is not lost.

$1.234(5) = 1.234 \pm 0.005$ `\num{1.234(5)} = \num[seperr]{1.234(5)}\$\`
 $1.234(5) \times 10^6 = (1.234 \pm 0.005) \times 10^6$ `\num{1.234(5)e6} = \num[seperr]{1.234(5)e6}\$`

The same applies to the unit and value macro `\SI`, described later, for example the rest mass of an electron [1]:

$m_e = 9.109\,389\,7(54) \times 10^{-31} \text{ kg}$ `\m_{\mathrm{e}}`
`= \SI{9.1093897(54)e-31}{\kg} \$`
 $m_e = (9.109\,389\,7 \pm 0.000\,005\,4) \times 10^{-31} \text{ kg}$ `\m_{\mathrm{e}}`
`= \SI[seperr]{9.1093897(54)e-31}{\kg} \$`

A number of effects are available as options. These are fully explained in Section 10. Some of the more useful options are illustrated here. By default, the output of the package is typeset in maths mode. However, the use of the current text font can be forced.⁷

$1\,234\,567\,890$ $1\,234\,567\,890$ `\num{1234567890}` `\num[mode=text]{1234567890}`

siunitx can automatically add zeros and signs to numbers. This can be altered as desired.

$1\,1.0$ `\num{1.}` `\num[padnumber=all]{1.}\`
 $2+2$ `\num{2}` `\num[addsign=all]{2}\`
 $3 \times 10^4 + 3 \times 10^4 + 3 \times 10^{+4}$ `\num{3e4}` `\num[addsign=mant]{3e4}` `\num[addsign=all]{3e4}\`
 $0.5\,5$ `\num{.5}` `\num[padnumber=none]{.5}`

The separation of digits can be turned on and off, and the output changed.

$1234\,1234$ `\num{1234}` `\num[sepfour=true]{1234}\`
 $12\,345\,12,345$ `\num{12345}` `\num[digitsep=comma]{12345}\`
 12345 `\num[digitsep=none]{12345}`

The formatting of exponents is also customisable.

1×10^{10} $1 \cdot 10^{10}$ `\num{1e10}` `\num[expproduct=cdot]{1e10}\`
 2×10^{20} 2×5^{20} `\num{2e20}` `\num[expbase=5]{2e20}\`
 3×10^{30} 3×10^{30} `\num{3e30}` `\num[expproduct=tighttimes]{3e30}`

siunitx can automatically add colour to negative numbers, which is often useful for highlighting purposes. This is turned on with the `colourneg` option; the colour used is set by `negcolour`. Both of these are available with the US spellings: `colorneg` and `negcolor`.

-1 `\num{-1}\`
 -2 `\ssetup{colourneg} \num{-2}\`
 3×10^{-3} `\num{3e-3}\`
 -4 `\num[negcolour=blue]{-4}`

⁶This is common in chemical crystallography, for example.

⁷This document is typeset using lowercase numbers in text mode, which emphasises the effect here.

siunitx can automatically zero-fill and round to a fixed number of decimal places. This is controlled by two options `fixdp` and `dp`. The later is an integer which specifies how many places to fix to; setting this option automatically sets `fixdp` to `true`. The place-fixing system will only alter pure numbers: for example, any error component will result in the input being left unchanged.

1.23456	<code>\num{1.23456}\</code>
1.23	<code>\sisetup{dp=2}</code>
9.80	<code>\num{1.23456}\</code>
-10.43	<code>\num{9.8}\</code>
44.3221(2)	<code>\num{-10.432}\</code>
	<code>\num{44.3221(2)}</code>

5 Tabular material

5.1 Aligning numbers

Centring numbers in tabular content is handled by a new column type, the `S` column. This is based closely on the `dcolum` method for centring numbers in columns, but adds the functionality of the `\num` macro.⁸

By default, the decimal marker of the number is placed at the centre of the column, which then resizes to accommodate the width of the contents (Table 1). This behaviour is set by the `tabnumalign=centredecimal` option. By setting the `tabnumalign` option to `centre`, the centre of the space reserved for the number is placed at the centre of the column. The space reserved is stored in `tabformat`, which is of the form `<before><dec><after>`, where `<before>` is the number of characters before the decimal marker and `<after>` is the number after. Thus in the example, `tabformat=2.4` provides space for two digits before the decimal marker and four after. `tabnumalign` can also be set to `left` and `right`, with the expected results.

```
\begin{table}
  \caption{Behaviour of \texttt{S} column type}
  \label{tab:default}
  \centering
  \begin{tabular}{%
    S%
    S[tabnumalign=centre,tabformat=2.4]%
    S[tabnumalign=right,tabformat=2.4]%
    S[tabnumalign=centre,tabformat=2.4,decimalsymbol=comma] }
  \toprule
  {Some Values} & {Some Values} & {Some Values} & {Some Values} \\
  \midrule
  2.3456 & 2.3456 & 2.3456 & 2.3456 \\
  34.2345 & 34.2345 & 34.2345 & 34.2345 \\
  56.7835 & 56.7835 & 56.7835 & 56.7835 \\
  90.473 & 90.473 & 90.473 & 90.473 \\
  \bottomrule
  \end{tabular}
\end{table}
```

⁸The approach used is actually a combination of `dcolum` for centring the material and `numprint` for processing it. It will therefore give rather different results than the `n` and `N` column types in `numprint`.

Table 1: Behaviour of S column type

Some Values	Some Values	Some Values	Some Values
2.3456	2.3456	2.3456	2,3456
34.2345	34.2345	34.2345	34,2345
56.7835	56.7835	56.7835	56,7835
90.473	90.473	90.473	90,473

The `tabformat` setting can also be used to reserve space for numbers containing exponents. This is given in the same format as above, but with a mantissa and exponent part (Table 2). Notice that this is designed to expect that numbers will contain a mantissa. Exponents can either be aligned so that the “ \times ” symbols match up vertically, or the exponent part can be allowed to move across as needed. Space for signs is added by using any sign in the `tabformat`, so for example `tabformat=+2.2` and `tabformat=-2.2` have exactly the same effect. Setting `tabformat` will automatically switch `tabnumalign` from `centredecimal` to `centre`, if the former is currently set. In other cases, the current alignment option is retained.

```
\begin{table}
\caption{Exponents in tables}
\label{tab:exptab}
\centering
\begin{tabular}{%
S[tabnumalign=right,tabformat=2.2e2]%
S[tabnumalign=centre,tabformat=2.2e1.1]%
S[tabnumalign=centre,tabformat=2.2e1.1,tabalignexp=false]%
S[tabnumalign=centre,tabformat=+2.2]}
\toprule
{Longer values}
& {Longer values}
& {Longer values}
& {Values} \\
\midrule
2.3e1 & 2.34e1 & 2.34e1 & +2.31 \\
34.23e45 & 34.23e45 & 34.23e45 & 34.23 \\
56.78 & 56.78 & 56.78 & -56.78 \\
1.0e34 & 1.0e34 & 1.0e34 & +-1.0 \\
\bottomrule
\end{tabular}
\end{table}
```

Data not to be processed as a number should be protected by wrapping it in braces: this is most likely to be true for column headers (again as illustrated). By default, the contents of non-numeric cells are centred. This can be altered by setting `tabtextalign`, which can be set to `left`, `right` or `centre`. The use of digit separators in table columns is accounted for: extra space is reserved if digit separators will be added.

Table 2: Exponents in tables

Longer values	Longer values	Longer values	Values
2.3×10^1	2.34×10^1	2.34×10^1	2.31
34.23×10^{45}	34.23×10^{45}	34.23×10^{45}	34.23
56.78	56.78	56.78	-56.78
1.0×10^{34}	1.0×10^{34}	1.0×10^{34}	± 1.0

Table 3: Number and units in tables

Value	Unit
2.16×10^{-5}	$\text{m}^2 \text{s}^{-1}$
2.83×10^{-6}	$\text{m}^2 \text{s}^{-1}$
7.39×10^3	$\text{Pa m}^3 \text{mol}^{-1}$
1.0×10^5	Pa

5.2 Columns of units

As a complement to the `S` column, `siunitx` also provides a second column type, `s`. This is intended for producing columns of units. The letters chosen are intended to be similar to `\SI` and `\si`, respectively. The alignment of material in `s` columns is governed by the `tabunitalign` option.

```
\begin{table}
\centering
\caption{Number and units in tables}
\label{tab:num-unit}
\begin{tabular}{%
  S[tabformat=1.2e-1,tabnumalign=centre]%
  s[tabunitalign=left]}
\toprule
{Value} & \multicolumn{1}{c}{Unit} \\
\midrule
2.16e-5 & \metre\squared\per\second \\
2.83e-6 & \metre\squared\per\second \\
7.39e3 & \pascal\cubic\metre\per\mole \\
1.0e5 & \pascal \\
\bottomrule
\end{tabular}
\end{table}
```

As the `\si` macro can take literal or macro input, the `s` column cannot validate the input. *Everything* in an `s` column is therefore passed to the `\si` macro for processing. To prevent this, you have to use `\multicolumn`, as is shown in [Table 4](#). Notice that the braces do not prevent processing and colouring of the cell contents.

```
\begin{table}
\centering
\caption{The \texttt{s} column processes everything}
```

Table 4: The `s` column processes everything

Unit	Unit
m^3	m^3
kg	kg

```
\label{tab:s-limits}
\begin{tabular}{%
s[colourall,colour=orange]%
s[colourall,colour=orange]}
\toprule
{Unit} & \multicolumn{1}{c}{Unit}\\
\midrule
{m^3} & \multicolumn{1}{c}{\si{m^3}} \\
\kilogram & \kilogram \\
\bottomrule
\end{tabular}
\end{table}
```

6 Angles

`\ang` Angles can be typeset using the `\ang` command. This takes two arguments, `\ang[⟨options⟩]{⟨angle⟩}`, where `⟨options⟩` can be any of the package options to apply only to this value. `⟨angle⟩` can be given either as a decimal number or as a semi-colon separated list of degrees, minutes and seconds, *i.e.* `\ang{⟨decimal angle⟩}` or `\ang{⟨degrees⟩;⟨minutes⟩;⟨seconds⟩}`. By default, no space is introduced between angles and the degrees, minutes and seconds markers.

$10^\circ 12.3^\circ 4.5^\circ$	<code>\ang{10} \ang{12.3} \ang{4,5}\</code>
$1^\circ 2' 3'' 0^\circ 1''$	<code>\ang{1;2;3} \ang{;;1}\</code>
$10^\circ -0^\circ 1'$	<code>\ang{+10;;} \ang{-0;1;}</code>

By default, angles with no degrees (or minutes) are zero-filled; angles with degrees but no minutes or seconds are not filled. This behaviour can be altered using the package options.

$0^\circ 0' 1'' 1''$	<code>\ang{;;1} \ang[padangle=none]{;;1}\</code>
$2^\circ 2' 0''$	<code>\ang{2;;} \ang[padangle=all]{2;;}\</code>
$0^\circ 3' 0'' 4^\circ 0' 0'' 0^\circ 0' 5''$	<code>\sisetup{padangle=all} \ang{;3;} \ang{4;;} \ang{;;5}</code>

The `\num` macro is used to typeset each number of the angle, so the options for `\num` also apply here. The `anglesep` value can be used to separate degrees, minutes and seconds.

$1.05^\circ 1.05^\circ$	<code>\ang{1.05} \ang[decimalsymbol=comma]{1.05}\</code>
$3.67890^\circ 3.67890^\circ$	<code>\ang{3.67890} \ang[digitsep=comma]{3.67890}\</code>
$9^\circ 8' 7'' 9^\circ 8' 7''$	<code>\ang{9;8;7} \ang[anglesep=thin]{9;8;7}</code>

The degrees, minutes and seconds signs can be placed over the decimal sign using the `astroang` option. This is designed on the assumption that only the last number given has a decimal part.

1.2° 1'2"	<code>\ang{1.2} \ang[astroang]{1.2}\</code>
1°2.3' 1°2'3"	<code>\ang{1;2.3;} \ang[astroang]{1;2.3;}\</code>
1°2'3.4'' 1°2'3''4	<code>\ang{1;2;3.4} \ang[astroang]{1;2;3.4}</code>

7 Units and values

`\SI` The core aim of `siunitx` is correctly typesetting values which have units. The main output macro here is `\SI`, which has the same syntax as the macros with the same name in `Sistyle` and `unitsdef` packages. The `\SI` macro takes two mandatory arguments, in addition to the optional set up argument, and a second optional argument: `\SI[options]{number}[preunit]{unit}`. The *number* argument operates in exactly the same manner as the equivalent argument of the `\num` macro. *unit* will be typeset with a non-breakable space between it and the preceding number, with font control as outlined earlier. Finally, *preunit* is a unit to be typeset *before* the numerical value (most likely to be a currency). Some examples illustrate the general power of the macro.

1.23 J mol ⁻¹ K ⁻¹	<code>\SI[mode=text]{1.23}{J.mol^{-1}.K^{-1}}\</code>
0.23 × 10 ⁷ cd	<code>\SI{.23e7}{\candela}\</code>
£1.99/kg	<code>\SI[per=slash]{1.99}{\pounds}{\per\kilogram}\</code>
70 m s ⁻¹	<code>\SI{70}{\metre\per\second}\</code>
1.345 A/mol	<code>\SI[per=frac,fraction=nice]{1,345}{\ampere\per\mole}</code>

The use of unit macros outside of the `\SI` macro is described later.

7.1 Literal units

Units can be input in two ways, inspired by `Sistyle` and `Slunits`. The `Sistyle`-like method uses literal input. Five characters have a special meaning:

- “^” and “_” The superscript and subscript characters can be used without the usual need for surrounding maths characters (\$);
- “.” and “,”: the full stop (point) symbol and comma are made active, and produce the current contents of the `unitsep` option;
- “~” The contents of the `unitspace` option are typeset by a tilde.

This allows ready input of units.

10 kg m s ⁻²	<code>\SI{10}{kg.m.s^{-2}}\</code>
1.453 g/cm ³	<code>\SI{1.453}{g/cm^3}\</code>
6.345 kg _{pol} mmol ⁻¹ _{cat}	<code>\SI{6.345}{kg_{pol}.mmol_{cat}^{-1}}\</code>
33.562 cd s	<code>\SI{33.562}{cd~s}\</code>
100 m s ⁻²	<code>\SI[unitsep=medium]{100}{m.s^{-2}}</code>

The literal unit system will correctly typeset input containing the symbols μ (micro), ° (degree) and Å (ring-A).⁹

10 μm	<code>\SI{10}{\mu m}\</code>
20 °C	<code>\SI{20}{^{\circ}C}\</code>
30 Å	<code>\SI{30}{\AA}\</code>

⁹Currently this works with X_YTeX and inputenc using the `latin1`, `latin5` and `latin9` encodings.

7.2 The unit interpreter

The second operation mode for the `\SI` macro is based on the behaviour of Slunits. Here, each unit, SI multiple prefix and power is given a macro name. These are entered in a method very similar to the reading of the unit name in English.

10 kg m s^{-2}	<code>\SI{10}{\kilo\gram\metre\per\second\squared}\</code>
1.453 g cm^{-3}	<code>\SI{1.453}{\gram\per\cubic\centi\metre}\</code>
33.562 cd s	<code>\SI{33.562}{\candela\second}\</code>
100 m s^{-2}	<code>\SI[unitsep=medium]{100}{\metre\per\Square\second}\</code>
$4.56 \times 10^3 \text{ m s}^{-1}$	<code>\SI[prefixsymbolic=false]{4.56}{\kilo\metre\per\second}\</code>

On its own, this is very similar to Slunits, and is less convenient than the direct input method.¹⁰ However, the package allows you to define new unit macros; a large number of pre-defined abbreviations are also supplied. More importantly, by defining macros for units, instead of literal values, new functionality is made available. Units may be re-defined to give different output, and handling of reciprocal values can be altered.

$10 \frac{\text{g m}}{\text{s}^2}$	<code>\SI[per=frac,fraction=frac]{10}{\gram\metre\per\second\squared}\</code>
1.453 g/cm^3	<code>\SI[per=slash]{1.453}{\gram\per\cubic\centi\metre}\</code>
33.562 cd s	<code>\SI{33.562}{\candela\second}\</code>
100 m/s^2	<code>\SI[per=frac,fraction=nice]{100}{\metre\per\Square\second}\</code>

The unit processor will trap *some* errors in the input and give the “best guess” result. However, it is down to the user to check the output.

7.3 Powers of units

<code>\Square</code>	Including powers in units is handled using a “natural language” method. Thus preceding a unit by <code>\Square</code> or <code>\cubic</code> which raise the unit to the appropriate power, while <code>\squared</code> or <code>\cubed</code> follow the unit they apply to. The <code>\Square</code> macro is capitalised to avoid a name clash with <code>pstricks</code> ; the alternative <code>\ssquare</code> is also provided.
<code>\ssquare</code>	
<code>\squared</code>	
<code>\cubic</code>	
<code>\cubed</code>	

10 m^2	<code>\SI{10}{\metre\squared}\</code>
20 m^2	<code>\SI{20}{\Square\metre}\</code>
30 m^3	<code>\SI{30}{\metre\cubed}\</code>
40 m^3	<code>\SI{40}{\cubic\metre}\</code>

`\per` The `\per` macro intelligently creates reciprocal powers, and also adds the power -1 when appropriate.

10 s^{-2}	<code>\SI{10}{\per\second\squared}\</code>
20 s^{-2}	<code>\SI{20}{\per\Square\second}\</code>
30 l/s^3	<code>\SI[per=frac,fraction=nice]{30}{\per\second\cubed}\</code>
40 /s^3	<code>\SI[per=slash]{40}{\per\cubic\second}\</code>
50 s^{-1}	<code>\SI{50}{\per\second}\</code>
$60 \text{ m}^{-1} \text{ cd}^2$	<code>\SI{60}{\per\metre\Square\candela}\</code>

`\tothe` For powers not defined above or with `\newpower`, the `\tothe` macro can be

`\raiseto`

¹⁰Users of Slunits should note the lack of need for a `\usk`-type macro.

used “in line” to produce a power. As follows from standard English usage, this comes after the unit. `\raiseto` achieves the same, but is used *before* a unit to add a power *after*.¹¹

16.86 m ⁴	<code>\SI{16.86}{\metre\tothe{4}}\%</code>
7.895 N ⁻⁶	<code>\SI{7.895}{\raiseto{-6}\newton}\%</code>
1.34 K ⁻⁷	<code>\SI{1.34}{\per\kelvin\tothe{7}}\%</code>

7.4 Units with no values

`\si` For typesetting the symbol for a unit on its own, with the full font control and without extra spaces, the `\si` macro is provided.¹² The macro name avoids a clash with the functionality of the earlier packages, but is similar to `\ilu` from the `unitsdef` package.

kg m/s ²	<code>\SI{}{kg.m/s^2}\%</code>
kg m/s ²	<code>\si{kg.m/s^2}\%</code>
mol dm ⁻³	<code>\si[mode=text,unitsep=thin]{\mole\per\cubic\deci\metre}\%</code>

7.5 Free-standing units

Users of the `unitsdef` package will be accustomed to using unit macros on their own (following a value) or with an optional argument containing a number. In both cases, only a single unit macro could be used. `siunitx` supports both operation modes, with the limitation that units trailing values lose font control of the value. When used in this way, the units *do not* take an optional keyval argument.

123 m	<code>\sisetup{prespace,allowoptarg}</code>
123 K	<code>123\metre\%</code>
234 A	<code>\kelvin[123]\%</code>
6 s	<code>\sisetup{mode=text} \ampere[234]\%</code>
	<code>6\second</code>

7.6 Pre-defined units, prefixes and powers

`\metre` The package always defines the seven base SI units, irrespective of any package options given (Table 5). The kilogram is notable as by default it is a *base* unit with a prefix. Thus, when the package is loaded with the option `load={}`, `\kilo` and `\gram` are not defined. As `metre` is often spelled as “meter” in the US, the macro `\meter` is provided in addition to the `\metre` macro.¹³

By default, a number of additional definitions are created by the package. These are controlled by the `load` and `noload` options. Unless specifically requested with the option `noload=prefix`, `siunitx` defines the standard prefixes for powers of ten (Table 6). This leads to the redefinition of `\kilogram` as `\kilo\gram`. The macro `\deka` is provided, as this is used as an alias for `\deca` in some places. The package also defines a number of derived SI units

¹¹`\raiseto` acts in the same way as `\tothe` when used in a literal context: the power will be produced where the macro is, rather than moving after the next item.

¹²The same effect can be achieved using the `\SI` macro with an empty numerical argument.

¹³The official SI spelling for the unit is “metre”.

Table 5: The seven base SI units

Unit	Macro	Symbol
kilogram	<code>\kilogram</code>	kg
metre	<code>\metre</code>	m
second	<code>\second</code>	s
mole	<code>\mole</code>	mol
kelvin	<code>\kelvin</code>	K
ampere	<code>\ampere</code>	A
candela	<code>\candela</code>	cd

Table 6: The SI prefixes (`load=prefix`)

Prefix	Macro	Power	Symbol	Prefix	Macro	Power	Symbol
yocto	<code>\yocto</code>	10^{-24}	y	deca	<code>\deca</code>	10^1	da
zepto	<code>\zepto</code>	10^{-21}	z	hecto	<code>\hecto</code>	10^2	h
atto	<code>\atto</code>	10^{-18}	a	kilo	<code>\kilo</code>	10^3	k
femto	<code>\femto</code>	10^{-15}	f	mega	<code>\mega</code>	10^6	M
pico	<code>\pico</code>	10^{-12}	p	giga	<code>\giga</code>	10^9	G
nano	<code>\nano</code>	10^{-9}	n	tera	<code>\tera</code>	10^{12}	T
micro	<code>\micro</code>	10^{-6}	μ	peta	<code>\peta</code>	10^{15}	P
milli	<code>\milli</code>	10^{-3}	m	exa	<code>\exa</code>	10^{18}	E
centi	<code>\centi</code>	10^{-2}	c	zetta	<code>\zetta</code>	10^{21}	Z
deci	<code>\deci</code>	10^{-1}	d	yotta	<code>\yotta</code>	10^{24}	Y

which have assigned names and symbols (Table 7). Note that `\Gray` is capitalised to avoid a name clash with the `pstricks` package.¹⁴

In addition to these units, there are three other groups of units for use with the SI system which do not fit into the above. These are those derived from physical measurements (Table 8), those considered “accepted” (Table 9), and those accepted temporarily (Table 10).¹⁵ The unit “litre” is often spelled “liter” in the US; both spellings are provided by `siunitx`, with `\liter` giving L and `\litre` producing l.

7.7 Prefixed and abbreviated units

Many basic units have prefixes which are commonly used with the unit, such as centimetre or megahertz. The package therefore defines a number of common prefixed units (`load=prefix`). Several of these also have obvious abbreviations (such as `\MHz` for `\megahertz`), which are made available by `load=abbr`. In common with the units discussed above, the prefixed and abbreviated unit definitions are loaded by default.

¹⁴The macros `\ohm` and `\celsius` are not defined by `siunitx` if the `gensymb` package is loaded.

¹⁵These are supposed to be replaced over time by SI units.

Table 7: The derived SI units with defined names (load=derived)

Unit	Macro	Symbol	Unit	Macro	Symbol
becquerel	\becquerel	Bq	newton	\newton	N
celsius	\celsius	°C	ohm	\ohm	Ω
coulomb	\coulomb	C	pascal	\pascal	Pa
farad	\farad	F	radian	\radian	rad
Gray	\Gray	Gy	siemens	\siemens	S
	\ggray	Gy	sievert	\sievert	Sv
hertz	\hertz	Hz	steradian	\steradian	sr
henry	\henry	H	tesla	\tesla	T
joule	\joule	J	volt	\volt	V
katal	\katal	kat	watt	\watt	W
lumen	\lumen	lm	weber	\weber	Wb
lux	\lux	lx			

Table 8: Units derived from experiments (load=physical)

Unit	Macro	Symbol
electron volt	\electronvolt	eV
unified atomic mass unit	\atomicmassunit	u
	\atomicmass	u

Table 9: Units accepted for use with SI (load=accepted)

Unit	Macro	Symbol
bel	\bel	B
day	\Day	d
	\dday	d
degree	\degree	°
hour	\hour	h
litre	\litre	l
	\liter	L
minute	\minute	min
minute (arc)	\arcmin	'
neper	\neper	Np
percent	\percent	%
second (arc)	\arcsec	"
tonne	\tonne	t

Table 10: Additional (temporary) SI units (load=addn)

Unit	Macro	Symbol
ångström	\angstrom	Å
are	\are	a
curie	\curie	Ci
bar	\BAR	bar
	\bbar	bar
barn	\barn	b
gal	\gal	Gal
hectare	\hectare	ha
millibar	\millibar	mbar
rad	\rad	rad
rem	\rem	rem
roentgen	\roentgen	R

Table 11: Prefixed (load=prefixed) and abbreviated (load=abbr) units

Unit	Macro	Symbol	Abbreviation
<i>Masses</i>			
kilogram	\kilogram	kg	\kg
femtogram	\femtogram	fg	\fg
picogram	\picogram	pg	\pg
nanogram	\nanogram	ng	\nanog
microgram	\microgram	μg	\micg
milligram	\milligram	mg	\mg
atomic mass	\atomicmass	u	\amu
<i>Lengths</i>			
picometre	\picometre	pm	\picom
nanometre	\nanometre	nm	\nm
micrometre	\micrometre	μm	\micm
millimetre	\millimetre	mm	\mm
centimetre	\centimetre	cm	\cm
decimetre	\decimetre	dm	\dm
kilometre	\kilometre	km	\km
<i>Times</i>			
second	\second	s	\Sec
attosecond	\attosecond	as	\as
femtosecond	\femtosecond	fs	\fs
picosecond	\picosecond	ps	\ps
nanosecond	\nanosecond	ns	\ns
microsecond	\microsecond	μs	\mics
millisecond	\millisecond	ms	\ms

Continued on next page

Unit	Macro	Symbol	Abbreviation
<i>Moles</i>			
femtomole	\femtomole	fmol	\fmol
picomole	\picomole	pmol	\pmol
nanomole	\nanomole	nmol	\nmol
micromole	\micromole	μmol	\micmol
millimole	\millimole	mmol	\mmol
<i>Currents</i>			
picoampere	\picoampere	pA	\pA
nanoampere	\nanoampere	nA	\nA
microampere	\microampere	μA	\micA
milliampere	\milliampere	mA	\mA
kiloampere	\kiloampere	kA	\kA
<i>Areas</i>			
square centimetre	\squarecentimetre	cm^2	\cms
	\centimetresquared	cm^2	
square metre	\squaremetre	m^2	
square kilometre	\squarekilometre	km^2	
<i>Volumes</i>			
microlitre	\microlitre	μl	\micl
millilitre	\millilitre	ml	\ml
microliter	\microliter	μL	\micL
milliliter	\milliliter	mL	\mL
cubic centimetre	\cubiccentimetre	cm^3	\cmc
	\centimetrecubed	cm^3	
cubic decimetre	\cubicdecimetre	dm^3	\dmc
<i>Frequencies</i>			
hertz	\hertz	Hz	\Hz
millihertz	\millihertz	mHz	\mHz
kilohertz	\kilohertz	kHz	\kHz
megahertz	\megahertz	MHz	\MHz
gigahertz	\gigahertz	GHz	\GHz
terahertz	\terahertz	THz	\THz
<i>Potentials</i>			
millivolt	\millivolt	mV	\mV
kilovolt	\kilovolt	kV	\kV
<i>Energies</i>			
kilojoule	\kilojoule	kJ	\kJ
electronvolt	\electronvolt	eV	\eV
millielectronvolt	\millielectronvolt	meV	\meV
kiloelectronvolt	\kiloelectronvolt	keV	\keV
megaelectronvolt	\megaelectronvolt	MeV	\MeV
gigaelectronvolt	\gigaelectronvolt	GeV	\GeV

Continued on next page

Unit	Macro	Symbol	Abbreviation
teraelectronvolt	<code>\teraelectronvolt</code>	TeV	<code>\TeV</code>
kilowatthour	<code>\kilowatthour</code>	kWh	<code>\kWh</code>
<i>Powers</i>			
milliwatt	<code>\milliwatt</code>	mW	
kilowatt	<code>\kilowatt</code>	kW	
megawatt	<code>\megawatt</code>	MW	
<i>Capacitances</i>			
femtofarad	<code>\femtofarad</code>	fF	
picofarad	<code>\picofarad</code>	pF	
nanofarad	<code>\nanofarad</code>	nF	
microfarad	<code>\microfarad</code>	μF	
millifarad	<code>\millifarad</code>	mF	
<i>Resistances</i>			
kiloohm	<code>\kiloohm</code>	kΩ	
megaohm	<code>\megaohm</code>	MΩ	
gigaohm	<code>\gigaohm</code>	GΩ	
millisiemens	<code>\millisiemens</code>	mS	
<i>Forces</i>			
millinewton	<code>\millinewton</code>	mN	
kilonewton	<code>\kilonewton</code>	kN	
<i>Other units</i>			
hectopascal	<code>\hectopascal</code>	hPa	
megabecquerel	<code>\megabecquerel</code>	MBq	
millisievert	<code>\millisievert</code>	mSv	

7.8 Defining new units

`\newunit` New units are produced using the `\newunit` macro. This works as might be expected: `\newunit[⟨options⟩]{⟨unit⟩}{⟨symbol⟩}`, where `⟨symbol⟩` can contain literal values, other units, multiple prefixes, powers and `\per`. The `⟨options⟩` argument can be any suitable options, and applies the specific unit macro only. The most obvious example for using this macro is the `\degree` unit.¹⁶ The (first) optional argument to `\SI` and `\si` can be used to override the settings for the unit. The `\renewunit` and `\provideunit` macros take the same arguments.

```

3.1415°          \SI{3.1415}{\degree}\
12 345XXX 67 890 XXX \newunit[valuesep=none]{\oddunit}{XXX}
                  \SI{12345}{\oddunit}
                  \SI[valuesep=thick]{67890}{\oddunit}

```

As with the \LaTeX commands `\newcommand`, *etc.*, the choice of `\newunit`, `\renewunit` or `\provideunit` depends on the presence of an existing definition. While `\newunit` should be used when a unit has not been previously defined, `\renewunit` will issue a warning if the named unit does not already exist.

¹⁶Although the `\ang` macro is preferred for this job.

`\provideunit` defines the unit if it does not exist, and otherwise does nothing at all. The same behaviour is seen with `\providepower` and `\provideprefix` (*vide infra*).

Output that is only valid in maths mode requires `\ensuremath`, text-only input requires `\text`. In the example below, `\mathnormal` is used to force the font choice only for the single character.¹⁷

$10\,\mathrm{m}\,\pi^{-2}$ `\newunit{\SIpi}{\ensuremath{\mathnormal{\pi}}}`
`\SI{10}{\metre\per\SIpi\squared}`

`\newpower` Powers are defined: `\newpower[post]{⟨power⟩}{⟨num⟩}`. Here, `⟨power⟩` is
`\renewpower` the name of the power macro and `⟨num⟩` is the (positive) number it represents.
`\providepower` The later argument is always processed internally by `\num`, but *must* be a number.
 Giving the optional argument `post` indicates to the package that the power will
 come after the unit it applies to; by default it is assumed that it will come before.

kg^4 `\newpower{\quartic}{4}`
 m^4 `\newpower[post]{\totheforth}{4}\`
`\si{\kilogram\totheforth}\`
`\si{\quartic\metre}`

`\newprefix` The standard SI powers of ten are defined by the package, and are de-
`\renewprefix` scribed above. However, the user can define new prefixes with `\newprefix`.
`\provideprefix` This has syntax `\newunit[binary]{⟨prefix⟩}{⟨symbol⟩}{⟨powers-ten⟩}`, where
`⟨powers-ten⟩` is the number of powers of ten the prefix represents. When the
 binary option is given, the prefix is a power of two. For example, `\kilo` and
`\kibi` are defined:

`\newprefix{\kilo}{k}{3}`
`\newprefix[binary]{\kibi}{Ki}{10}`

`\newqualifier` It is possible to create unit “qualifiers”, which add subscript descriptions
`\renewqualifier` to units. Although not encouraged, this is sometimes necessary to make the
`\providequalifier` meaning clear. No qualifiers are pre-defined by `siunitx`, and so the user needs to
 declare them using `\newqualifier`. Currently, only subscript qualifiers can be
 created; a more extended set of options is planned for the next release of `siunitx`.

$\mathrm{kg}_{\mathrm{pol}}\mathrm{mol}_{\mathrm{cat}}^{-1}\mathrm{h}^{-1}$ `\newqualifier{\polymer}{pol}`
`\newqualifier{\catalyst}{cat}`
`\si{\kg\polymer\per\mole\catalyst\per\hour}`

8 Specialist units

In some subject area, there are units which are in common use even though they are outside of the SI system. Unlike the units discussed earlier, these specialist units are not loaded by default. In each case, they should be requested with the option `alsoload=⟨name⟩`.

8.1 Binary units (binary)

`\bit` The binary prefixes, `\bit`, `\byte` (Table 12) are not formally part of the SI
`\byte` system. They are available by giving the `alsoload=binary` option.

¹⁷The `\mathrm` font used for this document has an “℔” at the π position.

Table 12: Binary prefixes (alsoload=binary)

Prefix	Macro	Power	Symbol
kibi	\kibi	2 ¹⁰	Ki
mebi	\mebi	2 ²⁰	Mi
gibi	\gibi	2 ³⁰	Gi
tebi	\tebi	2 ⁴⁰	Ti
pebi	\pebi	2 ⁵⁰	Pi
exbi	\exbi	2 ⁶⁰	Ei

100 MiB

\SI{100}{\mebi\byte}

8.2 Synthetic chemistry (synchem)

\mmHg The synchem file adds the common chemistry units \mmHg, \molar, \Molar,
 \molar \torr and \dalton to siunitx. The \Molar macro is somewhat awkward, as it
 \Molar can be given as either “m” or “M”. The later is obviously easily confused with the
 \torr sign for the prefix mega. By default, siunitx uses the UK default of a small-caps
 \dalton symbol. The \dalton unit is defined here as this name is not recognised by the
 various international bodies: the symbol u is preferred.

1 M HCl
 760 Torr
 0.01 mmHg
 3.0 mol dm⁻³
 106.42 Da

\SI{1}{\Molar} HCl\
 \SI{760}{\torr}\
 \SI{0.01}{\mmHg}\
 \SI{3.0}{\molar}\
 \SI{106.42}{\dalton}

8.3 High-energy physics (hep)

In contrast to hepunits, siunitx does not define a long list of compound units for high-energy physics.¹⁸ Instead, a small selection of new units are defined (Table 13). The mechanisms provided by siunitx should avoid the need for large numbers of abbreviations. For example, the hepunits \MinveV can be given as \per\MeV in siunitx, which requires only one more character.

\cflight The hep option defines two units which are slightly unusual. \cflight gives
 \eVperc c, which is recognised as a unit when used in the appropriate circumstances. The
 second unit provided is \eVperc, which is commonly-used and clear enough
 for a compound definition. Notice that the value of eVcorrb will need to be
 adjusted when using this unit.

4.657 MeV/c²

\SI[per=slash,eVcorrb=0.4ex]{4.657}{\mega\eVperc\squared}

8.4 Astronomy (astro)

\parsec For astronomers, the \parsec and \lightyear units are available, and give
 \lightyear the obvious results.

¹⁸Using the emulate=hepunits option will load a file defining those.

Table 13: High-energy physics units (alsoload=hep)

Unit	Macro	Symbol	Abbreviation
<i>Areas</i>			
yoctobarn	\yoctobarn	yb	\yb
zeptobarn	\zeptobarn	zb	\zb
attobarn	\attobarn	ab	\ab
femtobarn	\femtobarn	fb	\fb
picobarn	\picobarn	pb	\pb
nanobarn	\nanobarn	nb	\nb
<i>Other units</i>			
micron	\micron	μm	
millirad	\mrad	mrad	
gauss	\gauss	G	

12 pc \SI{12}{\parsec}\
 1 ly \SI{1}{\lightyear}

9 Font control

Following the lead of Slstyle, siunitx provides control over the font used to typeset output. By default, all text is typeset using the current upright serif maths font, whether the macros are given in text or maths mode. Some examples will show the effect.

10 10 \num{10} \$\num{10}\$\
 20° 20° \sffamily \ang{20} \$\ang{20}\$\
 30 kg \textbf{\SI{30}{\kilo\gram}}\
 40 kg \boldmath \$\SI{40}{\kilo\gram}\$
\[\num{50} \]

In contrast, by setting obeyall, the current font is used: this may be maths or text, depending on the context.

1°1'1" 1°1'1" \sisetup{obeyall}\
 2°2'2" 2°2'2" \ang{1;1;1} \$\ang{1;1;1}\$\
 3°3'3" 3°3'3" \sffamily \ang{2;2;2} \$\ang{2;2;2}\$\
 4°4'4" 4°4'4" \textbf{\ang{3;3;3}} \boldmath \$\ang{3;3;3}\$\
 5°5'5" \emph{\ang{4;4;4}} \emph{\$\ang{4;4;4}\$}
\[\ang{5;5;5} \]

Fine control of which elements of the local font are used is available with the obeyfamily, obeybold, obeyitalic and obeymode options.

1°1'1" 1°1'1" \sisetup{obeyfamily}\
 2°2'2" 2°2'2" \ang{1;1;1} \$\ang{1;1;1}\$\
 3°3'3" 3°3'3" \sffamily \ang{2;2;2} \$\ang{2;2;2}\$\
 4°4'4" 4°4'4" \sisetup{obeybold}
 5°5'5" \textbf{\ang{3;3;3}} \boldmath \$\ang{3;3;3}\$\
\emph{\ang{4;4;4}} \emph{\$\ang{4;4;4}\$}
\[\ang{5;5;5} \]

10 Package options

`\sisetup` The “native” options for the package are all given using the key–value method. Most of the package options can be given both when loading the package and at any point in the document. This is achieved using the `\sisetup` macro.

The package options take a number of different forms.

- `option=<bool>` Simple true/false values. These macros all default to `option=true`, meaning that giving the option name along will set the appropriate flag.
- `option=<choice>` Take a single item from a pre-determined list. Depending on the value, one or more internal states will be altered. Values not on the list are ignored (with a warning).
- `option=<choice, literal>` If the given value is a `<choice>`, then the internal settings for that choice are used. Any other value is used directly.
- `option=<literal>` The given value is used as a literal by the package.
- `option=<csname>` These options expect a command sequence as a value.
- `option=<length>` Requires a TeX length, for example `0.5ex`.
- `option=<list>` Takes a list of one or more items, which are not determined in advance.
- `option=<number>` Takes a number (possibly including an exponent part).

The package has a large range of options, to allow full control of the various features of the package. These control differing aspects of the package, and are given below in groups based on function. Where the key has a default value, it is given in bold.

10.1 Font family and style

The font used when typesetting material can be tightly controlled using `siunitx`. A number of options affect how the package matches the surrounding font, and the font families used to achieve this. The default is to use the current upright maths serif font with no variation.

`mode` The output of `siunitx` can occur using either text or maths mode. The package option `mode` determines which is used: valid options are **`maths`** and **`text`**.¹⁹
`textmode` The shortcut `textmode` is provided for setting `mode=text` quickly. Further
`valuemode` refinement is possible using the `valuemode` and `unitmode` options. These
`unitmode` apply to numbers (the output of `\num` and the first mandatory argument of
`obeymode` `\SI`) and units (all other output), respectively. By setting the `obeymode` flag, the package will use the local typesetting mode (maths or text).

`obeyall` The detection and matching of surrounding text can be controlled using a
`obeyfamily` number of Boolean package options. `obeyall` turns on all of the detection.
`obeybold` Thus output with `obeyall` in force will always match the local text appearance.
`obeyitalic`

¹⁹Here and in all other cases, either UK or US spelling may be used. Thus `mode=maths` or `mode=math` have exactly the same effect.

`obeyfamily` instructs the package on detecting the surrounding font family (Roman, sans serif, fixed width), but does not detect bold or italic. `obeybold` detects the local bold setting, whilst `obeyitalic` picks up italic fonts.

Bold detection is influenced by the value of `inlinebold`, which takes values **text** and **maths**. The package can detect the local value of bold for either the surrounding text, or the surrounding inline (\dots) maths. The `obeyitalic` option does *not* have the same facility (maths is italic anyway).

The font commands used by the package to achieve the above are all available for user modification. The options `mathsrms`, `mathssf` and `mathstt` hold the command sequences used in maths mode,²⁰ while `textrm`, `textsf` and `texttt` do the same for text mode. By default, these contain the obvious command names, for example `mathsrms=mathrm` and `texttt=ttfamily`. However, they can be set at will: the macro names indicate the nature of the surrounding text detected. For example, the value of `mathssf` is used in maths mode when the surrounding text is sans serif.

Each of the font options can be given separately for the contents of numbers and units. The option names include `value` or `unit` before the mode name. For example, the `mathsrms` option may be split into `valuemathsrms` and `unitmathsrms`.

The font detection system can treat displayed mathematical content in two ways. This is controlled by the `detectdisplay` option. When set to **true**, display mathematics is treated independently from the body of the document. Thus the local *maths* font is checked for matching. In contrast, when set to **false**, display material is treated with the current running text font.

<p>Some text</p> <p>More text</p>	$x = 1.2 \times 10^3 \text{ kg K cd}$ $y = 3 \text{ m s mol}$	<pre> \sfamily Some text \sisetup{obeyall} \[x = \SI{1.2e3}{\kg\kelvin\candela} \] More text \sisetup{detectdisplay=false} \[y = \SI{3}{\metre\second\mole} \]</pre>
-----------------------------------	---	--

10.2 Spacing and separators

The separators between items can all be set using options taking a list of pre-defined items or a literal value. The “sep” options (`unitsep`, `valuesep`, `digitsep` and `anglesep`) all recognise `thin`, `medium`, `med`, `thick`, `space`, `cdot`, `times`, `tightcdot`, `tighttimes`, `fullstop`, `stop`, `period` and `none`. The named spaces are the normal maths separations, with `space` representing a full (non-breakable text) space, and with the obvious meanings for `cdot` and `times`. The `tight` variants reduce the spacing available. Three possible values are provided for “.”, and `none` yields no space at all. In all cases, other values are treated literally and are typeset in maths mode. The default value is **thin** for all separations except `anglesep`, which is set to **none**.

The `unitspace` and `errspace` options again take a list or literal value, but only the “real” spaces `thin`, `medium`, `med`, `thick`, `space` and `none` are recognised in the list. The `unitspace` option controls the output generated by

²⁰These can also be set using `mathrm`, `mathsf` and `mathtt`

$1.234 \times 10^6 \pm 0.005 \times 10^6$
 $1.234 \text{ m} \pm 0.005 \text{ m}$
 $(1.234 \pm 0.005) \text{ m}$
 $1.234 \pm 0.005 \text{ m}$
 1.234 ± 0.005

```

\sisetup{seperr}\\
\num[trapambigerr=false]{1.234(5)e6}\\
\SI{1.234(5)}{\metre}\\
\sisetup{repeatunits=false}
\SI{1.234(5)}{\metre}\\
\SI[trapambigerr=false]{1.234(5)}{\metre}\\
\num[tightpm]{1.234(5)}

```

numprod The number processor can recognise products in the numerical input; the
 repeatunits symbols used for products are stored in numprod, with the default value of “x”.
 By default, the \SI macro will repeat the units for a number given in this way.
 This behaviour is altered by the repeatunits option, which takes the values
true, **false** and **power**. The later applies only when providing multiplied
 numbers with units, and converts the unit to the appropriate power rather than
 repeating the units.²² Notice that when applied to errors, repeatunits takes
 priority over trapambigerr.

$1 \times 2 \times 3$
 $4 \text{ m} \times 5 \text{ m} \times 6 \text{ m}$
 $1.2 \times 3.4 \times 5.6 \text{ mm}^3$
 $(1.234 \pm 0.005) \text{ m}$
 $9.1093897 \pm 0.0000054 \times 10^{-31} \text{ kg}$
 $9.1093897 \times 10^{-31} \text{ kg} \pm 0.0000054 \times 10^{-31} \text{ kg}$
 $1 \times 2 \times 3 \text{ m}^3$

```

\num{1 x 2 x 3}\\
\SI{4 x 5 x 6}{\metre}\\
\sisetup{repeatunits=false}
\SI{1.2 x 3.4 x 5.6}{\milli\metre\cubed}\\
\SI[seperr]{1.234(5)}{\metre}\\
\SI[seperr,
  trapambigerr=false]
{9.1093897(54)e-31}{\kilo\gram}\\
\SI[seperr,repeatunits,
  trapambigerr=false]
{9.1093897(54)e-31}{\kilo\gram}\\
\SI[repeatunits=power]{1 x 2 x 3}{\metre}

```

expproduct The formatting of exponents is controlled by expproduct and expbase.
 expbase expproduct sets the symbol used to indicate a product for exponents (e.g. the
 allowzeroexp \times in 2×10^2), while the value of expbase sets the power used (the 10 in the
 example). Both options accept a very short list of options: **times**, **tighttimes**,
cdot and **tightcdot** for the product, and **ten** and **two** for the power.²³
 Other choices are used literally. Also relevant to exponent processing is the
 allowzeroexp option. By default, the package will suppress a zero exponent,
 but setting the flag will allow the output of 10^0 .

addsign Additions to the input can take the form of implicit signs and padded ze-
 sign ros. The addsign option takes a list of potential sites to add a sign: **none**,
 retainplus mantissa, exponent and both.²⁴ If no sign is given in the input, the setting
 here determines if one is added. The sign to add is stored in sign, which takes
 the list of choices **plus**, **minus**, **pm** and **mp**, or uses the input literally (in maths
 mode). For positive numbers, the retainplus option causes a + sign explicitly
 in the input to be retained. By default, the package will remove such signs.

padnumber The padnumber option controls the addition of zeros to the input, to “pad”
 the result. The option takes a list of choices: **leading**, **trailing**, **both** and

²²This is a very simply option: do not expect it to work with anything except areas and volumes.

²³The **tighttimes** and **tightcdot** options give the rather questionable results: 1×10^2 and $1 \cdot 10^2$, as opposed to 1×10^2 and $1 \cdot 10^2$.

²⁴Aliases are provided: **mant** = mantissa, **exp** = exponent, **all** = **true** = **both**, **false** = **none**.

none.²⁵ No additional precision is added by this option; integer input will not add a decimal point.

0.1	<code>\num[padnumber=leading]{.1}\</code>
2	<code>\num[padnumber=leading]{2.}\</code>
3.0	<code>\num[padnumber=trailing]{3.}\</code>
4.0	<code>\num[padnumber=both]{4.}\</code>
0.5	<code>\num[padnumber=both]{.5}\</code>
6	<code>\num[padnumber=both]{6}\</code>
7	<code>\num[padnumber=none]{7.}\</code>
.8	<code>\num[padnumber=none]{.8}\</code>

`fixdp` In contrast to the `padnumber` option, the package can alter the precision of the input number if the `fixdp` option is set. The `fixdp` option will fix the decimal places of the output to the number stored in the `dp` option. The later should be a positive integer or zero.

1.000	<code>\setup{fixdp,dp=3}</code>
53.900	<code>\num{1}\</code>
4.568	<code>\num{53.9}\</code>
-1.294	<code>\num{4.56783}\</code>
-1.296	<code>\num{-1.2942}\</code>
10.000	<code>\num{-1.2959}\</code>
2.126×10^{90}	<code>\num{9.9999}\</code>
12	<code>\num{2.1264e90}\</code>
	<code>\num[dp=0]{12.345}</code>

`fixsf` In contrast to the `dp` option, the `fixsf` and `sf` options control the number of significant figures in the output. This never adds extra digits to the output, as significant figures are concerned with accuracy.

1	<code>\setup{fixsf,sf=3}</code>
53.9	<code>\num{1}\</code>
4.57	<code>\num{53.9}\</code>
-1.29	<code>\num{4.56783}\</code>
-1.30	<code>\num{-1.2942}\</code>
10.0	<code>\num{-1.2959}\</code>
2.13×10^{90}	<code>\num{9.9999}\</code>
773 000	<code>\num{2.1264e90}\</code>
	<code>\num{773322}</code>

10.4 Angle formatting

`padangle` The angle formatter uses `\num` to format numbers: any options for numbers are therefore applicable here. The `padangle` option takes choices **small**, **large**, **all** and **none**, and controls how angles are padded when given in degrees, minutes and seconds.²⁶ When giving angles as arcs (in degrees, minutes and seconds), the package can detect if the correct number of semi-colons have been given. This is controlled by the `strictarc` option, which is a Boolean switch with a **true** default. With `strictarc` set to **false**, an incomplete arc is interpreted as degrees and minute, while an over-complete one will drop excess input.

²⁵Aliases: `all = true = both`, `false = none`.

²⁶Aliases: `all = true = both`, `false = none`.

1°	<code>\ang[padangle=none]{1;}\</code>
2°0'0"	<code>\ang[padangle=large]{2;}\</code>
3°	<code>\ang[padangle=small]{3;}\</code>
0°4'0"	<code>\ang[padangle=both]{4;}\</code>
5'5"	<code>\ang[padangle=none]{5;5}\</code>
1°2'	<code>\ang[strictarc=false]{1;2}\</code>
1°2'3"	<code>\ang[strictarc=false]{1;2;3;4;}\</code>

`angformat` The angle formatting system can convert between decimal angles and those given as degrees, minutes and seconds. This is controlled by the `angformat` option, which takes choices **unchanged**, **decimal** and **arc**.²⁷ When set to **unchanged**, nothing is done to the input. The conversion is based on T_EX dimensions, and is therefore limited in accuracy. For this reason, the output is automatically rounded: output as a decimal angle is limited to three places, and that as an arc is given to a single decimal place for the seconds component.

$1^{\circ}2'3'' = 1.034^{\circ}$	<code>\$\ang{1;2;3} = \ang[angformat=dec]{1;2;3}\$\</code>
$4.56^{\circ} = 4^{\circ}33'36.0''$	<code>\$\ang{4.56} = \ang[angformat=arc]{4.56}\$\</code>

`astroang` For astronomers, the `astroang` option is provided. This moves the degrees, minutes or seconds symbol (as appropriate) over the decimal marker rather than after the number.

$1^{\circ}2'3.4''$	<code>\ang{1;2;3.4}\</code>
$5^{\circ}6'7''.8$	<code>\ang[astroang]{5;6;7.8}</code>

10.5 Tabular material

`tabnumalign` Material typeset in S columns is processed internally by the `\num` macro. Thus, as with angles, the number options also apply here. The positioning of tabular material is controlled by the two options `tabnumalign` and `tabformat`. `tabnumalign` takes values **centredecimal**, **centre**, **left** and **right**.²⁸ When using **centredecimal**, the package places the decimal marker of the mantissa at the centre of the column, which then grows to accommodate the widest number given. For equal numbers of digits before and after the decimal sign, this is the easiest option. The other choices use a fixed-width box to store the number; the box is then aligned with the edges of the column.

`tabformat` The `tabformat` option sets the amount of space reserved by siunitx for the alignment box when not using the **centredecimal** setting of `tabnumalign`. The numerical parts of `tabformat` are interpreted as $\langle pre \rangle \langle dec \rangle \langle post \rangle$; $\langle pre \rangle$ and $\langle post \rangle$ are the number of digits before and after the decimal sign, respectively. Both signs and exponents can be included in `tabformat`, resulting in appropriate space being reserved. The entire `tabformat` input is processed using the `\num` macro internally. Thus the decimal and exponent signs used in `tabformat` are checked against `numdecimal` and `numexp`, respectively.

`tabalignexp` When `tabformat` contains exponents, two possibilities are available for alignment. The first method is to place the exponent parts so that the “ $\times 10$ ” parts form a column, with whitespace after shorter mantissa components. In the second method, no additional space is added after the mantissa, and the

`tabexpalign`

²⁷Aliases: decimal = dec, arc = dms, unchanged = none.

²⁸Aliases centerdecimal = centredecimal; center = centre.

Table 14: The tabalignexp option

Header	Header
1.2×10^3	1.2×10^3
1.234×10^{56}	1.234×10^{56}

exponents do no line up (Table 14). This is controlled by the `tabalignexp` option, which can be set to **true** or **false**. The alias `tabexpalign` is available for this option.

```
\begin{table}
  \centering
  \caption{The \opt{tabalignexp} option}
  \label{tab:alignexp}
  \sisetup{tabformat=1.3e2,tabnumalign=centre}
  \begin{tabular}{SS[tabalignexp=false]}
    \toprule
    {Header} & {Header} \\
    \midrule
    1.2e3 & 1.2e3 \\
    1.234e56 & 1.234e56 \\
    \bottomrule
  \end{tabular}
\end{table}
```

`tabtextalign` Cells containing no numbers are handled by `siunitx` in a manner similar to
`tabunitalign` `\multicolumn`. The setting of `tabtextalign` is taken from the list **centre**,
`tabalign` right and left.²⁹ As would be expected, these settings **centre**, **right**- or **left**-
align the cell contents. In `s` columns, all content is treated as input to the `\si`
macro. The alignment of the contents relative to the cell is controlled by the
`tabunitalign` option, which takes options **left**, **right** and **centre**. The
settings for `tabnumalign`, `tabtextalign` and `tabunitalign` can be set to
the same value in one go with the `tabalign` option.

`tabautofit` The contents of table cells can automatically be rounded or zero-filled to
the number of decimal places given in `tabformat`. This is activated by the
`tabautofit` Boolean option. As `tabformat` does not apply to columns with
alignment **centredecimal**, `tabautofit` is also inactive for these columns
(Table 15).

```
\begin{table}
  \centering
  \caption{The \opt{tabautofit} option}
  \label{tab:autofit}
  \sisetup{tabformat=1.3,tabnumalign=centre}
  % Notice the overfull hbox which results with
  % the first column
  \begin{tabular}{%
    S%
    S[tabautofit]%
  }
```

²⁹Alias `centre` = `center`.

Table 15: The `tabautofit` option

Header	Header	Header
1.2	1.200	1.2
1.2345	1.235	1.2345

Table 16: The `tabparseonly` option

Header	Header	Header
14.2	14.2	14.2
1.234 56	1.234 56	1.234 56
1.2×10^3	1.2×10^3	1.2×10^3

```

S[tabautofit,tabnumalign=centredecimal]}
\toprule
{Header} & {Header} & {Header} \\
\midrule
1.2      & 1.2      & 1.2      \\
1.2345 & 1.2345 & 1.2345 \\
\bottomrule
\end{tabular}
\end{table}

```

`tabparseonly`

It is possible to turn off the automatic alignment of numbers while retaining the ability to parse the `S` column input. Setting `tabparseonly` to `true` will still parse the column contents, but will not align the decimal markers. The alignment of the cell is governed by `tabnumalign` (Table 16).

```

\begin{table}
\centering
\caption{The \opt{tabparseonly} option}
\label{tab:parse}
\begin{tabular}{%
S[tabparseonly]%
S[tabparseonly,tabnumalign=left]%
S[tabparseonly,tabnumalign=right]}
\toprule
{Header} & {Header} & {Header} \\
\midrule
14.2      & 14.2      & 14.2      \\
1.23456 & 1.23456 & 1.23456 \\
1.2e3    & 1.2e3    & 1.2e3    \\
\bottomrule
\end{tabular}
\end{table}

```

10.6 Units

`per` Most of the unit options are concerned with the processing of named units. The processor for units given as macro names can be influenced to give a variety of output formats. The `per` option defines how the keyword macro `\per` is handled. This option takes a choice from the list **reciprocal**, `slash` and `fraction`.³⁰ The default option uses `\per` to indicate reciprocal powers, whereas `slash` causes the package to use `/` to show division.

`fraction` The `fraction` option defines how `per=fraction` is interpreted. The list of applicable values here is **frac**, `nice`, `ugly` and `sfrac`. In each case, the unit is typeset as a fraction, but the macro used to achieve this varies. `frac` uses the \TeX `\frac` macro, while `nice` makes use of a `\nicefrac`-like method. The `ugly` option uses a slash in text mode and `\frac` in maths mode.³¹ Finally, the setting `fraction=sfrac` uses the `\sfrac` macro from the `xfrac` package, when available.³² The `slash` option sets the symbol used when `per=slash` is in force. This recognises the single keyword `slash`; anything else is used literally.

$\frac{m}{s}$	<code>\sisetup{per=fraction}</code>
m/s	<code>\si[fraction=frac]{\metre\per\second}\\</code>
m/s	<code>\si[fraction=nice]{\metre\per\second}\\</code>
m/s	<code>\si[fraction=sfrac]{\metre\per\second}\\</code>
	<code>\si[per=slash]{\metre\per\second}</code>

`stickyper` By default, `\per` applies only to the next unit given.³³ By setting the `stickyper` flag, this behaviour is changed so that `\per` applies to all subsequent units.³⁴

$kg\,m^{-1}\,A$	<code>\si{\kilogram\per\metre\ampere}\\</code>
$kg\,m^{-1}\,A^{-1}$	<code>\si[stickyper]{\kilogram\per\metre\ampere}</code>

`trapambigfrac` When using `per=slash`, multiple units in the denominator will yield a potentially ambiguous result. The `trapambigfrac` determines whether the package checks for this: this takes **true** and **false**. When set, the contents of `openfrac` are inserted before the denominator, and `closefrac` is inserted after.

$m/(s\,kg)$	<code>\sisetup{trapambigfrac,openfrac=(,closefrac=),per=slash}\\</code>
$m/s\,kg$	<code>\si{\metre\per\second\per\kilogram}\\</code>
	<code>\si[trapambigfrac=false]{\metre\per\second\per\kilogram}</code>

`prefixsymbolic` The unit prefixes (`\kilo`, *etc.*) are normally given as letters. However, the package can convert these into numerical powers.³⁵ This is controlled by the `prefixsymbolic` Boolean option, which by default is **true**. If `prefixsymbolic` is set to **false**, the format of the prefix is controlled by

³⁰Aliases `reciprocal = rp = power`, `fraction = frac`.

³¹Similar to the `ugly` option of the `nicefrac` package.

³²`xfrac` is part of the experimental system for \LaTeX_3 . As it requires a number of additional packages to work, `siunitx` does not load `xfrac`. If it is unavailable, the `sfrac` setting will fall back to using `\nicefrac`. See the `xfrac` documentation for reasons to prefer `\sfrac` to `\nicefrac`.

³³This is the standard method of reading units in English: for example, $J\,mol^{-1}\,K^{-1}$ is pronounced “joules per mole per kelvin”.

³⁴This is the behaviour in `Slunits`.

³⁵Provided things are not too complex!

	prefixbase and prefixproduct, which work in the same way as expbase and expproduct.
prespace	By default, the single unit macros (e.g. <code>\metre</code>) add no space either before or after the unit. Setting the <code>xspace</code> flag to true means that the single macros are followed by the <code>\xspace</code> command (when used outside of <code>\SI/\si</code>). For users of <code>unitsdef</code> , the <code>prespace</code> macro changes the behaviour of the unit macros, so that they can immediately follow a number. As a result, the unit macros will <i>always</i> be preceded by a fixed space when the <code>prespace</code> flag is true: this will be in addition to any other space. Also relevant to users moving from <code>unitsdef</code> is the <code>allowoptarg</code> option. This allows single unit macros to take an optional numerical argument, in the same way that occurs in that package.
xspace	
allowoptarg	

mis the symbol for metres	<code>\metre</code> is the symbol for metres\\
No, m is the correct symbol	<code>\sisetup{xspace}</code>
30 m	No, <code>\metre</code> is the correct symbol\\
Do not use m in running text	<code>\sisetup{prespace}</code>
40 m	30 <code>\metre</code> \\
	Do not use <code>\metre</code> in running text\\
	<code>\sisetup{allowoptarg}</code>
	<code>\metre[40]</code>

10.7 Symbols

User access to control the symbols used for Ω , μ , $^\circ$, $'$, $''$, \AA and $^\circ\text{C}$ is provided here. These are all literal options, which are available in text and maths mode variants. For example, `textmicro` is the code used for the μ symbol in text mode. The text mode macros should be safe when forced into text, and the maths ones when forced into maths. The symbols defined in this way are:

- `textOmega`;
- `mathsOmega`;
- `textmu`;
- `mathsmu`;
- `textdegree`;
- `mathsdegree`;
- `textminute`;
- `mathsminute`;
- `textsecond`;
- `mathssecond`;
- `textringA`;
- `mathsringA`;
- `textcelsius`;
- `mathscelsius`.

`redefsymbols` When `siunitx` is loaded, it can check for the presence of the `textcomp` and `upgreek` packages, to provide better symbols for certain items. To prevent this, set the `redefsymbols` option `false` (the default is `true`).

`eVcorra` The `eV` symbol requires some fine-tuning, and so has two options of its own, both \TeX lengths. `eVcorra` is the correction applied to the gap between “e” and “V” of the unit: the default is `0.3ex`. `eVcorrb` is the correction applied to the gap between “V” of the unit and whatever follows; the default is `0ex`. The optimal value for these options will depend on the current font settings.³⁶

`eV/m` `\si[per=slash]{\electronvolt\per\metre}\`
`eV/m` `\si[per=slash,eVcorrb=0.7ex]{\electronvolt\per\metre}`

10.8 Colour

`colourall` The package provides internal hooks for applying colour to part or all of the output. This requires the user to load the `color` or `xcolor` package to support colour in the output; `siunitx` will ignore a colour request if support is unavailable. The Boolean options `colourall`, `colourunits` and `colourvalues` are used to turn application of a given colour on or off for all output, only units and only values, respectively. All three switches are available with US spelling, e.g. `colorall` and `colorall` behave in the same way. With colour turned off, no `\color` command is issued internally, and output follows the surrounding text.

`colour` The colour names to use for colouring output are set by the `colour`, `unitcolour` and `valuecolour` options (all also available with US spelling). The `colour` option internally sets both `unitcolour` and `valuecolour`.

`Text 50` `\color{brown} Text \num{50}\`
`10 m` `\sisetup{colourall,colour=green}`
`Text 70` `\SI{10}{\metre}\`
`40 s` `\color{purple} Text \num{70}\`
 `\sisetup{colourunits=true,colourvalues=false}`
 `\SI{40}{\second}`

`colourneg` `siunitx` can automatically add a colour to negative numbers. This is turned on using the `colourneg` switch. The colour used is set by the `negcolour` option; both options are available using US spellings.

10.9 International support

`locale` `siunitx` allows the user to switch between the typographic conventions of different (geographical) areas by using *locales*. Currently, the package is supplied with configurations for locales UK, USA, DE (Germany) and ZA (South Africa). The `locale` option is used to switch to a particular locale.

`1.234 m` `\SI{1.234}{\metre}\`
`6,789 m` `\SI[locale=DE]{6.789}{\metre}`

`loctolang` Locales are distinct from `babel` languages, as typographic conventions are not tightly integrated with language. However, it is useful to be able to associate a particular locale with a `babel` language. The option `loctolang` handles this, and expects pairs of values: `loctolang=<locale>:<language>`.

³⁶This document uses `eVcorra=0.1ex`.

$6.022 \times 10^{23} \text{ mol}^{-1}$

```
\sisetup{loctolang={UK:UKenglish,DE:german}}\
\SI{6.022e23}{\per\mole}\
\selectlanguage{german}\
\SI{6.022e23}{\per\mole}
```

$6,022 \cdot 10^{23} \text{ mol}^{-1}$

10.10 Package control

`load` The package keeps most of the unit and abbreviations definitions in files separate from `siunitx.sty`. To control what is loaded, three complementary options are provided, all of which take a list of one or more choices. `load` and `alsoload` define which support configuration files are loaded. The list in `load` recognises the value `default`, which is expanded to the normal list before loading. The difference between `load` and `alsoload` is that `load` specifies the *complete* list of files to load, whereas `alsoload` adds to the existing list. To use the `load` option successfully requires knowing everything that is needed. The `noload` option can be used to delete one or more items from the `load` list, without needing to know what is on it.³⁷

`log` To control data written to the `.log` file, the `log` option is provided. This takes a value from the list **normal**, `none`, `minimal`, `errors` and `debug`. As would be expected, these indicate the amount of detail written to the log file. As a shortcut to `log=debug`, the package also recognises the `debug` option directly.

`strict` Some users will want to stick closely to the official rules for typesetting units. This could be made complicated if the options for non-standards behaviour could not be turned off. The load-time option `strict` resets package behaviour to follow the rules closely, and disables options which deviate from this. If the package is loaded with the `strict` option, all output is made in maths mode using the upright serif font.

10.11 Back-compatibility options

`emulate` The package can emulate `Slunits`, `Slstyle`, `unitsdef`, `units`, `hepunits`, `fancyunits` and `fancynum`. Giving the `emulate=<package>` option will give the desired emulation, and combinations which would be possible with the real packages will also work here. The package will recognise the options of the emulated packages. This will automatically cause emulation to be switched on.

10.12 Summary of all options

Table 17 lists a summary of the package options (excluding those for backward-compatibility). A reminder or the input format is also provided.

Table 17: All package options

Option	Type	Description
<code>addsign</code>	List	Add sign to number
<code>allowzeroexp</code>	Boolean	Allow 10^0

Continued on next page

³⁷`noload` does not prevent the loading of a file needed by one which is loaded. Thus the package may internally override a `noload` value if needed.

Option	Type	Description
angformat	List	Conversion of angle format
anglesep	List or literal	Space between angle components
astroang	Boolean	Astronomy-style angles
closeerr	Literal	Closes potential-ambiguous error
closefrac	Literal	Closes potential-ambiguous fraction
color	Literal	Colour used for units and values
colour	Literal	Colour used for units and values
colorall	Boolean	Switch for colouring all output
colourall	Boolean	Switch for colouring all output
colorneg	Boolean	Colour negative numbers
colourneg	Boolean	Colour negative numbers
colorunits	Boolean	Switch for colouring units
colourunits	Boolean	Switch for colouring units
colorvalues	Boolean	Switch for colouring values
colourvalues	Boolean	Switch for colouring values
decimalsymbol	List or literal	Decimal symbol
debug	Boolean	Write debugging data to log
detectdisplay	Boolean	Treat display maths separately
digitsep	List	Separation of digits in large numbers
dp	Integer	Number of decimal places to output numbers to
emulate	Modules	Emulation modules to load
errspace	List	Spacing of bracketed error
eVcorra	Length	Spacing correction in eV
eVcorrb	Length	Spacing correction after eV
expbase	List or literal	Base used for exponents
expproduct	List or literal	Product sign for exponents
fixdp	Boolean	Switch for fixing decimal places of numbers
fixsf	Boolean	Switch for fixing significant figures of numbers
fraction	List	Method used when setting per=frac
inlinebold	List	Select how inline bold is tested
load	Modules	Modules to load
locale	Modules	Locale to follow
loctolang	Special	Associate locale with babel language
log	List	Amount of data added to log
mathOmega	Literal	" Ω " symbol in maths mode
mathcelsius	Literal	" $^{\circ}\text{C}$ " symbol in maths mode
mathdegree	Literal	" $^{\circ}$ " symbol in maths mode
mathminute	Literal	" $'$ " symbol in maths mode
mathmu	Literal	" μ " symbol in maths mode
mathringA	Literal	" \AA " symbol in maths mode
mathrm	Csname	Roman maths font
mathsOmega	Literal	" Ω " symbol in maths mode
mathscelsius	Literal	" $^{\circ}\text{C}$ " symbol in maths mode
mathsdegree	Literal	" $^{\circ}$ " symbol in maths mode

Continued on next page

Option	Type	Description
mathsecond	Literal	"'" symbol in maths mode
mathsf	Csname	Sans serif maths font
mathsminute	Literal	"'" symbol in maths mode
mathsmu	Literal	"μ" symbol in maths mode
mathsringA	Literal	"Å" symbol in maths mode
mathsrn	Csname	Roman maths font
mathssecond	Literal	"'" symbol in maths mode
mathssf	Csname	Sans serif maths font
mathstt	Csname	Fixed-width maths font
mathtt	Csname	Fixed-width maths font
mode	List	Use text or maths mode for typesetting
negcolor	Literal	Colour used for negative numbers
negcolour	Literal	Colour used for negative numbers
noload	Modules	Modules not to load
numaddn	Literal	Additional input allowed in numbers
numcloseerr	Literal	Character indicating end of numerical error
numdecimal	Literal	Decimal symbols in numbers
numdigits	Literal	Digit characters in numbers
numdiv	Literal	Division characters in numbers
numexp	Literal	Exponent characters in numbers
numgobble	Literal	Characters to ignore in numbers
numopenerr	Literal	Character indicating start of numerical error
numprod	Literal	Characters used for a product
numsign	Literal	Sign characters in numbers
obeyall	Boolean	Combination of obeybold, obeyitalic and obeymode
obeybold	Boolean	Check local bold setting
obeyitalic	Boolean	Check local italic setting
obeymode	Boolean	Check local mode (text/maths)
openerr	Literal	Opens potentially-ambiguous error
openfrac	Literal	Opens potentially-ambiguous fraction
padangle	List	Add zeros to blank parts of angles
padnumber	List	Add zeros to blank parts of numbers
per	List	Behaviour of \per
prefixbase	List or literal	Base used when making prefixes numerical
prefixproduct	List or literal	Product sign for prefixes
prefixsymbolic	Boolean	Behaviour of unit prefixes
prespace	Boolean	Add space before units
redefsymbols	Boolean	Use better symbols if available
repeatunits	List	Repeat units with separated errors and products
retainplus	Boolean	Retain explicit plus sign
seperr	Boolean	Separate number and error

Continued on next page

Option	Type	Description
sepfour	Boolean	Separate four-digit numbers
sf	Integer	Number of significant figures to output numbers to
sign	List or literal	Sign to add to numbers
slash	List or literal	Symbol used for “/”
stickyper	Boolean	Require \per only once
strict	Boolean	Obey the rules strictly
strictarc	Boolean	Require exactly zero or two semi-colons
tabalign	List	Positioning of all column data
tabalignexp	Boolean	Alignment of exponents in tables
tabautofit	Boolean	Switch for rounding numbers to length given by <code>tabformat</code>
tabformat	Number	Space reserved in table for numbers
tabnumalign	List	Alignment of <code>S</code> column numbers
tabparseonly	Boolean	Do not align <code>S</code> columns on decimal marker
tabtextalign	List	Positioning of text in <code>S</code> columns
tabunitalign	List	Positioning of units in <code>s</code> columns
textcelsius	Literal	“°C” symbol in text mode
textdegree	Literal	“°” symbol in text mode
textminute	Literal	“'” symbol in text mode
textmu	Literal	“μ” symbol in text mode
textomega	Literal	“Ω” symbol in text mode
textringa	Literal	“Å” symbol in maths mode
textrm	Csname	Roman text font
textsecond	Literal	“''” symbol in text mode
textsf	Csname	Sans serif text font
texttt	Csname	Fixed-width text font
tightpm	Boolean	Reduce space around ±
trapambigerr	Boolean	Check for ambiguous errors
trapambigfrac	Boolean	Check for ambiguous fractions
unitcolor	Literal	Switch for colouring units
unitcolour	Literal	Switch for colouring units
unitmathrm	Csname	Roman maths font for units
unitmathsf	Csname	Sans serif maths font for units
unitmathsrn	Csname	Roman maths font for units
unitmathssf	Csname	Sans serif maths font for units
unitmathstt	Csname	Fixed-width maths font for units
unitmathtt	Csname	Fixed-width maths font for units
unitmode	List	As <code>mode</code> , for units only
unitsep	List or literal	Separator for units
unitspace	List or literal	Space used for “~” in units
valuecolor	Literal	Switch for colouring value
valuecolour	Literal	Switch for colouring value
valuemathrm	Csname	Roman maths font for values
valuemathsf	Csname	Sans serif maths font for values

Continued on next page

Option	Type	Description
<code>valuemathsr</code>	Csname	Roman maths font for values
<code>valuemathss</code>	Csname	Sans serif maths font for values
<code>valuemathstt</code>	Csname	Fixed-width maths font for values
<code>valuemaththt</code>	Csname	Fixed-width maths font for values
<code>valuemode</code>	List	As <code>mode</code> , for values only
<code>valuesep</code>	List or literal	Separator between value and unit
<code>xspace</code>	Boolean	Use <code>xspace</code> after units

11 Emulation of other packages

`siunitx` has been designed as a replacement for `Slunits`, `Slstyle`, `unitsdef`, `units`, `hepunits`, `fancyunits` and `fancynum`. It therefore provides options reproduce the functions of all of these packages. In this way, `siunitx` should be usable as a straight replacement for the older packages.³⁸ This means for example that the `\num` macro takes an optional star when emulating `Slstyle`. However, there are some points that should be remembered. In particular, `siunitx` validates numerical input, meaning that places where a number is expected in the older packages *require* a number when emulated by `siunitx`.

The `numprint` package has provided many useful ideas for the code used here for number formatting. The basic use of the `\numprint` (or `\np`) macro can be reproduced using `siunitx`. However, `numprint` is large and complex, with its own backward-compatibility options. As a result, emulation of `numprint` is not provided here. To use a `numprint` document with `siunitx`, the `\numprint` macro could be provided using the following code.

```

-123 456
-123 456 N/mm2

\newcommand*{\numprint}[2][\SI[obeymode]{#2}{#1}]{\SI[obeymode]{#2}{#1}}
\numprint{-123456} \SI[obeymode]{-123456}{N/mm^2}

```

`siunitx` can be used more-or-less directly to replace both `dcolumn` and `rcol`. As is explained in the code section, much of the column-alignment system here is taken from `dcolumn`, while `rcol` provided a model for a customisable system. However, neither package has been directly emulated here. The `S` column type can be used to replace both `D` and `R` columns by setting the appropriate package options.

12 Configuration files

`siunitx` is a modular package. The unit definitions, abbreviations and locales are all stored in configuration files. These all take names of the form `si-⟨name⟩.cfg`, where `⟨name⟩` is the part of the filename used as an option in `\sisetup` or when loading `siunitx`. Producing new configuration files therefore consists of making a suitably-named file and adding it to the path searched by `TEX`. The files should normally consist of settings (in `\sisetup`) and unit definitions, *etc.*

`\addtolocale` To allow arbitrary macros to be stored in locales, the `\addtolocale` macro

³⁸User macros means that they are described in the package documentation; simply not containing an `@` does not mean they will have been emulated.

is provided. This ensures that arbitrary text is only executed when using a locale, not when loading it. The macro takes two arguments, $\langle locale \rangle$ and $\langle code \rangle$.

Some text as filler
TEST This example is rather trivial!

```
\addtolocale{DE}{TEST}
Some text as filler \\
\sisetup{locale=DE}
This example is rather trivial!
```

`\requiresiconfigs` To load one or more configuration files from inside another configuration file, the `\requiresiconfigs` macro is provided. This accepts a comma-separated list of configuration names, in the same way as `load` or `noload`.

In addition to the various configuration files provided with the package, a local file `siunitx.cfg` may be provided. This is read at the end of loading `siunitx`, and allows the user to include any local definitions or settings easily.

13 Common questions

13.1 Why do I need `\per` more than once?

The unit engine of `siunitx` is based around the English method for reading units out loud. Thus $\text{J mol}^{-1} \text{K}^{-1}$ is pronounced “joules per mole per kelvin”. Hence by default you need to put `\per` before each item in the denominator of a unit. The behaviour can be altered by setting the `stickyper` option.

13.2 Why is the order of my units changed?

Then using `per=reciprocal`, the units are typeset as given. However, when using `per=slash` or `per=fraction`, the package needs to find which ones are in the denominator. It then prints the numerator and denominator separately. So if you give a unit in the denominator *before* one in the numerator, they have to be re-ordered.³⁹

$88 \text{ kg}^{-1} \text{ m}$
 66 m/kg

```
\SI{88}{\per\kilogram\metre} \\
\SI[per=slash]{66}{\per\kilogram\metre}
```

13.3 Why are compound units not recommended outside of `\SI/\si`?

To fully process units made up of several parts, the processor has to know where the end of the unit is. When the unit macros are used outside of `\SI/\si`, this is not the case. The package therefore does its best, but results may be sub-optimal. To get consistent results, either define a new *single* unit, or keep compound units inside `\SI` and `\si`.

$\text{m}/\mu\text{s}$
 $\text{m } \mu\text{s}^{-1}$
 $\text{m } \mu\text{s}^{-1}$
 $\text{kg m } \mu\text{s}^{-1}$
 $\text{kg m } \mu\text{s}^{-1}$

```
\metre\per\micro\second \\
\si{\metre\per\micro\second} \\
\newunit{\myunit}{\metre\per\micro\second}
\myunit
\newunit{\myunittwo}{\kilogram\myunit} \\
\myunittwo \\
\kilogram\myunit
```

³⁹“Double division” (1 s/m/kg) is mathematically incorrect.

Notice the difference in behaviour of `\per` in the first two lines, and the spacing error on the last line in the example.

13.4 How do I set superscripts to use lining numbers?

Lowercase (“old style”) numbers are favoured by many people for use in running text. However, this does not necessarily look good in superscripts. The mode used to typeset data can be varied, so that maths mode numbers are used for the unit part of the output.

$1234\,\mathrm{m\,s^{-1}}$	<code>\SI[mode=text]{1234}{\metre\per\second}\%</code>
$1234\,\mathrm{m\,s^{-1}}$	<code>\SI[valuemode=text,unitmode=maths]{1234}{\metre\per\second}</code>

13.5 Why do most of the examples use $\mathrm{J\,mol^{-1}\,K^{-1}}$?

The package author is a chemist, and this is the unit of entropy (disorder). It nicely demonstrates the use of the `\per` macro, and so it crops up a lot. It is also in the subsection heading here to act as a test with `hyperref` and moving arguments!

13.6 What can `numprint` do that `siunitx` cannot?

`siunitx` uses a lot of ideas from `numprint`: a reasonable amount of the number-processing code here is based on that in `numprint`. However, the two packages have somewhat different aims, and as a result there are things that `numprint` can do that `siunitx` does not implement. The main features of `numprint` not available here are:

- General support for numbers with base other than 10 (see `nbaseprt`);
- Alignment of the decimal marker of powers in tables;
- Alignment of numbers in running text;
- Specific formatting commands for $\mathrm{T\!E\!X}$ counters and lengths.

14 Tricks and known issues

14.1 Ensuring maths mode

Due to the possibility of output in either maths or text mode, any input which requires a particular mode needs to be protected. You cannot use `$. . . $`, as this can get “caught out”, but also as it may give hard-to-follow errors. Always use `\ensuremath` to force maths processing, and `\text` (from the $\mathcal{A}\mathcal{M}\mathcal{S}\mathcal{T}\mathcal{E}\mathcal{X}$ bundle) to ensure text mode.

Table 18: Passing single digit characters

Heading
1-2
1
1
-

14.2 Using . and fixed spaces in units

To use a literal . in a unit, it has to be within an extra set of braces. This does not need any extra protection, unlike the situation with `SIstyle` (for example, no `\text` macro is needed). The fixed space (`~`) is more problematic: set `unitspace=space` to get a full space here.

10 V vs. NHE

```
\newunit[unitspace=space]{\myunit}{V~vs{.}~NHE}%
\SI{10}{\myunit}
```

14.3 Passing unprocessed digits through an S column

The method used to detect numbers in an `S` column will pick up material wrapped inside braces if there is more than a single character inside the braces. If you want to pass a *single* numerical character without processing it, you need two sets of braces (Table 18).

```
\begin{table}
\centering
\caption{Passing single digit characters}
\label{tab:S-limits}
\begin{tabular}{S[colourall,colour=orange]}
\toprule
{Heading} \\
\midrule
{1-2} \\
{1} \\
{{1}} \\
{{-}} \\ % Using {-} gives an error!
\bottomrule
\end{tabular}
\end{table}
```

14.4 Limitations of `\mathrm`

The package uses the `\mathrm` font family by default to typeset output in maths mode. This however has a few side-effects. For example, the Greek alphabet can give odd results.⁴⁰ The use of the `\mathnormal` font *may* get around this issue.

⁴⁰This depends on your font setup; this document uses T1 encoding, which shows the issue, whereas using OT1 does not.

$4\text{f}\times 10^{-7}$
 $4\pi\times 10^{-7}$

```
\num[numaddn=\pi]{4\pi e-7}\n
\num[numaddn=\pi,mathsrn=mathnormal]{4\pi e-7}
```

On the other hand, you may want to use text mode, in which case `\ensuremath` is needed. Depending on the exact circumstances, the \LaTeX protection mechanism (`\DeclareRobustCommand`) may be sufficient; in some cases, this will fail and the $\varepsilon\text{-TeX}$ `\protected` system may be required. There are several potential pitfalls in this area; experimentation may well be needed.

$4\pi\times 10^{-7}$

```
\DeclareRobustCommand*\numpi{\ensuremath{\pi}}
\num[numaddn=\numpi,mode=text]{4\numpi e-7}
```

14.5 Entire document in sans serif font

If your entire document is not in a Roman font, using the font detection system is not the most efficient method for setting the `siunitx` output. Instead, the `mathrm` and `textrm` package options can be redefined.

Some text
 1×10^2
 3 N

$4\times 10^5\text{ Pa}$

```
\sffamily
Some text \n
\sisetup{obeyfamily=false,mathrm=mathsf,textrm=sffamily}
\num{1e2} \n
\SI{3}{\newton}
\[ \SI{4e5}{\pascal} \]
```

14.6 Effects of emulation

The package has been designed so that almost everything can be set using the options. In the emulation code, some internal macros are redefined. This is because the legacy packages do odd things, which are deliberately not implemented by `siunitx`. Using an emulation file will prevent subsequent loading of the real package. This is to prevent errors or, worse, difficult to diagnose changes to output.

14.7 Centring columns on non-decimal input

The `dcolumn` manual suggests using that package to align a column on a \pm sign. The same type of output is possible using `siunitx`, but some care is needed (Table 19). Odd things may happen: use with care!

```
\begin{table}
\centering
\caption{Non-standard \texttt{S} column}
\label{tab:dcolumn}
\begin{tabular}{%
S[digitsep=none,decimalsymbol={\, \pm\,},
numdigits={0123456789.},numdecimal=+]}
\toprule
{Some Values} \n
\midrule
2.3456 + 0.02 \n
34.2345 + 0.001 \n
56.7835 + 0.067 \n
```

Table 19: Non-standard S column

Some Values
2.3456 ± 0.02
34.2345 ± 0.001
56.7835 ± 0.067
90.473 ± 0.021

```

90.473 + 0.021 \\
\bottomrule
\end{tabular}
\end{table}

```

14.8 Expanding content in tables

When processing S columns, siunitx works hard to expand any items which may give numbers. So for example you can define values as macros (Table 20). To avoid the expansion of single macros, you must either wrap them in two sets of braces or make them robust (using either `\DeclareRobustCommand` or `\protected`).

```

\begin{table}
\centering
\caption{Values as macros}
\label{tab:vmacros}
\newcommand*{\myvala}{1.234}%
\newcommand*{\myvalb}{20.345}%
\newcommand*{\myvalc}{0.987654}%
\DeclareRobustCommand*{\myvald}{88.88}%
\begin{tabular}{S[tabtextalign=left]}
\toprule
{Some Values} \\
\midrule
\myvala \\
\myvalb \\
\myvalc \\
{{\myvala}} \\
\myvald \\
\bottomrule
\end{tabular}
\end{table}

```

It is possible to use calculated values in tables. For this to work, the calculation must take place before attempting to parse the number. This means that any calculation code should be wrapped in braces and appear before the use of the number. This is illustrated by using the `datatool` package to set up a miniature database, and then output the values doubled (Table 21). This example also shows that macros such as `\DLTforeach`, which construct a table while \TeX is running, cannot be placed inside an S column (or an s one). Instead, an

Table 20: Values as macros

Some Values
1.234
20.345
0.987 654
1.234
88.88

Table 21: Calculated values

Value	Doubled
66.7012	133.4024
66.0212	132.0424
64.9026	129.8052

additional dummy column has been added with no inter-column space. This is used to contain the tale-building macro.

```

\DTLnewdb{data}
\DTLnewrow{data} \DTLnewdbentry{data}{value}{66.7012}
\DTLnewrow{data} \DTLnewdbentry{data}{value}{66.0212}
\DTLnewrow{data} \DTLnewdbentry{data}{value}{64.9026}
\begin{table}
  \caption{Calculated values}
  \label{tab:calc}
  \centering
  \sisetup{tabformat=2.4}
  \begin{tabular}{SS@{}l}
    \toprule
    {Value} & {Doubled} & \\
    \DTLforeach{data}{\myvalue=value}{%
      \DTLiffirstrow {\midrule}{\midrule}%
      \myvalue & % First column
      {\DTLmul{\myvalue}{\myvalue}{2}} \myvalue % second column
      & }\\
    \bottomrule
  \end{tabular}
\end{table}

```

14.9 Adding items after the last column of a tabular

If you use an `S` or `s` column as the last one in a `tabular`, and you use the array “<” construction to add items after it, the spacing may be wrong. This will occur if the column contents are of differing widths. Changing the \LaTeX `\lineending` for the plain \TeX `\cr` will give the correct spacing, but does not allow adjustment

Table 22: Correcting spacing in last S column

Long header	Long header	Long header	Long header
1.23 kg	1.23 kg	1.23 kg	1.23 kg
4.56 kg	4.56 kg	4.56 kg	4.56 kg
7.8 kg	7.8 kg	7.8 kg	7.8 kg

of inter-row distance (Table 22).⁴¹ In most cases, this should not be a serious issue. Notice that an extra set of braces is needed here, compared to usual L^AT_EX use; this is to prevent any expansion of the material by siunitx.

```
\begin{table}
  \caption{Correcting spacing in last \texttt{S} column}
  \label{tab:cr}
  \hfil
  \begin{tabular}{S<{\, \si{\kg}} S<{\, \si{\kg}} }
    \toprule
    \multicolumn{1}{c}{Long header} &
    \multicolumn{1}{c}{Long header} \\
    \midrule
    1.23 & 1.23 \\
    4.56 & 4.56 \\
    7.8 & 7.8 \\
    \bottomrule
  \end{tabular}
  \hfil
  \begin{tabular}{S<{\, \si{\kg}} S<{\, \si{\kg}} }
    \toprule
    \multicolumn{1}{c}{Long header} &
    \multicolumn{1}{c}{Long header} \\
    \midrule
    1.23 & 1.23 \cr
    4.56 & 4.56 \cr
    7.8 & 7.8 \cr
    \bottomrule
  \end{tabular}
  \hfil
\end{table}
```

15 Reporting a problem

siunitx is quite long and complicated, and works hard to cover all possible eventualities. However, there will be bugs in the code and unexpected interactions with other packages. If you think you have found a bug, please report it. A short

⁴¹For the T_EX experts, the issue here is that the system to gather up cell contents is added in using the < construction. Normally, this comes after the cell contents and any other < arguments, so collects the user additions. However, in the last cell the contents include \\, which is converted to \cr before gathering can occur. By using \cr directly, the gathering process receives all of the cell contents as normal.

test-case demonstrating the problem would be very welcome. The following is a suitable template, and is available as `si-bug.ltx` in the `doc/latex/siunitx` directory or by running the `.dtx` or `.ins` file through \TeX .

```
1 \listfiles
2 \documentclass{article}
```

Load other packages needed here.

```
3 \usepackage{siunitx}
```

Normally, debugging the load procedure will not be needed; the debug option here means that all run-time information is logged.

```
4 \sisetup{debug}
5 \begin{document}
6 This is the bug test-case document for the \textsf{siunitx}
7 package.\\
8 Please put your demonstration here, and e-mail to the package
9 author.
10 \begin{center}
11   \texttt{joseph.wright@morningtar2.co.uk}
12 \end{center}
13 \end{document}
```

16 Feature requests

Feature requests for `siunitx` are welcome. The package maintainer will consider any ideas within the remit of the package (units and values). If suggesting a new feature, an example of how it should work would be appreciated. If new controls are needed, some suggestions for option names would be welcome.

17 Acknowledgements

Many thanks indeed to Stefan Pinnow, who has made a very large number of suggestions and found numerous bugs in the package. His contribution to the package has been vital. The package author has learned \LaTeX tricks from far too many people to thank all of them. However, for this package specific thanks must go to the authors of the existing “unit” packages: Danie Els (`Slstyle`), Marcel Heldoorn (`Slunits`), Patrick Happel (`unitsdef`), Axel Reichert (`units`) and Harald Harders (`numprint`). Will Robertson and Heiko Oberdiek deserve much credit for demonstrating \LaTeX coding best practice. Victor Eijkhout’s excellent (and free) *\TeX by Topic* has provided some useful coding hints [2]. The idea for combining and extending unit provision in \LaTeX was heavily inspired by Philip Lehmann’s `biblatex`. Thanks to the various contributors of ideas for the package: Donald Arseneau, Michele Dondi, Paul Gans, Ben Morrow, Lan Thuy Pham, Alan Ristow, Patrick Heinze, Andrea Blomenhofer, Morten Høgholm, Burkhard Moddemann and Patrick Steegstra.

Part III

Correct application of (SI) units

18 Background

Consistent and logical units are a necessity for scientific work, and have applicability everywhere. Historically, a number of systems have been used for physical units. SI units were introduced by the *Conférence Générale des Poids et Mesures* (CGPM) in 1960. SI units are a coherent system based on seven base units, from which all other units may be derived.

At the same time, physical quantities with units are mathematical entities, and as such way that they are typeset is important. In mathematics, changes of type (such as using bold, italic, sans serif typeface and so on) convey information. This means that rules exist not only for the type of units to be used under the SI system, but also the way they should appear in print. Advice on best practice has been made available by the *National Institute of Standards and Technology* (NIST) [3].

As befits an agreed international standard, the full rules are detailed. It is not appropriate to reproduce these in totality here; instead, a useful summary of the key points is provided. The full details are available from the *Bureau International des Poids et Mesures* (BIPM) in French [4] and English [5]. They also publish a very useful and detailed guide to using units, values and so on, available online in a number of different formats [6].

siunitx takes account of the information given here, so far as is possible. Thus the package defaults follow the recommendations made for typesetting units and values. Spacing and so forth is handled in such a way as to make implementing the rules (relatively) easy.

19 Units

19.1 SI base units

There are seven base SI units, listed in Table 5. Apart from the kilogram, these are defined in terms of a measurable physical quantity needing the definition alone.⁴² The base units have been chosen such that all physical quantities can be expressed using an appropriate combination of these units, needing no others and with no redundancy. The kilogram is slightly different from the other base units as it is still defined in terms of a “prototype” held in Paris.⁴³

19.2 SI derived units

All other units within the SI system are regarded as “derived” from the seven base units. At the most basic, all other SI units can be expressed as combinations of the base units. However, many units (listed in Table 7, Table 8 and Table 9)

⁴²Some base units need others defined first; there is therefore a required order of definition.

⁴³At the time of writing, this is under review and will be altered.

have a special name and symbol.⁴⁴ Most of these units are simple combinations of one or more base units (raised to powers as appropriate). A small number of units derived from experimental data are allowed as SI units (Table 8).

Some of these units (in Table 9) are regarded as only “temporarily” accepted, as the use of only the base and fully-consistent derived units in Table 7 is encouraged. They are accepted as they are in common use in one or more disciplines; some are still very widespread in the appropriate areas. These units are mainly multiples of base units (for example, a tonne is 1000 kg).

One point to note is that “unitless ratios” are regarded as having base units which cancel out. For example, the radian is regarded as having base unit m m^{-1} . The result of this division (“1”) is therefore regarded as a derived SI unit in this context.

19.3 SI prefixes

A series of SI prefixes for decimal multiples and submultiples are provided, and can be used as modifiers for any SI unit (either base or derived units) with the exception of the kilogram. The prefixes are listed in Table 6. No space should be used between a prefix and the unit, and only a single prefix should be used. Even the degree Celsius can be given a prefix, for example $1 \text{ m}^\circ\text{C}$. The only exception to this rule is for degrees, minutes and seconds of an arc: $1^\circ 2' 3''$.

It is important to note that the kilogram is the only SI unit with a prefix as part of its name and symbol. Only single prefix may be used, and so in the case of the kilogram prefix names are used with the unit name “gram” and the prefix symbols are used with the unit symbol g. For example $1 \times 10^{-6} \text{ kg} = 1 \text{ mg}$.

19.4 Other units

The application of SI units is meant to provide a single set of units which ensure consistency and clarity across all areas. However, other units are common in many areas, and are not without merit. The units provided by `siunitx` by default do not include any of these; only units which are part of the SI set or are accepted for use with SI units are defined. However, several other sets of units can be loaded as optional modules. The binary prefixes and units (Section 8.1 and Table 12) are the most obvious example. These are *not* part of the SI specifications, but the prefix names are derived from those in Table 6.

Other units (such as those provided by the modules `synchem`, `hep` and `astro`) are normally to be avoided where possible. SI units should, in the main, be preferred due to the advantages of clear definition and self-consistency this brings. However, there will probably always be a place for specialist or non-standard units. This is particularly true of units derived from basic physical constants; for example reason, the `hep` module defines the speed of light, c , as a unit. For work in basic science, a small number of physical constants are recognised as units provided the results for comparison with experiment are given in SI units.

There are also many areas where non-standard units are used so commonly that to do otherwise is difficult or impossible. For example, most synthetic che-

⁴⁴The nautical mile has a given name but no agreed symbol, and although accepted by the SI is not provided by `siunitx` as a unit macro.

mists measure the pressure inside vacuum apparatus in mmHg, partly because the most common gauge for the task still uses a column of mercury metal. For these reasons, siunitx does define non-SI units.

20 Units and values in print

20.1 Mathematical meaning

As explained earlier, a unit–value combination is a single mathematical entity. This has implications for how both the number and the unit should be printed. Firstly, the two parts should not be separated. With the exception of the symbols for plane angles ($^{\circ}$, $'$ and $''$), it is usual to have a space between the unit and the value. This should therefore be a non-breaking space between the two. Different geographical areas have different conventions on the size of this space; a “small” space ($\, , \,$) is the siunitx default.

A space for 10 %
and also for 100 °C
but not for 1.23°.

A space for `\SI{10}{\percent}` \\
and also for `\SI{100}{\celsius}` \\
but not for `\ang{1.23}`.

The mathematical meaning of units also means that the shape, weight and family are important. Units are supposed to be typeset in an upright, medium weight serif font. Italic, bold and sans serif are all used mathematically to convey other meanings. siunitx package defaults again follow this convention: any local settings are ignored, and uses the current upright serif maths font. However, there are occasions where this may not be the most desirable behaviour. A classic example would be in an all-bold section heading. As the surrounding text is bold, some people feel that any units should follow this.

Units should **not be bold**: 54 F
But perhaps in a running block,
it might look better: 54 F

Units should `\textbf{not be bold: \SI{54}{\farad}}` \\
`\textbf{But perhaps in a running block, \\`
`it might look better: \SI[obeybold]{54}{\farad}}`

20.2 Unit multiplication and division

Symbols for units formed from other units by multiplication are indicated by means of either a half-height (that is, centred) dot or a (thin) space. This document uses a half-height dot as (i) this is the recommendation of NIST, amongst others and (ii) it avoids potential confusion between unit prefixes and multiplied units.

m s = metre second
ms = millisecond
m s = metre second
ms = millisecond

`\si{\metre\second} = \mbox{metre second}$ \\`
`\si{\milli\second} = \mbox{millisecond}$ \\`
`\sisetup{unitsep=thin}`
`\si{\metre\second} = \mbox{metre second}$ \\`
`\si{\milli\second} = \mbox{millisecond}$`

There are some circumstances under which it is permissible to omit any spaces. The classic example is kWh, where “kW h” does not add any useful information. If using such a unit repeatedly, users of siunitx are advised to create a custom unit to ensure consistency.⁴⁵

⁴⁵`\kWh` and `\kilowatthour` are defined by siunitx in this way.

Symbols for units formed from other units by division are indicated by means of a virgule (oblique stroke, slash, /), a horizontal line, or negative exponents.⁴⁶ However, to avoid ambiguity, the virgule must not be repeated on the same line unless parentheses are used. This is ensured when using named unit macros in siunitx, which will “trap” repeated division and format it correctly. In complicated cases, negative exponents are to be preferred over other formats.

$$\frac{\text{J mol}^{-1} \text{K}^{-1}}{\frac{\text{J}}{\text{mol K}}}$$

```
\si{\joule\per\mole\per\kelvin} \\
\si[per=fraction]{\joule\per\mole\per\kelvin} \\
\si[per=slash]{\joule\per\mole\per\kelvin}
```

20.3 Repeating units

Products and errors should show what unit applies to each value given. Thus $2\text{ m} \times 3\text{ m}$ is an ordered set of lengths of a geometric area, whereas $2 \times 3\text{ m}$ is a length (and equal to 6 m). Thus, \times is not a product but is a mathematical operator; in the same way, a 2×3 matrix is not a 6 matrix! In some areas, areas and volumes are given with separated units but a unit raised to the appropriate power: $2 \times 3\text{ m}^2$. Although this does display the correct overall units, it is potentially-confusing and is not encouraged.

20.4 Clarity in writing values of quantities

Care must be taken when writing ranges of numbers. For purely numerical values, it is common to use an en-dash between values, for example “see pages 1–5”. On the other hand, values with units could be misinterpreted as negative values if written in this way. As the unit–value combination is a single mathematic entity, writing the values with an en-dash followed by a single unit is also incorrect. As a result, using the word “to” is strongly recommended.

1 m to 5 m long.

```
\SI{1}{\metre} to \SI{5}{\metre} long.
```

20.5 Graphs and tables

In graphs and tables, repetition of the units following each entry or axis mark is confusing and repetitive. It is therefore best to place the unit in the label part of the information. Placing the unit in square brackets is common but mathematically poor.⁴⁷ Much better is to show division of all values by the unit, which leaves the entries as unitless ratios. This is illustrated in Table 23 and Figure 1.

```
\begin{table}
\centering
\caption{An example of table labelling}
\label{tab:label}
\begin{tabular}{cS[tableformat=1.4,tabnumalign=centre]}
\toprule
{Entry} & {Length/\si{\metre}} \\
\end{tabular}
\end{table}
```

⁴⁶Notice that a virgule and a solidus are not the same symbol.

⁴⁷For example, for an acceleration a , the expression $[a]$ is the dimensions of a , i.e. length per time squared in this case.

Table 23: An example of table labelling

Entry	Length/m
1	1.1234
2	1.1425
3	1.7578
4	1.9560

```

\midrule
1 & 1.1234 \\
2 & 1.1425 \\
3 & 1.7578 \\
4 & 1.9560 \\
\bottomrule
\end{tabular}
\end{table}

\begin{figure}
\centering
\begin{tikzpicture}
\begin{axis}[xlabel=$t/\text{second}$,ylabel=$d/\text{metre}$]
\addplot[smooth,mark=x]
plot coordinates {
(0,0)
(1,5)
(2,8)
(3,9)
(4,8)
(5,5)
(6,0)
};
\end{axis}
\end{tikzpicture}
\caption{An example of graph labelling}
\label{fig:label}
\end{figure}

```

In most cases, adding exponent values in the body of a table is less desirable than adding a fixed exponent to column headers. An example is shown in [Table 24](#). The use of `\multicolumn` is needed here due to the “<”; without `\multicolumn`, the titles are followed by “kg”!

```

\begin{table}
\centering
\caption{Good and bad columns}
\label{tab:exp}
\sisetup{tabnumalign=centre}
\begin{tabular}{c}
c \\
S[tabformat=1.3e1]<\,\text{kilogram}\}
\end{tabular}
\end{table}

```

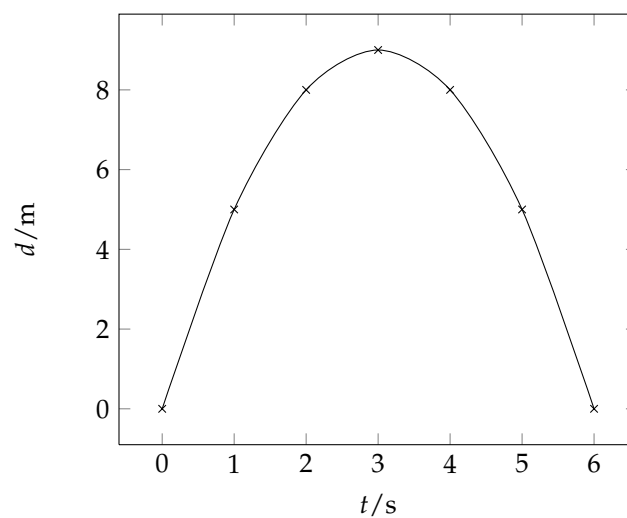


Figure 1: An example of graph labelling

Table 24: Good and bad columns

Entry	Mass	Mass/ 10^3 kg
1	4.56×10^3 kg	4.56
2	2.40×10^3 kg	2.40
3	1.345×10^4 kg	13.45
4	4.5×10^2 kg	0.45

```

S[tabformat=2.2]}
\toprule
Entry & \multicolumn{1}{c}{Mass} &
      {Mass/\SI{e3}{\kilogram}} \\
\midrule
1 & 4.56e3 & 4.56 \\
2 & 2.40e3 & 2.40 \\
3 & 1.345e4 & 13.45 \\
4 & 4.5e2 & 0.45 \\
\bottomrule
\end{tabular}
\end{table}

```

Part IV

Notes

21 Change History

v1.0		Unit processor extended to interpret _ correctly	11	
	General: First official release	1		
v1.1		v1.1d		
	General: New fixsf option	26	General: Added tabexpalign as an alias for tabalignexp . . .	27
	New sf option	26	New units \micoliter, \milliliter, \micL and \mL	17
	Qualifiers introduced	19		

22 Index

Numbers written in *italic* refer to the page where the corresponding entry is described; numbers underlined refer to the code line of the definition; numbers in *roman* refer to the code lines where the entry is used.

A			
\ab	21	\bit	19
addsign (option)	25	\byte	19
\addtolocale	37	C	
allowoptarg (option)	31	\candela	14
allowzeroexp (option)	25	\celsius	15
alsoload (option)	33	\centi	14
\ampere	14	\centimetre	16
\amu	16	\centimetrecubed	17
\ang	10	\centimetresquared	17
angformat (option)	27	\clight	20
anglesep (option)	23	closeerr (option)	24
\angstrom	16	closefrac (option)	30
\arcmin	15	\cm	16
\arcsec	15	\cmc	17
\are	16	\cms	17
\as	16	color (option)	32
astroang (option)	27	colorall (option)	32
\atomicmass	15, 16	colorneg (option)	32
\atomicmassunit	15	colorunit (option)	32
\atto	14	colorvalue (option)	32
\attobarn	21	colour (option)	32
\attosecond	16	colourall (option)	32
B		colourneg (option)	32
\BAR	16	colourunits (option)	32
\barn	16	colourvalues (option)	32
\bbar	16	\coulomb	15
\becquerel	15	\cubed	12
\bel	15	\cubic	12
		\cubiccentimetre	17

\cubicdecimetre	17	\giga	14
\curie	16	\gigaelectronvolt	17
D		\gigahertz	17
\dalton	20	\gigaohm	18
\Day	15	\Gray	15
\dday	15	H	
debug (option)	33	\hectare	16
\deca	14	\hecto	14
\deci	14	\hectopascal	18
decimalsymbol (option)	24	\henry	15
\decimetre	16	\hertz	15, 17
\degree	15	\hour	15
detectdisplay (option)	23	\Hz	17
digitsep (option)	23, 24	J	
\dm	16	\joule	15
\dmc	17	K	
dp (option)	26	\kA	17
E		\katal	15
\electronvolt	15, 17	\kelvin	14
emulate (option)	33	\keV	17
errspace (option)	23	\kg	16
\eV	17	\kHz	17
eVcorra (option)	32	\kibi	20
eVcorrb (option)	32	\kilo	14
\eVperc	20	\kiloampere	17
\exa	14	\kiloelectronvolt	17
\exbi	20	\kilogram	14, 16
expbase (option)	25	\kilohertz	17
expproduct (option)	25	\kilojoule	17
F		\kilometre	16
\farad	15	\kilonewton	18
\fb	21	\kiloohm	18
\femto	14	\kilovolt	17
\femtobarn	21	\kilowatt	18
\femtofarad	18	\kilowatthour	18
\femtogram	16	\kJ	17
\femtomole	17	\km	16
\femtosecond	16	\kV	17
\fg	16	L	
fixdp (option)	26	\lightyear	20
fixsf (option)	26	\liter	14, 15
\fmol	17	\litre	14, 15
fraction (option)	30	load (option)	33
\fs	16	locale (option)	32
G		loctolang (option)	32
\gal	16	log (option)	33
\gauss	21	\lumen	15
\GeV	17	\lux	15
\ggray	15	M	
\GHz	17	\mA	17
\gibi	20		

numprod (option)	25	mathsminute	31
numsign (option)	24	mathsmu	31
O			
obeyall (option)	22	mathsOmega	31
obeybold (option)	22	mathsringA	31
obeyfamily (option)	22	mathsrm	23
obeyitalic (option)	22	mathssecond	31
obeymode (option)	22	mathssf	23
\ohm	15	mathstt	23
openerr (option)	24	mathtt	23
openfrac (option)	30	mode	22
options:		negcolor	32
addsign	25	negcolour	32
allowoptarg	31	noload	33
allowzeroexp	25	numaddn	24
alsoload	33	numcloseerr	24
angformat	27	numdecimal	24
anglesep	23	numdigits	24
astroang	27	numdiv	24
closeerr	24	numexp	24
closefrac	30	numgobble	24
color	32	numopenerr	24
colorall	32	numprod	25
colorneg	32	numsign	24
colorunit	32	obeyall	22
colorvalue	32	obeybold	22
colour	32	obeyfamily	22
colourall	32	obeyitalic	22
colourneg	32	obeymode	22
colourunits	32	openerr	24
colourvalues	32	openfrac	30
debug	33	padangle	26
decimalsymbol	24	padnumber	25
detectdisplay	23	per	30
digitsep	23, 24	prefixbase	30
dp	26	prefixproduct	30
emulate	33	prefixsymbolic	30
errspace	23	prespace	31
eVcorra	32	redefsymbols	32
eVcorrb	32	repeatunits	25
expbase	25	retainplus	25
expproduct	25	seperr	24
fixdp	26	sepfour	24
fixsf	26	sf	26
fraction	30	sign	25
load	33	slash	30
locale	32	stickyper	30
loctolang	32	strict	33
log	33	strictarc	26
mathrm	23	tabalign	28
mathscelsius	31	tabalignexp	27
mathsdegree	31	tabautofit	28
mathsf	23	tabexpalign	27
		tabformat	27
		tabnumalign	27

tabparseonly	29	\peta	14
tabtextalign	28	\pg	16
tabunitalign	28	\pico	14
textcelsius	31	\picoampere	17
textdegree	31	\picobarn	21
textminute	31	\picofarad	18
textmode	22	\picogram	16
textmu	31	\picom	16
textOmega	31	\picometre	16
textringA	31	\picomole	17
textrm	23	\picosecond	16
textsecond	31	\pmol	17
textsf	23	prefixbase (option)	30
texttt	23	prefixproduct (option)	30
tightpm	24	prefixsymbolic (option)	30
trapambigerr	24	prespace (option)	31
trapambigfrac	30	\providepower	19
unitcolor	32	\provideprefix	19
unitcolour	32	\providequalifier	19
unitmathsrn	23	\provideunit	18
unitmathssf	23	\ps	16
unitmathstt	23		
unitmode	22	R	
unitsep	23	\rad	16
unitspace	23	\radian	15
unittextrm	23	\raiseto	12
unittextsf	23	redefsymbols (option)	32
unittexttt	23	\rem	16
valuecolor	32	\renewpower	19
valuecolour	32	\renewprefix	19
valuemathrm	23	\renewqualifier	19
valuemathsf	23	\renewunit	18
valuemathsrn	23	repeatunits (option)	25
valuemathssf	23	\requiresiconfigs	38
valuemathstt	23	retainplus (option)	25
valuemathhtt	23	\roentgen	16
valuemode	22		
valuesep	23	S	
valuetextrm	23	\Sec	16
valuetextsf	23	\second	14, 16
valuetexttt	23	seperr (option)	24
xspace	31	sepfour (option)	24
		sf (option)	26
P		\SI	11
\pA	17	\si	13
padangle (option)	26	\siemens	15
padnumber (option)	25	\sievert	15
\parsec	20	sign (option)	25
\pascal	15	\sisetup	4, 22
\pb	21	slash (option)	30
\pebi	20	\Square	12
\per	12	\squarecentimetre	17
per (option)	30	\squared	12
\percent	15	\squarekilometre	17

<code>\squaremetre</code>	17	<code>unitcolour (option)</code>	32
<code>\ssquare</code>	12	<code>unitmathsrn (option)</code>	23
<code>\steradian</code>	15	<code>unitmathssf (option)</code>	23
<code>stickyper (option)</code>	30	<code>unitmathstt (option)</code>	23
<code>strict (option)</code>	33	<code>unitmode (option)</code>	22
<code>strictarc (option)</code>	26	<code>unitsep (option)</code>	23
T		<code>unitspace (option)</code>	23
<code>tabalign (option)</code>	28	<code>unittextrm (option)</code>	23
<code>tabalignexp (option)</code>	27	<code>unittextsf (option)</code>	23
<code>tabautofit (option)</code>	28	<code>unittexttt (option)</code>	23
<code>tabexpalign (option)</code>	27	V	
<code>tabformat (option)</code>	27	<code>valuecolor (option)</code>	32
<code>tabnumalign (option)</code>	27	<code>valuecolour (option)</code>	32
<code>tabparseonly (option)</code>	29	<code>valuemathrm (option)</code>	23
<code>tabtextalign (option)</code>	28	<code>valuemathsf (option)</code>	23
<code>tabunitalign (option)</code>	28	<code>valuemathsrn (option)</code>	23
<code>\tebi</code>	20	<code>valuemathssf (option)</code>	23
<code>\tera</code>	14	<code>valuemathstt (option)</code>	23
<code>\teraelectronvolt</code>	18	<code>valuemathhtt (option)</code>	23
<code>\terahertz</code>	17	<code>valuemode (option)</code>	22
<code>\tesla</code>	15	<code>valuesep (option)</code>	23
<code>\TeV</code>	18	<code>valuetextrm (option)</code>	23
<code>textcelsius (option)</code>	31	<code>valuetextsf (option)</code>	23
<code>textdegree (option)</code>	31	<code>valuetexttt (option)</code>	23
<code>textminute (option)</code>	31	<code>\volt</code>	15
<code>textmode (option)</code>	22	W	
<code>textmu (option)</code>	31	<code>\watt</code>	15
<code>textOmega (option)</code>	31	<code>\weber</code>	15
<code>textringA (option)</code>	31	X	
<code>textrm (option)</code>	23	<code>xspace (option)</code>	31
<code>textsecond (option)</code>	31	Y	
<code>textsf (option)</code>	23	<code>\yb</code>	21
<code>texttt (option)</code>	23	<code>\yocto</code>	14
<code>\THz</code>	17	<code>\yoctobarn</code>	21
<code>tightpm (option)</code>	24	<code>\yotta</code>	14
<code>\tonne</code>	15	Z	
<code>\torr</code>	20	<code>\zb</code>	21
<code>\tothe</code>	12	<code>\zepto</code>	14
<code>trapambigerr (option)</code>	24	<code>\zeptobarn</code>	21
<code>trapambigfrac (option)</code>	30	<code>\zetta</code>	14
U			
<code>unitcolor (option)</code>	32		

23 References

- [1] The IUPAC Green Book, 1993. http://old.iupac.org/publications/books/gbook/green_book_2ed.pdf.
- [2] Victor Eijkhout. T_EX by Topic, 2007. <http://www.eijkhout.net/tbt/>.
- [3] <http://physics.nist.gov/cuu/Units/index.html>.

- [4] <http://www.bipm.org/fr/si/>.
- [5] <http://www.bipm.org/en/si/>.
- [6] http://www.bipm.org/en/si/si_brochure/.