

Writing, running and including the output of external documents from within a main L^AT_EX document – v. 0.38

Herbert Voß hvoss@tug.org*

December 8, 2023

Contents

1 Loading the package	1
2 Syntax	1
3 First examples	2
3.1 Without showing the code	2
3.2 Showing code and output of a Python example	2
4 Setting marker in the source	5
5 Optional arguments	6
5.1 Programs and runs	6
5.2 Grafik options	8
5.3 Listings options	9
5.4 Background color	9
5.5 Type of the source code	10
5.6 Output more than one page	10
5.7 Output as floating object with caption and label	11
5.8 Cropping the PDF	11
5.9 Code and output side by side	12
5.10 Horizontal alignment of the output	13
5.11 Inline images	13
5.12 Input text instead of an image	14
5.13 Running additional external programs	15
5.14 Using listings	17
5.15 Vertical space	19
5.16 No output	19
6 Defining new marker	20
7 Supported engines	21
7.1 METAPOST example	21
7.2 plainT _E X example	21
7.3 LuaL ^A T _E X example	22

*Thanks to Karl Berry; Denis Bitouzé; Werner Lemberg; Rolf Niepraschk

3 First examples

7.4 ConTeXt example	23
8 Running external commands	24
9 Other options	25

1 Loading the package

```
\usepackage[Option]{hvextern}
```

There exists only one option `checkCode` which is valid for all \TeX -compiler. In this case an already existing external file will only be compiled, if the external code changed. This doesn't depends on the setting of the option `force`. `checkCode` can speed up the compilation time.

2 Syntax

This package allows to write external METAPOST, \TeX , ConTeXt, L^AT_EX, Lua \TeX , LuaL^AT_EX, X_L^AT_EX, Lua, Perl, Java and/or Python source code, which will then be run via `shell escape` to create a PDF or text output to include it into the main L^AT_EX document.

There is only one environment and one command:

```
\begin{externalDocument}[<options>]{<external filename without extension>}  
...  
source code  
...  
\end{externalDocument}  
  
\runExtCmd[<options>]  
  {<command with arguments>}  
  {<external filename without extension>}
```

The very first compilation run of the main document must be done with the `-shell-escape` command-line option, otherwise it won't work. Follow-up runs, for example, to resolve references, should usually be done without `-shell-escape`. The currently used filename for the example is saved in the macro `\hvExternFilename`.

```
lualatex --shell-escape <file>
```

The purpose for this package is to show the output of documents which have to be compiled with a different preamble or a different engine or a complete different system, but integrating the output automatically in the main document..

All examples in this document are created on-the-fly while running this L^AT_EX document with lualatex with the `--shell-escape` option.

3 First examples


3.1 Without showing the code

This document was run with Lua \TeX . Suppose you want to insert the output of a document which needs for several reasons a X_L^AT_EX run. Instead of created and running a document outside of the main document and then to insert the output we can do this from within this Lua \TeX document itself. The external document is compiled with X_L^AT_EX and the output is insert as pdf image: 美好的一天. The current

filename of the above example is voss-1 and for the source see page 13.

Let's show another example which needs a pdf \LaTeX run. The source code itself is also not shown by the environment `externalDocument`.

```
\begin{externalDocument}[
  compiler=pdflatex, force=true, cleanup]{voss}
\documentclass[standalone]
%StartVisiblePreamble
\usepackage{fontenc}
\usepackage{libertinus}
\usepackage[linguistics]{forest}
\forestapplylibrarydefaults{linguistics, edges}
%StopVisiblePreamble
\begin{document}
\begin{forest}
[VP
  [DP]
  [V
    [V]
    [DP]
  ]
]
\end{forest}
\end{document}
\end{externalDocument}
```



3.2 Showing code and output of a Python example

The png image is created on the fly with the following arguments of `externalDocument`:

```
\begin{externalDocument}[
  compiler=python3,
  code,
  ext=py,
  docType=py,
  usefancyvrb,
  grfOptions={width=\ linewidth}}{python}
... Python code ...
\end{externalDocument}
```

The code which is declared as header and main can be marked by:

```
\hv@extern@exampleType{py}
{\NumChar StartVisibleMain}
{\NumChar StopVisibleMain}
{\NumChar StartVisiblePreamble}
{\NumChar StopVisiblePreamble}
```

`\NumChar` is the default Python comment character # and needs to be saved with a different category, which is done internally by the package. The complete definition of the code is:

```
\begin{externalDocument}[
  compiler=python3,
  code,
  ext=py,
  force=true,
  docType=py,
  usefancyvrb,
```

3 First examples

```
grfOptions={width=\linewidth}\{python}
import os
#StartVisiblePreamble
from PIL import Image
import subprocess
# drawing area (xa < xb and ya < yb)
xa = -0.1716
xb = -0.1433
ya = 1.022
yb = 1.044
maxIt = 1024 # iterations
imgx = 1000 # image size
imgy = 750
image = Image.new("RGB", (imgx, imgy))
#StopVisiblePreamble

#StartVisibleMain
for y in range(imgy):
    cy = y * (yb - ya) / (imgy - 1) + ya
    for x in range(imgx):
        cx = x * (xb - xa) / (imgx - 1) + xa
        c = complex(cx, cy)
        z = 0
        for i in range(maxIt):
            if abs(z) > 2.0: break
            z = z * z + c
        r = i % 4 * 6
        g = i % 8 * 32
        b = i % 16 * 16
        image.putpixel((x, y), b * 65536 + g * 256 + r)
#StopVisibleMain
# now get the filename created by the latex document
imageName = os.path.basename(os.path.splitext(__file__)[0])+".png" # get filename
image.save(imageName, "PNG")
\end{externalDocument}
```


And with using this code we get the image as png inserted. The given filename of the external document is internally extended by a consecutive number which isn't known to the Python code. However, it is no problem in any programming language to get the name of a running file. The forlast line in the above code shows how it can be done with Python.

```
from PIL import Image
import subprocess
# drawing area (xa < xb and ya < yb)
xa = -0.1716
xb = -0.1433
ya = 1.022
yb = 1.044
maxIt = 1024 # iterations
imgx = 1000 # image size
imgy = 750
image = Image.new("RGB", (imgx, imgy))
```

```

for y in range(imgy):
    cy = y * (yb - ya) / (imgy - 1) + ya
    for x in range(imgx):
        cx = x * (xb - xa) / (imgx - 1) + xa
        c = complex(cx, cy)
        z = 0
        for i in range(maxIt):
            if abs(z) > 2.0: break
            z = z * z + c
        r = i % 4 * 6
        g = i % 8 * 32
        b = i % 16 * 16
        image.putpixel((x, y), b * 65536 + g * 256 + r)

```

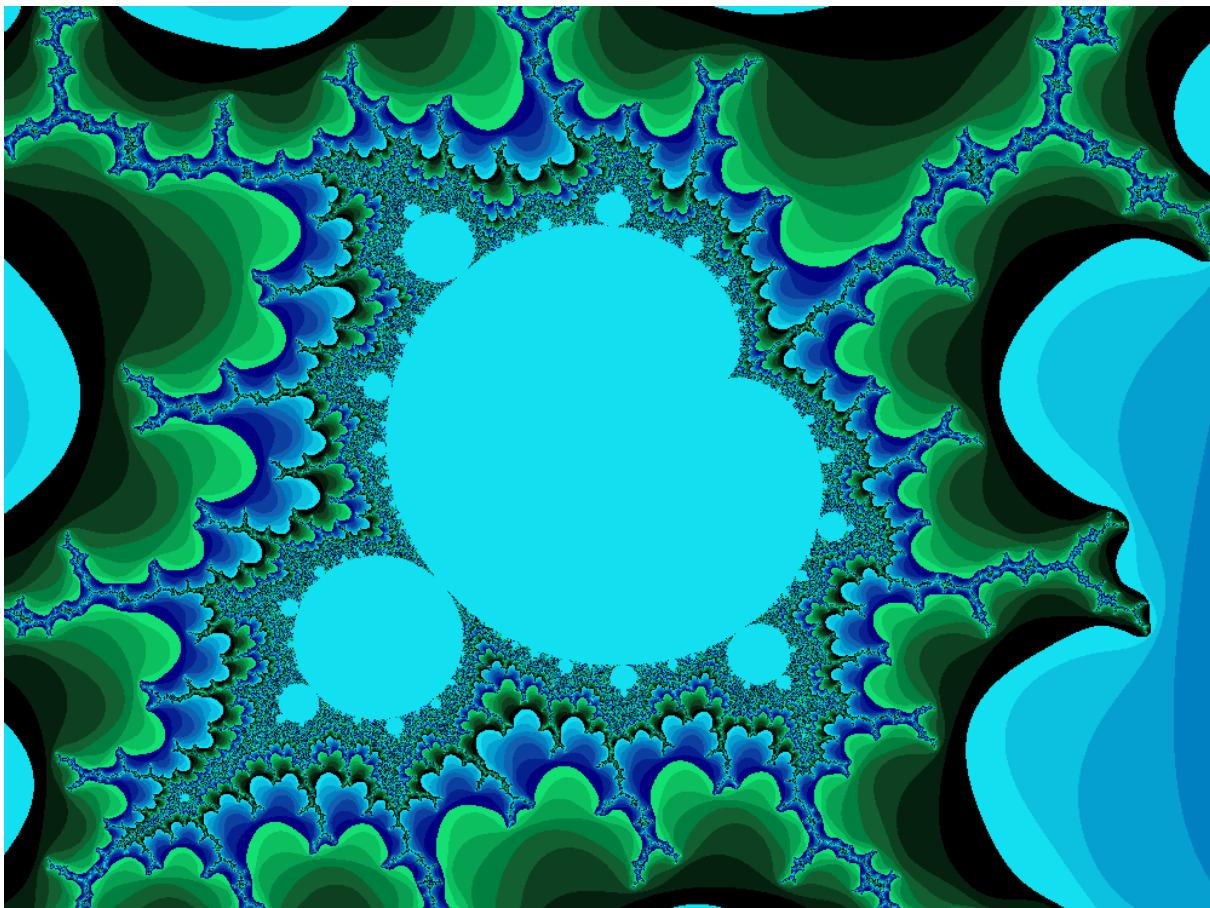


The external filename, extended by a consecutive number, kan be printed in the margin by setting the keyword `showFilename`. In general it is printed in the outer margin or in `twocolumn` mode in the outer column. If the example is set in `twocolumn` mode but inside a starred floating environment over both column, then use the keyword `outerFN`. Then `hvextern` doesn't test for `twocolumn` mode.

A vertical shift of the filename is possible by setting a length to the keyword `shiftFN`, e.g. `shiftFN=5ex`.

```
\usepackage{tikz}
\usepackage[hks,pantone,xcolor]{xespotcolor}

\SetPageColorSpace{HKS}
\definecolor{HYellow}{spotcolor}{HKS05N,0.5}
\definecolor{HRed}{spotcolor}{HKS14N,0.5}
\definecolor{HBlue}{spotcolor}{HKS38N,0.5}
\begin{tikzpicture}[scale=0.7,fill opacity=0.7]
\fill[HYellow]( 90:1.2) circle (2);
\fill[HRed] (210:1.2) circle (2);
\fill[HBlue] (330:1.2) circle (2);
\node at ( 90:2) {Typography};
\node at ( 210:2) {Design};
\node at ( 330:2) {Coding};
\node {\LaTeX};
\end{tikzpicture}
```

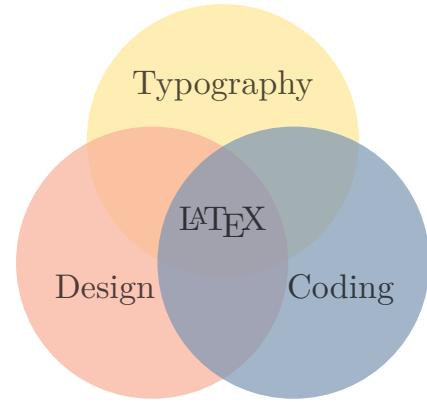

4 Setting marker in the source

The marker for the code ranges which should be listed depend to the used programming language:

```
[...]
%StartVisiblePreamble
[... listed preamble code ]
%StopVisiblePreamble
[...]
\begin{document}
[...]
\end{document}
```

everything between `%StartVisiblePreamble` and `%StopVisiblePreamble` will be listed as preamble and in case of a L^AT_EX source everything between `\begin{document}` and `\end{document}` as body. The marker must be defined with an own macro, e.g.:

```
\hv@extern@exampleType{py}
{ \NumChar StartVisibleMain}
{ \NumChar StopVisibleMain}
{ \NumChar StartVisiblePreamble}
{ \NumChar StopVisiblePreamble}
```

`\NumChar` is the comment character #, which needs a special handling. This version of `hvextern` supports the following programming languages (option `compiler`): `mpost`, `tex`, `latex`, `luatex`, `python3`, `perl`, `lua`, `xetex`, `pdflatex`, `lualatex`, `xelatex`, and `context`. The default is `pdflatex`. The option `docType` selects the config file, which must be one of `context`, `lua`, `pl`, `tex`, `latex`, `mp`, and `py`. For Lua it is

```
\hv@extern@exampleType{lua}
{--StartVisibleMain}
{--StopVisibleMain}
{--StartVisiblePreamble}
{--StopVisiblePreamble}
```

It defines the marker strings for the listed code sequences. In some cases you have to use multiple times the same value for different optional arguments, e.g.

```
ext=lua, compiler=lua, docType=lua, ...
```

5 Optional arguments

The default setting is always shown in brackets.

5.1 Programs and runs

The progpath should only in some rare cases needed. In general all used compilers will be found by the system. A given progpath must be end with a slash, e.g. ./bin/

```
\define@key{hv}{progpath}[]{\def\hv@extern@progpath{\#1}}
\define@key{hv}{compiler}[pdflatex]{\def\hv@extern@compiler{\#1}}
\define@key{hv}{runsequence}[]{\def\hv@extern@runsequence{\#1}}
\define@key{hv}{runs}[1]{\setcounter{hv@extern@runs}{\#1}}
```

Instead of the optional arguments compiler, biber, and xindex one can define an individual command sequence by using the optional argument runsequence. It must be comma separated list:

```
runsequence={lualatex,biber,xindex -l de -c AU,lualatex,lualatex}
```

VOSS-5.tex

```
\usepackage[ngerman]{babel}
\usepackage{libertinus,hvindex}
\usepackage{makeidx}\makeindex
\usepackage[biblatex]{biblatex}\addbibresource{biblatex-examples.bib}

Sort with xindex \verb|-1 DE --config AU|
\blindtext
\Index{Österreich} \Index{Öresund}
\Index{Ostern} \Index{Ober} \Index{Oberin}
\Index{Österreich} \Index{Öresund}
\Index{Ödem} \Index{Oligarch} \Index{Oder}
\Index{Goldmann}
\printindex
\nocite{*}\printbibliography
\blindtext
\blindeddocument
```

Sort with xindex -1 DE --config AU Dies hier ist ein Blindtext zum Testen von Textausgaben. Wer diesen Text liest, ist selbst schuld. Der Text gibt lediglich den Grauwert der Schrift an, ist das wirklich so? Ist es gleichgültig, ob ich schreibe: „Dies ist ein Blindtext“ oder „Häuerde gefburn? Kjff – mitnichten! Ein Blindtext bietet mir wichtige Informationen! An ihm messe ich die Lesbarkeit einer Schrift, ihre Ausrichtung, wie harmonisch die Figuren sind, ob sie gut aussehen, ob sie leicht zu schreiben sind.“ Ein Blindtext sollte möglichst viele verschiedene Buchstaben enthalten und in der Originalsprache gesetzt sein. Er muss keinen Sinn ergeben, sollte aber lesbar sein. Fremdsprachige Texte wie „Lorem ipsum“ dienen nicht dem eigentlichen Zweck, da sie eine falsche Ausnutzung vermitteln. Österreich Öresund Ostern Ober Oberin Österreich Öresund Ödem Oligarch Oder Goldmann

Index

G
Goldmann, 1

O
Ober, 1
Oberin, 1
Oder, 1
Oligarch, 1
Ostern, 1

O
Ödem, 1
Öresund, 1
Österreich, 1

Literatur

- [1] José L. Almeido u. a. "Elektromagnetisches Signalhorn". EJ-29702195U (FR, GB, DE), 1998.
- [2] Arnold Angenendt, "In Honore Salvatoris – Vom Sinn und Unsinne der Patroninienkunde" In: *Revue d'Histoire Ecclésiastique* 97 (2002), S. 431–456, 791–823.
- [3] Aristotle, *De Anima*, Hrsg. von Robert Drew Hicks. Cambridge: Cambridge University Press, 1907.
- [4] Aristotle, *Physics*, Übers. von P. H. Wicksteed und F. M. Cornford, New York: C. P. Putnam, 1929.
- [5] Aristotle, *Porticus*, Hrsg. von D. W. Lucas, Clarendon Aristotle. Oxford: Clarendon Press, 1968.
- [6] Aristotle, *The Rhetoric of Aristotle with a commentary by the late Edward Meredith Cope*, Hrsg. und komment. von Edward Meredith Cope. 3 Bde. Cambridge University Press, 1877.
- [7] Robert L. Augustine, *Heterogeneous catalysis for the synthetic chemist*. New York: Marcel Dekker, 1995.
- [8] Avicenna, *Drei Abhandlungen über die Conjunction des separaten Intellects mit dem Menschen. Von Avicenna (Vater und Sohn), aus dem Arabischen übersetzt von Samuel Ibn Tibbon*, Hrsg. und übers. von J. Herz. Berlin: S. Hermann, 1869.

1

3

5

The following Java-program creates the Mandelbrot set as png image. The valid setting for the environment externalDocument is:


```
compiler=java,ext=java,docType=java,
```

5 Optional arguments

```
public static int iterZahl(final double cx, final double cy, int maxIt,
                           final double radius) {
    // bestimmt Anzahl der Iterationen
    int zaehler = 0;
    double zx = 0.0, zy = 0.0, tmp;
    do {
        tmp = zx*zx - zy*zy + cx;
        zy = 2*zx*zy + cy; zx = tmp;
        zaehler++;
    } while (zx*zx + zy*zy <= radius && zaehler < maxIt);
    return zaehler;
}

double xa = -2.5, xe = 0.7, ya = -1.2, ye = 1.2; // Ratio 20:15
double dx = (xe-xa)/(imageBreite-1), dy = (ye-ya)/(imageHoehe-1);
double cx, cy; int R, G, B;
double radius = 10.0; int maxIt = 1024;
cx = xa;
for (int sp = 0; sp < imageBreite; sp++) {
    cy = ye; // von oben nach unten
    for (int ze = 0; ze < imageHoehe; ze++) {
        int zIter = iterZahl(cx, cy, maxIt, radius);
        if (zIter == maxIt) {
            g.setColor(Color.WHITE);
            g.drawLine(sp, ze, sp, ze);
        } else {
            R = zIter % 4 * 6 ; G = zIter % 8 * 32; B = zIter % 16 * 16;
            g.setColor(new Color(R,G,B));
            g.drawLine(sp, ze, sp, ze);
        }
        cy = cy - dy;
    } // for ze
    cx = cx + dx;
} // for sp
```

java-6.java

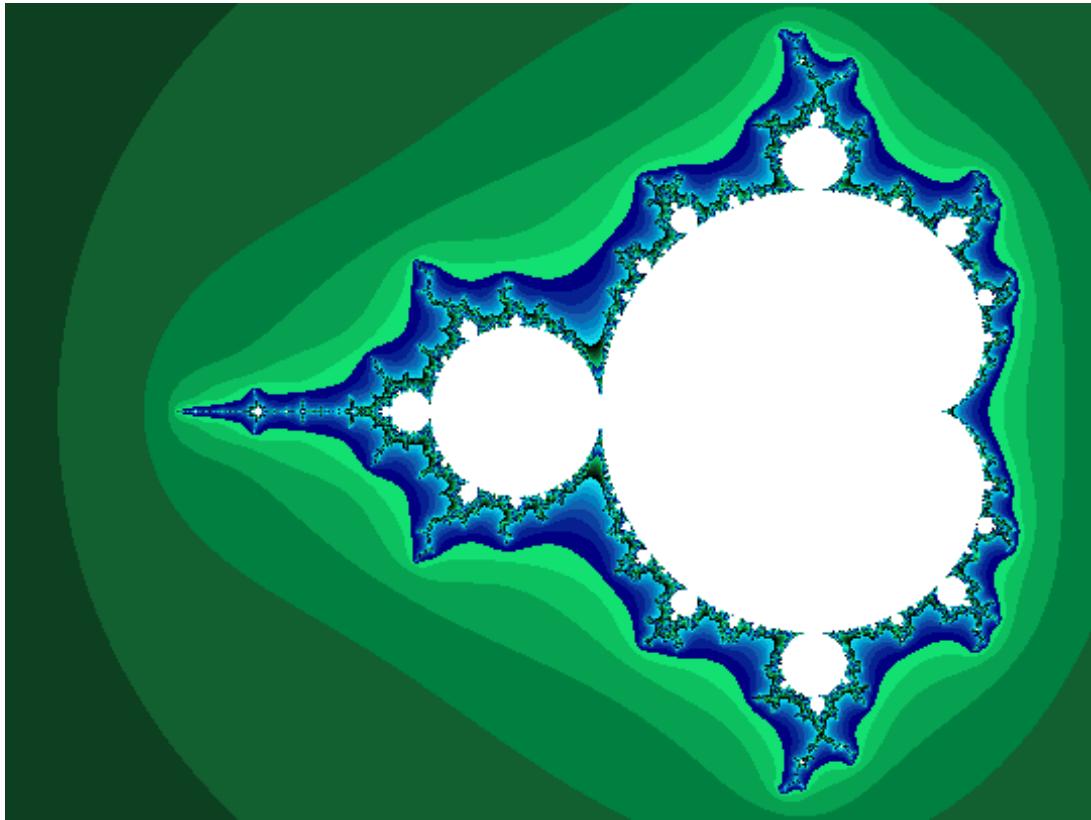

5.2 Grafik options


```
\define@key{hv}{grf0ptions}[]{\def\hv@extern@grf0ptions{#1}}
```

The option is passed to `\includegraphics`, e.g. `angle=90, width=\linewidth` for the following example.

voss-7.tex

```
\usepackage{tikz}
\usepackage[hks,pantone,xcolor]{xespotcolor}

\SetPageColorSpace{HKS}
\definecolor{HYellow}{spotcolor}{HKS05N,0.5}
\definecolor{HRed}{spotcolor}{HKS14N,0.5}
\definecolor{HBlue}{spotcolor}{HKS38N,0.5}
\begin{tikzpicture}[scale=0.7, fill opacity=0.7]
\fill[HYellow] ( 90:1.2) circle (2);
\fill[HRed] (210:1.2) circle (2);
\fill[HBlue] (330:1.2) circle (2);
\node at ( 90:2) {Typography};
\node at ( 210:2) {Design};
\node at ( 330:2) {Coding};
\node {\LaTeX};
\end{tikzpicture}
```

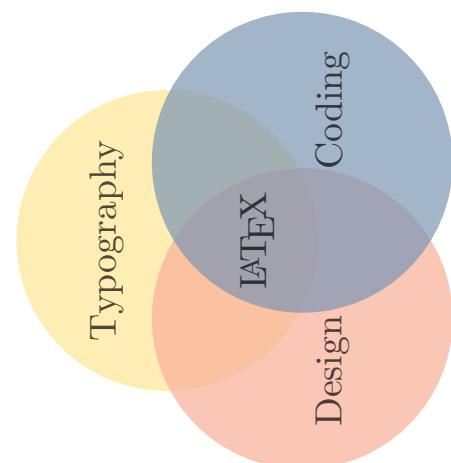


5.3 Listings options

```
\define@key{hv}{1stOptions}[]{\def\hv@extern@1stOptions{#1}}
```

The option is passed either to `\lstinputlisting`, or, if `usefancyvrb` is active, to `\VerbatimInput`. The following example uses

```
1stOptions={basicstyle=\sffamily\itshape\scriptsize},
```

```
\usepackage{pst-calend}
\psscalebox{0.3}{%
\psCalDodecaeder[Year=2022,style=april]%
}
```

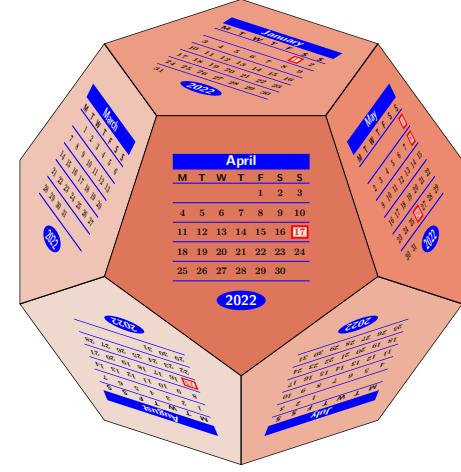

5.4 Background color


There are different colors for the preamble and body listing: the background and frame color.

```
\define@key{hv}{BGpreamble}[black!12]{\def\hv@extern@BGpreamble{#1}}
\define@key{hv}{BGbody}[black!8]{\def\hv@extern@BGbody{#1}}
\define@key{hv}{B0preamble}[black!12]{\def\hv@extern@B0preamble{#1}}
\define@key{hv}{B0body}[black!8]{\def\hv@extern@B0body{#1}}
```

The options are passed to `tcolorbox` and preset to `black!12` and `black!8`. The color of the frame is set to the same values, hence not seen. The following example uses

```
BGpreamble=red!10, B0preamble=red,
BGbody=blue!8, B0body=blue,
```

```
\usepackage{pst-calend}
\pscalebox{0.3}{%
\psCalDodecaeder[Year=2022,style=may]%
}
```

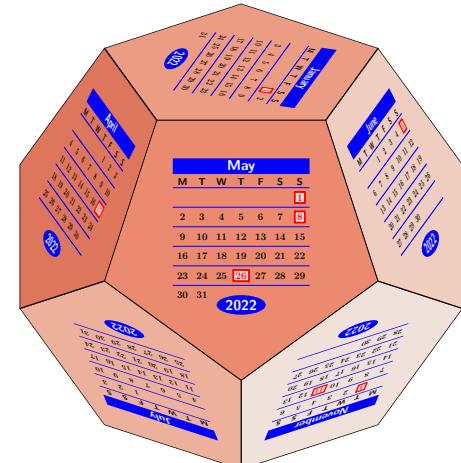

5.5 Type of the source code

The current version of hvextern supports code written as METAPOST, plain TeX, L^AT_EX, ConTeXt, and Python. Every type has its own keywords for the linerange which should be printed for the preamble and the body. For example the latex config is:

```
\hv@extern@exampleType{latex}%
for _all_LaTeX engines
{\string\begin{\string{document\string}}\string}%
{\string\end{\string{document\string}}\string}%
{\perCent StartVisiblePreamble}%
{\perCent StopVisiblePreamble}%

% only for the sequence latex->dvips->ps2pdf
\def\hv@extern@runLATEX#1#2#3#4[% path compiler file extension
  \ifhv@extern@verbose \typeout{>>> running #1#2 #3#4}\fi
  \ShellEscape{#1#2\space #3#4}%
  \ifhv@extern@verbose \typeout{>>> running #1dvips #3}\fi
  \ShellEscape{#1dvips\space #3.dvi}%
  \ifhv@extern@verbose \typeout{>>> running ps2pdf #3.ps}\fi
  \ShellEscape{#1ps2pdf\space -dAutoRotatePages=/None\space -dALLOWPSTRANSparency\space #3.ps}%
}
```

If a source needs more than running the defined compiler, it must be defined by a macro

```
\def\hv@extern@run<NAME>#1#2#3#4[% path compiler file extension
...]
```

The type of the source code can be different to the compiler, e.g. source latex, but compiler lualatex.

5.6 Output more than one page

The pages which should be printed can be defined by

```
\define@key{hv}{pages}[1]{\def\hv@extern@pages{#1}}
\define@key{hv}{pagesep}[1em]{\hv@extern@pagesep=#1}
\define@boolkey{hv}[hv@extern@]{frame}[true]{}
```

With frame the pages can be framed (internally by \fbox). It is left to the user to choose the correct image width for the pages. The separation between the pages is defined by the length pagesep. The following example uses:


```
pages={1,2,3},
pagesep=2pt,
grfOptions={width=0.3\linewidth},
compiler=lualatex, runs=2, % for the TOC
frame,
```

voss-10.tex

```
\usepackage[american]{babel}
\usepackage{libertinus}
\usepackage{blindtext}
```

```
\title{A multipage example}
\author{Erasmus von Rotterdam}
\maketitle
\tableofcontents
```

```
\blinddocument
```

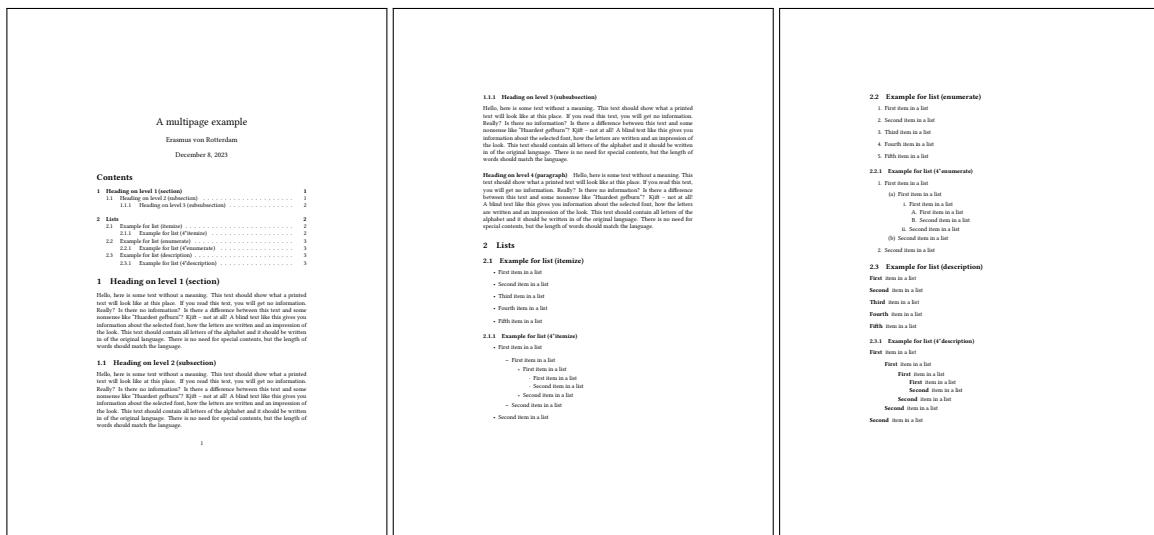

5.7 Output as floating object with caption and label

By default the images are not inserted as a float. This can be changed by the keyword `float`, a caption and a label are optional. The float type is always figure.

```
\define@boolkey{hv}{hv@extern@}{float}[true]{}
\define@key{hv}{floatsetting}[]{}{\def\hv@extern@floatsetting{\#1}}
\define@key{hv}{caption}[]{}{\def\hv@extern@caption{\#1}}
\define@key{hv}{label}[]{}{\def\hv@extern@label{\#1}}
```

The image Figure 1 shows an example for a floating object, which uses the floatsetting `!htb`, which is the default. Using a caption and a label are optional.

```
\usepackage{pst-coxeterp}
```

```
\begin{pspicture}(-1,-1)(1,1)\Simplex[dimension=2]\end{pspicture}
\begin{pspicture}(-1,-1)(1,1)\Simplex[dimension=3]\end{pspicture}
\begin{pspicture}(-1,-1)(1,1)\Simplex[dimension=5]\end{pspicture}
\begin{pspicture}(-1,-1)(1,1)\Simplex[dimension=7]\end{pspicture}
```

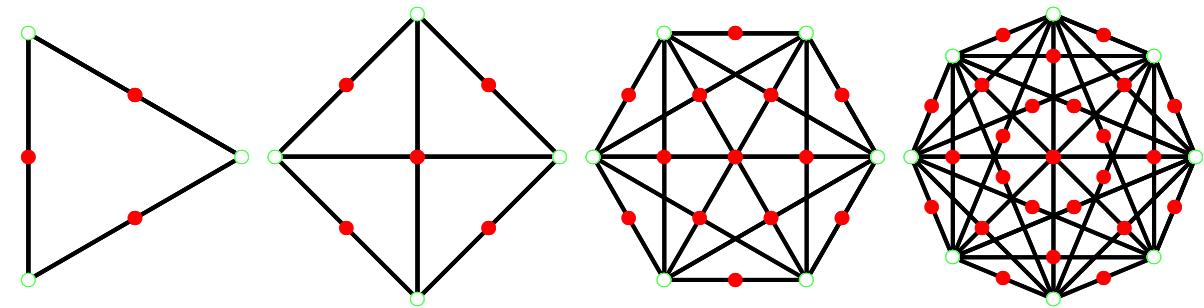


Figure 1: An example for Coxeter images

5.8 Cropping the PDF

Instead of using the documentclass `standalone`, which already crops the created PDF, one can use the optional argument `crop`.

```
\define@boolkey{hv}[hv@extern@][crop][true]{}
\define@key{hv}{cropmargin}[2]{\def\hv@extern@cropmargin{\#1 }% length in pt
```

It is also possible to crop a document with more than one page. In this case the beginning and end of the pages should be on the same height. Otherwise the pages will have different heights after cropping (see next image). The following example was created with

```
pages={1,2,3},  
pagesep=2pt,  
grf0ptions={width=0.3\linewidth},  
compiler=lualatex, runs=2, % for the TOC  
frame,  
crop, cropmargin=5,%      5pt margin
```

vooss-12.tex

```
\usepackage[american]{babel}
\usepackage{libertinus}
\usepackage{blindtext}
\pagestyle{headings}
```

```
\title{A multipage example}
\author{Erasmus von Rotterdam}
\maketitle
\tableofcontents
\Blinddocument
```

A multipage example	1
Erasmus von Rotterdam	2
December 8, 2023	3
Contents	1
1 Heading on level 1 (section)	1
1.1 Heading on level 2 (subsection)	2
1.1.1 Heading on level 3 (subsection)	3
2 Lists	5
2.1 Example for list (itemize)	5
2.1.1 Example for list ("4"itemize)	6
2.2 Example for list (enumerate)	7
2.2.1 Example for list ("4"enumerate)	9
2.3 Example for hash (description)	11
2.3.1 Example for hash ("4"description)	12
2.3.2 Example for hash ("4"list-item)	12
2.3.3 Example for hash ("4"list-item*)	12

at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like "Huarden gefunkt"? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in the original language. There is no need for special contents, but the length of words should match

After this fourth paragraph, we start a new paragraph sequence. Here, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some like "Heardeus gemitum"? The answer is yes. As the letters are written and an impression of the book is selected, fast, how the letters are written and an impression of the book. This text should contain all letters of the alphabet and it should be written in the original language. There is no need for special accents, but the words of words should match the language.

language, there is no need for special contents, but the length of words should match the language.

Hello, here is some text without a meaning. This text should show what a printtext will look like at this place. If you read this text, you will get no information. Is reality? Is there no information? Is there a difference between this text and some nonsense like "Huerdest gefun?" Kift - not at all! A blind text like this gives you no information about the selected font. how the letters are written and an impression on the visual language. This text should contain all letters of the alphabet and it should be written in the original language. There is no need for special contents, but the length of

1 Heading on level 1 (section)

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information! Really? Is there no information? Is there a difference between this text and some nonsense like "Hudeast gefburn"? Kjöt – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in the original language. There is no need for special contents, but the length of words should match the language.

This is the second paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like "Hausred gebrun"? Kjif - not at all! A blind text like this gives you information about the selected font, how the letters are aligned and an impression of the look. This text should contain all letters of the alphabet and it should be written in the original language. There is no need for special characters, but the length of words should match the language.

And after the second paragraph follows the third paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like.

words should match the language.

1.1 Heading on level 2 (subsection)

This is the second paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like "Huærest neður?" Kjñt - not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and should be written in the original language. There is no need for special contents, but the length of words should match the language.

And after the second paragraph follows the third paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like "Huardeles gefblunt". Kijf! - not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text

selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special contents, but the length of words should match.

at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like "Huurst gebrun?" Kjift – not at all! A blind text like that gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special contents, but the length of words should match

language, there is no need for special contents, but the length of words should match the language.

Here, he is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like "Huusdært geburn?" Kjift - not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text contains all letters of the alphabet and it should be length of the original language. There is no need for special contents, but the length of

words should match the language.

text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? There is a difference between this text and some nonsense like "Hueastend gefburn? Kjft - not at all! A blank text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in the original language. There is no need for special contexts, but the length of words should match the language.

In the fourth paragraph, we start a new paragraph sequence. *Hæde*, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Is there no information? Is there a difference between this text and some nonsense like *Hærest gefnum?* *Kjift*, not all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special contents, but the length of words should match the language.

Hello, here is some text without a meaning. This text should show what a printed language. There is no need for special contents, but the length of words should match the language.

5.9 Code and output side by side

By default the code and the output is on top of each other. With setting the width of a minipage with `mpwidth` greater than 0 pt the output will be side by side

```
\define@key{hv}{mpwidth}[0pt]{\setlength\hv@extern@mpwidth{\#1}}
\define@key{hv}{mpvalign}[0pt]{\def\hv@extern@mpvalign{\#1}}
```

`mpwidth` is the width of the code. The rest of the line, minus 1em for the space between the minipages, will be the possible width for the output and will be calculated automatically. The two minipages are aligned by default to its top. This can be changed by setting `mpalign` to `c` or `b`.

5.10 Horizontal alignment of the output

```
align=\centering, % default
```

```
\rule{0.5\linewidth}{5mm}
```



```
align=\raggedright,
```

```
\rule{0.5\linewidth}{5mm}
```



```
align=\raggedleft,
```

```
\rule{0.5\linewidth}{5mm}
```



```
align=\centering, mpwidth=0.5\linewidth, % default for side by side
```

```
\rule{0.25\linewidth}{5mm}
```



```
align=\raggedright, mpwidth=0.5\linewidth,
```

```
\rule{0.25\linewidth}{5mm}
```



```
align=\raggedleft, mpwidth=0.5\linewidth,
```

```
\rule{0.25\linewidth}{5mm}
```



5.11 Inline images

By default code and image are own paragraphs. With the optional argument `inline` the created image can be part of the current line. This may make sense, if you need characters which are not part of your current font.

```
\define@boolkey{hv}[hv@extern@]{inline}[true]{%
  \hv@extern@codefalse
  \hv@extern@showfilenamefalse}
```

With the setting `inline=true` the optional keyword `code` and `showFilename` is automatically set to false. The next Chinese characters 美好的一天 are inserted as inline image without showing the code. The complete code looks like:

```
With \Lkeyset{inline} the optional argument \Lkeyword{code} is
automatically set to false. The next Chinese characters
\begin{externalDocument}[vshift=-1pt,
  compiler=xelatex, inline, runs=2, grfOptions={height=8pt},
  crop, cropmargin=0, cleanup, force=true, docType=latex]{voss}
```

```
\documentclass{ctexart}
\pagestyle{empty}
\begin{document}
美好的一天
\end{document}
\end{externalDocument}
are inserted as inline image without showing the code. The complete
code looks like:
```

With the keyword `vshift` the inserted image can be moved in vertically direction.

5.12 Input text instead of an image

By default the created pdf which can be, of course, only text, will be inserted by `\includegraphics`. If you have only text as output and don't want to create a pdf you can insert this kind of output as verbatim text by setting `includegraphic=false`.

```
\define@boolkey{hv}[hv@extern@]{includegraphic}[true]{}{}
```

The textfile must have the same main filename with the extension `.txt`. As already mentioned, in every programming language you can get the current used filename from within the code itself. The following Perl example which calculates the Kaprekar constants uses

```
my $filename = $0; # the current filename
$filename =~ s/\.pl//; # without extension .pl
$filename = "${filename}.txt"; # for the output
```

Only for some completeness: a Kaprekar constant is a number A with $\max(A) - \min(A) = A$. \max and \min are the sorted digits of the number A : $495 = 954 - 459$.

voss-20.pdf

```
my $zahl = 1;
my $anfang = 1;
my $ende = 9;

print $fh "Finding Kaprekarconstants ... \n";
while ($zahl < 8) {
    print $fh "{$zahl}-stellig: ";
    foreach ($anfang...$ende) { # for every row $_
        @Zeichen = split(//,$_);
        $Min = join("",sort(@Zeichen));
        $Max = reverse($Min);
        $Dif=$Max-$Min;
        if($_ eq $Dif) {
            $found = 1;
            print $fh $_, ", ";
        }
    }
    if (!$found) { print $fh "----\n"; }
    else { print $fh "\n"; }
    $found = false;
    $zahl = $zahl+1;
    $anfang = $anfang*10;
    $ende = $ende*10;
}

Finding Kaprekarconstants ...
1-stellig: ---
2-stellig:
3-stellig: 495,
4-stellig: 6174,
5-stellig:
6-stellig: 549945, 631764,
7-stellig:
```

Another example with running Lua to calculate and print the Pascal's triangle. The internal filename is available with

5 Optional arguments

```
local filename = arg[0]
local shortFN = str:match("(.)%..+")
outFile = io.open(shortFN..".txt","w+")
-- open external file
```

```
function nextrow(t)
    local ret = {}
    t[0], t[#t+1] = 0, 0
    for i = 1, #t do ret[i] = t[i-1] + t[i] end
    return ret
end

function triangle(n)
    t = {1}
    for i = 1, n do
        m = (n - i)
        for j = 1,m do outFile:write("      ") end
        for k = 1,i do outFile:write(string.format("%8s",t[k])) end
        outFile:write("\n")
        t = nextrow(t)
    end
end

triangle(10)
```

```
          1
         1   1
        1   2   1
       1   3   3   1
      1   4   6   4   1
     1   5   10  10  5   1
    1   6   15  20  15  6   1
   1   7   21  35  35  21  7   1
  1   8   28  56  70  56  28  8   1
 1   9   36  84  126 126 84   36   9   1
```

vooss-21.lua

5.13 Running additional external programs

For a L^AT_EX additional programs for bibliography, index, a.s.o. maybe needed.

```
\define@boolkey{hv}{hv@extern@}{biber}[true]{}
\define@boolkey{hv}{hv@extern@}{xindex}[true]{}
\define@key{hv}{xindexOptions}{}{\def\hv@extern@xindexOptions{\#1}}
\define@key{hv}{runsequence}{}{\def\hv@extern@runsequence{\#1}}
```

The biber run needs no additional options, but for xindex it maybe useful. The following examples uses

```
\begin{externalDocument}[
  compiler=lualatex, runs=2, pages=2,crop,
  xindex, xindexOptions={-l DE --config AU},
  mpwidth=0.6\linewidth, usefancyvrb=false,
  docType=latex,
  ...
]{vooss}
```

vooss-22.tex

```
\usepackage{makeidx}\makeindex
\usepackage{hvindex}

Sort with xindex \verb|-l DE --config AU|
\Index{Österreich} \Index{Öresund}

\Index{Ostern} \Index{Ober} \Index{Oberin}
\Index{Österreich} \Index{Öresund}

\Index{Ödem} \Index{Oligarch} \Index{Oder}
\Index{Ostern} \Index{Ober} \Index{Oberin}

\Index{Obstler} \Index{Öl} \Index{ölen}
\Index{Oder|seealso{Fluss}} \Index{Göbel}

\Index{oder} \index{Fluss!Oder}
\Index{Goethe} \Index{Göthe} \Index{Götz}

\Index{Goldmann}
\printindex
```

Index

F	Obstler, 1
Fluss	oder, 1
	- Oder, 1
G	Oder, 1, <i>siehe auch</i> Fluss
Goethe, 1	Oligarch, 1
Goldmann, 1	Ostern, 1
Göbel, 1	Ö
Göthe, 1	Ödem, 1
Götz, 1	Öl, 1
O	Öresund, 1
Ober, 1	Österreich, 1
Oberin, 1	ö
	ölen, 1

Instead of using the options `compiler`, `biber`, and `xindex` one can also use only the optional argument `runsequence` to define an individuell sequence of commands, e.g.:

```
runsequence={lualatex,biber,{xindex -l de -c AU},lualatex,lualatex}
```

vooss-23.tex

```
\usepackage[ngerman]{babel}
\usepackage{libertinus,hvindex}
\usepackage{makeidx}\makeindex
\usepackage[biblatex]{biblatex}\addbibresource{biblatex-examples.bib}

\blindtext
\Index{Österreich} \Index{Öresund}
\Index{Ostern} \Index{Ober} \Index{Oberin}
\Index{Österreich} \Index{Öresund}
\Index{Ödem} \Index{Oligarch} \Index{Oder}
\Index{Goldmann}
\printindex
\nocite{*}\printbibliography
\blindtext
\blindeddocument
```

Die hier ist ein Blindtext zum Testen von Textausgaben. Wer diesen Text liest, ist selbst schuld. Der Text gibt lediglich den Grauwert der Seite wieder. Ist das nicht so? Ist das kein Pech, ob ich schreibe? Dies ist ein Blindtext! Ich kann gar nichts mitrichten! Ein Blindtext bietet mir wichtige Informationen. An ihm messe ich die Lesbarkeit einer Schrift, ihre Ausnutzung, wie harmonisch die Figuren zueinander stehen und prüfe, wie breit oder schmal sie laufen. Ein Blindtext sollte möglichst viele verschiedene Buchstaben enthalten und der Originalsprache gesetzt sein. Er muss keinen Sinn ergeben, sollte aber lesbar sein. Fremdsprachige Texte wie „Lorem ipsum“ dienen nicht dem eigentlichen Zweck, da sie eine falsche Ausnutzung vermitteln. Österreich Ostern Ober Oberin Österreich Öresund Ödem Oligarch Oder Goldmann

Index

G	Goldmann, 1
O	Ober, 1
	Oberin, 1
	Oder, 1
	Oligarch, 1
	Ostern, 1
Ö	Ödem, 1
	Öresund, 1
	Österreich, 1

	<p>Literatur</p> <ul style="list-style-type: none"> [1] José L. Almendrou, a. "Elektromagnetisches Signalhorn". EU-29702195U (FR, GB, DE), 1998. [2] Arnold Angermeier. "In Honore Salvatoris – Vom Sinn und Unsinne des Paterzinialiums". In: <i>Revue d'histoire Ecclésiastique</i> 97 (2002), S. 431–456, 791–825. [3] Aristotle. <i>De Anima</i>. Hrsg. von Robert Drew Hicks. Cambridge: Cambridge University Press, 1907. [4] Aristotle. <i>Physics</i>. Übers. von P. H. Wicksteed und F. M. Cornford. New York: G. P. Putnam, 1929. [5] Aristotle. <i>Poetics</i>. Hrsg. von D. I. Lucas. Clarendon Aristotle. Oxford: Clarendon Press, 1968. [6] Aristotle. <i>The Rhetoric of Aristotle with a commentary by the late Edward Meredith Cope</i>. Hrsg. und komment. von Edward Meredith Cope. 3 Bde. Cambridge University Press, 1877. [7] Robert L. Augustine. <i>Heterogeneous catalysis for the synthetic chemist</i>. New York: Marcel Dekker, 1995. [8] Averroes. <i>Drei Abhandlungen über die Conjunction des separaten Intellects mit dem Menschen</i>. Von Averroes (<i>Vater und Sohn</i>), aus dem Arabischen übersetzt von Samuel Ibn Tibbon. Hrsg. und übers. von J. Herz. Berlin: S. Hermann, 1869. 	<p>Literatur</p> <ul style="list-style-type: none"> [9] Averroes. <i>The Epistle on the Possibility of Conjunction with the Active Intellect by Ibn Rushd with the Commentary of Moses Narboni</i>. Hrsg. und übers. von Kalman P. Bland. Moreshet: Studies in Jewish History, Literature and Thought 7. New York: Jewish Theological Seminary of America, 1982. [10] Averroes. <i>Des Averroës Abhandlung: "Über die Möglichkeit der Conjunction" oder "Über den materiellen Intellect"</i>. Hrsg., übers. und erläut. von Ludwig Hanne. Halle an der Saale: C. A. Kaemmerer, 1892. [11] John C. Baez und Aaron D. Lauda. <i>Higher-Dimensional Algebra V: 2-Groups</i>. Version 3. 27. Okt. 2004. arXiv: math/0307200v3. [12] John C. Baez und Aaron D. Lauda. <i>Higher-Dimensional Algebra V: 2-Groups</i>. Version 3. In: <i>Theory and Applications of Categories</i> 12 (2004), S. 423–491. arXiv: math/0307200v3. [13] Aaron Bergman und Richard Wentworth. "Gromov invariants for holomorphic-maps on Riemann surfaces". In: <i>J. Amer. Math. Soc.</i> 9.2 (1996), S. 529–571. [14] Ahavav von Bruckhausen und Erich Hoffmann. "Die nordische Expansion des Wissens des Hochmeisters bis 1448". In: <i>Europa im Hoch- und Spätmittelalter</i>. Hrsg. von Ferdinand Seibt. Handbuch der europäischen Geschichte 2. Stuttgart: Klett-Cotta, 1987. S. 884–917. [15] <i>The Chicago Manual of Style: The Essential Guide for Writers, Editors, and Publishers</i>. 15. Aufl. Chicago, Ill.: University of Chicago Press, 2003. ISBN: 0-226-10403-6.
--	---	--

5.14 Using listings

The default is using `\lstinputlisting` for the printed code sequences.

```
\documentclass[chapterprefix=on,parskip=half-,DIV=12,fontsize=12pt]{scrbook}
\DeclareNewSectionCommand[
  style=section,
  level=4,
  beforeskip=-3.25ex plus -1ex minus -.2ex,
  afterskip=1.5ex plus .2ex,
  font=\normalsize,
  indent=0pt,
  counterwithin=subsubsection
]{subsubsubsection}
\RedeclareSectionCommand[
  level=5,
  toplevel=5,
  tocindent=13em,
  tocnumwidth=5.9em,
  counterwithin=subsubsubsection
]{paragraph}
\RedeclareSectionCommand[
  level=6,
  toplevel=6,
  tocindent=15em,
  tocnumwidth=6.8em
]{subparagraph}
\setcounter{secnumdepth}{\subsubsubsectionnumdepth}
\setcounter{tocdepth}{\subsubsubsectiontocdepth}

\tableofcontents
\chapter{Einführung}
\section{Ein Abschnitt}
\subsection{Ein Unterabschnitt}
\subsubsection{Ein Unter-Unterabschnitt}
\subsubsubsection{Ein Unter-Unter-Unterabschnitt}
\paragraph{Der normale Paragraph}
\blindtext
\subparagraph{Der normale Unterparagraph}
\blindtext
\blinddocument
```

<p>Inhaltsverzeichnis</p> <table> <tr> <td>1 Einführung</td> <td></td> </tr> <tr> <td> 1.1 Ein Abschnitt</td> <td>3</td> </tr> <tr> <td> 1.1.1 Ein Unterabschnitt</td> <td>3</td> </tr> <tr> <td> 1.1.1.1 Ein Unter-Unterabschnitt</td> <td>3</td> </tr> <tr> <td> 1.1.1.1.1 Ein Unter-Unter-Unterabschnitt</td> <td>3</td> </tr> <tr> <td>2 Überschrift auf Ebene 0 (chapter)</td> <td>5</td> </tr> <tr> <td> 2.1 Überschrift auf Ebene 1 (section)</td> <td>5</td> </tr> <tr> <td> 2.1.1 Überschrift auf Ebene 2 (subsection)</td> <td>5</td> </tr> <tr> <td> 2.1.1.1 Überschrift auf Ebene 3 (subsubsection)</td> <td>6</td> </tr> <tr> <td> 2.2 Listen</td> <td>6</td> </tr> <tr> <td> 2.2.1 Beispiel einer Liste (itemize)</td> <td>6</td> </tr> <tr> <td> 2.2.1.1 Beispiel einer Liste (4)itemize</td> <td>7</td> </tr> <tr> <td> 2.2.2 Beispiel einer Liste (enumerate)</td> <td>7</td> </tr> <tr> <td> 2.2.2.1 Beispiel einer Liste (4)enumerate</td> <td>7</td> </tr> <tr> <td> 2.2.3 Beispiel einer Liste (description)</td> <td>8</td> </tr> <tr> <td> 2.2.3.1 Beispiel einer Liste (4)description</td> <td>8</td> </tr> </table>	1 Einführung		1.1 Ein Abschnitt	3	1.1.1 Ein Unterabschnitt	3	1.1.1.1 Ein Unter-Unterabschnitt	3	1.1.1.1.1 Ein Unter-Unter-Unterabschnitt	3	2 Überschrift auf Ebene 0 (chapter)	5	2.1 Überschrift auf Ebene 1 (section)	5	2.1.1 Überschrift auf Ebene 2 (subsection)	5	2.1.1.1 Überschrift auf Ebene 3 (subsubsection)	6	2.2 Listen	6	2.2.1 Beispiel einer Liste (itemize)	6	2.2.1.1 Beispiel einer Liste (4)itemize	7	2.2.2 Beispiel einer Liste (enumerate)	7	2.2.2.1 Beispiel einer Liste (4)enumerate	7	2.2.3 Beispiel einer Liste (description)	8	2.2.3.1 Beispiel einer Liste (4)description	8	<p>Kapitel 1</p> <h2>Einführung</h2> <h3>1.1 Ein Abschnitt</h3> <h4>1.1.1 Ein Unterabschnitt</h4> <h5>1.1.1.1 Ein Unter-Unterabschnitt</h5> <p>Der normale Paragraph Dies hier ist ein Blindtext zum Testen von Textausgaben. Wer diesen Text liest, ist selbst schuld. Der Text gibt lediglich den Gewicht der Schrift an. Ist das wirklich so? Ist es gleichgültig, ob ich schreibe: „Dies ist ein Blindtext“ oder „Hastest gehörn?“ Klappe – mitnichten! Ein Blindtext bietet mir wichtige Informationen. An ihm messe ich die Lesbarkeit einer Schrift, ihre Anmutung, wie harmonisch die Figuren zueinander stehen und prüfe, wie breit oder schmal sie läuft. Ein Blindtext sollte möglichst viele verschiedene Buchstaben enthalten und in der Originalsprache gesetzt sein. Er muss keinen Sinn ergeben, sollte aber lesbar sein. Fremdsprachige Texte wie „Lorem ipsum“ dienen nicht dem eigentlichen Zweck, da sie eine falsche Anmutung vermitteln.</p> <p>Der normale Unterparagraph Dies hier ist ein Blindtext zum Testen von Textausgaben. Wer diesen Text liest, ist selbst schuld. Der Text gibt lediglich den Gewicht der Schrift an. Ist das wirklich so? Ist es gleichgültig, ob ich schreibe: „Dies ist ein Blindtext“ oder „Hastest gehörn?“ Klappe – mitnichten! Ein Blindtext bietet mir wichtige Informationen. An ihm messe ich die Lesbarkeit einer Schrift, ihre Anmutung, wie harmonisch die Figuren zueinander stehen und prüfe, wie breit oder schmal sie läuft. Ein Blindtext sollte möglichst viele verschiedene Buchstaben enthalten und in der Originalsprache gesetzt sein. Er muss keinen Sinn ergeben, sollte aber lesbar sein. Fremdsprachige Texte wie „Lorem ipsum“ dienen nicht dem eigentlichen Zweck, da sie eine falsche Anmutung vermitteln.</p>
1 Einführung																																	
1.1 Ein Abschnitt	3																																
1.1.1 Ein Unterabschnitt	3																																
1.1.1.1 Ein Unter-Unterabschnitt	3																																
1.1.1.1.1 Ein Unter-Unter-Unterabschnitt	3																																
2 Überschrift auf Ebene 0 (chapter)	5																																
2.1 Überschrift auf Ebene 1 (section)	5																																
2.1.1 Überschrift auf Ebene 2 (subsection)	5																																
2.1.1.1 Überschrift auf Ebene 3 (subsubsection)	6																																
2.2 Listen	6																																
2.2.1 Beispiel einer Liste (itemize)	6																																
2.2.1.1 Beispiel einer Liste (4)itemize	7																																
2.2.2 Beispiel einer Liste (enumerate)	7																																
2.2.2.1 Beispiel einer Liste (4)enumerate	7																																
2.2.3 Beispiel einer Liste (description)	8																																
2.2.3.1 Beispiel einer Liste (4)description	8																																

It also possible to use `\VerbatimInput` from package `fancyvrb`. In general it makes no difference using the optional argument `usefancyvrb` or not.

```
\documentclass[chapterprefix=on,parskip=half-,DIV=12,fontsize=12pt]{scrbook}
\DeclareNewSectionCommand[
  style=section,
  level=4,
  beforeskip=-3.25ex plus -1ex minus -.2ex,
  afterskip=1.5ex plus .2ex,
  font=\normalsize,
  indent=0pt,
  counterwithin=subsubsection
]{subsubsubsection}
\RedeclareSectionCommand[
  level=5,
  toclevel=5,
  tocindent=13em,
  tocnumwidth=5.9em,
  counterwithin=subsubsubsection
]{paragraph}
\RedeclareSectionCommand[
  level=6,
  toclevel=6,
  tocindent=15em,
  tocnumwidth=6.8em
]{subparagraph}
\setcounter{secnumdepth}{\subsubsubsectionnumdepth}
\setcounter{tocdepth}{\subsubsubsectiontocdepth}
\tableofcontents
\chapter{Einführung}
```

```
\section{Ein Abschnitt}
\subsection{Ein Unterabschnitt}
\subsubsection{Ein Unter-Unterabschnitt}
\subsubsubsection{Ein Unter-Unter-Unterabschnitt}
\paragraph{Der normale Paragraph}
\blindtext
\subparagraph{Der normale Unterparagraph}
\blindtext
\blindeddocument
```

5.15 Vertical space

```
\define@key{hv}{aboveskip}[\medskipamount]{%
    \setlength\hv@extern@aboveskip{#1}}
\define@key{hv}{belowpreambleskip}[\smallskipamount]{%
    \setlength\hv@extern@belowpreambleskip{#1}}
\define@key{hv}{belowbodyskip}[\smallskipamount]{%
    \setlength\hv@extern@belowbodyskip{#1}}
\define@key{hv}{belowskip}[\medskipamount]{%
    \setlength\hv@extern@beforeskip{#1}}
```

aboveskip Vertical space *before* the environment `externalDocument` or the command `\runExtCm` (default `\medskipamount`)

belowpreambleskip Vertical space between preamble and body (default \smallskipamount)

belowbodyskip Vertical space between body and output (default \smallskipamount)

belowskip Vertical space *after* the environment `externalDocument` or the command `\runExtCmd` (default `\medskipamount`)

The listings environment uses its own keywords `aboveskip` and `belowskip`, also preset to `\medskipamount`. These ones can be changed by using the keyword `1stOptions`:

..., `lstOptions` = {`aboveskip`=..., `belowskip`=...}, ...

5.16 No output

By default there is an image or text as output of the external run. In a case, where you are only interested in the code, which should be formatted in the same style as other examples, you can set `showoutput` to `false`.

```
\documentclass[chapterprefix=on,parskip=half-,DIV=12,fontsize=12pt]{scrbook}
\DeclareNewSectionCommand[
  style=section,
  level=4,
  beforeskip=-3.25ex plus -1ex minus -.2ex,
  afterskip=1.5ex plus .2ex,
  font=\normalsize,
  indent=0pt,
  counterwithin=subsubsection
]{subsubsubsection}

\tableofcontents
\chapter{Einführung}
\section{Ein Abschnitt}
\subsection{Ein Unterabschnitt}
\subsubsection{Ein Unter-Unterabschnitt}
\subsubsubsection{Ein Unter-Unter-Unterabschnitt}
\blindtext
```

6 Defining new marker

Suppose you do not want for a L^AT_EX document the complete body part between \begin{ and \end printed. In this case you can define own markers, e.g.:

```
\defMarkerType{ltx}
{\perCent StartVisibleBody}
{\perCent StopVisibleBody}
{\perCent StartVisiblePreamble}
{\perCent StopVisiblePreamble}
```

Whith this definition and the setting docType=ltx the last example looks like:

```
\DeclareNewSectionCommand[
  style=section,
  level=4,
  beforeskip=-3.25ex plus -1ex minus -.2ex,
  afterskip=1.5ex plus .2ex,
  font=\normalsize,
  indent=0pt,
  counterwithin=subsubsection
]{subsubsubsection}

\subsubsubsection{Ein Unter-Unter-Unterabschnitt}
```

Inhaltsverzeichnis

1 Einführung	2
1.1 Ein Abschnitt	2
1.1.1 Ein Unterabschnitt	2
1.1.1.1 Ein Unter-Unterabschnitt	2
1.1.1.1.1 Ein Unter-Unter-Unterabschnitt	2

7 Supported engines


7.1 METAPOST example

Needs the run sequence setting to get a pdf from the created dvi output. It is already internally defined.

```
defaultfont:="ptmr8r";
warningcheck:=0;

draw fullcircle shifted (0.5,0.6) xscaled 8cm yscaled 3.5cm
    withpen pencircle scaled 5bp withcolor red;
special( " /Times-Roman findfont 150 scalefont setfont " &
" 0 10 moveto (MPost) false charpath clip stroke gsave 150 70 translate " &
" 2 4 600 {dup 0 moveto 0 exch 0 exch 0 360 arc stroke} for grestore " );
```

voss-28.mp

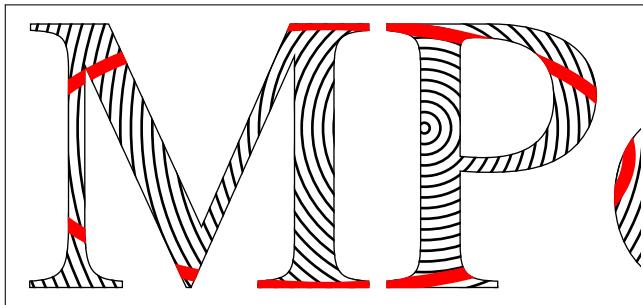

7.2 plainTeX example

Needs the run sequence setting to get a pdf from the created dvi output. It is already internally defined.

```
\footline={\footsc the electronic journal of combinatorics
{\footbf 16} (2009), \#R00\hfil\footrm\folio}

\font\bigrm=cmr12 at 14pt
\centerline{\bigrm An elementary proof of the reconstruction conjecture}

\bigskip\bigskip
\centerline{D. Remifa\footnote*{Thanks to the editors of this journal!}}
\smallskip
\centerline{Department of Inconsequential Studies}
\centerline{Solatido College, North Kentucky, USA}
\centerline{\tt remifa@dis.solatido.edu}
\bigskip
\centerline{\footrm
Submitted: Jan 1, 2009; Accepted: Jan 2, 2009; Published: Jan 3, 2009}
\centerline{\footrm Mathematics Subject Classifications: 05C88, 05C89}
\bigskip\bigskip
\centerline{\bf Abstract}
\smallskip
{\narrower\noindent
The reconstruction conjecture states that the multiset of unlabeled
vertex-deleted subgraphs of a graph determines the graph, provided it
has at least 3 vertices. A version of the problem was first stated
by Stanis\l aw Ulam. In this paper, we show that the conjecture can
be proved by elementary methods. It is only necessary to integrate
the Lenkle potential of the Broglington manifold over the quantum
supervacillatory measure in order to reduce the set of possible
counterexamples to a small number (less than a trillion). A simple
computer program that implements Pipletti's classification theorem
for torsion-free Aramaic groups with symplectic socles can then
```

voss-29.tex

```
finish the remaining cases.}
```

```
\bigskip
\begin{section}{1. Introduction.}
```

This is the start of the introduction.




7.3 *Lua^AT_EX example*

With *Lua^AT_EX* and and using PostScript code the intermediate GhostScript run is not needed. The pdf is directly created.

vooss-30.tex

```
\usepackage{fontenc}\usepackage{libertinus}
\usepackage{pst-all}

\psset{unit=0.8cm}
\begin{pspicture}(-9,-15)(9,2)
\psaxes(0,0)(-9,-15)(9,2)
\psplot[algebraic,plotstyle=curve,curvature=1 1 0,
linewidth=2pt, linecolor=red]{-8}{8}{
1 - 3876218985722260225*x^2/10892114744073986176
+ 14975974793271450625*x^4/174273835905183778816
- 317095420958296875*x^6/26811359370028273664
+ 194412970920703125*x^8/214490874960226189312
- 2090988251953125*x^10/53622718740056547328
+ 99480224609375*x^12/107245437480113094656
- 7879638671875*x^14/697095343620735115264
+ 152587890625*x^16/2788381374482940461056}
\end{pspicture}
```

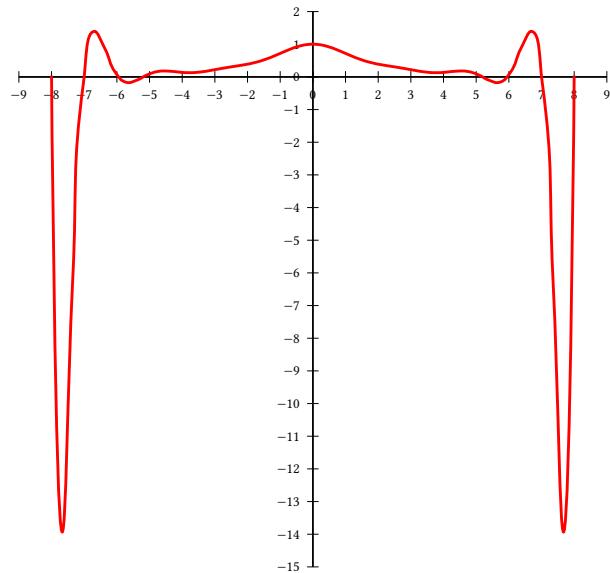

7.4 ConTEXt example

```
\definehead
[myhead]
[section]
\setuphead
[myhead]
[numberstyle=bold,
 textstyle =bold,
 before     =\hairline\blank,
 after      =\nowhitespace\hairline]

\startstandardmakeup
\midaligned{From Hasselt to America}
\midaligned{by}
\midaligned{J. Jonker and C. van Marle}
\stopstandardmakeup
\placecombinedlist[content]
\chapter{Introduction}
\input knuth \input knuth
\chapter[rensseelaer]{The Rensselaer family}
\input knuth
\section{The first born}
\input knuth
\section{The early years}
... in those days Hasselt was ...
\input knuth
\section{Living and workin in America}
\input knuth
\chapter[lansing]{The Lansing family}
... the Lansing family was also ...
\input knuth
\chapter[cuyler]{The Cuyler family}
... much later Tydeman Cuyler ...
\input knuth
\myhead[headlines]{And the end of all}
foo
```

	<p style="text-align: center;">1</p> <table border="0" style="width: 100%; border-collapse: collapse;"> <tr><td style="width: 50%;">1 Introduction</td><td style="width: 50%;">2</td></tr> <tr><td>2 The Rensselaer family</td><td>3</td></tr> <tr><td>2.1 The first born</td><td>3</td></tr> <tr><td>2.2 The early years</td><td>3</td></tr> <tr><td>2.3 Living and workin in America</td><td>4</td></tr> <tr><td>3 The Lansing family</td><td>5</td></tr> <tr><td>4 The Cuyler family</td><td>6</td></tr> </table> <p style="text-align: center;">From Hasselt to America by J. Jonker and C. van Mark</p>	1 Introduction	2	2 The Rensselaer family	3	2.1 The first born	3	2.2 The early years	3	2.3 Living and workin in America	4	3 The Lansing family	5	4 The Cuyler family	6	
1 Introduction	2															
2 The Rensselaer family	3															
2.1 The first born	3															
2.2 The early years	3															
2.3 Living and workin in America	4															
3 The Lansing family	5															
4 The Cuyler family	6															
3	4	5														

8 Running external commands

Integrating the current directory of this document we can use the macro `\runExtCmd` with the optional argument `redirect`

```
\runExtCmd[redirect]{ls -la}{voss}
```

to get the directory listed:

```
total 4808
drwxr-xr-x 19 voss staff      608  8 Dez 20:40 .
drwxr-xr-x 156 voss staff    4992  8 Dez 20:34 ..
-rw-----  1 voss staff 12627 27 Mär 2022 .cedit.menu
drwxr-xr-x  3 voss staff      96 24 Apr 2022 .ctan
drwxr-xr-x  4 voss staff     128 27 Apr 2022 .test
-rw-r--r--  1 voss staff    2342  8 Dez 20:34 Changes
drwxr-xr-x 102 voss staff    3264  8 Dez 20:40 Exa
-rw-rw-rw-  1 voss staff   1170 27 Mai 2022 Makefile
-rw-rw-rw-  1 voss staff    711 29 Aug 17:03 README
-rw-rw-rw-  1 voss staff   3998 27 Mai 2022 hvdoctools.sty
-rw-rw-rw-  1 voss staff   1040 29 Aug 17:00 hvextern-checkfile.lua
-rw-r--r--  1 voss staff   16384  8 Dez 20:39 hvextern.aux
-rw-r--r--  1 voss staff    8192  8 Dez 20:39 hvextern.idx
-rw-r--r--  1 voss staff  107044  8 Dez 20:39 hvextern.log
```

```
-rw-r--r--    1 voss  staff      727 20 Jun  2022 hvextern.lua
-rw-r--r--@   1 voss  staff  1287638  8 Dez 20:40 hvextern.pdf
-rw-r--r--    1 voss  staff     45501  8 Dez 20:34 hvextern.sty
-rw-r--r--    1 voss  staff     53005  8 Dez 20:35 hvextern.tex
-rw-r--r--    1 voss  staff       0  8 Dez 20:36 hvextern.toc

\runExtCmd[redirect,verbose,1stOptions={basicstyle=\ttfamily\small}]{du}{voss}% *nix

5992  ./Exa
1264  ./.test
96    ./ctan/hvextern/latex
8     ./ctan/hvextern/script
3040  ./ctan/hvextern/doc
8     ./ctan/hvextern/lualatex
3168  ./ctan/hvextern
3168  ./ctan
15232 .
```

9 Other options

vshift A length for a vertical shift of the object, only valid for the inline mode. See document source of example on page 13.

force=false can speed up the comiling time for the document. If a created image/output already exists, there is no need to create it with the next run again and again. This option is not valid if the package option checkCode exists.

cleanup the auxiliary files of a L^AT_EX-run are deleted, preset to aux, log. It must be a comma seperated list of the extensions of the main file, s.g. cleanup={aux,log}.

moveToExampleDir move all examples into a directory, must be set *before* the option ExampleDir.

ExampleDir name of a directory for the examples, must first be created by the user himself.

tcbox=false Can be used if there are some negative interactions between package listings and package tcolorbox.

framesep Value for \fbox if keyword frame is used.

mpsep Distance between code and output (default 1 em).

pagesep Distance between pages for multipage output (default 1 em).

verbose Print control messages into the terminal and logfile.

eps create an eps from the pdf (historical).

Index

Symbols

-shell-escape (package option), 1
.bin/ (value), 6
#, 3
%StartVisiblePreamble, 5
%StopVisiblePreamble, 5

A

aboveskip (keyword), 19

B

b (value), 12
\begin, 20
\begin{document}, 5
belowbodyskip (keyword), 19
belowpreambleskip (keyword), 19
belowskip (keyword), 19
biber (keyword), 6, 15f
bibliography, 15
black!12 (color), 9
black!8 (color), 9

C

c (value), 12
checkCode (package option), 1, 25
cleanup (keyword), 25
code (keyword), 13
compiler (keyword), 5f, 16
context (value), 5
crop (keyword), 11
cropping, 12
current line, 13

D

docType (keyword), 5, 20
documentclass, 11

E

\end, 20
\end{document}, 5
eps (keyword), 25
ExampleDir (keyword), 25
externalDocument (environment), 2, 7, 19

F

false (value), 14, 25
fancyvrb (package), 18
\fbox, 10, 25
figure (environment), 11
float (keyword), 11
force (keyword), 1, 25
frame (keyword), 10

framesep (keyword), 25

H

\hvExternFilename, 1
hvextern (package), 5, 10

I

includegraphic (keyword), 14
\includegraphics, 8, 14
index, 15
inline (keyword), 13
inline image, 13

J

Java, 1

K

Kaprekar, 14

Keyword

- ExampleDir, 25
- aboveskip, 19
- belowbodyskip, 19
- belowpreambleskip, 19
- belowskip, 19
- biber, 6, 15f
- cleanup, 25
- code, 13
- compiler, 5f, 16
- crop, 11
- docType, 5, 20
- eps, 25
- float, 11
- force, 1, 25
- frame, 10
- framesep, 25
- includegraphic, 14
- inline, 13
- lstOptions, 19
- moveToExampleDir, 25
- mpsep, 25
- mpvalign, 12
- mpwidth, 12
- outerFN, 5
- pagesep, 10, 25
- progpath, 6
- redirect, 24
- runsequence, 6, 16
- shiftFN, 5
- showFilename, 5, 13
- showoutput, 19
- tcbox, 25

-usefancyvrb, 9, 18
-verbose, 25
-vshift, 14, 25
-xindex, 6, 15f

L

1atex (value), 5, 10
listings (package), 25
lstOptions (keyword), 19
\lstinputlisting, 9, 17
ltx (value), 20
lua (value), 5
Lua, 1
lualatex (value), 5, 10
luatex (value), 5

M

\medskipamount, 19
minipages, 12
moveToExampleDir (keyword), 25
mp (value), 5
mpost (value), 5
mpsep (keyword), 25
mpvalign (keyword), 12
mpwidth (keyword), 12

N

\NumChar, 3, 5

O

outerFN (keyword), 5

P

pagesep (keyword), 10, 25
Pascal's triangle, 14
pdflatex (value), 5
perl (value), 5
Perl, 1
p1 (value), 5
png, 2
progpath (keyword), 6
py (value), 5
Python, 1, 3
python3 (value), 5

R

redirect (keyword), 24
\runExtCmd, 19, 24
runsequence (keyword), 6, 16

S

shiftFN (keyword), 5
showfilename (keyword), 5, 13
showoutput (keyword), 19
\smallskipamount, 19

source, 2
standalone (doc class), 11

T

tbox (keyword), 25
tcolorbox (package), 9, 25
tex (value), 5
.txt (file extension), 14

U

usefancyvrb (keyword), 9, 18

V

Value
- false, 14, 25
- ltx, 20

\VerbatimInput, 9, 18
verbose (keyword), 25
vshift (keyword), 14, 25

X

xelatex (value), 5
xetex (value), 5
xindex (keyword), 6, 15f