

# The L<sup>A</sup>T<sub>E</sub>X keyfloat Package

v2.06 — 2021/06/29

© 2016–2021 Brian Dunn  
bd@BDTechConcepts.com

Provides a key/value interface for generating floats.

## Abstract

The **keyfloat** package provides a key/value user interface for quickly creating figures with a single image each, figures with arbitrary contents, tables, subfloats, rows of floats, floats located [H]ere, floats in the [M]argin, and floats with text [W]rapped around them.

Key/value combinations may specify a caption and label, a width proportional to `\ linewidth`, a fixed width and/or height, rotation, scaling, a tight or loose frame, an `\ arraystretch`, a continued float, additional supplemental text, and an artist/author's name with automatic index entry. When used with the `tocdata` package, the name also appears in the List of Figures.

FLOATS may be moved into or rearranged inside a multi-row environment or subfloats, and are typeset to fit within the given number of columns, continuing to additional rows as necessary. Nested sub-rows may be used to generate layouts such as two small figures placed vertically next to one larger figure.

As an example, a typical command to include a figure with a framed image of half `\ linewidth` could be:

```
\keyfig*[hbp]{f, lw=.5, c={A caption}, l={fig:label}}{image}
```

**keyfloat** uses the `caption`, `subcaption`, `newfloat` or `float`, and `wrapfig` packages, and cannot be used with the `subfig`, `subfigure`, `subfloat`, `floatrow`, or `floatflt` packages.

See the [General Index](#) for an index of topics and troubleshooting.

For the latest updates, see [Updates](#).

## License:

This work may be distributed and/or modified under the conditions of the L<sup>A</sup>T<sub>E</sub>X Project Public License, either version 1.3 of this license or (at your option) any later version. The latest version of this license is in <http://www.latex-project.org/lppl.txt> and version 1.3 or later is part of all distributions of L<sup>A</sup>T<sub>E</sub>X version 2005/12/01 or later.

 [incompatible packages](#)

 [Need help?](#)

[What's new?](#)

# Contents

<b>1</b>	<b>Introduction</b>	<b>6</b>
1.1	A problem with floats . . . . .	6
1.2	The <code>keyfloat</code> package . . . . .	6
1.3	Features . . . . .	7
1.4	Updates . . . . .	8
1.5	Other float-related packages . . . . .	9
<b>2</b>	<b>Using the <code>keyfloat</code> package</b>	<b>10</b>
2.1	Loading <code>keyfloat</code> and related packages . . . . .	10
2.2	Macros and environments . . . . .	11
2.3	Keys and values . . . . .	13
2.4	Other settings . . . . .	17
2.5	Examples . . . . .	18
2.5.1	Single floats . . . . .	18
2.5.2	Groups of floats, shared keys, keep aspect ratio . . . . .	29
2.5.3	Subfloats . . . . .	31
2.5.4	Continued floats . . . . .	33
2.5.5	Continued subfloats . . . . .	34
2.5.6	Margin floats . . . . .	35
2.5.7	Wrapped floats . . . . .	37
2.5.8	Custom frames . . . . .	42
2.5.9	Artist's name . . . . .	44
2.6	Customization . . . . .	46
2.6.1	Custom frames . . . . .	46
2.6.2	Distance between floats and rows . . . . .	46
2.6.3	Formatting the captions . . . . .	47
<b>3</b>	<b>Code</b>	<b>48</b>
3.1	Older packages . . . . .	48
3.2	Prohibited packages . . . . .	48
3.3	Required packages . . . . .	49
3.4	In-line figures and tables . . . . .	50
3.5	Row counting and control . . . . .	51
3.6	Float key handling . . . . .	51
3.7	Nesting control . . . . .	58
3.8	Subfloat key handling . . . . .	59

3.9	Computing image width . . . . .	62
3.10	Framing and rotation . . . . .	64
3.11	A graphics image from a file . . . . .	65
3.12	Printing the caption . . . . .	68
3.13	Defaults for a new float . . . . .	73
3.14	Row start/end processing . . . . .	74
3.15	Key environment helper macros . . . . .	74
3.16	The \KFLT@keyflt macro . . . . .	85
3.17	The \keyflt macro . . . . .	86
3.18	The keyfloat environment . . . . .	86
3.19	The keyfigure environment . . . . .	87
3.20	The \keyfig macro . . . . .	88
3.21	The \keyfigbox macro . . . . .	88
3.22	The \keyparbox macro . . . . .	88
3.23	The \keytab macro . . . . .	89
3.24	The keytable environment . . . . .	90
3.25	A row of floats . . . . .	90
3.26	Subfloats . . . . .	95
3.27	Margin floats . . . . .	101
3.28	Wrapped floats . . . . .	102
<b>4</b>	<b>keyfloat package maintenance</b>	<b>103</b>
<b>Change History</b>		<b>104</b>
<b>Index of Objects</b>		<b>106</b>
<b>General Index</b>		<b>111</b>
<b>Index of Indexes</b>		<b>113</b>
<b>List of Examples</b>		
1	Figure with an image from a file . . . . .	18
2	Figure with arbitrary contents . . . . .	18

3	Figure environment with arbitrary contents . . . . .	19
4	Table macro . . . . .	19
5	Table environment with arbitrary contents . . . . .	20
6	Figure with many options selected . . . . .	21
7	Using <code>\linewidth</code> . . . . .	22
8	Using frames . . . . .	23
9	Using rotation with boxes . . . . .	24
10	Located [H]ere . . . . .	25
11	Unnumbered float . . . . .	26
12	Unnumbered float with a LOF entry . . . . .	26
13	An unnumbered in-text image . . . . .	27
14	A box without a caption. . . . .	28
15	Groups of figures — keyfloats environment . . . . .	29
16	Subfigures — keysfsubfigs environment . . . . .	31
17	Subtables [H] — keysfsubtabs environment . . . . .	32
18	Continued figure . . . . .	33
19	Continued subfloats . . . . .	34
20	The <code>marginfigure</code> environment . . . . .	35
21	The <code>margintable</code> environment . . . . .	35
22	Using <code>\keyfig[M]</code> . . . . .	36
23	Using <code>keytable[M]</code> and an offset . . . . .	36
24	Using <code>\keyfig[W]</code> and <code>\keytab[W]</code> . . . . .	37
25	Using <code>\keyfigbox[W]</code> and <code>\keyparbox[W]</code> . . . . .	38
26	Using <code>\keyfigure[W]</code> and <code>\keytable[W]</code> . . . . .	39
27	Using <code>keywrap</code> with a <code>\keyfig</code> . . . . .	40
28	Using wrap width <code>ww</code> and <code>wlw</code> . . . . .	41
29	Custom frames with <code>mdframed</code> . . . . .	42
30	Custom shadows with <code>fancybox</code> . . . . .	43
31	Artist's name — image . . . . .	44
32	Artist's name — arbitrary contents . . . . .	44
33	Subfloats with an artist . . . . .	45

## List of Figures

1	A <code>\keyfig</code> with an image . . . . .	18
2	A <code>\keyfigbox</code> . . . . .	18
3	A <code>keyfigure</code> environment . . . . .	19
4	A figure with options . . . . .	21
5	Half of <code>\linewidth</code> . . . . .	22
6	Loosely-framed figure . . . . .	23
7	Tightly-framed figure . . . . .	23
8	A <code>keyfig</code> [H] . . . . .	25
	Starred short caption . . . . .	26
9	Next to a <code>\keyparbox</code> . . . . .	28
10	First in a group . . . . .	30

11	Third in a group . . . . .	30
12	Fourth in a group, with a longer caption . . . . .	30
13	Fifth in a group . . . . .	30
14	Sixth in a group . . . . .	30
15	Subfigures . . . . .	31
16	Figure to be continued . . . . .	33
16	...continued . . . . .	33
17	A set of figures . . . . .	34
17	...continued . . . . .	34
18	A marginfigure . . . . .	35
19	A \keyfig[M] . . . . .	36
20	A \keyfig[W] . . . . .	37
21	A \keyfigbox[W] . . . . .	38
22	A \keyfigure[W] . . . . .	39
23	Keywrap with \keyfig . . . . .	40
24	A \keyfig[W] with wlw . . . . .	41
25	A \keyfig[W] with ww . . . . .	41
26	Custom-framed image . . . . .	42
27	Custom loosely-framed box . . . . .	42
28	Custom shadow . . . . .	43
29	Custom loosely-framed shadow . . . . .	43
30	Artist's name — image . . . . .	<i>First Last</i> 44
31	Artist's name — arbitrary contents . . . . .	<i>Last</i> 44
32	Artist's collection . . . . .	<i>First Last</i> 45

## List of Tables

1	Keys and values — part I . . . . .	14
1	Keys and values — part II . . . . .	15
2	Caption-related key combinations . . . . .	16
3	Key wp: Wrapped float placement options . . . . .	16
4	A \keytab table . . . . .	19
5	A keytable environment . . . . .	20
6	Loosely-framed table . . . . .	23
7	Tightly-framed table . . . . .	23
8	Table, rotated . . . . .	24
9	A table [H] . . . . .	25
10	Seventh in a group . . . . .	30
11	Subtables [H] . . . . .	32
12	A margintable . . . . .	35
13	A keytable[M] . . . . .	36
14	A \keytab[W] . . . . .	37
15	A keytable[W] . . . . .	39

## 1 Introduction

The `keyfloat` package simplifies the creation of L<sup>A</sup>T<sub>E</sub>X floats, while still allowing a large number of useful features.

### 1.1 A problem with floats

When including a figure with a graphics image into a document, the user typically enters something such as:

```
\begin{figure}
\centering
\includegraphics[width=3in]{filename}
\caption{A Figure}
\label{fig:somelabel}
\end{figure}
```

When doing that often enough, it makes sense to factor the common code:

```
\onefigure[3in]{filename}{A Figure}{fig:somelabel}
```

Expanding the capability of `\onefigure` via `xparse` can lead to the general case of:

```
\onefigure*[loc](width){filename}(add'l text)[shortcap]{caption}*[label]
```

Attempting to add additional features such as frames and continued floats hits the limit of nine parameters for a T<sub>E</sub>X macro, requiring that new features use some kind of change-state macros instead. Attempting to support rows of floats or subfloats only makes things more complicated still.

A key/value system solves the problem of adding more features, does not require much additional typing, is a more self-documenting syntax, and allows a shared syntax with subfloats and groups of floats as well. Thus, the `keyfloat` package.

### 1.2 The `keyfloat` package

Using `keyfloat`, the previous example becomes:

```
\keyfig{w=3in,c=A figure,l=fig:somelabel}{filename}
```

The `\onefigure` general case becomes:

```
\keyfig*[loc]{w=width,t={add'l text},sc=shortcap,cstar=caption,
l=label}{filename}
```

### 1.3 Features

The macros and environments provided by `keyfloat` include:

`\keyfig`: A figure with an image.

`\keytab`: A table.

`\keyflt`: An arbitrary float type macro.

`\keyfigbox`: A figure with arbitrary contents.

`\keyparbox`: A “figure” without a caption, useful to place uncaptioned text inside a group,

`keyfigure`: A figure environment.

`keytable`: A table environment.

`keyfloat`: An arbitrary float type environment.

`keyfloats`: A group of rows and columns of floats.

`keysubfigs`: A figure containing a group of rows and columns of subfigures.

`keysubtabs`: A table containing a group of rows and columns of subtables.

`keysubfloats`: A float of arbitrary type containing a group of rows and columns of subfloats.

`keywrap`: Wraps a keyfloat around an environment of text. Usable inside a list.

`marginfigure`: A figure environment placed into the margin.<sup>1</sup>

`margintable`: A table environment placed in the margin.

Additional features include:

- Rows and columns of floats may be generated by placing them inside a `keyfloats` environment.
- Subfloats may be generated by placing them inside a `keysubfigs` or `keysubtabs` environment.
- Dynamic layout: The number of columns is specified. Extra floats are placed onto additional rows as needed, with the final row adjusted to compensate for leftovers.

---

<sup>1</sup>`marginfigure` and `margintable`: The environments provided by the `tufte-book` class are used if loaded, otherwise `keyfloat` provides its own versions.

- Floats may be placed [`H`]ere.
- Floats may be placed in the [`M`]argin.
- Floats may be placed with text [`W`]rapped around them.
- Floats may be starred to span two columns.
- Continued floats may be used to repeat the previous float number.
- A figure may contain an image, with additional sizing, rotation, and a frame.
- Tables may be stretched. (`\arraystretch`)
- Boxes of arbitrary contents may be assigned a width and framed.
- Floats may be moved into and out of the grouping environments as needed.
- An artist/author's name may be added to a figure and the index.
- If the `tocdata` package is loaded (use v0.12+), the name is also added to the LOF.
- Additional descriptive text may be added as well.
- Frames may be customized.

**examples** A large number of examples are provided, each showing L<sup>A</sup>T<sub>E</sub>X source and the resulting float.

**index** A customized index is included at the back of the documentation, including troubleshooting issues.

**margin tags** Blue margin tags are used to help quickly find information, and often indicate the destination of index entries.

 **warnings** Several warnings are noted in the text. Watch out for these special cases.

## 1.4 Updates

Recent changes include the following:

**v2.06:** Added shared keys for groups of floats or subfloats. Added the `kar` key to keep the aspect ratio of an image. Removed `:` for an empty caption. Warns if an image is too wide to fit.

**v2.02, v2.04:** Added keys for wrapped floats.

## 1.5 Other float-related packages

Several other L<sup>A</sup>T<sub>E</sub>X packages related to floats include:

**caption and subcaption:** Improved control over captions.

**floatrow:** A macro-based package for creating floats; including captions, footnotes, and rows of floats.

**hfloat:** A key / value system allowing the easy rotation of captions and floats.

**nccfloats:** Macros for minipage floats and side-by-side floats.

**newfloat:** Macros for the creationg of float environments.

**rotfloat:** Environments for rotated floats.

**subfig:** Macros to add subfloats inside a float.

## 2 Using the **keyfloat** package

### 2.1 Loading **keyfloat** and related packages

**keyfloat** is loaded with the usual command:

```
\usepackage{keyfloat}
```

Pkg tocdata If you wish to have artists' names appear in the list of figures, as provided by the **tocdata** package, load **tocdata**, optionally followed by either **tocloft** or **titletoc**, then **keyfloat**:

```
Pkg tocloft \usepackage{tocdata}
Pkg titletoc \usepackage{titletoc}% or titletoc, or neither
Pkg keyfloat \usepackage{keyfloat}
```

Pkg float To use custom float types with the **float** package:

```
\usepackage{float}
\newfloat{diagram}{htb}{lod}
```

Pkg newfloat To use custom float types with the **newfloat** package:

```
\usepackage{newfloat}
\DeclareFloatingEnvironment[
  fileext={lod},
  listname={List of Diagrams},
  name={Diagram},
]{diagram}
```

Pkg caption For the **caption** package, to have table captions appear above the tables, and to use custom float types:

```
\usepackage[tableposition=top]{caption}
\captionsetup[diagram]{
  style=default, justification=centering,
  margin=0pt, parskip=0pt, skip=1ex,
  labelfont={small,bf}, textfont={small,bf}
}
```

Pkg cleveref To use custom float and subfloat types with **cleveref**:

```
\usepackage{cleveref}
\crefname{diagram}{diagram}{diagrams}
\crefname{subdiagram}{subdiagram}{subdiagrams}
```

## 2.2 Macros and environments

\keyfig	* [ $\langle loc \rangle$ ] { $\langle keys/values \rangle$ } { $\langle image\ filename \rangle$ }	A macro to generate a figure with an image from a file.
\keytab	* [ $\langle loc \rangle$ ] { $\langle keys/values \rangle$ } { $\langle tabular\ contents \rangle$ }	A macro to generate a table with tabular contents. Usually use the keytable environment instead.
\keyflt	* [ $\langle loc \rangle$ ] { $\langle float\ type \rangle$ } { $\langle keys/values \rangle$ } { $\langle contents \rangle$ }	A macro to generate an arbitrary float type with its contents.
\keyfigbox	* [ $\langle loc \rangle$ ] { $\langle keys/values \rangle$ } { $\langle box\ contents \rangle$ }	A macro to generate a figure with arbitrary paragraph contents. See example 2.
\keyparbox	* [ $\langle loc \rangle$ ] { $\langle keys/values \rangle$ } { $\langle box\ contents \rangle$ }	A macro to generate a figure with arbitrary paragraph contents, but no number or caption. This is equal to a \keyfigbox with cstar={}. Mostly useful to add supplemental information inside a row of floats or subfloats. See example 14.
Env keyfigure	* [ $\langle loc \rangle$ ] { $\langle keys/values \rangle$ }	An environment to generate a figure with arbitrary contents. Useful for multi-paragraph contents. See example 3.
Env keytable	* [ $\langle loc \rangle$ ] { $\langle keys/values \rangle$ }	An environment to generate a table with arbitrary contents. Useful for larger tables. See example 5.
Env keyfloat	* [ $\langle loc \rangle$ ] { $\langle float\ type \rangle$ } { $\langle keys/values \rangle$ }	An environment to generate an arbitrary float type with its contents. Useful for multi-paragraph contents.

---

**The above macros and environments may be used by themselves, or inside the following keyfloats, keysubfigs, or keysubtabs environments.**

---

Env keyfloats	* [ $\langle loc \rangle$ ] { $\langle num\ columns \rangle$ } [ $\langle shared\ keys/values \rangle$ ]	A group of figures or tables typeset in rows. May be nested, [H], [W], or [M]. The optional shared keys / values are passed to each object within. See example 15.
Env keysubfigs	* [ $\langle loc \rangle$ ] { $\langle numcols \rangle$ } { $\langle keys \rangle$ } [ $\langle shared\ keys/values \rangle$ ]	A group of subfigures typeset in rows. May not be nested. May be [H], [W], or [M]. The optional shared keys / values are passed to each object within. See example 16.

Env `keysubtabs` \* [ $\langle loc \rangle$ ] { $\langle numcols \rangle$ } { $\langle keys \rangle$ } [ $\langle shared\ keys/values \rangle$ ]  
A group of subtables typeset in rows. May *not* be nested. May be [H], [W], or [M]. The optional shared keys / values are passed to each object within. See example 17.

Env `keysubfloats` \* [ $\langle loc \rangle$ ] { $\langle float\ type \rangle$ } { $\langle numcols \rangle$ } { $\langle keys \rangle$ } [ $\langle shared\ keys/values \rangle$ ]  
A group of subfloats typeset in rows. May *not* be nested. May be [H], [W], or [M]. The optional shared keys / values are passed to each object within.

Env `keywrap` { $\langle width\ of\ keyfloat \rangle$ } { $\langle keyfloat \rangle$ }

Displays a keyfloat next to an environment of text. Two minipages are used side-by-side, which allows its use inside a list item where [W] will not work, but extra empty vertical space will appear if the keyfloat and the text are of unequal vertical size.  $\langle keyfloat \rangle$  may be any of `\keyfig`, `keyfigure`, `keyfloats`, `keysubfigs`, etc., each with its proper arguments. See example 27.

Env `marginfigure` [ $\langle offset \rangle$ ]

A figure placed into the margin, with an optional vertical offset. `\keyfloat` uses the version provided by the `tufte-book` class if available, or provides its own version otherwise. See example 20.

Env `margitable` [ $\langle offset \rangle$ ]

A table placed into the margin, with an optional vertical offset. `\keyfloat` uses the version provided by the `tufte-book` class if available, or provides its own version otherwise. See example 21.

---

Arg \* The star option creates floats which span both columns in a two-column document.

Arg [H] The [H] location forces a figure to be “Here”, in the form of a minipage instead of a float. A caption, label, etc. may still be assigned.

Arg [M] The [M] location places the float into the margin. When the `tufte-book` class is used, its `marginfigure` and `margitable` environments are used, otherwise `keyfloat` provides and uses its own versions of the same environments. See examples 22 and 23.

Arg [W] The [W] location wraps text around the float. Use this just before the start of a paragraph with contents large enough to wrap around the float. Do not use this inside a list environment. Select placement with the `wp` key; see the `wrapfig` package documentation for more information. Use `w` or `lw` to set the width of the item / image contained inside the wrap area. By default the caption will also be contained in this width. To use a larger width for the overall container and caption, set `w` or `lw` for the size of the image, and also use `ww` or `wlw` for a larger size for the caption. Watch the log for warnings from `wrapfig`.

Pkg `wrapfig`

Arg [loc] The star and [loc] options are ignored for floats inside a `keyfloats`, `keysubfigs`, or `keysubtabs` environment. Note that these container environments may have their own star and [loc] options.

### ⚠ `wrapfig` warnings

## 2.3 Keys and values

Table 1 shows the key/value combinations which are allowed. In most cases these may be used in any order and any combination, except for the following:

**subfloat keys** The keys labeled "Sub" may be used for the `keysubfigs` and `keysubtabs` environments, which group a number of subfloats together under one master float. The master float has its own caption, label, and text, and each subfloat inside the group likewise has its own set of keys.

**keyfloats keys** `keyfloats` does not accept any keys at all.

The "artist" keys `ap`, `af`, `al`, and `as` are only used by figures.

The `stretch` key increases space between tabular elements.

The rest of the macros and environments accept all of the keys, as they each create an individual float or subfloat, and each may have its own assigned dimensions and frame.

**short/long  
caption combinations** Table 2 shows the combinations of the caption-related keys `c`, `cstar`, and `sc`, and how they control the caption numbering and entries in the LOF/LOT.

**wrapped float placement** Table 3 shows the wrapped-float placement options for the `wp` key for floats placed [W].

**Table 1: Keys and values — part I**

Key	Sub <sup>a</sup>	Description	Example
c	•	An unstarred caption. If empty, creates a figure with a number but no caption.	c={A caption}
cstar	•	A starred caption. Creates a float without a number. If empty, creates a figure with no number or caption.	cstar={No Num}
sc	•	The short caption for the LOF/LOT, even if cstar.	sc={Short cap}
cont	•	Continued float?	cont
l	•	The label. Enclose in braces if a comma is included. Ignored in unnumbered floats.	l=fig:alabel
ap, aup	•	Artist/author's prefix, such as "Mr." <sup>b</sup>	ap=Mr.
af, auf	•	Artist/author's first name. <sup>b</sup>	af=First
al, aul	•	Artist/author's last name. <sup>b</sup>	al=Last
as, aus	•	Artist/author's suffix, such as ~III. <sup>b</sup>	al=~III
t	•	Additional text. May include paragraphs. Enclose in braces if a comma is included. May need \protect before macro calls. Fully-justified alignment.	t={Paragraphs}
tc	•	Additional text, aligned to the center.	tc={Paragraphs}
tl	•	Additional text, aligned to the left.	tl={Paragraphs}
tr	•	Additional text, aligned to the right.	tr={Paragraphs}

<sup>a</sup>: All the keys in Part I may be used with the main keys of the `keysubfigs`, `keysubtabs`, and `keysubfloats` environments.

<sup>b</sup>: Artist/author keys: al is an artist's last name, aul is an author's last name, etc. Artists names are printed centered, authors are flush right. A fixed-width non-breakable space is placed between parts of names, except that the optional suffix is connected directly to the last name, allowing "as={, Title}", for example.

---

... continued

**Table 1: Keys and values — part II**

Key	Sub <sup>c</sup>	Description	Example
lw	—	Set the width to a fraction of \linewidth. Cancels w. If a non-image float, sets the width of the text box. For wrapped objects, may be used with wlw for a smaller item with a larger caption.	lw=.5
w	—	Set the actual width. Cancels lw. If a non-image float, sets the width of the text box. For wrapped objects, may be used with ww for a smaller item with a larger caption.	w=2in
h	—	Set the actual height. Images only.	w=2in
kar	—	Keep aspect ratio: Use with w or lw, along with h, to fit an image into a given area. Images only.	kar
s	—	Set the image scale. Images only.	s=3
r	—	Set the rotation angle; counter-clockwise degrees.	r=90
f	—	Selects a loose frame with the current \fboxsep. Only rotated with \keyfig.	f
ft	—	Selects a tight frame with no \fboxsep. Useful for photographs, or diagrams which already have some margin built in.	ft
stretch	—	Sets \arraystretch inside the float.	stretch=1.5
mo	—	Sets the vertical offset for a margin float.	mo=-1.2ex
wn	—	Sets the number of lines for a wrapped float.	wn=2
wp	—	Sets the wrap placement for a wrapped float. The default is 0, which places the wrapped float at the outside edge of the text. See table 3.	wp=I
wo	—	Sets the wrap overhang for a wrapped float.	wo=8em
wlw	—	Sets the total width of the wrapped item to a fraction of \linewidth. May be more than the w or lw width.	wlw=.6
ww	—	Sets the total width of the wrapped item. May be more than the w or lw width.	ww=2in
va	—	Sets the vertical alignment of the outermost minipage container for the keyfloat. Defaults to 'c'. Ignored by subfigure, subtable.	va=t

<sup>c</sup> None of the keys in Part II are used in the main keys of the `keysubfigs`, `keysubtabs`, or `keysubfloats` environments, but may be used in the optional shared keys to be passed to each object within.

**Table 2: Caption-related key combinations**

Keys in Use			Type of	
c	cstar	sc	Caption <sup>a</sup>	LOF / LOT <sup>b</sup>
•	—	—	Numbered	Caption
•	—	•	Numbered	Short Caption
—	•	—	Unnumbered	None
—	•	•	Unnumbered	Short Caption
—	cstar={}	Ignored	None	None

<sup>a</sup>: Caption: Shows whether the float will be numbered, unnumbered, or have no caption.

<sup>b</sup>: LOF / LOT: Shows whether the regular or short caption will appear in the List of Figures or List of Tables, or if there will be no listing.

**Table 3: Key wp: Wrapped float placement options**

Key	Location
r R	to the right of the text body
l L	to the left of the text body
i I	to the inside margin
o O	to the outside margin

The un-capitalized key attempts to place the float “here”, and the capitalized key allows L<sup>A</sup>T<sub>E</sub>X to try to find the best location. The default is O.

## 2.4 Other settings

\KFLTtightframe {*contents*} Frames the contents without separation.

\KFLTlooseframe {*contents*} Frames the contents with separation.

These may be used to re-define how contents are framed. The default is a simple \fbox.

Len \KFLTtightframewidth Combined width of the frame and separation for each of tight and loose frames. These settings should be adjusted when changing the frame width and/or separation. The value should be equivalent to \fboxwidth plus \fboxsep.

Len \KFLTlooseframewidth The computed width of the image. Useful to enclose an mdframed environment to restrict its width. See example 29.

*An image.*

**Figure 1:** A \keyfig with an image

Some text. More text.

Another paragraph.

**Figure 2:** A \keyfigbox

## 2.5 Examples

### 2.5.1 Single floats

---

#### Example 1: Figure with an image from a file

*Code:*

```
\keyfig{c=A \cs{keyfig} with an image,l=fig:simple}{image}
```

*Result:*

*Figure 1*

---

**natural size** This float (fig. 1) is shown at its natural size because no width or height modifiers were specified. When used alone like this, a regular float is created.

---

#### Example 2: Figure with arbitrary contents

*Code:*

```
\keyfigbox{f,c={A \cs{keyfigbox}},l=fig:figbox}
           {Some text. More text. \par Another paragraph.}
```

*Result:*

*Figure 2*

---

**default width** The \keyfigbox creates a figure with a box of arbitrary contents, instead of an image from a file. Its default width is the full \linewidth, unless w or lw keys are used.

Arbitrary contents may go here.

Including multiple paragraphs.

**Figure 3: A `\keyfigure` environment**

**Table 4: A `\keytab` table**

A	B
C	D

### Example 3: Figure environment with arbitrary contents

*Code:*

```
\begin{keyfigure}{f,c={A \env{keyfigure} environment},
l=fig:environment}
Arbitrary contents may go here.
```

Including multiple paragraphs.  
\end{keyfigure}

*Result:*

*Figure 3*

The `keyfigure` environment is preferred over the `\keyfigbox` macro when multiple lines of contents are to be included.

### Example 4: Table macro

*Code:*

```
\keytab{c=A \cs{keytab} table,l=tab:simpletable}{\testtable}
```

*Result:*

*Table 4*

Do not try to use tables which overflow the page.

For anything other than a simple table, use the `keytable` environment. See example 5.

**large tables** For large tables, use the `longtable` or `supertabular` packages.

**Table 5: A keytable environment**

Arbitrary contents may go here. <sup>a</sup>
_____
A B C D

<sup>a</sup>A footnote.

---

**Example 5: Table environment with arbitrary contents**

*Code:*

```
\begin{keytable}{f,c={A \env{keytable} environment},  
l=tab:environment}  
Arbitrary contents may go here.\footnote{A footnote.}  
  
\testtable  
\end{keytable}
```

*Result:*

*Table 5*

---

The keytable environment is preferred over the \keytab macro since most tables are multi-line creations.

\keytab centers the table, but keytable does not. Add \centering if desired.



Additional text. Multiple paragraphs may be used. The entire text is enclosed in braces because a comma is included. Alignment may be set by using tags tc, tl, or tr instead of t

**Figure 4: A figure with many options**

---

**Example 6: Figure with many options selected**

*Code:*

```
\keyfig{  
    w=2in,ft,r=15,  
    c=A figure with many options,  
    sc=A figure with options,  
    t={Additional text. Multiple paragraphs may be used.  
        The entire text is enclosed in braces because a comma  
        is included. Alignment may be set by using  
        tags \optn{tc}, \optn{tl}, or \optn{tr}  
        instead of \optn{t}},  
    l=fig:options  
}{image}
```

*Result:*

*Figure 4*

---

Width is fixed at 2 in, a tight frame is specified (\fboxsep of 0 pt), a short caption appears in the List of Figures, and the additional text is using the default fully-justified alignment.

Since fig. 4 is a float, it may appear on the following page.



Figure 5: Half of \linewidth

---

**Example 7: Using \linewidth**

*Code:*

```
\keyfig{lw=.5,c=Half of \cs{linewidth},l=fig:linewidth}{image}
```

*Result:*

Figure 5

---

**\linewidth** Figure 5 is half of \linewidth in size. When the lw key is used inside a keyfloats or keysubfigs environment, the \linewidth will be proportional to the sub-box for each element. When used alone, such as here, the \linewidth is the full width of the text on this page.

lw and w are not used at the same time. If both lw and w are specified, the last one cancels any previous ones.

---


**Example 8: Using frames**

*Code:*

```
\begin{keyfloats}[hbp]{4}
\keyfig{f,c=Loosely-framed figure,l=fig:looseframe}{image}
\keyfig{ft,c=Tightly-framed figure,l=fig:tightframe}{image}
\keytab{f,c=Loosely-framed table,l=tab:looseframe}{\testtable}
\keytab{ft,c=Tightly-framed table,l=tab:tightframe}{\testtable}
\end{keyfloats}
```

*Result:*

Figures 6 and 7 and tables 6 and 7



**Figure 6:**  
Loosely-framed  
figure



**Figure 7:**  
Tightly-framed  
figure

**Table 6:**  
Loosely-framed  
table

A	B
C	D

**Table 7:**  
Tightly-framed  
table

A	B
C	D


---

The f key adds a loose frame with the current \fboxsep. This is desirable in most cases.

The tf key adds a tight frame with no separation. This is useful for framing a photograph, or a diagram which already has a margin.

Framing tables is seldom recommended. In the case of the tight frame, table 7, note that the external frame almost overwrites the table's natural horizontal rules.

**custom frames** Also see section 2.6.1 for customizing frames.

**Table 8: Table, rotated**

(Framed to show box width.)

**Example 9: Using rotation with boxes***Code:*

```
\keytab{f,w=.8in,c={Table, rotated},
r=70,l=tab:rotated,
tc=(Framed to show box width.)}
{\testwidetable}
```

*Result:**Table 8***rotated whitespace****⚠ box width**

Unless a width is given, a box is the full `\ linewidth`. When rotated, this extra horizontal space is rotated into extra vertical space. To avoid this extra space, set a `w` or `lw` to be wide enough for the table or other contents, but not much wider. When this box is rotated, it will not take much more vertical space than necessary.

**frame rotation**

Unlike an image, the frame of a box does not rotate with its contents.

---

**Example 10: Located [H]ere**

*Code:*

```
\keytab[H]{c={A table [H]},l=tab:here}{\testtable}
\keyfig[H]{f,w=1in,c={A keyfig [H]},l=fig:here}{image}
```

---

*Result:*

*Table 9, Figure 8*

**Table 9: A table [H]**

---

A	B
C	D

---

*An image.*

**Figure 8: A keyfig [H]**

---

**⚠ Out of sequence**

Table 9 and Figure 8 are to be placed “[H]ere”, and therefore may appear out-of-sequence with surrounding figures. Place a \clearpage before or after to re-sync, if necessary.



An image.  
=====

Starred caption with a short caption.

---

**Example 11: Unnumbered float**

*Code:*

```
\keyfig[H]{f,cstar={A starred caption}}{image}
```

*Result:*

*See fig. "A starred caption".*



An image.  
=====

A starred caption

---

A starred caption creates a float without a number, and without an entry in the List of Figures unless there is a non-empty short caption. (See the next example.)

 **No label** Labels cannot be used when there is no number for a float.

---

**Example 12: Unnumbered float with a LOF entry**

*Code:*

```
\keyfig{  
    f,cstar={Starred caption with a short caption.},  
    sc={Starred short caption}  
}{image}
```

*Result:*

*See fig. "Starred caption with a short caption".*

---

A starred caption with a non-empty short caption creates an unnumbered entry in the List of Figures.

---

**Example 13: An unnumbered in-text image**

*Code:*

```
\keyfig[H]{f,cstar={},  
          tc={Optional text which is not a caption.}  
          }{image2}
```

*Result:*

*See fig. "Optional text which is not a caption."*



Optional text which is not a caption.

---

By using [H] and cstar={}, the image is placed inline without a number or LOF entry.

Also see example 14.

**Example 14: A box without a caption.**

*Code:*

```
\begin{keyfloats}{2}
\keyparbox{
  f, lw=.5,
  tc={A \cs{keyparbox} with no number or label.}
}{Some contents.}
\keyfig{c=Next to a \cs{keyparbox}, l=fig:nexttoparbox}{image}
\end{keyfloats}
\keyparbox[H]{f, lw=.5}{A \cs{keyparbox} [H], outside the keyfloats.}
```

---

*Result:*

Figure 9, and the box to its left.

A \keyparbox [H], outside the keyfloats.

---

A \keyparbox is a \keyfigbox with `cstar={}`, and is mostly useful as an information box inside a row or a set of subfloats.

### 2.5.2 Groups of floats, shared keys, keep aspect ratio

#### Example 15: Groups of figures — keyfloats environment

*Code:*

```
\begin{keyfloats}{2}
\keyfig[lw=1,c={First in a group},
         l=fig:firstinrow,tl={\cs{raggedright} text}
         ]{image}
\keyparbox{}{\centering A \cs{keyparbox} describing something.
             \par With several paragraphs.}
\begin{keyfloats}{2}[f,lw=1,h=3em,kar,va=t]
\keyfig[lw=1,c={Third in a group},
         l=fig:thirdinarow]{image}
\keyfig[lw=1,c={Fourth in a group, with a longer caption}]{image2}
\keyfig[lw=1,c={Fifth in a group}]{image}
\keyfig[lw=1,c={Sixth in a group},
         l=fig:sixthinarow]{image2}
\end{keyfloats}
\keytab[c={Seventh in a group},l=tab:seventhinrow]{\testwidetable}
\end{keyfloats}
```

*Result:*

*Figure 10 to Table 10*

**automatic layout**

The keyfloats environment takes an argument for the number of columns. Additional floats are automatically placed on following rows. Changing the number of columns will cause the floats to automatically readjust as necessary. Leftovers will be centered on the last row. An optional argument may contain keys and values which are passed to each object inside the group.

**nested groups**

Figure 10 to table 10 are in a keyfloats environment. Furthermore, Figures 11 to 14 are in an additional nested keyfloats environment, forming a small box of floats inside the larger group. In this subgroup, shared keys are set so that each image is framed and keeps its aspect ratio while being resized to fit a fixed width and height.

 **\linewidth**

Note that \linewidth is adjusted for each row and nested row, so the lw key may need to be changed if a float is moved to a different nesting level.

 **image too large**

Fixed-width or fixed-height floats may be too large to fit if they are moved into a group. A warning is issued if so. It is the user's responsibility to adjust w, h, or lw as necessary. To allow images to automatically adjust, use lw=1 or less, which adjusts to the \linewidth.

**location**

Keyfloats may be located [H], [M], or located [W] set with half the line width:

# An image.

---



---

\raggedright text


A \keyparbox describing something.

With several paragraphs.

**Figure 10: First in a group**



**Figure 11: Third in a group**



**Figure 12: Fourth in a group, with a longer caption**



**Figure 13: Fifth in a group**



**Figure 14: Sixth in a group**

**Table 10: Seventh in a group**


A	B	C
D	E	F

\begin{keyfloats}[H]{2} ...

**two columns** Keyfloats may be starred to span both columns in a two-column format:  
\begin{keyfloats}\*{2} ...

**grid of images** As shown in the sub group above, to display a group of images of varying shape inside a grid, use the shared option to select a maximum size, keep aspect ratio, and align at the top so that captions of varying length may wrap below each image:

```
\begin{keyfloats}{2}[lw=1,h=3em,kar,va=t]
...
\end{keyfloats}
```

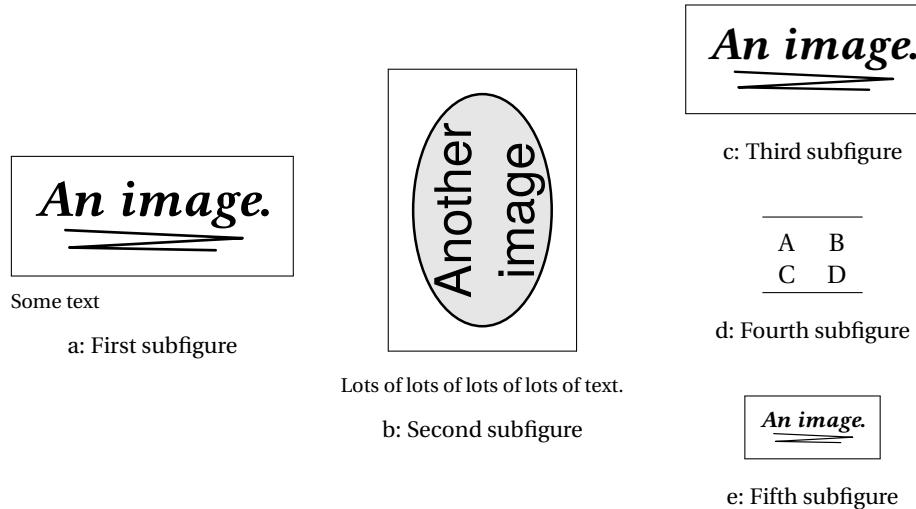**Figure 15: Subfigures**

### 2.5.3 Subfloats

---

#### Example 16: Subfigures — `keysubfigs` environment

*Code:*

```
\begin{keysubfigs}{3}{c=Subfigures,l=fig:subfigs}
\keyfig{lw=1,f,c={First subfigure},
l=fig:firstsubfig,t=Some text}{image}
\keyfig{lw=1,f,r=90,c={Second subfigure},
l=fig:secondsubfig,
t=Lots of lots of lots of lots of text.}
{image2}
\begin{keyfloats}{1}
\keyfig{lw=1,f,c={Third subfigure},l=fig:thirdsubfig}{image}
\keytab{c={Fourth subfigure},l=fig:fourthsubfig}{\testtable}
\keyfig{lw=.5,f,c={Fifth subfigure},l=fig:fifthsubfig}{image}
\end{keyfloats}
\end{keysubfigs}
```

*Result:*

*Figure 15*

---

Figures 15a to 15e are in the fig. 15 `keysubfigs` environment. The `keysubtabs` environment is similar. Mixed types have the type of their container, as shown with fig. 15d.

Subfloats are associated floats (a, b, ...) collected together into one common float (the enclosing `keysubfigs` or `keysubtabs` environment). The enclosing float can have its own caption (call “Sub-Figures” in the example), which appears in the LOF/LOT, and also a label. Each subfloat can have its own caption and label as well, but the subcaption does not appear in the LOF/LOT.

- ⚠ **mixed subfloats** All subfloats are forced to have the same type as its containing float. A table inside a figure will be labeled as a figure, for example. This avoids miss-labeling as each subfloat must clearly be identified as a child of its containing float.
- ⚠ **nested subfloats** `keysubfigs` and `keysubtabs` may not be used inside the `keyfloats` environment, and cannot be nested inside each other. (No subfloat 12aa, 12ab, 12ba, etc.)
- nested keyfloats** The `keyfloats` environment may be used inside `keysubfigs` or `keysubtabs` to gather subfloats together, such as the three right-most figures in fig. 15.
- location** Subfloats may be located [H], [M], or located [W] set with half the line width:  
`\begin{keysubfigs}[H]{3}{key/vals ...}`
- two columns** Subfloats may be starred to span both columns in a two-column format:  
`\begin{keysubfigs}*{2}{key/vals ...}`
- shared keys** A group of subfloats may have an optional argument for shared keys and values, which are then passed to each subfloat within.
- ⚠ **va** The vertical alignment option `va` does not work with subfloats.

---

#### Example 17: Subtables [H] — `keysubtabs` environment

*Code:*

```
\begin{keysubtabs}[H]{2}{c=Subtables [H],l=tab:subtabs}
\keytab{c={First subtable},l=fig:firstsubtab}{\testtable}
\keytab{c={Second subtable},l=fig:secondsubtab}{\testwidetable}
\end{keysubtabs}
```

*Result:*

*Table 11*

**Table 11: Subtables [H]**

a: First subtable

A	B
C	D

b: Second subtable

A	B	C
D	E	F

---

An image.



**Figure 16: Figure to be continued**

**Figure 16: ...continued**

#### 2.5.4 Continued floats

The `cont` key may be used to generate a “continued” float. The continued float receives the same number as the previous float, and it is assumed that they are the same float, except that they are separated for some reason such as size on the page.

The label may be placed in a continued float, and will still receive the same float number as the prior non-continued float.

---

#### Example 18: Continued figure

*Code:*

```
\begin{keyfloats}{2}
\keyfig[,c=Figure to be continued]{image}
\keyfig[c={\dots continued},cont,l=fig:firstcontinued]{image2}
\end{keyfloats}
```

*Result:*

*Figure 16*

---

*An image.*

a: First of a set

*An image.*

b: Second of a set

**Figure 17: A set of figures**



c: Third of a set



d: Fourth of a set

**Figure 17: ...continued**

### 2.5.5 Continued subfloats

The `keysubfigs` and `keysuptabs` environments may also be given the `cont` key. The containing environment's float receives the same number as the previous float (presumably another subfloat container).

#### Example 19: Continued subfloats

*Code:*

```
\begin{keysubfigs}{2}{c={A set of figures},l=fig:continuedfigures}
\keyfig{c={First of a set},l=fig:contfirst}{image}
\keyfig{c={Second of a set},l=fig:contsecond}{image}
\end{keysubfigs}
\begin{keysubfigs}{2}{c={\dots continued},cont}
\keyfig{c={Third of a set},l=fig:contthird}{image2}
\keyfig{c={Fourth of a set},l=fig:contfourth}{image2}
\end{keysubfigs}
```

*Result:*

*Figure 17*

### 2.5.6 Margin floats

When a keyfloat is located [M], it will be placed in the margin.

- cls tufte-book When the tufte-book class is used, its `marginfigure` or `margintable` environments will be used, otherwise `keyfloat` provides environments of the same name and uses those instead.

---

#### Example 20: The `marginfigure` environment

*Code:*

```
\begin{marginfigure}
\centering
\includegraphics[width=.75\linewidth]{image}
```

*An image.*

---

Some text added by hand.

**Figure 18: A `marginfigure`**

Some text added by hand.

```
\caption{A \env{marginfigure}}
\label{fig:marginfigure}
\end{marginfigure}
```

*Result:*

*Figure 18*

---



---

#### Example 21: The `margintable` environment

*Code:*

A	B	C
D	E	F

**Table 12: A `margintable`**

```
\begin{margintable}
\centering
\testwidetable
\caption{A \env{margintable}}
\label{fig:margintable}
\end{margintable}
```

*Result:*

*Table 12*

---

---

**Example 22: Using \keyfig[M]***Code:*

```
\keyfig[M]{c={A \cs{keyfig}\optn{[M]}},l=fig:keyfigm,ft,
t=Additional text.
Text text text text text text.
```

Additional text. Text text text text text  
text.

More paragraphs.

**Figure 19: A \keyfig[M]**

More paragraphs.

```
}{image2}
```

*Result:***Figure 19****Table 13: A keytable[M]**

A	B	C
D	E	F

---

**Example 23: Using keytable[M] and an offset***Code:*

```
\begin{keytable}[M]{c={A \env{keytable}\optn{[M]}},
l=tab:keytablem,mo=-.9in}
\centering
\testwidetable
\end{keytable}
```

*Result:***Table 13**

A negative offset was used to shift the table upwards to the top of the example.

**margin float offset**

To set the minimum-allowed distance between \marginpars and margin floats:

```
\setlength{\marginparpush}{3ex}
```

### 2.5.7 Wrapped floats

---

#### Example 24: Using \keyfig[W] and \keytab[W]


*Code:*

```
\keyfig[W]{c={A \cs{keyfig}\optn{[W]}},
    l=fig:keyfigw,ft,lw=.4,wp=I, wo=8em, wn=12,
    t={.4\cs{linewidth} wide, placed \optn{I}.}
}{image2}
\blindtext

\keytab[W]{c={A \cs{keytab}\optn{[W]}},l=tab:keytabw,w=.75in,
}{\testtable}
\blindtext
```

*Result:*

Figure 20 and table 14

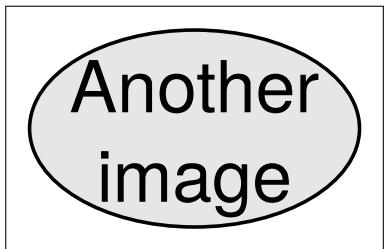

.4\linewidth wide, placed I.

Figure 20: A \keyfig[W]

Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Etiam lobortis facilisis sem. Nullam nec mi et neque pharetra sollicitudin. Praesent imperdiet mi nec ante. Donec ullamcorper, felis non sodales commodo, lectus velit ultrices augue, a dignissim nibh lectus placerat pede. Vivamus nunc nunc, molestie ut, ultricies vel, semper in, velit. Ut porttitor. Praesent in sapien. Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Duis fringilla tristique neque. Sed interdum libero ut metus. Pellentesque placerat. Nam rutrum augue a leo. Morbi sed elit sit amet ante lobortis sollicitudin. Praesent blandit blandit mauris. Praesent lectus tellus, aliquet aliquam, luctus a, egestas a, turpis. Mauris lacinia lorem sit amet ipsum. Nunc quis urna dictum turpis accumsan semper.

Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Etiam lobortis facilisis sem. Nullam nec mi et neque pharetra sollicitudin. Praesent imperdiet mi nec ante. Donec ullamcorper, felis non sodales commodo, lectus velit ultrices augue, a dignissim nibh lectus placerat pede. Vivamus nunc nunc, molestie ut, ultricies vel, semper in, velit. Ut porttitor. Praesent in sapien. Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Duis fringilla tristique neque. Sed interdum libero ut metus. Pellentesque placerat. Nam rutrum augue a leo. Morbi sed elit sit amet ante lobortis sollicitudin. Praesent blandit blandit mauris. Praesent lectus tellus, aliquet aliquam, luctus a, egestas a, turpis. Mauris lacinia lorem sit amet ipsum. Nunc quis urna dictum turpis accumsan semper.

Table 14: A  
\keytab[W]

A	B
C	D

---

**Example 25: Using \keyfigbox[W] and \keyparbox[W]**

Code:

```
\keyfigbox[W]{c={A \cs{keyfigbox}\optn{[W]}},
  l=fig:keyfigboxw,f,1w=.25,wp=I, wn=7,
  t=Text text text text text text text text
}{The contents.}
\blindtext

\keyparbox[W]{w=1in}{A \cs{keyparbox}[W] and some more text.}
\blindtext
```

Result:

*Figure 21* and the \keyparbox.

**Figure 21: A  
\keyfigbox[W]**

The contents.

Text text text text text text  
text text text

Lore ipsum dolor sit amet, consectetuer adipiscing elit. Etiam lobortis facilisis sem. Nullam nec mi et neque pharetra sollicitudin. Praesent imperdiet mi nec ante. Donec ullamcorper, felis non sodales commodo, lectus velit ultrices augue, a dignissim nibh lectus placerat pede. Vivamus nunc nunc, molestie ut, ultricies vel, semper in, velit. Ut porttitor. Praesent in sapien. Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Duis fringilla tristique neque. Sed interdum libero ut metus. Pellentesque placerat. Nam rutrum augue a leo. Morbi sed elit sit amet ante lobortis sollicitudin. Praesent blandit blandit mauris. Praesent lectus tellus, aliquet aliquam, luctus a, egestas a, turpis. Mauris lacinia lorem sit amet ipsum. Nunc quis urna dictum turpis accumsan semper.

Lore ipsum dolor sit amet, consectetuer adipiscing elit. Etiam lobortis facilisis sem. Nullam nec mi et neque pharetra sollicitudin. Praesent imperdiet mi nec ante. Donec ullamcorper, felis non sodales commodo, lectus velit ultrices augue, a dignissim nibh lectus placerat pede. Vivamus nunc nunc, molestie ut, ultricies vel, semper in, velit. Ut porttitor. Praesent in sapien. A  
\keyparbox[W]  
and some more  
text.

Lore ipsum dolor sit amet, consectetuer adipiscing elit. Duis fringilla tristique neque. Sed interdum libero ut metus. Pellentesque placerat. Nam rutrum augue a leo. Morbi sed elit sit amet ante lobortis sollicitudin. Praesent blandit blandit mauris. Praesent lectus tellus, aliquet aliquam, luctus a, egestas a, turpis. Mauris lacinia lorem sit amet ipsum. Nunc quis urna dictum turpis accumsan semper.

---

**Example 26: Using \keyfigure[W] and \keytable[W]***Code:*

```
\begin{keyfigure}[W]{c={A \cs{keyfigure}\optn{[W]}},  
    l=fig:keyfigurew,f,w=1.5in, wo=4em,wn=5}  
This is a keyfigure.  
\end{keyfigure}  
\blindtext  
  
\begin{keytable}[W]{c={A \env{keytable}\optn{[W]}},  
    l=tab:keytablew,w=2in,wp=L,  
    tc=Placed \optn{L} and 2in wide.}  
\centering  
\testwidetable  
\end{keytable}  
\blindtext
```

*Result:**Figure 22 and table 15*

Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Etiam lobortis facilisis sem. Nullam nec mi et neque pharetra sollicitudin. Praesent imperdier mi nec ante. Donec ullamcorper, felis non sodales commodo, lectus velit ultrices augue, a dignissim nibh lectus placerat pede. Vivamus nunc nunc, molestie ut, ultricies vel, semper in, velit. Ut porttitor. Praesent in sapien. Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Duis fringilla tristique neque. Sed interdum libero ut metus. Pellentesque placerat. Nam rutrum augue a leo. Morbi sed elit sit amet ante lobortis sollicitudin. Praesent blandit blandit mauris. Praesent lectus tellus, aliquet aliquam, luctus a, egestas a, turpis. Mauris lacinia lorem sit amet ipsum. Nunc quis urna dictum turpis accumsan semper.

**Table 15: A keytable[W]**

A	B	C
D	E	F

Placed L and 2in wide.

Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Etiam lobortis facilisis sem. Nullam nec mi et neque pharetra sollicitudin. Praesent imperdier mi nec ante. Donec ullamcorper, felis non sodales commodo, lectus velit ultrices augue, a dignissim nibh lectus placerat pede. Vivamus nunc nunc, molestie ut, ultricies vel,

semper in, velit. Ut porttitor. Praesent in sapien. Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Duis fringilla tristique neque. Sed interdum libero ut metus. Pellentesque placerat. Nam rutrum augue a leo. Morbi sed elit sit amet ante lobortis sollicitudin. Praesent blandit blandit mauris. Praesent lectus tellus, aliquet aliquam, luctus a, egestas a, turpis. Mauris lacinia lorem sit amet ipsum. Nunc quis urna dictum turpis accumsan semper.

**This is a keyfigure.****Figure 22: A \keyfigure[W]**

**Example 27: Using keywrap with a \keyfig***Code:*

```
\begin{itemize}
\item First item.
    Several lines of text text text text text
    text text text text text text text.
\item \begin{keywrap}{.3\linewidth}{\keyfig{%
    lw=1,c={Keywrap with \cs{keyfig}},l=fig:keywrapfig%
}}{image}}
    Second item.
    Several lines of text text text text text
    text text text text text text text text
    text text text text text text.
\end{keywrap}
\item Third item.
\end{itemize}
```

*Result:**Figure 23*

- First item. Several lines of text text.

- Second item. Several lines of text text text text text
 text text text text text text text text text text
 text text text text.

These paragraphs are inside the keywrap. A vertical gap appears below if the text is not enough to fill the space next to the \keyfig.

**notes**

Outside the wrapfig, but still in the second item. There is no elegant way to place only part of a paragraph inside a keywrap, and attempting to do so requires manually removing the vertical paragraph skip.

- Third item.


**Figure 23: Keywrap with \keyfig**

**Example 28: Using wrap width ww and wlw***Code:*

```
\keyfig[W]{c={A \cs{keyfig}\optn{[W] with \optn{wlw}}},  
  l=fig:keyfiglw,ft,lw=.15,wlw=.4,wp=I,  
  t={.15\cs{linewidth} wide, in a .4\cs{linewidth} box.}  
}{image2}  
\blindtext[1]  
  
\keyfig[W]{c={A \cs{keyfig}\optn{[W] with \optn{ww}}},  
  l=fig:keyfigww,ft,w=1cm,ww=3cm,wp=I,  
  t={1cm wide, in a 3cm box.}  
}{image2}  
\blindtext[1]
```

*Result:**Figures 24 and 25*

.15\linewidth wide, in a .4\linewidth box.

**Figure 24: A \keyfig[W] with wlw**

Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Etiam lobortis facilisis sem. Nullam nec mi et neque pharetra sollicitudin. Praesent imperdier mi nec ante. Donec ullamcorper, felis non sodales commodo, lectus velit ultrices augue, a dignissim nibh lectus placerat pede. Vivamus nunc nunc, molestie ut, ultricies vel, semper in, velit. Ut porttitor. Praesent in sapien.

Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Duis fringilla tristique neque. Sed interdum libero ut metus. Pellentesque placerat. Nam rutrum augue a leo. Morbi sed elit sit amet ante lobortis sollicitudin. Praesent blandit blandit mauris. Praesent lectus tellus, aliquet aliquam, luctus a, egestas a, turpis. Mauris lacinia lorem sit amet ipsum. Nunc quis urna dictum turpis accumsan semper.



1cm wide, in a 3cm box.

**Figure 25: A \keyfig[W] with ww**

Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Etiam lobortis facilisis sem. Nullam nec mi et neque pharetra sollicitudin. Praesent imperdier mi nec ante. Donec ullamcorper, felis non sodales commodo, lectus velit ultrices augue, a dignissim nibh lectus placerat pede. Vivamus nunc nunc, molestie ut, ultricies vel, semper in, velit. Ut porttitor. Praesent in sapien. Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Duis fringilla tristique neque. Sed interdum

libero ut metus. Pellentesque placerat. Nam rutrum augue a leo. Morbi sed elit sit amet ante lobortis sollicitudin. Praesent blandit blandit mauris. Praesent lectus tellus, aliquet aliquam, luctus a, egestas a, turpis. Mauris lacinia lorem sit amet ipsum. Nunc quis urna dictum turpis accumsan semper.



Figure 26: Custom-framed image

A loosely-framed box.

Figure 27: Custom loosely-framed box

### 2.5.8 Custom frames

---

#### Example 29: Custom frames with mdframed

*Code:*

```
\renewcommand{\KFLTtightframe}[1]{%
\begin{minipage}{\KFLTimageboxwidth}
\begin{mdtightframe}%
#1
\end{mdtightframe}%
\end{minipage}
}
\setlength{\KFLTtightframewidth}{1pt}

\renewcommand{\KFLTlooseframe}[1]{%
\begin{mdlooseframe}[leftmargin=1.5in,rightmargin=1.5in]%
#1
\end{mdlooseframe}%
}
\setlength{\KFLTlooseframewidth}{4pt}

\keyfig{ft,c=Custom-framed image,l=fig:customframe,r=90}{image}
\keyfigbox{f,c=Custom loosely-framed box,
l=fig:customlooseframe}{A loosely-framed box.}
```

*Result:*

*Figures 26 and 27*

---

Pkg `mdframed`  
⚠ `mdframed width`

Example 29 shows custom frames created with the `mdframed` package along with `tikz`. Note that `mdframed` uses the full `\ linewidth` even if the left/right margins are explicitly set, which causes extra vertical space when rotated. Because of this, the framed object is enclosed inside a `minipage` whose width is precomputed based on the object itself, then set in `\KFLTimageboxwidth`. Any shadow may fall outside this



**Figure 28: Custom shadow**



**Figure 29: Custom loosely-framed shadow**

box.

See section [2.6.1](#) for more details.

### Example 30: Custom shadows with `fancybox`

*Code:*

```
\renewcommand{\KFLTtightframe}[1]{%
\setlength{\fboxrule}{.4pt}
\setlength{\fboxsep}{0pt}
\setlength{\shadowsize}{2pt}
\shadowbox{#1}%
}
\setlength{\KFLTtightframewidth}{0.4pt}

\renewcommand{\KFLTlooseframe}[1]{%
\setlength{\fboxrule}{.4pt}
\setlength{\fboxsep}{3pt}
\setlength{\shadowsize}{2pt}
\shadowbox{#1}%
}
\setlength{\KFLTlooseframewidth}{3.4pt}

\keyfig{ft,c=Custom shadow,l=fig:customshadow}{image}
\keyfigbox{f,c=Custom loosely-framed shadow,lw=.5,
l=fig:customlooseshadow}{A loosely-framed shadow box.}
```

*Result:*

[Figures 28 and 29](#)

Pkg fancybox Example 30 shows custom shadow frames created with the `fancybox` package. This combination respects `lw` and `w`.

See section [2.6.1](#) for more details.

MR. FIRST LAST III

*About the illustration.***Figure 30: Artist's name — image**

Some text, a quotation, a TikZ diagram — anything not an image file.

MR. LAST

**Figure 31: Artist's name — arbitrary contents**

### 2.5.9 Artist's name

**Example 31: Artist's name — image**
*Code:*

```
\keyfig{ft,ap=Mr.,af=First,al=Last,as={~III},
tc={\textit{About the illustration.}},
c=Artist's name --- image,l=fig:artist}{image}
```

*Result:**Figure 30*
**Example 32: Artist's name — arbitrary contents**
*Code:*

```
\tdartistright
\begin{keyfigure}{f,ap=Mr.,al=Last,
c=Artist's name --- arbitrary contents,l=fig:artistpar}
\centering Some text, a quotation, a TikZ\ diagram ---
anything not an image file.
\end{keyfigure}
\tdartistcenter
```

*Result:**Figure 31*

The artist's name and optional prefix/suffix are printed below the figure, and an index entry is made for the name in (Last, First) format, or (Last) if there is no first name. If the `tocdata` package is loaded, the artist's name is also added to the List of Figures, and the `tocdata \tdname...` macros may be used to align the name.



PREFIX FIRST LAST, SUFFIX

Some fully-justified text just for illustrative purposes, in case you have use for long explanations. This text may be the full \linewidth in size.

Multiple paragraphs of text are allowed.

**Figure 32: Artist's collection**

### Example 33: Subfloats with an artist

*Code:*

```
\begin{keysubfigs}{2}%
  c=Artist's collection, l=fig:artistcollection,
  t={Some fully-justified text just for illustrative purposes,
  in case you have use for long explanations.
  This text may be the full \cs{linewidth} in size. \par
  Multiple paragraphs of text are allowed.},
  ap=Prefix,af=First,al=Last,as={, Suffix}
}
\keyfig{c=Artist's First Work}{image}
\keyfig{c=Artist's Second Work,
        tc={Commentary about the work.}}{image2}
\end{keysubfigs}
```

*Result:*

**Figure 32**

A group of figures may be placed into a subfloat container, which may have its own artist keys and additional text. Furthermore, each subfloat inside the collection may also have its own artist tags and additional text.

## 2.6 Customization

### 2.6.1 Custom frames

There are two user-redefinable framing macros:

`\KFLTtightframe` and `\KFLTlooseframe`

A float's contents are placed into a box, which is passed to either of these two macros depending on the key `f` or `tf`.

Each macro takes one argument and frames it.

Each macro has a associated L<sup>A</sup>T<sub>E</sub>X lengths:

`\KFLTtightframewidth` and `\KFLTlooseframewidth`

These lengths must be redefined to the expected total frame width, equal to the frame thickness plus separation.

The default definitions are:

```
\newcommand{\KFLTtightframe}[1]{%
  \setlength{\fboxsep}{0pt}%
  \setlength{\fboxrule}{.4pt}%
  \fbox{#1}%
}
\setlength{\KFLTtightframewidth}{.4pt}

\newcommand{\KFLTlooseframe}[1]{%
  \setlength{\fboxsep}{3pt}%
  \setlength{\fboxrule}{.4pt}%
  \fbox{#1}%
}
\setlength{\KFLTlooseframewidth}{3.4pt}
```

See example 29 for an example created with the `mdframed` package, and example 30 for an example created with the `fancybox` package.

### 2.6.2 Distance between floats and rows

**rows too close/far** To spread out the distance between floats and/or rows of floats on a busy page, the following settings may be changed. The settings used in this documentation are:

```
\setlength{\floatsep}{5ex plus 1ex minus 1ex}
\setlength{\dblfloatsep}{5ex plus 1ex minus 1ex}
```

### 2.6.3 Formatting the captions

To modify the typesetting of the captions, see the `caption` package. The settings used in this documentation are:

```
% default applied to margin floats:  
\captionsetup{labelfont={small,bf},textfont={small,bf}}  
  
\captionsetup[figure]{  
    style=default, justification=centering,  
    margin=0pt, parskip=0pt, skip=2ex,  
    labelfont={small,bf},textfont={small,bf}  
}  
  
\captionsetup[table]{  
    style=default, justification=centering,  
    margin=0pt, parskip=0pt, skip=1ex,  
    labelfont={small,bf},textfont={small,bf}  
}  
  
\captionsetup[subfigure]{  
    style=default, justification=centering,  
    margin=0pt, parskip=0pt, skip=2ex,  
    labelfont={small},textfont={small}  
}  
  
\captionsetup[subtable]{  
    style=default, justification=centering,  
    margin=0pt, parskip=0pt, skip=1ex,  
    labelfont={small},textfont={small}  
}
```

## 3 Code

### 3.1 Older packages

Ensure that `tocdata`, if loaded, is new enough:

```

1 \@ifpackageloaded{tocdata}{
2     \@ifpackagelater{tocdata}{2019/03/21}{}{
3         \PackageError{keyfloat}
4         {%
5             The tocdata package is out of date.\MessageBreak
6             Update to tocdata v2.02 2019/03/21 or later\MessageBreak
7             to use use this version of keyfloat%
8         }
9         {%
10            Please update the tocdata package. It's worth it!%
11        }
12    }
13 }{}
```

### 3.2 Prohibited packages

Prohibits the use of a certain other packages.

```

\KFLT@@prohibitpackage {\langle packagename\rangle}

14 \newcommand*{\KFLT@@prohibitpackage}[2]{%
15 \@ifpackageloaded{\#1}
16 {
17     \PackageError{keyfloat}
18     {%
19         The keyfloat package conflicts with the #1\MessageBreak
20         package. Remove #1 to use keyfloat.\MessageBreak
21         Alternative(s):\MessageBreak
22         \space\space\#2%
23     }
24     {%
25         Keyfloat uses the caption, subcaption, newfloat, and wrapfig packages.%
26     }
27 }{%
28 }
```

```
\KFLT@prohibitpackage {\langle packagename\rangle}
```

---

Prohibits the use of another package, both now and also \AtBeginDocument.

```
29 \newcommand*{\KFLT@prohibitpackage}[2]{  
30     \KFLT@prohibitpackage{#1}{#2}  
31     \AtBeginDocument{\KFLT@prohibitpackage{#1}{#2}}  
32 }
```

The list of prohibited packages:

```
33 \KFLT@prohibitpackage{floatrow}{caption and subcaption}  
34 \KFLT@prohibitpackage{subfig}{subcaption}  
35 \KFLT@prohibitpackage{subfigure}{subcaption}  
36 \KFLT@prohibitpackage{subfloat}{subcaption}  
37 \KFLT@prohibitpackage{floatflt}{wrapfig}
```

### 3.3 Required packages

Pkg etoolbox v2.6 or later for \BeforeBeginEnvironment, \AfterEndEnvironment

```
38 \RequirePackage{etoolbox}[2011/01/03]%
```

Pkg xparse Argument processing:

```
39 \RequirePackage{xparse}
```

Pkg keyval Key processing:

```
40 \RequirePackage{xkeyval}
```

Pkg graphicx For \includegraphics and rotating:

```
41 \RequirePackage{graphicx}
```

Pkg caption Handles all caption-related functions:

```
42 \RequirePackage{caption}[2010/10/31]% v3.2 to support \phantomcaption
```

Pkg subcaption Derived from caption, used to handle subfloats:

```
43 \RequirePackage{subcaption}
```

Pkg calc Used to compute box width minus frame sep and width.

```
44 \RequirePackage{calc}
```

Pkg `rotating` Provides rotation via the `turn` environment:

```
45 \RequirePackage{rotating}
```

Pkg `placeins` Provides

to process existing floats before adding new ones.

```
46 \RequirePackage{placeins}
```

Pkg `wrapfig` Provides figure wrapping code.

```
47 \RequirePackage{wrapfig}
```

Pkg `getttitlestring` Used by `hyperref` and `nameref`.

Expand names used in titles:

```
48 \PassOptionsToPackage{expand}{getttitlestring}
```

Rows of floats are created by a simple `minipage` environment, instead of relying on a preexisting package. This proved to be advantageous when support was added for multiple rows in one environment.

### 3.4 In-line figures and tables

These macros are commonly used by others.

Env `tablehere` Place a table exactly [H].

```
49 \ProvideDocumentEnvironment{tablehere}{}  
50 {  
51     \vskip\intextsep\noindent%  
52     \minipage{\linewidth}%  
53     \def\@captype{table}%  
54     \normalcolor\reset@font\normalsize%  
55 }%  
56 {\endminipage\vskip\intextsep}%
```

Env `figurehere` Place a figure exactly [H].

```
57 \ProvideDocumentEnvironment{figurehere}{}  
58 {  
59     \vskip\intextsep\noindent%  
60     \minipage{\linewidth}%
```

---

```

61     \def\@capttype{figure}%
62     \normalcolor\reset@font\normalsize%
63 }%
64 {\endminipage\vskip\intextsep}%

```

### 3.5 Row counting and control

Used to count position and wrap at end of each row.

Ctr `KFLT@numcols` Columns per row.

```
65 \newcounter{KFLT@numcols}
```

Ctr `KFLT@thiscol` Column currently processing. 0 if not yet in a keyfloats or subfloat.

```
66 \newcounter{KFLT@thiscol}
```

Len `\KFLT@rowboxwidth` How wide is each box in the row.

```
67 \newlength{\KFLT@rowboxwidth}
```

### 3.6 Float key handling

Bool `KFLT@cont` Continued float?

```
68 \newboolean{KFLT@cont}
```

Key [main] `cont` Continued float?

```
69 \define@key{KFLT@keys}{cont}[true]{\setboolean{KFLT@cont}{#1}}
```

`\KFLT@c` Caption storage

```
70 \newcommand{\KFLT@c}{}%
```

Bool `KFLT@cstar` Starred caption?

```
71 \newboolean{KFLT@cstar}
```

Key [main] `c` Caption

```

72 \define@key{KFLT@keys}{c}{%
73     \renewcommand{\KFLT@c}{#1}\setboolean{KFLT@cstar}{false}%
74 }
```

Key [main] cstar Caption starred?

```
75 \define@key{KFLT@keys}{cstar}{%
76   \renewcommand{\KFLT@c}{\#1}\setboolean{KFLT@cstar}{true}%
77 }
```

Key [main] sc Short caption

```
78 \define@key{KFLT@keys}{sc}{%
79   \renewcommand{\KFLT@sc}{\#1}%
80   \setboolean{KFLT@scgiven}{true}%
81 }
```

\KFLT@sc Short caption storage

```
82 \newcommand{\KFLT@sc}{}
```

Bool KFLT@scgiven Was a short caption given?

```
83 \newboolean{KFLT@scgiven}
```

\KFLT@type Float type: “figure”, “table”

```
84 \newcommand*{\KFLT@type}{}%
```

Key [main] l Label

```
85 \define@key{KFLT@keys}{l}{\renewcommand{\KFLT@l}{\#1}}
```

\KFLT@l Label storage

```
86 \newcommand*{\KFLT@l}{}
```

For the artist/author keys:

Key [main] ap Artist prefix

```
87 \define@key{KFLT@keys}{ap}{\renewcommand{\KFLT@ap}{\#1}}
```

\KFLT@ap Storage for artist prefix

```
88 \newcommand*{\KFLT@ap}{}
```

Key [main] af Artist first name

89 \define@key{KFLT@keys}{af}{\renewcommand{\KFLT@af}{#1}}

\KFLT@af Storage for artist first name

90 \newcommand\*{\KFLT@af}{}{}

Key [main] al Artist last name

91 \define@key{KFLT@keys}{al}{\renewcommand{\KFLT@al}{#1}}

\KFLT@al Storage for artist last name

92 \newcommand\*{\KFLT@al}{}{}

Key [main] as Artist suffix

93 \define@key{KFLT@keys}{as}{\renewcommand{\KFLT@as}{#1}}

\KFLT@as Storage for artist suffix

94 \newcommand\*{\KFLT@as}{}{}

Key [main] aup Author prefix

95 \define@key{KFLT@keys}{aup}{\renewcommand{\KFLT@aup}{#1}}

\KFLT@aup Storage for author prefix

96 \newcommand\*{\KFLT@aup}{}{}

Key [main] auf Author first name

97 \define@key{KFLT@keys}{auf}{\renewcommand{\KFLT@auf}{#1}}

\KFLT@auf Storage for author first name

98 \newcommand\*{\KFLT@auf}{}{}

Key [main] aul Author last name

99 \define@key{KFLT@keys}{aul}{\renewcommand{\KFLT@aul}{#1}}

\KFLT@al Storage for author last name

100 \newcommand\*\{\KFLT@al\}{}{}

Key [main] aus Author suffix

101 \define@key{KFLT@keys}{aus}{\renewcommand{\KFLT@aus}{#1}}

\KFLT@aus Storage for author suffix

102 \newcommand\*\{\KFLT@aus\}{}{}

\KFLT@textalign Storage for text alignment.

Used for the additional text in the float.

103 \newcommand\*\{\KFLT@textalign\}{}{}

\KFLT@t Additional text storage

Used for the additional text in the float.

104 \newcommand{\KFLT@t}{}{}

Create replacement macros in case tocdata is not loaded:

105 \providecommand{\tdartisttextjustify}{}  
106 \providecommand{\tdartisttextcenter}{}  
107 \providecommand{\tdartisttextleft}{}  
108 \providecommand{\tdartisttextright}{}  
109 \providecommand{\tdauthortextjustify}{}  
110 \providecommand{\tdauthortextcenter}{}  
111 \providecommand{\tdauthortextleft}{}  
112 \providecommand{\tdauthortextright}{}  
113 \providecommand{\tdartistjustify}{}  
114 \providecommand{\tdartistcenter}{}  
115 \providecommand{\tdartistleft}{}  
116 \providecommand{\tdartistright}{}  
117 \providecommand{\tdauthorjustify}{}  
118 \providecommand{\tdauthorcenter}{}  
119 \providecommand{\tdauthorleft}{}  
120 \providecommand{\tdauthorright}{}{}

Key [main] t Additional text, justified alignment.

```

121 \define@key{KFLT@keys}{t}{%
122     \renewcommand{\KFLT@t}{#1}%
123     \renewcommand{\KFLT@textalign}{}%
124 }

```

Key [main] tc Additional text, centered alignment.

```

125 \define@key{KFLT@keys}{tc}{%
126     \renewcommand{\KFLT@t}{#1}%
127     \renewcommand{\KFLT@textalign}{\centering}%
128 }

```

Key [main] tr Additional text, aligned to the right.

```

129 \define@key{KFLT@keys}{tr}{%
130     \renewcommand{\KFLT@t}{#1}%
131     \renewcommand{\KFLT@textalign}{\raggedleft}%
132 }

```

Key [main] tl Additional text, aligned to the left.

```

133 \define@key{KFLT@keys}{tl}{%
134     \renewcommand{\KFLT@t}{#1}%
135     \renewcommand{\KFLT@textalign}{\raggedright}%
136 }

```

Key [main] lw Fraction of \linewidth

```

137 \define@key{KFLT@keys}{lw}{%
138     \renewcommand{\KFLT@lw}{#1}%
139     \setlength{\KFLT@w}{0pt}%
140 }

```

\KFLT@lw Fraction of linewidth storage: ".5"

```
141 \newcommand*{\KFLT@lw}{}%
```

Key [main] w Fixed width

```

142 \define@key{KFLT@keys}{w}{%
143     \setlength{\KFLT@w}{#1}%
144     \renewcommand{\KFLT@lw}{}%
145 }

```

\KFLT@w Width storage: "3cm"

```
146 \newlength{\KFLT@w}
```

Key [main] h Fixed height

```
147 \define@key{KFLT@keys}{h}{\setlength{\KFLT@h}{#1}}
```

\KFLT@h Height storage: "2in"

```
148 \newlength{\KFLT@h}
```

Key [main] kar Keep aspect ratio

```
149 \define@key{KFLT@keys}{kar}[false]{%
150   \renewcommand{\KFLT@keepaspectratio}{keepaspectratio}%
151 }
```

\KFLT@keepaspectratio Stores "keepaspectratio" if set.

```
152 \newcommand{\KFLT@keepaspectratio}{}%
```

Key [main] s Scale

```
153 \define@key{KFLT@keys}{s}{\renewcommand{\KFLT@s}{#1}}
```

\KFLT@s Scale storage: "3"

```
154 \newcommand*\KFLT@s{1}
```

Key [main] r Angle. 90 is counter-clockwise 90 degrees.

```
155 \define@key{KFLT@keys}{r}{\renewcommand{\KFLT@r}{#1}}
```

\KFLT@r Angle storage: "90"

```
156 \newcommand*\KFLT@r{0}
```

Key [main] f Frame the image with \KFLTlooseframe.

```
157 \define@key{KFLT@keys}{f}[true]{\setboolean{KFLT@f}{#1}}
```

Bool KFLT@f Frame the image?

```
158 \newboolean{KFLT@f}
```

Key [main] **ft** Tightly frame the image using `\KFLTtightframe`. This is useful for photographs, or diagrams which already have built-in margins.

```
159 \define@key{KFLT@keys}{ft}[true]{\setboolean{KFLT@ft}{#1}}
```

Bool `KFLT@ft` Tightly frame the image?

```
160 \newboolean{KFLT@ft}
```

Key [main] **stretch** Set `\arraystretch` inside the table environment.

```
161 \define@key{KFLT@keys}{stretch}{\renewcommand{\KFLT@stretch}{#1}}
```

`\KFLT@stretch` Storage for `\arraystretch`.

```
162 \newcommand*\KFLT@stretch{1}
```

Key [main] **mo** Set vertical offset for a margin float.

```
163 \define@key{KFLT@keys}{mo}{\setlength{\KFLT@mo}{#1}}
```

`\KFLT@mo` Storage for the vertical margin offset.

```
164 \newlength{\KFLT@mo}
```

Key [main] **wn** Set wrap number of narrow lines for a wrapped float.

```
165 \define@key{KFLT@keys}{wn}{\renewcommand{\KFLT@wn}{#1}}
```

`\KFLT@wn` Storage for the wrap placement.

```
166 \newcommand{\KFLT@wn}{}%
```

Key [main] **wp** Set wrap placement for a wrapped float.

See table 3 on page 16.

```
167 \define@key{KFLT@keys}{wp}{\renewcommand{\KFLT@wp}{#1}}
```

`\KFLT@wp` Storage for the wrap placement.

```
168 \newcommand{\KFLT@wp}{0}
```

Key [main] wo Set wrap overhang for a wrapped float.

```
169 \define@key{KFLT@keys}{wo}{\renewcommand{\KFLT@wo}{#1}}
```

\KFLT@wo Storage for the wrap placement.

```
170 \newcommand{\KFLT@wo}{\wrapoverhang}
```

Key [main] wlw Wrapped figure, fraction of \linewidth

```
171 \define@key{KFLT@keys}{wlw}{%
172   \renewcommand{\KFLT@wlw}{#1}%
173   \setlength{\KFLT@ww}{0pt}%
174 }
```

\KFLT@wlw Wrapped figure, fraction of linewidth storage: ".5"

```
175 \newcommand*{\KFLT@wlw}{}%
```

Key [main] ww Wrapped figure, fixed width

```
176 \define@key{KFLT@keys}{ww}{%
177   \setlength{\KFLT@ww}{#1}%
178   \renewcommand{\KFLT@wlw}{}%
179 }
```

\KFLT@ww Wrapped figure, width storage: "3cm"

```
180 \newlength{\KFLT@ww}
```

Key [main] va Set vertical alignment of the outermost minipage container.

```
181 \define@key{KFLT@keys}{va}{\renewcommand{\KFLT@va}{#1}}
```

\KFLT@va Storage for the vertical alignment.

```
182 \newcommand{\KFLT@va}{c}
```

### 3.7 Nesting control

Ctr KFLT@keyfloatdepth Depth inside a keyfigs environment

```
183 \newcounter{KFLT@keyfloatdepth}
184 \setcounter{KFLT@keyfloatdepth}{0}
```

Bool KFLT@inkeys floats Inside a keys subfigs environment?

```
185 \newboolean{KFLT@inkeys floats}
186 \setboolean{KFLT@inkeys floats}{false}
```

### 3.8 Subfloat key handling

These keys are for the container holding a collection of subfigures.

Bool KFLT@subgrpcont Continued float?

```
187 \newboolean{KFLT@subgrpcont}{}%
```

Key [subfloat container] cont Continued float

```
188 \define@key{KFLT@subgrpkeys}{cont}[true]{%
189     \setboolean{KFLT@subgrpcont}{#1}%
190 }
```

\KFLT@subgrpc Sub-caption storage

```
191 \newcommand{\KFLT@subgrpc}{}%
```

Bool KFLT@subgrpstart Sub-caption starred?

```
192 \newboolean{KFLT@subgrpstar}
```

Key [subfloat container] c Caption

```
193 \define@key{KFLT@subgrpkeys}{c}{%
194     \renewcommand{\KFLT@subgrpc}{#1}\setboolean{KFLT@subgrpstar}{false}%
195 }
```

Key [subfloat container] cstar Starred caption?

```
196 \define@key{KFLT@subgrpkeys}{cstar}{%
197     \renewcommand{\KFLT@subgrpc}{#1}\setboolean{KFLT@subgrpstar}{true}%
198 }
```

Key [subfloat container] sc Short caption

```
199 \define@key{KFLT@subgrpkeys}{sc}{%
200     \renewcommand{\KFLT@subgrpsc}{#1}%
201     \setboolean{KFLT@subgrpscgiven}{true}%
202 }
```

\KFLT@subgrpsc Sub-shortcaption storage

203 \newcommand{\KFLT@subgrpsc}{}{}

Bool KFLT@subgrpscgiven Sub-shortcaption was given?

204 \newboolean{KFLT@subgrpscgiven}

\KFLT@subgrptype Subfloats collection type storage: "figure", "table"

205 \newcommand\*\{\KFLT@subgrptype}{}{}

Key [subfloat container] 1 Label

206 \define@key{KFLT@subgrpkeys}{1}{\renewcommand{\KFLT@subgrpl}{#1}}  
207 \newcommand\*\{\KFLT@subgrpl}{}{}

\KFLT@subgrptextalign Storage for text alignment.

Used for the additional text in the float.

208 \newcommand\*\{\KFLT@subgrptextalign}{}{}

\KFLT@subgrpt Additional text storage

Used for the additional text in the float.

209 \newcommand{\KFLT@subgrpt}{}{}

Key [subfloat container] t Additional text — full justification

210 \define@key{KFLT@subgrpkeys}{t}{%  
211 \renewcommand{\KFLT@subgrpt}{#1}%  
212 \renewcommand{\KFLT@subgrptextalign}{}%  
213 }

Key [subfloat container] t Additional text — center justification

214 \define@key{KFLT@subgrpkeys}{tc}{%  
215 \renewcommand{\KFLT@subgrpt}{#1}%  
216 \renewcommand{\KFLT@subgrptextalign}{\centering}%  
217 }

Key [subfloat container] t Additional text — aligned left

```
218 \define@key{KFLT@subgrpkeys}{tl}{%
219     \renewcommand{\KFLT@subgrpt}{\#1}%
220     \renewcommand{\KFLT@subgrptextalign}{\raggedright}%
221 }
```

Key [subfloat container] t Additional text — aligned right

```
222 \define@key{KFLT@subgrpkeys}{tr}{%
223     \renewcommand{\KFLT@subgrpt}{\#1}%
224     \renewcommand{\KFLT@subgrptextalign}{\raggedleft}%
225 }
```

For the `tocdata` package:

Key [subfloat container] ap Artist prefix

```
226 \define@key{KFLT@subgrpkeys}{ap}{\renewcommand{\KFLT@subgrpap}{\#1}}
```

\KFLT@subgrpap Storage for artist prefix

```
227 \newcommand*{\KFLT@subgrpap}{}%
```

Key [subfloat container] af Artist first name

```
228 \define@key{KFLT@subgrpkeys}{af}{\renewcommand{\KFLT@subgrpaf}{\#1}}
```

\KFLT@subgrpaf Storage for artist first name

```
229 \newcommand*{\KFLT@subgrpaf}{}%
```

Key [subfloat container] al Artist last name

```
230 \define@key{KFLT@subgrpkeys}{al}{\renewcommand{\KFLT@subgrpal}{\#1}}
```

\KFLT@subgrpal Storage for artist last name

```
231 \newcommand*{\KFLT@subgrpal}{}%
```

Key [subfloat container] as Artist suffix

```
232 \define@key{KFLT@subgrpkeys}{as}{\renewcommand{\KFLT@subgrpas}{\#1}}
```

\KFLT@subgrpas Storage for artist suffix

```
233 \newcommand*{\KFLT@subgrpas}{}%
```

Key [subfloat container] aup Author prefix

234 \define@key{KFLT@subgrpkeys}{aup}{\renewcommand{\KFLT@subgrpaup}{#1}}

\KFLT@subgrpaup Storage for author prefix

235 \newcommand\*{\KFLT@subgrpaup}{}{}

Key [subfloat container] auf Author first name

236 \define@key{KFLT@subgrpkeys}{auf}{\renewcommand{\KFLT@subgrpauf}{#1}}

\KFLT@subgrpauf Storage for author first name

237 \newcommand\*{\KFLT@subgrpauf}{}{}

Key [subfloat container] aul Author last name

238 \define@key{KFLT@subgrpkeys}{aul}{\renewcommand{\KFLT@subgrpaul}{#1}}

\KFLT@subgrpaul Storage for author last name

239 \newcommand\*{\KFLT@subgrpaul}{}{}

Key [subfloat container] aus Author suffix

240 \define@key{KFLT@subgrpkeys}{aus}{\renewcommand{\KFLT@subgrpaus}{#1}}

\KFLT@subgrpaus Storage for author suffix

241 \newcommand\*{\KFLT@subgrpaus}{}{}

### 3.9 Computing image width

Len \KFLT@imagewidth Computed width of the image

242 \newlength{\KFLT@imagewidth}

Len \KFLT@boxwidth Computed width of the container box

243 \newlength{\KFLT@boxwidth}

Len \KFLT@wrapwidth Computed width of the wrapped figure

```
244 \newlength{\KFLT@wrapwidth}
```

\KFLT@findwidths Figure out how wide to make an image and its container

```
245 \newcommand*\KFLT@findwidths[]{%
```

Default to a box of full \linewidth minus the potential frame:

```
246     \ifbool{\KFLT@ft}{% tight frame?
247         {\setlength{\KFLT@boxwidth}{\linewidth - 2\KFLT@tightframewidth}}%
248         {% not tight frame
249             \ifbool{\KFLT@f}{% loose frame?
250                 {\setlength{\KFLT@boxwidth}{\linewidth - 2\KFLT@looseframewidth}}%
251                 {\setlength{\KFLT@boxwidth}{\linewidth}}% no frame
252             }% not tight frame
```

Several width options exist. First see if width was given:

```
253 \ifdimgreater{\KFLT@w}{0pt}{%
```

Width was given:

```
254     {\setlength{\KFLT@imagewidth}{\KFLT@w}}%
255     {% width not given
```

Use full \linewidth or only a fraction:

```
256     \ifcsempty{\KFLT@lw}{%
257         {\setlength{\KFLT@imagewidth}{\KFLT@boxwidth}}%
258         {\setlength{\KFLT@imagewidth}{\KFLT@lw\KFLT@boxwidth}}%
259     }% width not given
```

The wrap width is the same as the image width, unless specified:

```
260 \ifdimgreater{\KFLT@ww}{0pt}{%
```

Width was given:

```
261     {%
262         \setlength{\KFLT@wrapwidth}{\KFLT@ww}}%
263     {% width not given
```

If w<sub>lw</sub>, use a fraction of line width, else if none given use the same as the image width.

```
264 \ifcsempty{\KFLT@wlw}{%
```

```

265      {%
266          \setlength{\KFLT@wrapwidth}{\KFLT@imagewidth}}%
267      {%
268          \setlength{\KFLT@wrapwidth}{\KFLT@wlw\KFLT@boxwidth}}%
269      }% width not given
270 }

```

### 3.10 Framing and rotation

A user-redefinable macro and length to tightly frame the contents.

**\KFLTtightframe:** Redefine to a macro which frames its contents.

**\KFLTtightframewidth:** Redefine to the total width of the new frame and its separation.

```

\KFLTtightframe {\langle contents\rangle}

271 \newcommand{\KFLTtightframe}[1]{%
272     \setlength{\fboxsep}{0pt}%
273     \setlength{\fboxrule}{.4pt}%
274     \fbox{#1}%
275 }
276

```

Len \KFLTtightframewidth Must be set to the combined width of the tight frame and separation used by \KFLTtightframe.

```

277 \newlength{\KFLTtightframewidth}
278 \setlength{\KFLTtightframewidth}{.4pt}

```

```
\KFLTlooseframe {\langle contents\rangle}
```

A user-redefinable macro and length to loosely frame the contents.

**\KFLTlooseframe:** Redefine to a macro which frames its contents.

**\KFLTlooseframewidth:** Redefine to the total width of the new frame and its separation.

```

279 \newcommand{\KFLTlooseframe}[1]{%
280     \setlength{\fboxsep}{3pt}%
281     \setlength{\fboxrule}{.4pt}%
282     \fbox{#1}%
283 }

```

Len \KFLTlooseframewidth Must be set to the combined width of the loose frame and separation used by \KFLTlooseframe.

```
284 \newlength{\KFLTlooseframewidth}
285 \setlength{\KFLTlooseframewidth}{3.4pt}
```

\KFLT@frame {*<contents>*}

Frames the contents according to the f key. To be nested for further processing.

```
286 \newcommand{\KFLT@frame}[1]
287 {%
288     \ifbool{KFLT@ft}%
289         {\KFLTtightframe{\#1}}%
290         {%
291             \ifbool{KFLT@f}%
292                 {\KFLTlooseframe{\#1}}%
293                 {\#1} no frame
294         }%
295 }
```

\KFLT@findenvboxwidth Figures the width of the contents of \KFLT@envbox plus the frame:

```
296 \newcommand{\KFLT@findenvboxwidth}{%
297     \settowidth{\KFLTimageboxwidth}{\usebox{\KFLT@envbox}}%
298     \ifbool{KFLT@ft}%
299         {\addtolength{\KFLTimageboxwidth}{2\KFLTtightframewidth}}%
300         {%
301             \ifbool{KFLT@f}%
302                 {\addtolength{\KFLTimageboxwidth}{2\KFLTlooseframewidth}}%
303                 {}%
304         }%
305 }
```

### 3.11 A graphics image from a file

Len \KFLT@testwidth Used to find the width of a graphics image.

```
306 \newlength{\KFLT@testwidth}
```

\KFLT@includegraphics [*keys*] {*file name*}

Issue a warning if the image will be too wide, then display the image.

```
307 \newcommand*{\KFLT@includegraphics}[2][]{%
```

Find the width of the image:

```
308     \settowidth{\KFLT@testwidth}{\includegraphics[#1]{#2}}%
```

Avoid rounding errors when using the `lw` option, and also avoid the exact line width in case images are side-by-side.

If close to `\linewidth`, use slightly less than the `\linewidth`:

```
309     \ifboolexpr{%
310         test {\ifdimgreater{\KFLT@testwidth}{\linewidth-.01pt}} and
311         test {\ifdimless{\KFLT@testwidth}{\linewidth+1pt}}
312     }%
313     {\setlength{\KFLT@testwidth}{\linewidth-.01pt}}%
314 }
```

Issue a warning if wider than the `\linewidth`:

```
315     \ifdimgreater{\KFLT@testwidth}{\linewidth}{%
316         \PackageWarning[keyfloat]{The image is wider than the line width}%
317     }{}%
```

Display the image:

```
318     \includegraphics[#1]{#2}%
319 }
```

`\KFLT@onefigureimage {<filename>}`

Create an image with size, frame, and turn.

```
320 \NewDocumentCommand{\KFLT@onefigureimage}{m}%
321 {%
```

Several possible combinations of `linewidth`, `width`, and `height` are available, and each is treated separately. Scaling and `width/height` are done first, then framing, then rotation.

```
322     \begin{lrbox}{\KFLT@envbox}%
```

Handle the `lw` key. If `lw` is used, `width` and `height` are ignored.

```
323     \ifdefempty{\KFLT@lw}{%
324         % not linewidth
```

Handle the `w` key, which may be used along with the `h` key:

```

325      \ifdimgreater{\KFLT@w}{0pt}%
326      {% width is given
327          \ifdimgreater{\KFLT@h}{0pt}%

```

Width and height are both given:

```

328      {% w and h
329          \KFLT@includegraphics[%
330              scale=\KFLT@s,%
331              width=\KFLT@imagewidth,%
332              height=\KFLT@h,%
333              \KFLT@keepaspectratio,%
334          ]{#1}%
335      }% w and h

```

Only width:

```

336      {% only w
337          \KFLT@includegraphics[%
338              scale=\KFLT@s,%
339              width=\KFLT@imagewidth,%
340              \KFLT@keepaspectratio,%
341          ]{#1}%
342      }% only w
343      }% width is given

```

Width was not given, so maybe handle h alone:

```

344      {% width is not given
345          \ifdimgreater{\KFLT@h}{0pt}%

```

h was given:

```

346      {%
347          \KFLT@includegraphics[%
348              scale=\KFLT@s,%
349              height=\KFLT@h,%
350              \KFLT@keepaspectratio,%
351          ]{#1}%
352      }%

```

If none were given, use the image's natural size:

```

353      {%
354          \KFLT@includegraphics[%
355              scale=\KFLT@s,%
356              \KFLT@keepaspectratio,%
357          ]{#1}%

```

```

358          }%
359      }% width is not given
360  }% not linewidth
361  { % linewidth given

362      \ifdimgreater{\KFLT@h}{0pt}%
363      { % lw and h given
364          \KFLT@includegraphics[%
365              scale=\KFLT@s,%
366              width=\KFLT@imagewidth,%
367              height=\KFLT@h,%
368              \KFLT@keepaspectratio,%
369          ]{#1}%
370      }%
371  { % lw w/o h
372      \KFLT@includegraphics[%
373          scale=\KFLT@s,%
374          width=\KFLT@imagewidth,%
375          \KFLT@keepaspectratio,%
376      ]{#1}%
377  }%
378 }%
379 \end{lrbox}%
380 \unskip%
381 \KFLT@findenvboxwidth%
382 \begin{turn}{\KFLT@r}%
383 \KFLT@frame{\usebox{\KFLT@envbox}}%
384 \unskip%
385 \end{turn}%
386 }

```

### 3.12 Printing the caption

\KFLT@dosimplecaption {*star?*} {*short cap or -NO VALUE-*} {*caption*}

Calls \caption depending on several combinations of star and short captions being given.

```

387 \NewDocumentCommand{\KFLT@dosimplecaption}{m m m}
388 {%
389     \unskip%
390     \IfBooleanTF{#1}{ star?
391         {\IfValueTF{#2}{\caption*[#2]{#3}}{\caption*{#3}}}%
392         {\IfValueTF{#2}{\caption[#2]{#3}}{\caption{#3}}}%
393     }

```

There are two versions of \KFLT@docaption, depending on whether tocdata is loaded.

```

394 \@ifpackageloaded{tocdata}
395 {%
396   \newcommand*{\KFLT@docaption}[6]{%
397     \addvspace{\smallskipamount}%
398     \ifcsempty{KFLT@#6t}{%
399       \IfBooleanTF{#3}{%
400         {%
401           \csuse{caption#1}*[#4]{#5}%
402           []% 
403           [\csuse{KFLT@#6a#2p}]%
404           [\csuse{KFLT@#6a#2f}]%
405           [\csuse{KFLT@#6a#21}]%
406           [\csuse{KFLT@#6a#2s}]%
407         }{%
408           \csuse{caption#1}[#4]{#5}%
409           []% 
410           [\csuse{KFLT@#6a#2p}]%
411           [\csuse{KFLT@#6a#2f}]%
412           [\csuse{KFLT@#6a#21}]%
413           [\csuse{KFLT@#6a#2s}]%
414         }%
415     }{%
416       \ifcsstring{KFLT@#6textalign}{}{\csuse{td#1textjustify}}{}%
417       \ifcsstring{KFLT@#6textalign}{\centering}{\csuse{td#1textcenter}}{}%
418       \ifcsstring{KFLT@#6textalign}{\raggedleft}{\csuse{td#1textright}}{}%
419       \ifcsstring{KFLT@#6textalign}{\raggedright}{\csuse{td#1textleft}}{}%
420       \IfBooleanTF{#3}{%
421         {%
422           \csuse{caption#1}*[#4]{#5}%
423           [\csuse{KFLT@#6t}]%
424           [\csuse{KFLT@#6a#2p}]%
425           [\csuse{KFLT@#6a#2f}]%
426           [\csuse{KFLT@#6a#21}]%
427           [\csuse{KFLT@#6a#2s}]%
428         }{%
429           \csuse{caption#1}[#4]{#5}%
430           [\csuse{KFLT@#6t}]%
431           [\csuse{KFLT@#6a#2p}]%
432           [\csuse{KFLT@#6a#2f}]%
433           [\csuse{KFLT@#6a#21}]%

```

```

434      [ \csuse{KFLT@#6a#2s} ]%
435    }%
436 }%
437 }

\KFLT@docaption * [〈2:short caption〉] {〈3:caption〉} {〈4:empty or “subgrp”〉}

```

Depending on whether the `tocdata` package is present, and an artist is specified, use either `\caption` or `\captionartist`.

The fourth argument is {} if a regular float, or `subgrp` if `keysubfigs` or `keysubtabs`.

See Table 2 for the possible combinations of the caption-related keys: `c`, `cstar`, and `sc`.

With `tocdata`:

```

438 \NewDocumentCommand{\KFLT@docaption}{s o m m}
439 {%

```

Is the last name empty? Assume no artist if so.

```

440   \ifcsemptry{KFLT@#4al}%
441     {% figure w/o artist
442       \ifcsemptry{KFLT@#4aul}%
443         {% figure w/o artist or author

```

A figure without an artist or author uses the simple caption.

```

444   \KFLT@dosimplecaption{#1}{#2}{#3}%
445   }% figure w/o artist or author

```

A figure with an author uses the `tocdata \captionauthor` macro, which also creates an index entry.

```

446   {% figure w/ author
447     \KFLT@@docaption{author}{u}{#1}{#2}{#3}{#4}%
448   }% figure w/ author
449   }% figure w/o artist
450   {% figure with an artist

```

A figure with an artist uses the `tocdata \captionartist` macro, which also creates an index entry.

```

451   \KFLT@@docaption{artist}{}{#1}{#2}{#3}{#4}%
452   }% figure with an artist
453 }% KFLT@tocdata
454 }% tocdata loaded

```

```
455 {%
```

Without tocdata:

```
\KFLT@docaption * [<2:short caption] {<3:caption} {<4: empty or “subgrp”}
```

```
456 \NewDocumentCommand{\KFLT@docaption}{s o m m}
457 {%
```

If tocdata is not loaded, use a simple caption.

```
458 \KFLT@dosimplecaption{#1}{#2}{#3}%
```

Create an index entry depending on whether there is a last, first name:

```
459 \ifcsemptry{\KFLT@#4al}%
460 {%
461   \ifcsemptry{\KFLT@#4aul}%
462   {}%
463   {% yes author
464     \ifcsemptry{\KFLT@#4auf}%
465       {\index{\csuse{\KFLT@#4aul}}}%
466       {\index{\csuse{\KFLT@#4aul}, \csuse{\KFLT@#4auf}}}%
467     }% yes author
468   }% no artist
469   {% yes artist
470     \ifcsemptry{\KFLT@#4af}%
471       {\index{\csuse{\KFLT@#4al}}}%
472       {\index{\csuse{\KFLT@#4al}, \csuse{\KFLT@#4af}}}%
473     }% yes artist
474 }% KFLT@docaption
475 }% no tocdata
```

```
\KFLT@caption {<empty or “subgrp”}
```

Caption-creation logic.

The argument is {} if a regular float, or subgrp if keysubfigs or keysubtabs.

See Table 2 for the possible combinations of the caption-related keys: c, cstar, and sc.

```
476 \newcommand{\KFLT@caption}[1]{%
```

A starred caption is printed but not numbered.

```
477 \ifbool{\KFLT@#1cstar}{% starred caption?
```

This is a starred caption:

```
478      {%-starred caption
```

A key given as `cstar={}` yields a float with no caption at all.

```
479      \ifcsemptry{KFLT@#1c}{% cstar={}?
480          {}%
```

Non-empty starred caption might have a LOF entry if it has a short caption `sc` key:

```
481      {%- non-empty starred caption
482          \ifcsemptry{KFLT@#1sc}{%
```

No `sc` short caption, but there is a `cstar`, so no LOF entry:

```
483          {}%
```

Both `cstar` and `sc` were given, so add a LOF entry:

```
484      {%- non-empty cstar and sc:
485          \edef\KFLT@listtype{\csuse{KFLT@#1type}}%
486          \addcontentsline{\csuse{ext@\KFLT@listtype}}%
487              {\csuse{KFLT@#1type}}{\KFLT@sc}%
488      }%- non-empty cstar and sc
```

In the following, the test for an empty caption is because the `caption` package does not detect an empty caption if it is given as a macro.

`cstar` was given, so create an unnumbered caption:

```
489      \ifcsemptry{KFLT@#1c}{%
490          {\KFLT@docaption*{}{#1}}%
491          {\KFLT@docaption*{\csuse{KFLT@#1c}}{#1}}%
492      }%
493  }%- starred caption
```

Unstarred caption `c` was given, so number this float:

```
494      {%- unstarred caption
495          \ifcsemptry{KFLT@#1sc}{%
496              {%- no short cap
497                  \ifcsemptry{KFLT@#1c}{%
498                      {\KFLT@docaption{}{#1}}%
499                      {\KFLT@docaption{\csuse{KFLT@#1c}}{#1}}%
500                  }%- no short cap
501                  {%- short cap
502                      \ifcsemptry{KFLT@#1c}{%
```

```

503          {\KFLT@docaption[\csuse{KFLT@#1sc}]{\#1}}%
504          {\KFLT@docaption[\csuse{KFLT@#1sc}]\{\csuse{KFLT@#1c}\}{\#1}}%
505      }% short cap

```

Optional label:

```

506      \ifcsempy{KFLT@#1}{%
507          {}%
508          {\label{\csuse{KFLT@#1}}}{%
509      }% unstarred caption
510 }

```

### 3.13 Defaults for a new float

\KFLT@defaults Defaults all settings before reading the keys.

```

511 \newcommand*\KFLT@defaults{%
512     \setboolean{KFLT@cont}{false}%
513     \renewcommand{\KFLT@c}{\relax}%
514     \setboolean{KFLT@cstar}{false}%
515     \renewcommand{\KFLT@sc}{\relax}%
516     \setboolean{KFLT@scgiven}{false}%
517     \renewcommand{\KFLT@type}{figure}%
518     \renewcommand{\KFLT@l}{\relax}%
519     \renewcommand{\KFLT@ap}{\relax}%
520     \renewcommand{\KFLT@af}{\relax}%
521     \renewcommand{\KFLT@al}{\relax}%
522     \renewcommand{\KFLT@as}{\relax}%
523     \renewcommand{\KFLT@up}{\relax}%
524     \renewcommand{\KFLT@auf}{\relax}%
525     \renewcommand{\KFLT@aul}{\relax}%
526     \renewcommand{\KFLT@aus}{\relax}%
527     \renewcommand{\KFLT@t}{\relax}%
528     \renewcommand{\KFLT@textalign}{\relax}%
529     \renewcommand{\KFLT@lw}{\relax}%
530     \setlength{\KFLT@w}{0pt}%
531     \setlength{\KFLT@h}{0pt}%
532     \renewcommand{\KFLT@keepaspectratio}{\relax}%
533     \renewcommand{\KFLT@s}{1}%
534     \renewcommand{\KFLT@r}{0}%
535     \setboolean{KFLT@f}{false}%
536     \setboolean{KFLT@ft}{false}%
537     \renewcommand{\KFLT@stretch}{1}%
538     \setlength{\KFLT@mo}{-1.2ex}%
539     \renewcommand{\KFLT@wn}{\relax}%
540     \renewcommand{\KFLT@wp}{0}%
541     \renewcommand{\KFLT@wo}{\wrapoverhang}%
542     \renewcommand{\KFLT@wlw}{\relax}%

```

```

543     \setlength{\KFLT@ww}{0pt}%
544     \renewcommand{\KFLT@va}{c}%
545 }
```

### 3.14 Row start/end processing

\KFLT@maybestartfloatrow Counts rows

After ending a preexisting row, move to the next row. The use of \defcounter makes this counter change local.

```

546 \newcommand*{\KFLT@maybestartfloatrow}{%
547     \KFLT@maybeendfloatrow%
548     \defcounter{KFLT@thiscol}{\value{KFLT@thiscol}+1}%
549 }
```

\KFLT@maybeendfloatrow Counts rows

Adds vertical space then resets to allow the start of a new row. The use of \defcounter makes this counter change local.

```

550 \newcommand*{\KFLT@maybeendfloatrow}{%
551     \ifnumless{\value{KFLT@thiscol}}{\value{KFLT@numcols}}{%
552         }% thiscol < numcols
553         {%
554             \par%
555             \addvspace{.75\floatsep}%
556             \defcounter{KFLT@thiscol}{0}%
557         }%
558 }%
```

### 3.15 Key environment helper macros

\KFLT@trackrows Tracks and spaces rows and columns.

```

559 \newcommand{\KFLT@trackrows}{%
560 {%
```

If are nested inside a keyfloats or a subfloat:

```

561     \ifboolexpr{%
562         test {\ifnumgreater{\value{KFLT@keyfloatdepth}}{0}} or%
563         bool{KFLT@inkeysubfloats}%
564     }%
565     {%
566         }%
```

Tracks row start and end:

```
566 \KFLT@maybestartfloatrow%
```

Possibly fill space between columns:

```
567 \ifnumgreater{\value{KFLT@thiscol}}{1}%
568   {\hfill}%
569   {}%
570 }% nested
571 {}% not nested
572 }
```

```
\KFLT@addtext {\langle empty or “subgrp”\rangle}
```

Adds optional additional text.

The argument is {} if a regular float, or subgrp if keysubfigs or keysubtabs.

```
573 \newcommand{\KFLT@addtext}[1]
574 {%
```

Is there text to add?

```
575 \ifcsempty{KFLT@#1t}%
576 {}% no text
577 {}% text to add
578   {}% local
```

Add some space, then create a full-width minipage to contain the text:

```
579 \addvspace{\smallskipamount}%
580 \begin{minipage}{\linewidth}%

```

Inside this minipage, temporarily prevent underfull \hbox warnings:

```
581 \hbadness=10000\relax%
```

Set the alignment and some text parameters:

```
582 \csuse{KFLT@#1textalign}%
583 \footnotesize%
584 \setlength{\parskip}{1.5ex}%
585 \setlength{\parindent}{0em}%
```

Typeset the actual text:

```
586 \csuse{KFLT@#1t}%

```

Close it all out with a little more space:

```
587      \end{minipage}%
588      \par\addvspace{2ex}%
589      }% local
590      }% text to add
591 }
```

\KFLT@optionalname {*<name>*}

Adds optional artist's name and the following space.

```
592 \newcommand{\KFLT@optionalname}[1]
593 {%
594     \ifblank{#1}{%
595         {}%
596         {#1}%
597 }}
```

\KFLT@addartisttext {*<empty or “subgrp”>*}

Adds optional additional text.

The argument is {} if a regular float, or subgrp if keysubfigs or keysubtabs.

One of two versions is used, depending on whether the tocdata package is available.

If tocdata is loaded and this float has an artist or author, then the float's artist's information and optional text will be printed elsewhere by \KFLT@caption. Otherwise, the text is printed here.

Two versions, depending on whether tocdata is loaded:

```
598 \@ifpackageloaded{tocdata}
599 {%
  tocdata loaded}
```

If tocdata is loaded:

```
600 \newcommand{\KFLT@addartisttext}[1]
601 {%
```

Only add text if is a figure without an artist or author name. If an artist or author is given, the name and text will be added by tocdata.

```
602     \ifcsempty{KFLT@#1al}{%
  artist last name
603     {%
604         \ifcsempty{KFLT@#1aul}{%
  author last name
605             {\KFLT@addtext{#1}}}}
```

```

606          {}%
607          }%
608          {}% fig w/ artist: text will be added by \captionartist in \KFLT@caption
609 }% KFLT@addartisttext
610 }% tocdata loaded

```

If `tocdata` is not loaded, the name and text are added here:

```
611 { % tocdata not loaded
```

Factored from `\KFLT@addartisttext`

```
612 \newcommand*{\KFLT@addartisttext}[3]{%
```

Add space and create the name inside a full-width minipage:

```

613      \addvspace{\medskipamount}%
614      \begin{minipage}{\linewidth}%

```

Inside this minipage, temporarily prevent underfull `\hbox` warnings:

```
615      \hbadness=10000\relax%
```

Text alignment is #3, and depends on artist or author:

```
616      #3%
```

#1 is empty or 'subgrp'  
#2 is empty for artist, 'u' for author:

```

617      \footnotesize\textrm{sc}{%
618      \KFLT@optionalname{\csuse{\KFLT@#1a#2p}}%
619      \KFLT@optionalname{\csuse{\KFLT@#1a#2f}}%
620      \csuse{\KFLT@#1a#2l}%
621      \csuse{\KFLT@#1a#2s}%
622      }%
623      \end{minipage}%
624      \par\addvspace{2ex}%
625 }
626
627 \newcommand{\KFLT@addartisttext}[1]
628 {%

```

Only use the artist information if a last name is given:

```

629      \ifcsempty{\KFLT@#1al}%
630      { % artist last name not given
631          \ifcsempty{\KFLT@#1aul}%

```

---

```

632      {}% author last name not given
633      {% author last name given
634          \KFLT@addartisttext{\#1}{u}{\raggedleft}%
635      }% author last name given
636      }% artist last name not given
637      {% artist last name given
638          \KFLT@addartisttext{\#1}{\centering}%
639      }%

```

Any additional text follows the artist's name:

```

640      \KFLT@addtext{\#1}%
641 }% KFLT@addartisttext
642 }% tocdata not loaded

```

Len \KFLTimageboxwidth The computed width of the object.

This may be used as the width parameter of a minipage to encase the object.

```
643 \newlength{\KFLTimageboxwidth}
```

Env KFLT@boxinner Typeset the contents in a width which depends on the keys.

```

644 \newsavebox{\KFLT@envbox}
645
646 \NewDocumentEnvironment{KFLT@boxinner}{}%
647 {%
    \keyboxinner

```

(Possibly) frame the contents of an lrbox:

```
648 \begin{lrbox}{\KFLT@envbox}%
```

Rotate the contents:

```
649 \turn{\KFLT@r}%
```

Box the contents in the width computed by \KFLT@findwidths:

```
650 \minipage{\KFLT@imagewidth}%
```

Spacing inside the box. Also default to regular justified text alignment.

```

651 \setlength{\parskip}{2ex}%
652 \renewcommand{\arraystretch}{\KFLT@stretch}%
653 }%
    \keyboxinner

```

End of the environment:

```
654 {%
  endkeyboxinner
655   \endminipage%
```

End the rotated box:

```
656   \endturn%
```

Possibly frame:

```
657   \end{lrbox}%
658   \KFLT@frame{\usebox{\KFLT@envbox}}%
659   \par%
660 }%
661 }% endkeyboxinner
```

\KFLT@sharedkeys Key/values to apply to each object in this group, such as a keyfloats or keysubfigs.

```
661 \newcommand*{\KFLT@sharedkeys}{}%
```

\KFLT@boxkeys {\langle keys\rangle} {\langle float type\rangle}

Default the options, adjust for a table, then parse the keys:

```
662 \NewDocumentCommand{\KFLT@boxkeys}{+m m}%
663 {}%
```

Set the key defaults:

```
664   \KFLT@defaults%
```

Remember the float type:

```
665   \renewcommand{\KFLT@type}{#2}%
666 }
```

Set the shared keys. Expansion seems to be required for `xkeyval`.

```
666   \edef\next{\noexpand\setkeys{\KFLT@keys}{\KFLT@sharedkeys}}%
667   \next%
```

Set the float-specific keys, which might overright the group's keys:

```
668   \setkeys{\KFLT@keys}{#1}%
669 }
```

Bool KFLT@captionistop Saves the value of `\caption@position`, which may become unreliable if using Ko-mascript and

---

```
\captionsetup[table]{position=above}

670 \newbool{KFLT@captionistop}
```

\KFLT@LWR@hook@boxouter Used by \warp.

```
671 \newcommand*{\KFLT@LWR@hook@boxouter}{}%
```

Env KFLT@boxouter {*star?*} {*loc*}

Boxes the contents of figures and floats.

Not used by subfigures.

```
672 \NewDocumentEnvironment{KFLT@boxouter}{m m}
673 {%
  \begin{boxouter}
```

The keyfigure and keytable environments handle the contents in one of three possible ways, depending on whether it is called alone, inside a keyfloats environment, or inside a keysupfigs or keysuptabs environment.

Start the new subfigure or subtable, of the given width:

```
674 \ifbool{KFLT@inkeysubfloats}%
675   {\csuse{sub\KFLT@type}{\KFLT@rowboxwidth}}% subfloat
```

If keyfloats, place the contents inside a minipage:

```
676 {%
  \ifnumgreater{\value{KFLT@keyfloatdepth}}{0}%
  {%
    \begin{keyfloats}
      \ifbool{KFLT@keywrap}%
        {\minipage[t]{\KFLT@rowboxwidth}}%
        {\minipage[\KFLT@va]{\KFLT@rowboxwidth}}%
      \captionsetup*{type=\KFLT@type}%
    \end{keyfloats}
  }%
  \ifbool{KFLT@keyfloats}%
    {}%
  \else
    \minipage{\KFLT@rowboxwidth}%
  \fi
}
```

A hook for \warp to set \linewidth, etc.

```
685 \KFLT@LWR@hook@boxouter%
```

Not a subfloat or keyfloats, so create a single float.

See if inside a keywrap. If so, force [H] and vertical align top.

```
686 \ifbool{KFLT@keywrap}%

```

```
687     {%
688         \par\addvspace{\baselineskip}%
689         \noindent%
690         \minipage[t]{\linewidth}%
691         \captionsetup{type=\KFLT@type}%
692     }%
693     {% not a keywrap
```

See if the float should [W]rap:

694 \ifstreq{#2}{W}{%

Place [W], so create a wrapfloat using the wrapfig package:

695 { % [W]

Temporarily figure out `\KFL{T}{\imagewidth}`, and make the wrapped figure environment as wide as the desired image size plus frame:

696 \KFLT@findwidths%

Expand the arguments for wrapfig:

```

697 \edef\next{%
698   \noexpand\wrapfloat%
699   {\KFLT@type}[\KFLT@wn]{\KFLT@wp}[\KFLT@wo]%
700   {\KFLT@wrapwidth+2\KFLTlooseframewidth}%
701 }%
702 \next%
703 \minipage{\KFLT@wrapwidth+2\KFLTlooseframewidth}%

```

Inside this minipage, temporarily prevent underfull \hbox warnings:

704 \hbadness=1000\relax%  
705 \normalcolor\reset@font\normalsize%

Change the interior image to the discovered fixed width.

```
706 \renewcommand{\KFLT@lw}{\%}
707 \renewcommand{\KFLT@w}{\KFLT@imagewidth\%}
708 \renewcommand{\KFLT@lw}{\%}
709 \renewcommand{\KFLT@ww}{0pt\%}
710 }% [W]
711 {%- not [W]
```

See if the float should be positioned in the [M]argin:

```
712          \ifstrequal{#2}{M}%
```

Place [M], so create a marginfloat:

```
713          {%
714              \KFLT@marginfloat[\KFLT@mo]{\KFLT@type}%
715          }%
716          {%
717              \not{[M]}%
```

See if the float should be positioned [H]ere:

```
717          \ifstrequal{#2}{H}%
```

Place [H], so create an inline minipage:

```
718          {%
719              \vskip\intextsep%
720              \noindent\minipage[\KFLT@va]{\linewidth}%
721                  \normalcolor\reset@font\normalsize%
722                  \captionsetup{type=\KFLT@type}%
723          }%
724          [H]
```

Not [H], so create a float: For a starred float, make a two-column table in a two-col format.

```
724          {%
725              \IfBooleanTF{#1}%
726                  {\csuse{\KFLT@type*}[#2]}%
727                  {\csuse{\KFLT@type}[#2]}%
728          }%
729          {%
730              \not{[H]}%
731          }%
732          {%
733              \not{[M]}%
734          }%
735          {%
736              \not{[W]}%
737          }%
738          {%
739              \not{keywrap}%
740          }%
741          {%
742              \not{keyfloats}%
743          }%
744          {%
745              \not{subfloat}%
746          }
```

Handle a continued float. Ignored if in a subfloat.

```
734      \ifbool{\KFLT@cont}{\ContinuedFloat}{}
```

Figure out image and parbox widths for the contents:

```
735      \KFLT@findwidths%
```

Place the caption above the contents depending on caption position option:

```

736     \caption@iftop%
737         {\booltrue{KFLT@captionistop}}%
738         {\boolfalse{KFLT@captionistop}}%
739     \ifbool{KFLT@captionistop}{\KFLT@caption{}{}}{%

```

Typeset the contents:

```

740     \center\unskip%
741 }% boxouter

```

End of the KFLT@boxouter environment:

```

742 {%
743     \endcenter\unskip%
744     \addvspace{\smallskipamount}%

```

Optionally print artist's name and additional text:

```
745     \KFLT@addartisttext{}%
```

Place the caption below the contents depending on **caption position** option:

```
746     \ifbool{KFLT@captionistop}{\KFLT@caption{}{}}{%
```

If are inside keysubtabs, end the subtable:

```

747     \ifbool{KFLT@inkeysubfloats}{%
748         {%
749             \csuse{endsub\KFLT@type}%
750         }% subfloat
751         {%
752             \ifnumgreater{\value{KFLT@keyfloatdepth}}{0}{%
753                 {%
754                     \endminipage%
755                 }% keyfloats
756                 {%
757                     \%
758                     \endminipage%
759                     \par\addvspace{\baselineskip}%

```

Not subfloat or keyfloats, so is an individual float.

Close the minipage or float:

See if in a keywrap:

```

757     \ifbool{KFLT@keywrap}{%
758         \endminipage%
759         \par\addvspace{\baselineskip}%

```

```
760      }%
761      {%
762          not keywrap
```

See if the float should [W]rap:

```
762          \ifstrequal{#2}{W}%
```

Place [W], so close the wrap float:

```
763          {%
764              [% W]
765                  \endminipage%
766                  \endwrapfloat%
767          }%
768          {%
769              not[W]
```

See if the float should be positioned in the [M]argin:

```
768          \ifstrequal{#2}{M}%
```

[M], so close the marginfloat:

```
769          {%
770              [% M]
771                  \endKFLT@marginfloat%
```

[H] or float:

```
772          {%
773              not [% M]
774                  \ifstrequal{#2}{H}%
775                  {%
776                      \endminipage% [% H]
777                      \vskip\intextsep%
778                  }%
779                  {%
780                      not [% H]
781                          \IfBooleanTF{#1}{%
782                              starred float?
783                              \csuse{end\KFLT@type*}%
784                              \csuse{end\KFLT@type}%
785                          }%
786                      not [% H]
787                  }%
788          }%
789          not [% M]
790          not [% W]
791          not keywrap
792          not keyfloats
793          not subfloat
794      }%
795  endkeyboxouter
```

\KFLT@ignorespaces {*commandname*} Only do command if not nested inside something.

```

789 \newcommand*{\KFLT@ignorespaces}[1]{%
790     \ifboolexpr{%
791         test {\ifnumgreater{\value{KFLT@keyfloatdepth}}{0}} or%
792         \bool{KFLT@inkeysubfloats}%
793     }{}{\csuse{#1}}%
794 }

```

\KFLT@ignorespaces Only \ignorespaces if not nested inside something.

```

795 \newcommand*{\KFLT@ignorespaces}{%
796     \KFLT@@ignorespaces{ignorespaces}%
797 }

```

\KFLT@envignorespaces Only \ignorespaces if not nested inside something.

```

798 \newcommand*{\KFLT@envignorespaces}{%
799     \KFLT@@ignorespaces{ignorespacesafterend}%
800 }

```

### 3.16 The \KFLT@keyfl macro

\KFLT@keyflt {<1:star>} {<2:loc>} {<3:type>} {<4:keys/values>} {<5:contents>}

A lower-level macro to generate a float with its contents. This is used by \keyfig and \keyflt.

```

801 \NewDocumentCommand{\KFLT@keyflt}{m m m +m +m}
802 {%
803     \ifcsdef{ftype@#3}{}{%
804         \PackageError{keyfloat}%
805         {%
806             \protect\keyflt: Invalid float type.\MessageBreak%
807             \protect\keyflt*[loc]{type}{keys/values}{contents}\MessageBreak%
808             Also, \protect\keyflt\space is not an environment
809         }%
810         {%
811             Check argument order and float type.
812         }%
813     }%
814     \KFLT@ignorespaces%
815     \KFLT@trackrows%
816     \KFLT@boxkeys{#4}{#3}%
817     \begingroup%

```

```

818     \KFLT@boxouter{\#1}{\#2}%
819     #5%
820     \endKFLT@boxouter%
821     \endgroup%
822     \KFLT@ignorespaces%
823 }
```

### 3.17 The `\keyfl` macro

`\keyfl * [<loc>] {<type>} {<keys/values>} {<contents>}`

A user-level macro to generate a float with its contents centered inside an inner box. This may be used by itself, or inside a `keyfloats` or `keysubtabs` environment.

```

824 \NewDocumentCommand{\keyfl}{s O{tbp} m +m +m}
825 {%
826     \KFLT@keyfl{\#1}{\#2}{\#3}{\#4}{%
827         \KFLT@boxinner%
828         \centering%
829         #5%
830         \endKFLT@boxinner%
831     }%
832 }
```

`\endkeyfl` Generates an error in case the user tried to use `\keyfl` as an environment.

```

833 \def\endkeyfl{%
834     \PackageError{keyfloat}
835     {%
836         \protect\end{keyfl}: \MessageBreak
837         \protect\keyfl\space is a macro, not an environment.\MessageBreak
838         Perhaps you want the keyfloat environment instead%
839     }%
840     {%
841         Use \protect\begin{keyfloat} ... \protect\end{keyfloat}.
842     }%
843 }
```

### 3.18 The `keyfloat` environment

`\KFLT@keyfloatstart {<star?>} {<loc>} {<float type>} {<keys/values>}`

```

844 \newcommand{\KFLT@keyfloatstart}[4]{%
845     \KFLT@envignorespaces%
846     \KFLT@boxkeys{\#4}{\#3}%
```

```

847     \KFLT@boxouter{\#1}{\#2}%
848     \KFLT@boxinner%
849 }

\KFLT@keyfloatend

850 \newcommand{\KFLT@keyfloatend}{%
851     \endKFLT@boxinner%
852     \endKFLT@boxouter%
853     \KFLT@envignorespaces%
854 }

Env keyfloat * [<loc>] {<float type>} {<keys/values>}

855 \NewDocumentEnvironment{keyfloat}{s 0{tbp} m +m}
856 {%
857     \KFLT@keyfloatstart{\#1}{\#2}{\#3}{\#4}%
858 }%
859 {%
860     \KFLT@keyfloatend%
861 }

```

Before keyfloat Extra code to track rows outside of the keyfloat environment, before it starts. This is done to allow nesting without losing track of the prior level.

```

862 \BeforeBeginEnvironment{keyfloat}{%
863     \KFLT@trackrows%
864 }

```

### 3.19 The keyfigure environment

```

Env keyfigure * [<loc>] {<keys/values>}

865 \NewDocumentEnvironment{keyfigure}{s 0{tbp} +m}
866 {%
867     \KFLT@keyfloatstart{\#1}{\#2}{figure}{\#3}%
868 }%
869 {%
870     \KFLT@keyfloatend%
871 }

```

Before keyfigure Extra code to track rows outside of the keyfigure environment, before it starts. This is done to allow nesting without losing track of the prior level.

---

```

872 \BeforeBeginEnvironment{keyfigure}{%
873     \KFLT@trackrows%
874 }
```

### 3.20 The `\keyfig` macro

`\keyfig * [<loc>] {<keys/values>} {<image filename>}`

A user-level macro to generate a figure with an image. This may be used by itself, or inside a `keyfloats` or `keysubfigs` environment.

```

875 \NewDocumentCommand{\keyfig}{s 0{tbp} +m m}
876 {%
877     \KFLT@keyfltl{#1}{#2}{figure}{#3}{%
878         \KFLT@onefigureimage{#4}%
879     }%
880 }
```

### 3.21 The `\keyfigbox` macro

`\keyfigbox * [<loc>] {<keys/values>} {<box contents>}`

A user-level macro to generate a figure with arbitrary paragraph contents. This may be used by itself, or inside a `keyfloats` or `keysubtabs` environment.

```

881 \NewDocumentCommand{\keyfigbox}{s 0{tbp} +m +m}
882 {%
883     \KFLT@ignorespaces%
884     \KFLT@trackrows%
885     \KFLT@boxkeys{#3}{figure}%
886     \begingroup%
887     \KFLT@boxouter{#1}{#2}%
888     \KFLT@boxinner%
889     #4%
890     \endKFLT@boxinner%
891     \endKFLT@boxouter%
892     \endgroup%
893     \KFLT@ignorespaces%
894 }
```

### 3.22 The `\keyparbox` macro

`\keyparbox * [<loc>] {<keys/values>} {<box contents>}`

A user-level macro to generate a figure with arbitrary paragraph contents, but no number or caption. This is equal to a \keyfigbox with cstar={}. This may be used by itself, or inside a keyfloats or keysubtabs environment.

```
895 \NewDocumentCommand{\keyparbox}{s 0{tbp} +m +m}
896 {%
897     \KFLT@ignorespaces%
898     \KFLT@trackrows%
899     \KFLT@boxkeys{#3}{figure}%
```

Force cstar={}:

```
900     \renewcommand{\KFLT@c}{}%
901     \setboolean{KFLT@cstar}{true}%
```

Continue like \figbox:

```
902     \begingroup%
903     \KFLT@boxouter{#1}{#2}%
904     \KFLT@boxinner%
905     #4%
906     \endKFLT@boxinner%
907     \endKFLT@boxouter%
908     \endgroup%
909     \KFLT@ignorespaces%
910 }
```

### 3.23 The \keytab macro

```
\keytab * [<loc>] {<keys/values>} {<tabular contents>}
```

A user-level macro to generate a table with tabular contents. This may be used by itself, or inside a keyfloats or keysubtabs environment.

```
911 \NewDocumentCommand{\keytab}{s 0{tbp} +m +m}
912 {%
913     \IfBooleanTF{#1}{%
914         \keyfltn*[#2]{table}{#3}{#4}%
915     }{%
916         \keyfltn[#2]{table}{#3}{#4}%
917     }%
918 }
```

### 3.24 The keytable environment

```

Env  keytable  * [<loc>] {<keys/values>}

919 \NewDocumentEnvironment{keytable}{s O{tbp} +m}
920 {%
921     \KFLT@keyfloatstart{\#1}{\#2}{table}{\#3}%
922 }%
923 {%
924     \KFLT@keyfloatend%
925 }

```

Before keytable Extra code to track rows outside of the keytable environment, before it starts. This is done to allow nesting without losing track of the prior level.

```

926 \BeforeBeginEnvironment{keytable}{%
927     \KFLT@trackrows%
928 }

```

### 3.25 A row of floats

\KFLT@nonest Error message if tried to nest subfloats.

```

929 \newcommand*{\KFLT@nonest}{%
930     \ifboolexpr{%
931         test {\ifnumgreater{\value{KFLT@keyfloatdepth}}{0}} or
932         bool {KFLT@inkeysubfloats}%
933     }%
934     {%
935         \PackageError{keyfloat}{%
936             Cannot nest keysubfigs or keysubtabs.\MessageBreak%
937             (Not in outer par mode.)%
938         }%
939     }%
940     {%
941         The subcaption package do not support nested environments,%
942         \MessageBreak
943         so the keyfloat package cannot place a\MessageBreak
944         keysubfigs or keysubtabs environment inside another,%
945         \MessageBreak
946         or inside a keyfloats.%%
947     }%
948 }%
949 {}%
950 }

```

\KFLT@LWR@hook@keyfloats Used by \warp.

```
951 \newcommand*{\KFLT@LWR@hook@keyfloats}{}%
```

KFLT@LWR@hook@keyfloatsminipage {\langle contents\rangle}

Modified by \warp.

```
952 \newenvironment*{\KFLT@LWR@hook@keyfloatsminipage}[1]
953   {\noindent\minipage[\KFLT@va]{#1}}
954   {\endminipage}
```

Env keyfloats \* [\langle loc\rangle] {\langle num columns\rangle} [\langle shared keys/values\rangle]

User-level macro to create rows of figures/tables. Wrapping occurs after the number of specified columns. keyfloats environments may be nested to create a vertical set of figures next to a single larger figure, for example.

Place \keyfig, \keyfigbox, and \keytab commands inside the keyfloats environment.

Note that \w linewidth keys may need to be adjusted inside a keyfloats, keysubfigs, or keysubtabs, since \linewidth changes depending on the number of columns. Likewise, manually-selected \w width and \h height tags may need to be adjusted to prevent overflow.

```
955 \NewDocumentEnvironment{keyfloats}{s 0{tbp} m 0{}}
956 {}
957   \KFLT@envignorespaces%
```

A hook for \warp to set \linewidth, etc.

```
958   \KFLT@LWR@hook@keyfloats%
```

Track the depth:

```
959   \addtocounter{\KFLT@keyfloatdepth}{1}%
```

Nest the group's keys.

```
960   \edef\KFLT@outersharedkeys{\KFLT@sharedkeys}%
961   \edef\KFLT@sharedkeys{\KFLT@sharedkeys,\#4}%
```

If [H], nested, subfloats, or keywrap, use a minipage instead of a float:

```
962   \ifboolexpr{%
```

```

963      test {\ifstreq{\#2}{H}} or
964      test {\ifnumgreater{\value{KFLT@keyfloatdepth}}{1}} or
965      \bool{KFLT@inkeysubfloats} or
966      \bool{KFLT@keywrap}%
967  }%

```

Create an inline minipage:

```
968  {%
  H or nested
```

If nested, use different spacing as was computed in the outer nesting level:

```

969      \ifboolexpr{%
970          \ifnumgreater{\value{KFLT@keyfloatdepth}}{1}} or
971          \bool{KFLT@inkeysubfloats}%
972      }%
973  {%

```

Use the keys from the outer container. Expansion required for `xkeyval`.

```

974      \edef\next{\noexpand\setkeys{KFLT@keys}{\KFLT@outersharedkeys}}%
975      \next%

```

Create the containing minipage:

```

976      \KFLT@LWR@hook@keyfloatsminipage{\KFLT@rowboxwidth}%
977  }%
978  {%
979      \vskip\intextsep%
980      \KFLT@LWR@hook@keyfloatsminipage{\ linewidth}%
981  }%

```

Reset font and color:

```
982  \normalcolor\reset@font\normalsize%
```

If inside subfloats, generate subfigures by default:

```

983      \ifbool{KFLT@inkeysubfloats}{%
984      }%
985      {\captionsetup*[type=figure]}%
986  }%
  H or nested

```

Isn't [H] or nested

```

987  {%
  See if [W]:
988  \ifstreq{\#2}{W}
989  {%
    [W]:
```

[W]:

```
990          \wrapfloat{figure}{0}{.5\linewidth}%
991          \minipage{\linewidth}%
```

Inside this minipage, temporarily prevent underfull \hbox warnings:

```
992          \hbadness=10000\relax%
993          \normalcolor\reset@font\normalsize%
994      }%
995      {%
996      \ifstreq{\#2}{M}%
997      {%
998      \KFLT@marginfloat{figure}%
999      }%
```

[M]:

```
998          \KFLT@marginfloat{figure}%
999          }%
```

A normal figure:

```
1000         {% figure
1001         \IfBooleanTF{#1}{ starred figure, two-col figure in a two-col format
1002             {\begin{figure*}[#2]}%
1003             {\begin{figure}[#2]}%
1004             }% figure
1005         }% not [H]
1006     }%
```

Compute the width of each entry:

```
1007     \ifboolexpr{%
1008         test {\ifnumgreater{\value{KFLT@keyfloatdepth}}{1}} or
1009         bool {KFLT@inkeys floats}
1010     }%
```

Nested or subfloats:

```
1011     {\setlength{\KFLT@rowboxwidth}{.9\KFLT@rowboxwidth/\real{#3}}}%
```

Keyfloats:

```
1012     {\setlength{\KFLT@rowboxwidth}{.9\linewidth/\real{#3}}}%
```

Center the contents:

```
1013     \centering%
```

Count columns using \defcounter for a local effect:

```
1014      \defcounter{KFLT@numcols}{#3}%
1015      \defcounter{KFLT@thiscol}{0}%
1016 }% starting keyfloats environment
```

When ending a keyfloats environment:

```
1017 { % ending keyfloats environment
```

[H] or rows/subfigs? Close a minipage:

```
1018      \ifboolexpr{%
1019          test {\ifstreq{\#2}{H}} or
1020          test {\ifnumgreater{\value{KFLT@keyfloatdepth}}{1}} or
1021          bool {KFLT@inkeysfloats} or
1022          bool {KFLT@keywrap}
1023      }%
1024      { % was [H], etc.
1025          \endKFLT@LWR@hook@keyfloatsminipage%
1026      }%
```

Spacing if nested or not:

```
1027      \ifboolexpr{%
1028          test {\ifnumgreater{\value{KFLT@keyfloatdepth}}{0}} or
1029          bool {KFLT@keywrap}
1030      }%
1031      {}{ % not nested
1032          \vskip\intextsep%
1033      }%
1034  }% was [H], etc.
```

Not [H]:

```
1035      { % not [H], etc.
1036          \ifstreq{\#2}{W}%
1037          { % [W]:
```

[W]:

```
1038          \endminipage%
1039          \endwrapfloat%
1040      }%
1041      { %
1042          \ifstreq{\#2}{M}%
1043          { % [M]:
```

[M]:

```
1044           \endKFLT@marginfloat%
1045           }%
1046           {%
1047           \IfBooleanTF{#1}{%
1048             \end{figure}{}{\end{figure}}%
1049           }%
1050           }%
1051           }% not [H], etc.
```

A figure:

```
1047           \IfBooleanTF{#1}{%
1048             \end{figure}{}{\end{figure}}%
1049           }%
1050           }%
1051           }% not [H], etc.
```

Unnest the environment:

```
1052   \addtocounter{KFLT@keyfloatdepth}{-1}%
1053   \KFLT@envignorespaces%
1054 }
```

Before keyfloats Extra code to track rows outside of the keyfloats environment, before it starts. This is done to allow nesting without losing track of the prior level.

```
1055 \BeforeBeginEnvironment{keyfloats}{%
1056   \KFLT@trackrows%
1057 }
```

## 3.26 Subfloats

\KFLT@subgrpdefaults Sets defaults before reading the keys.

```
1058 \newcommand*{\KFLT@subgrpdefaults}{%
1059   \setboolean{KFLT@subgrpcont}{false}%
1060   \renewcommand{\KFLT@subgrpc}{()}%
1061   \setboolean{KFLT@subgrpcstar}{false}%
1062   \renewcommand{\KFLT@subgrpsc}{()}%
1063   \setboolean{KFLT@subgrpscgiven}{false}%
1064   \renewcommand{\KFLT@subgrptype}{figure}%
1065   \renewcommand{\KFLT@subgrpl}{()}%
1066   \renewcommand{\KFLT@subgrpap}{()}%
1067   \renewcommand{\KFLT@subgrpaf}{()}%
1068   \renewcommand{\KFLT@subgrpal}{()}%
1069   \renewcommand{\KFLT@subgrpas}{()}%
1070   \renewcommand{\KFLT@subgrpaup}{()}%
1071   \renewcommand{\KFLT@subgrpauf}{()}%
1072   \renewcommand{\KFLT@subgrpaul}{()}%
```

```

1073     \renewcommand{\KFLT@subgrpaus}{ }%
1074     \renewcommand{\KFLT@subgrpt}{ }%
1075     \renewcommand{\KFLT@subgrptextalign}{ }%
1076 }
```

Bool KFLT@subcaptionistop Saves the value of `\caption@position`, which may become unreliable if using Koma-script and

```
    \captionsetup[table]{position=above}
```

```
1077 \newbool{KFLT@subcaptionistop}
```

```
\KFLT@subfloats {<starred?>} {<loc>} {<cols>} {<keys/values>}
```

Start a subfloat environment

```

1078 \NewDocumentCommand{\KFLT@subfloats}{m m m +m}%
1079 {%
1080     \KFLT@envignorespaces%
```

Parse the key-value combinations:

```
1081     \setkeys{KFLT@subgrpkeys}{#4}%
```

Nest the environment:

```
1082     \setboolean{KFLT@inkeysubfloats}{true}%
```

Figure out the width of each subfloat. If starred, use the full-page `\textwidth`, else use `\linewidth`. .9 is used to leave a little room between columns.

```

1083     \IfBooleanTF{#1}{%
1084         {\setlength{\KFLT@rowboxwidth}{.9\textwidth/\real{#3}}}%
1085         {\setlength{\KFLT@rowboxwidth}{.9\linewidth/\real{#3}}}%
```

If [H], or in a keywrap, create an inline minipage:

```

1086     \ifboolexpr{%
1087         test {\ifstreq{\#2}{H}} or
1088         bool {KFLT@keywrap}
1089     }{%
1090     }{%
1091         \vskip\intextsep\noindent\begin{minipage}{\linewidth}%
1092             \normalcolor\reset@font\normalsize%
1093     }%
```

Not [H]:

```
1094      {%
1095          \ifstrequal{#2}{W}%
1096          {% [W]
```

[W]:

```
1097          \wrapfloat{\KFLT@subgrptype}{0}{.5\linewidth}%
1098          \setlength{\KFLT@rowboxwidth}{.5\KFLT@rowboxwidth}%
1099          \minipage{\linewidth}%
```

Inside this minipage, temporarily prevent underfull \hbox warnings:

```
1100          \hbadness=10000\relax%
1101          \normalcolor\reset@font\normalsize%
1102          }%
1103          {% not [H]%
1104              \ifstrequal{#2}{M}%
1105              {% [M]:
```

[M]:

```
1106          \KFLT@marginfloat{\KFLT@subgrptype}%
1107          \setlength{\KFLT@rowboxwidth}{.9\marginparwidth/\real{#3}}%
1108          }% [M]
1109          {% subfloat
```

A subfloat:

```
1110          \IfBooleanTF{#1}%
1111              {\begin{\KFLT@subgrptype*}[#2]}%
1112              {\begin{\KFLT@subgrptype}[#2]}%
1113          }%
1114          }% not [H]
1115      }%
```

Set the caption type:

```
1116      \captionsetup*[type=\KFLT@subgrptype]%
```

Process continued floats:

```
1117      \ifbool{KFLT@subgrpcont}%
1118          {\ContinuedFloat}%
1119      {}%
```

Center the contents:

```
1120 \center\unskip%
```

Place the caption above the contents depending on `caption position` option:

```
1121 \caption@iftop%
1122   {\booltrue{KFLT@subcaptionistop}}%
1123   {\boolfalse{KFLT@subcaptionistop}}%
1124 \ifbool{KFLT@subcaptionistop}{\KFLT@caption{subgrp}}{}%
```

Not yet started a row of subfloats. The use of `\defcounter` makes these changes local.

```
1125 \defcounter{KFLT@numcols}{#3}%
1126 \defcounter{KFLT@thiscol}{0}%
```

Create a group for the subfloats. Necessary in case they change `\tdartisttextcenter`, etc.

```
1127 \begingroup%
1128 }
```

`\KFLT@endsubfloats` {*starred?*} {*loc*}

Ends a subfloat environment.

```
1129 \newcommand*{\KFLT@endsubfloats}[2]{%
```

End the group containing the subfloats:

```
1130 \endgroup%
1131 \unskip%
1132 \endcenter%
```

A little extra space at the bottom:

```
1133 \par\addvspace{\bigskipamount}%
```

Optionally print artist's name and additional text:

```
1134 \KFLT@addartisttext{subgrp}%
```

Place the caption below the contents depending on `caption position` option:

```
1135 \ifbool{KFLT@subcaptionistop}{}{\KFLT@caption{subgrp}}%
```

End the float or minipage:

```

1136      \ifboolexpr{%
1137          test {\ifstreq{\#2}{H}} or
1138          \bool{KFLT@keywrap}
1139      }%
1140      {\end{minipage}\vskip\intextsep} was [H]
1141      {%
1142          \ifstreq{\#2}{W}%
1143          {%
1144              \endminipage%
1145              \endwrapfloat%
1146          }%
1147          {%
1148              \ifstreq{\#2}{M}%
1149              {%
1150                  \endKFLT@marginfloat%
1151              }%
1152              {%
1153                  \subfloat{%
1154                      \IfBooleanTF{\#1}{starred?}{%
1155                          {\end{\KFLT@subgrptype*}}%
1156                      }%
1157                  }%
1158              }%
1159          }%
1160      }%
1161 }
```

Unnest the environment:

```

1159      \setboolean{KFLT@inkeysubfloats}{false}%
1160      \KFLT@envignorespaces%
1161 }
```

\KFLT@LWR@hook@keysubfloats Used by \warp.

```
1162 \newcommand*{\KFLT@LWR@hook@keysubfloats}{}%
```

Env KFLT@keysubfloats {⟨1: star?⟩} {⟨2: loc⟩} {⟨3: float type⟩} {⟨4: numcols⟩} {⟨5: keys/values⟩} {⟨6: shared keys/values⟩}

A group of subfigures typeset in rows.

```

1163 \NewDocumentEnvironment{KFLT@keysubfloats}{m m m m +m m}
1164 {%
```

Error if trying to nest environments:

```
1165 \KFLT@nonest%
```

A hook for `\warp` to set `\linewidth`, etc.

```
1166 \KFLT@LWR@hook@keysubfloats%
```

Default the options:

```
1167 \KFLT@subgrpdefaults%
```

Nest the group's keys:

```
1168 \edef\KFLT@sharedkeys{\KFLT@sharedkeys,#6}%
```

Default to figure float type:

```
1169 \renewcommand{\KFLT@subgrptype}{#3}%
```

Start of the environment:

```
1170 \KFLT@subfloats{#1}{#2}{#4}{#5}%
1171 }% the start of the environment
```

end of the environment:

```
1172 {%
1173 \KFLT@endsubfloats{#1}{#2}%
1174 }
```

Env `keysubfloats` \* [ $\langle 2: loc \rangle$ ] [ $\langle 3: float\ type \rangle$ ] [ $\langle 4: numcols \rangle$ ] [ $\langle 5: keys/values \rangle$ ] [ $\langle 6: shared\ keys/values \rangle$ ]

A group of subfloats typeset in rows.

```
1175 \NewDocumentEnvironment{keysubfloats}{s 0{tbp} m m +m 0{}}
1176 {\KFLT@keysubfloats{#1}{#2}{#3}{#4}{#5}{#6}}
1177 {\endKFLT@keysubfloats}
```

Env `keysubfigs` \* [ $\langle 2: loc \rangle$ ] [ $\langle 3: numcols \rangle$ ] [ $\langle 4: keys/values \rangle$ ] [ $\langle 5: shared\ keys/values \rangle$ ]

A group of subfigures typeset in rows.

```
1178 \NewDocumentEnvironment{keysubfigs}{s 0{tbp} m +m 0{}}
1179 {\KFLT@keysubfloats{#1}{#2}{figure}{#3}{#4}{#5}}
1180 {\endKFLT@keysubfloats}
```

```
Env  keysubtabs  * [<2: loc>] {<3: numcols>} {<4: keys/values>} [<5: shared keys/values>]
```

A group of subtables typeset in rows.

```
1181 \NewDocumentEnvironment{keysubtabs}{s O{tbp} m +m O{}}
1182     {\KFLT@keysubfloats[#1]{#2}{table}{#3}{#4}{#5}}
1183     {\endKFLT@keysubfloats}
```

### 3.27 Margin floats

```
Env  KFLT@marginfloat  [<offset>] {<type>}
```

```
1184 \newsavebox{\KFLT@marginfloatbox}
1185
1186 \NewDocumentEnvironment{KFLT@marginfloat}{O{-1.2ex} m}
1187 {%
1188     \FloatBarrier% keep floats in order
1189     \KFLT@envignorespaces%
1190     \begin{lrbox}{\KFLT@marginfloatbox}%
1191     \begin{minipage}{\marginparwidth}%
1192     \captionsetup{type=#2}%
1193     \hbox{}\vspace*{#1}%
1194     \noindent%
1195     \normalcolor\reset@font\normalsize%
1196 }%
1197 {%
1198     \end{minipage}%
1199     \end{lrbox}%
1200     \marginpar{\usebox{\KFLT@marginfloatbox}}%
1201     \KFLT@envignorespaces%
1202 }%
```

Provided in case `tufte-book` is not loaded:

```
Env  marginfigure  [<offset>]
```

```
1203 \ProvideDocumentEnvironment{marginfigure}{O{-1.2ex}}
1204     {\begin{KFLT@marginfloat}[#1]{figure}}
1205     {\end{KFLT@marginfloat}}
```

```
Env  margintable  [<offset>]
```

```
1206 \ProvideDocumentEnvironment{margintable}{O{-1.2ex}}
1207     {\begin{KFLT@marginfloat}[#1]{table}}
1208     {\end{KFLT@marginfloat}}
```

### 3.28 Wrapped floats

Bool KFL@keywrap Tells the next keyfloat to wrap around some text.

```
1209 \newboolean{KFLT@keywrap}
1210 \boolfalse{KFLT@keywrap}
```

Len \KFLT@keywrapwidth The width of the object to be wrapped beside the text.

```
1211 \newlength{\KFLT@keywrapwidth}
```

Len \KFLT@keywrapparskip The \parskip outside of the keywrap.

```
1212 \newlength{\KFLT@keywrapparskip}
```

Len \KFLT@keywrapparindent The \parindent outside of the keywrap.

```
1213 \newlength{\KFLT@keywrapparindent}
```

Env keywrap {*width*} {*keyfloat*}

The main text is placed in a minipage to the left, and the wrapped content is later placed in another minipage to the right.

```
1214 \DeclareDocumentEnvironment{keywrap}{m +m}%
1215 {%
1216   \par\noindent%
1217   \setlength{\KFLT@keywrapwidth}{\linewidth}%
1218   \addtolength{\KFLT@keywrapwidth}{-\#1}%
1219   \addtolength{\KFLT@keywrapwidth}{-2em}%
1220   \minipage[t]{\KFLT@keywrapwidth}%
1221 %
1222   \setlength{\parskip}{\KFLT@keywrapparskip}%
1223   \setlength{\parindent}{\KFLT@keywrapparindent}%
1224   \booltrue{KFLT@keywrap}%
1225 }
1226 {%
1227   \par%
1228   \endminipage%
1229   \hfill%
1230   \begin{minipage}[t]{\#1}%
1231   \booltrue{KFLT@keywrap}%
1232   \normalcolor\reset@font\normalsize%
```

Inside this minipage, temporarily prevent underfull \hbox warnings:

```
1233 \hbadness=10000\relax%
```

```
1234      #2%
1235      \par%
1236      \unskip\vspace{\smallskipamount}%
1237      \end{minipage}%
1238      \par%
1239 }
1240
1241 \BeforeBeginEnvironment{keywrap}{%
1242     \setlength{\KFLT@keywrapparskip}{\parskip}%
1243     \setlength{\KFLT@keywrapparindent}{\parindent}%
1244 }
```

## 4 keyfloat package maintenance

To compile the keyfloat documentation from `keyfloat.dtx` and `keyfloat.ins`:

```
pdflatex keyfloat.ins
pdflatex keyfloat.dtx
pdflatex keyfloat.dtx
pdflatex keyfloat.dtx
makeindex -s gglo.ist -o keyfloat.gls keyfloat.glo
splitindex keyfloat.idx -- -s gind.ist
pdflatex keyfloat.dtx
pdflatex keyfloat.dtx
```

# Change History

For the most recent changes, see page 105.

v0.10	General: 2016/12/01 Initial ver. . . . .	1	v1.00	Handle vertical alignment key va. . . . .	80
v0.11	\KFLT@addtext: Improved paragraph handling. . . . .	75		General: 2019/01/11 . . . . .	1
	General: 2016/12/02 . . . . .	1		Docs PDF bookmark improvements. . . . .	1
v0.12	\keyfigbox: Group around contents. . . . .	88		Removed xifthen dependency. . . . .	49
	\keyflt: Group around contents. . . . .	86		Removed spurious spaces. . . . .	1
	\keyparbox: Group around contents. . . . .	89	v2.00	Source formatting improvements. . . . .	1
	General: 2016/12/09 . . . . .	1		\KFLT@docaption: Factored. . . . .	69
	Adapts to older version of toCDATA. . . . .	54		\KFLT@ignorespaces: Added. . . . .	84
	Added mo key. . . . .	57		\KFLT@caption: Generalized for float type. . . . .	72
	Added wp key. . . . .	57		\KFLT@docaption: Added support for authors. . . . .	71
	Docs: Improved index. . . . .	1		\KFLT@envignorespaces: Added. . . . .	85
	Docs: Loading keyfloat. . . . .	1		\KFLT@ignorespaces: Added. . . . .	85
	Docs: Margin float examples. . . . .	35		\KFLT@keyfloatend: Factored. . . . .	87
	Docs: Wrapped float examples. . . . .	37		\KFLT@keyfloatstart: Factored. . . . .	86
	marginfigure: Added. . . . .	101		\KFLT@keyflt: Added. . . . .	85
	margintable: Added. . . . .	101		\KFLT@onefigureimage: Filename in arg instead of \KFLT@i. . . . .	66
	KFLT@boxouter: [M] and [W] floats. . . . .	80		\KFLT@prohibitpackage: Improved package conflict detection. . . . .	49
v0.13	\KFLT@subfloats: Fix: Subfloat type selection. . . . .	96		\endkeyflt: Added. . . . .	86
	General: 2017/01/18 . . . . .	1		\keyfig: Factored. . . . .	88
	\KFLTimageboxwidth: Added. . . . .	78		\keyflt: Added. . . . .	86
	Docs: Other Settings. . . . .	1		\keytab: Factored. . . . .	89
	Fix: Expands names in references. . . . .	50	General: 2019/03/21 . . . . .	1	
v0.14	\KFLT@docaption: Fix: No index entry if no artist given. . . . .	70		Added custom float types. . . . .	1
	General: 2017/02/09 . . . . .	1		Added float authors. . . . .	1
v0.15	\KFLT@subfloats: Adjustments for keywrap. . . . .	96		Adjustments for toCDATA v2.00. . . . .	54
	General: 2017/05/12 . . . . .	1		keyfloat: Added. . . . .	87
	Added vertical alignment key va. . . . .	58		KFLT@boxouter: Added custom float types. . . . .	82, 84
	keyfloats: Adjustments for keywrap. . . . .	91	v2.01	\KFLT@endsubfloats: Added keysubfloats [M]. . . . .	99
	keywrap: Added. . . . .	102		Added keysubfloats [W]. . . . .	99
	KFLT@boxouter: Adjustments for keywrap. . . . .	80		Fix: Positions with KOMASCIPT. . . . .	98
				Improved vertical space. . . . .	99

\KFLT@subfloats: Added	Avoid underfull \hbox warning. . . 81
keysfloats [M]. . . . .	97
Added keysfloats [W]. . . . .	97
Fix: Font and color. . . . .	96
Fix: Positions with KOMASCIPT. .	98
Improved vertical space. . . . .	96
General: 2019/09/23 . . . . .	1
tablehere: Fix: Font and color. . . .	50
Improved vertical space. . . . .	50
keyfloats: Added keyfloats [M].	93, 95
Added keyfloats [W]. . . . .	93, 94
Fix: Font and color. . . . .	92
Improved vertical space. . . . .	92, 94
keywrap: Fix: \noindent. . . . .	102
Fix: Font and color. . . . .	102
KFLT@boxouter: Fix: Font and color.	82
Fix: Positions with KOMASCIPT. .	82, 83
Improved vertical space. . . . .	82, 84
KFLT@marginfloat: Fix: Font and	
color. . . . .	101
figurehere: Fix: Font and color. . .	50
Improved vertical space. . . . .	50
v2.02	
\KFLT@addartisttext: Avoid	
underfull \hbox warning. . . . .	77
\KFLT@addtext: Avoid underfull	
\hbox warning. . . . .	75
\KFLT@findwidths: Added ww and	
wlw. . . . .	63
\KFLT@keyflt: Work with float. . .	85
\KFLT@subfloats: Avoid underfull	
\hbox warning. . . . .	97
General: 2021/05/27 . . . . .	1
Added ww and wlw. . . . .	58, 63
Work with float. . . . .	49
keyfloats: Avoid underfull \hbox	
warning. . . . .	93
keywrap: Avoid underfull \hbox	
warning. . . . .	102
KFLT@boxouter: Added ww and wlw. .	81
v2.03	
General: 2021/05/28 . . . . .	1
Fixed \hbadness w/ \relax. . . . .	1
v2.04	
General: 2021/06/08 . . . . .	1
Added wn key. . . . .	57
Added wo key. . . . .	58
KFLT@boxouter: Added wn and wo. .	81
v2.05	
General: 2021/06/11 . . . . .	1
Docs: Fixed r key. . . . .	13
Docs: Fixed braces for multi-word	
values. . . . .	13
KFLT@boxouter: No longer patch	
wrapfig for expansion. . . . .	81
v2.06	
\KFLT@boxkeys: Added shared keys.	79
\KFLT@caption: Fix for empty	
caption. . . . .	72
\KFLT@defaults: Added kar. . . .	73
\KFLT@includegraphics: Clip if close	
to \linewidth. . . . .	66
Warn if image too wide. . . . .	66
\KFLT@keepaspectratio: Added kar.	56
\KFLT@onefigureimage: Added kar.	66
Fix: lw with h. . . . .	68
\KFLT@sharedkeys: Added shared	
keys. . . . .	79
General: 2021/06/29 . . . . .	1
Added kar. . . . .	56
keyfloats: Added shared keys. . .	91, 92
keysfigs: Added shared keys. . .	100
keysfloats: Added shared keys. .	100
keysubtabs: Added shared keys. . .	101
KFLT@keysubfloats: Added shared	
keys. . . . .	100
KFLT@LWR@hook@keyfloatsmipage:	
Added vertical alignment. . . . .	91

# Index of Objects

This is an index of macros, environments, booleans, counters, lengths, packages, classes, options, keys, files, and various other programming objects. Each is listed by itself, and also by category. In some cases, they are further subdivided by [class].

Numbers written in italic refer to the page where the corresponding entry is described; numbers underlined refer to the code line of the definition.

Symbols		boolean:
* (argument) . . . . .	<i>12</i>	KFL@keywrap . . . . . <i>102</i>
[H] (argument) . . . . .	<i>12</i>	KFLT@captionistop . . . . . <i>79</i>
[M] (argument) . . . . .	<i>12</i>	KFLT@cont . . . . . <i>51</i>
[W] (argument) . . . . .	<i>12</i>	KFLT@cstar . . . . . <i>51</i>
[loc] (argument) . . . . .	<i>12</i>	KFLT@f . . . . . <i>56</i>
		KFLT@ft . . . . . <i>57</i>
		KFLT@inkeys floats . . . . . <i>59</i>
A		
af (key) [main] . . . . .	<i>53</i>	KFLT@scgiven . . . . . <i>52</i>
af (key) [subfloat container] . . . . .	<i>61</i>	KFLT@subcaptionistop . . . . . <i>96</i>
a1 (key) [main] . . . . .	<i>53</i>	KFLT@subgrpcont . . . . . <i>59</i>
a1 (key) [subfloat container] . . . . .	<i>61</i>	KFLT@subgrpcstart . . . . . <i>59</i>
ap (key) [main] . . . . .	<i>52</i>	KFLT@subgrpsc given . . . . . <i>60</i>
ap (key) [subfloat container] . . . . .	<i>61</i>	
argument:		C
* . . . . .	<i>12</i>	c (key) [main] . . . . . <i>51</i>
[H] . . . . .	<i>12</i>	c (key) [subfloat container] . . . . . <i>59</i>
[M] . . . . .	<i>12</i>	calc (package) . . . . . <i>49</i>
[W] . . . . .	<i>12</i>	caption (package) . . . . . <i>10, 49</i>
[loc] . . . . .	<i>12</i>	class:
as (key) [main] . . . . .	<i>53</i>	tufte-book . . . . . <i>35</i>
as (key) [subfloat container] . . . . .	<i>61</i>	cleverref (package) . . . . . <i>10</i>
auf (key) [main] . . . . .	<i>53</i>	cont (key) [main] . . . . . <i>51</i>
auf (key) [subfloat container] . . . . .	<i>62</i>	cont (key) [subfloat container] . . . . . <i>59</i>
aul (key) [main] . . . . .	<i>53</i>	counter:
aul (key) [subfloat container] . . . . .	<i>62</i>	KFLT@keyfloatdepth . . . . . <i>58</i>
aup (key) [main] . . . . .	<i>53</i>	KFLT@numcols . . . . . <i>51</i>
aup (key) [subfloat container] . . . . .	<i>62</i>	KFLT@thiscol . . . . . <i>51</i>
aus (key) [main] . . . . .	<i>54</i>	cstar (key) [main] . . . . . <i>52</i>
aus (key) [subfloat container] . . . . .	<i>62</i>	cstar (key) [subfloat container] . . . . . <i>59</i>
B		E
Before keyfigure . . . . .	<i>87</i>	\endkeyfl t . . . . . <i>833</i>
Before keyfloats . . . . .	<i>95</i>	environment:
Before keyfloat . . . . .	<i>87</i>	keyfigure . . . . . <i>11</i>
Before keytable . . . . .	<i>90</i>	keyfloat . . . . . <i>11</i>

keyfloats	11	auf	53
keysubfigs	11	aul	53
keysubfloats	12	aup	53
keysubtabs	12	aus	54
keytable	11	c	51
keywrap	12	cont	51
marginfigure	12	cstar	52
margintable	12	f	56
environments:		ft	57
figurehere	57	h	56
keyfigure	865	kar	56
keyfloat	855	l	52
keyfloats	955	lw	55
keysubfigs	1178	mo	57
keysubfloats	1175	r	56
keysubtabs	1181	s	56
keytable	919	sc	52
keywrap	1214	stretch	57
KFLT@boxinner	644	t	54
KFLT@boxouter	672	tc	55
KFLT@keysubfloats	1163	tl	55
KFLT@LWR@hook@keyfloatsminipage	952	tr	55
KFLT@marginfloat	1184	va	58
marginfigure	1203	w	55
margintable	1206	wlw	58
tablehere	49	wn	57
etoolbox (package)	49	wo	58
		wp	57
		ww	58
F	[subfloat container]:		
f (key) [main]	56	af	61
fancybox (package)	43	al	61
figurehere (environment)	57	ap	61
float (package)	10	as	61
ft (key) [main]	57	auf	62
G	aul	62	
gettitlestring (package)	50	aup	62
graphicx (package)	49	aus	62
H	c	59	
h (key) [main]	56	cont	59
K	cstar	59	
kar (key) [main]	56	l	60
key:	sc	59	
[main]:	t	60, 61	
af	\keyfig	11, 875	
al	\keyfigbox	11, 881	
ap	keyfigure (environment)	11, 865	
as	keyfloat (environment)	11, 855	
	keyfloats (environment)	11, 955	
	\keyflt	11, 824	

\keyparbox	11, 895	KFLT@keysubfloats (environment)	1163
keys subfigs (environment)	11, 1178	\KFLT@keywrapparindent (length)	102
keys subfloats (environment)	12, 1175	\KFLT@keywapparskip (length)	102
keys subtabs (environment)	12, 1181	\KFLT@keywrapwidth (length)	102
\keytab	11, 911	\KFLT@l	86
keytable (environment)	11, 919	\KFLT@lw	141
keyval (package)	49	\KFLT@LWR@hook@boxouter	671
keywrap (environment)	12, 1214	\KFLT@LWR@hook@keyfloats	951
KFLT@keywrap (boolean)	102	KFLT@LWR@hook@keyfloatsminipage (en-	
\KFLT@@docaption	396	vironment)	952
\KFLT@ignorespaces	789	\KFLT@LWR@hook@keysubfloats	1162
\KFLT@prohibitpackage	14	KFLT@marginfloat (environment)	1184
\KFLT@addartisttext	598	\KFLT@maybeendfloatrow	550
\KFLT@addtext	573	\KFLT@maybestartfloatrow	546
\KFLT@af	90	\KFLT@mo	164
\KFLT@a1	92, 100	\KFLT@nonest	929
\KFLT@ap	88	KFLT@numcols (counter)	51
\KFLT@as	94	\KFLT@onefigureimage	320
\KFLT@aup	98	\KFLT@optionalname	592
\KFLT@aus	96	\KFLT@prohibitpackage	29
KFLT@boxinner (environment)	644	\KFLT@r	156
\KFLT@boxkeys	662	\KFLT@s	154
KFLT@boxouter (environment)	672	\KFLT@sc	82
\KFLT@boxwidth (length)	62	KFLT@scgiven (boolean)	52
\KFLT@c	70	\KFLT@sharedkeys	661
\KFLT@caption	476	\KFLT@stretch	162
KFLT@captionistop (boolean)	79	KFLT@subcaptionistop (boolean)	96
KFLT@cont (boolean)	51	\KFLT@subfloats	1078
KFLT@cstar (boolean)	51	\KFLT@subgrpaf	229
\KFLT@defaults	511	\KFLT@subgrpal	231
\KFLT@docaption	438, 456	\KFLT@subgrpap	227
\KFLT@dosimplecaption	387	\KFLT@subgrpas	233
\KFLT@endsubfloats	1129	\KFLT@subgrpauf	237
\KFLT@envignorespaces	798	\KFLT@subgrpaul	239
KFLT@f (boolean)	56	\KFLT@subgrpaup	235
\KFLT@findenvboxwidth	296	\KFLT@subgrpaus	241
\KFLT@findwidths	245	\KFLT@subgrpc	191
\KFLT@frame	286	KFLT@subgrpcont (boolean)	59
KFLT@ft (boolean)	57	KFLT@subgrpstart (boolean)	59
\KFLT@h	148	\KFLT@subgrpdefaults	1058
\KFLT@ignorespaces	795	\KFLT@subgrpsc	203
\KFLT@imagewidth (length)	62	KFLT@subgrpscgiven (boolean)	60
\KFLT@includegraphics	307	\KFLT@subgrprt	209
KFLT@inkeys subfloats (boolean)	59	\KFLT@subgrptextalign	208
\KFLT@keepaspectratio	152	\KFLT@subgrptype	205
KFLT@keyfloatdepth (counter)	58	\KFLT@t	104
\KFLT@keyfloatend	850	\KFLT@testwidth (length)	65
\KFLT@keyfloatstart	844	\KFLT@textalign	103
\KFLT@keyflt	801	KFLT@thiscol (counter)	51

\KFLT@trackrows . . . . .	559	h (key) . . . . .	56
\KFLT@type . . . . .	84	kar (key) . . . . .	56
\KFLT@va . . . . .	182	l (key) . . . . .	52
\KFLT@w . . . . .	146	lw (key) . . . . .	55
\KFLT@wlw . . . . .	175	mo (key) . . . . .	57
\KFLT@wn . . . . .	166	r (key) . . . . .	56
\KFLT@wo . . . . .	170	s (key) . . . . .	56
\KFLT@wp . . . . .	168	sc (key) . . . . .	52
\KFLT@wrapwidth (length) . . . . .	63	stretch (key) . . . . .	57
\KFLT@ww . . . . .	180	t (key) . . . . .	54
\KFLTimageboxwidth (length) . . . . .	17, 78	tc (key) . . . . .	55
\KFLTlooseframe . . . . .	17, 279	tl (key) . . . . .	55
\KFLTlooseframewidth (length) . . . . .	17, 65	tr (key) . . . . .	55
\KFLTtightframe . . . . .	17, 271	va (key) . . . . .	58
\KFLTtightframewidth (length) . . . . .	17, 64	w (key) . . . . .	55
<b>L</b>			
l (key) [main] . . . . .	52	wlw (key) . . . . .	58
l (key) [subfloat container] . . . . .	60	wn (key) . . . . .	57
Last, . . . . .	44	wo (key) . . . . .	58
Last, First . . . . .	44, 45	wp (key) . . . . .	57
length:		ww (key) . . . . .	58
\KFLT@boxwidth . . . . .	62	marginfigure (environment) . . . . .	12, 1203
\KFLT@imagewidth . . . . .	62	marginstable (environment) . . . . .	12, 1206
\KFLT@keywrapparindent . . . . .	102	mdframed (package) . . . . .	42
\KFLT@keywrapparskip . . . . .	102	mo (key) [main] . . . . .	57
\KFLT@keywrapwidth . . . . .	102	<b>N</b>	
\KFLT@rowboxwidth . . . . .	51	newfloat (package) . . . . .	10
\KFLT@testwidth . . . . .	65	<b>P</b>	
\KFLT@wrapwidth . . . . .	63	package:	
\KFLTimageboxwidth . . . . .	17, 78	calc . . . . .	49
\KFLTlooseframewidth . . . . .	17, 65	caption . . . . .	10, 49
\KFLTtightframewidth . . . . .	17, 64	cleveref . . . . .	10
lw (key) [main] . . . . .	55	etoolbox . . . . .	49
<b>M</b>			
[main]:		fancybox . . . . .	43
af (key) . . . . .	53	float . . . . .	10
al (key) . . . . .	53	gettitlestring . . . . .	50
ap (key) . . . . .	52	graphicx . . . . .	49
as (key) . . . . .	53	keyval . . . . .	49
auf (key) . . . . .	53	mdframed . . . . .	42
aul (key) . . . . .	53	newfloat . . . . .	10
aup (key) . . . . .	53	placeins . . . . .	50
aus (key) . . . . .	54	rotating . . . . .	50
c (key) . . . . .	51	subcaption . . . . .	49
cont (key) . . . . .	51	titletoc . . . . .	10
cstar (key) . . . . .	52	tocdata . . . . .	10
f (key) . . . . .	56	tocloft . . . . .	10
ft (key) . . . . .	57	wrapfig . . . . .	12, 50
		xparse . . . . .	49
		placeins (package) . . . . .	50

<b>R</b>	<b>T</b>		
r (key) [main] . . . . .	<b>56</b>	t (key) [main] . . . . .	<b>54</b>
rotating (package) . . . . .	<b>50</b>	t (key) [subfloat container] . . . . .	<b>60, 61</b>
<b>S</b>		tablehere (environment) . . . . .	<b>49</b>
s (key) [main] . . . . .	<b>56</b>	tc (key) [main] . . . . .	<b>55</b>
sc (key) [main] . . . . .	<b>52</b>	titletoc (package) . . . . .	<b>10</b>
sc (key) [subfloat container] . . . . .	<b>59</b>	tl (key) [main] . . . . .	<b>55</b>
stretch (key) [main] . . . . .	<b>57</b>	tocdata (package) . . . . .	<b>10</b>
subcaption (package) . . . . .	<b>49</b>	tocloft (package) . . . . .	<b>10</b>
[subfloat container]:		tr (key) [main] . . . . .	<b>55</b>
af (key) . . . . .	<b>61</b>	tufte-book (class) . . . . .	<b>35</b>
a1 (key) . . . . .	<b>61</b>	<b>V</b>	
ap (key) . . . . .	<b>61</b>	va (key) [main] . . . . .	<b>58</b>
as (key) . . . . .	<b>61</b>	<b>W</b>	
auf (key) . . . . .	<b>62</b>	w (key) [main] . . . . .	<b>55</b>
aul (key) . . . . .	<b>62</b>	wlw (key) [main] . . . . .	<b>58</b>
aup (key) . . . . .	<b>62</b>	wn (key) [main] . . . . .	<b>57</b>
aus (key) . . . . .	<b>62</b>	wo (key) [main] . . . . .	<b>58</b>
c (key) . . . . .	<b>59</b>	wp (key) [main] . . . . .	<b>57</b>
cont (key) . . . . .	<b>59</b>	wrapfig (package) . . . . .	<b>12, 50</b>
cstar (key) . . . . .	<b>59</b>	ww (key) [main] . . . . .	<b>58</b>
l (key) . . . . .	<b>60</b>	<b>X</b>	
sc (key) . . . . .	<b>59</b>	xparse (package) . . . . .	<b>49</b>
t (key) . . . . .	<b>60, 61</b>		

# General Index

This is a general index, including how-to and troubleshooting.

Symbols	
\linewidth	22, 29
subfloats	29
with rotation	24
A	
aspect ratio	30
author's or artist's name	44
C	
caption	
formatting	47
options	16
continued float	33
continued subfloat	34
D	
distance between floats	36, 46
F	
fancybox	43
float	
continued	33
default width	18
distance between	36, 46
[H]ere placement	25
inline	25
inline without caption	27
margin placement	35
nested group	30
out of sequence	25
shared keys	29
subfloat continued	34
text added	21
unnumbered	26
no label	26
without caption	28
wrapped placement	16
frame	
custom	46
fancybox	43
mdframed	42
G	
group	
nested	30
shared keys	29, 32
H	
[H]ere placement	25
I	
image	
\linewidth	22
grid of	30
keep aspect ratio	30
natural size	18
too large	29
K	
keep aspect ratio	30
keyfloats	
\linewidth	22
keys	13
nested	32
keys	
and values	14, 15
keyfloats	13
shared in a group	29, 32
subfloats	13
L	
label	
missing	26
unnumbered float	26
M	
margin placement	35
mdframed	42, 43
mixed subfloats	32
N	
name	
author or artist	44
nested subfloats	32

	<b>R</b>	
rotate		nested ..... 32
box width and vertical space .....	24	shared keys ..... 32
extra space .....	24, 43	
frame .....	24	
	<b>S</b>	
subfloat		table
\linewidth .....	22, 29	large ..... 19
continued .....	34	rows too close or far ..... 46
distance between .....	46	
keys .....	13	
	<b>T</b>	
		text
		added ..... 21
	<b>W</b>	
		wrapped float placement ..... 16

# **Index of Indexes**

<b>C</b>		<b>I</b>	
Change History . . . . .	104	Index of Objects . . . . .	106
<b>G</b>			
General Index . . . . .	111		