

pstricks-add additional Macros for pstricks

v.3.00

Dominique Rodriguez and Herbert Voß

December 29, 2007

Abstract

This version of pstricks-add needs pstricks.tex version >1.04 from June 2004, otherwise the additional macros may not work as expected. The ellipsis material and the option asolid (renamed to eofill) are now part of the new pstricks.tex package, available at CTAN or at <http://perce.de/LaTeX/>. pstricks-add will forever be an experimental and dynamical package, try it at your own risk.

- It is important to load pstricks-add as **last** PSTricks related package, otherwise a lot of the macros won't work in the expected way.
- pstricks-add uses the extended version of the keyval package. So be sure, that you have installed pst-xkey which is part of the xkeyval-package and that all packages, that uses the old keyval interface are loaded **before** the xkeyval.[1]
- the option tickstyle from pst-plot is no more supported, use ticksize instead.
- the option xyLabel is no more supported, use the option labelFontSize instead.

Contents

I	pstricks	7
1	Numeric functions	7
1.1	\pst@divide	7
1.2	\pst@mod	7
1.3	\pst@max	8
1.4	\pst@maxdim	8
1.5	\pst@abs	8
1.6	\pst@absdim	8
2	Dashed Lines	9
3	\rmultiput: a multiple \rput	9
4	\psrotate: Rotating objects	10
5	\psHomothetie: central dilatation	12
6	\psbrace	13
6.1	Syntax	13
6.2	Options	13
7	Random dots	18
8	Arrows	20
8.1	Definition	20
8.2	Multiple arrows	21
8.3	hookarrow	22
8.4	hookrightarrow and hookleftarrow	22
8.5	ArrowInside Option	23
8.6	ArrowFill Option	24
8.7	Examples	24
8.7.1	\psline	25
8.7.2	\pspolygon	26
8.7.3	\psbezier	28
8.7.4	\pcline	29
8.7.5	\pccurve	30
8.8	Special arrows v-V,t-T, and f-F	31

8.9	Special arrow option <code>arrowLW</code>	32
9	<code>\psFormatInt</code>	33
10	Color	33
10.1	Transparent colors	33
10.2	„Manipulating Transparent colors“	33
10.3	Calculated colors	34
10.4	Gouraud shading	36
II	<code>pst-node</code>	39
11	Relative nodes with <code>\psGetNodeCenter</code>	39
12	<code>\ncdiag</code> and <code>\pcdiag</code>	39
13	<code>\ncdiagg</code> and <code>\pcdiagg</code>	41
14	<code>\ncbarr</code>	42
15	<code>\psRelNode</code> and <code>\psDefPSPNodes</code>	43
16	<code>\psRelLine</code>	44
17	<code>\psParallelLine</code>	48
18	<code>\psIntersectionPoint</code>	49
19	<code>\psLNode</code> and <code>\psLCNode</code>	50
20	<code>\nlput</code> and <code>\psLDNode</code>	51
III	<code>pst-plot</code>	52
21	New options	52
21.1	Changing the label font size with <code>labelFontSize</code>	54
21.2	<code>algebraic</code>	55
21.2.1	Using the Sum function	57
21.2.2	Using the IfTE function	58
21.3	<code>comma</code>	60
21.4	<code>xyAxes</code> , <code>xAxis</code> and <code>yAxis</code>	60
21.5	<code>xyDecimals</code> , <code>xDecimals</code> and <code>yDecimals</code>	61
21.6	<code>ticks</code>	62
21.7	<code>labels</code>	63
21.8	<code>ticksize</code> , <code>xticksize</code> , <code>yticksize</code>	64

21.9	subticks	65
21.10	subticksize, xsubticksize, ysubticksize	66
21.11	tickcolor, subtickcolor	67
21.12	ticklinestyle and subticklinestyle	67
21.13	loglines	68
21.14	xylogBase, xlogBase and ylogBase	70
21.14.1	xylogBase	70
21.14.2	ylogBase	71
21.14.3	xlogBase	73
21.14.4	No logstyle (xylogBase={})	74
21.15	subticks, tickwidth and subtickwidth	75
21.16	xlabelFactor and ylabelFactor	80
21.17	Plot style bar and option barwidth	80
21.18	trigLabels and trigLabelBase – axis with trigonometrical units . .	81
21.19	New options for \readdata	85
21.20	New options for \listplot	86
21.20.1	Example for nStep/xStep	87
21.20.2	Example for nStart/xStart	87
21.20.3	Example for nEnd/xEnd	88
21.20.4	Example for all new options	88
21.20.5	Example for xStart	89
21.20.6	Example for yStart/yEnd	90
21.20.7	Example for plotNo/plotNoMax	91
21.20.8	Example for changeOrder	93
21.20.9	Example for plotstyle	94
22	Polar plots	96
23	\pstScalePoints	98

IV	New commands and environments	99
24	psgraph environment	99
24.1	The new options	105
24.2	Problems	106
25	\psStep	107
26	\psplotTangent and option Tnormal	109
26.1	A polarplot example	112
26.2	A \parametricplot example	113
27	Successive derivatives of a function	114
28	Variable step for plotting a curve	115
28.1	Theory	115
28.2	The cosine	116
28.3	The neperian Logarithm	117
28.4	Sinus of the inverse of x	118
28.5	A really complex function	118
28.6	A hyperbola	119
28.7	Successive derivatives of a polynom	120
28.8	The variable step algorithm together with the IfTE primitive	121
28.9	Using \parametricplot	121
29	New math functions and their derivative	123
29.1	The inverse sin and its derivative	123
29.2	The inverse cosine and its derivative	124
29.3	The inverse tangente and its derivative	125
29.4	Hyperbolique functions	126
30	\psplotDiffEqn – solving diffential equations	130
30.1	Variable step for differential equations	131
30.2	Equation of second order	134
30.2.1	Simple equation of first order $y' = y$	136
30.2.2	$y' = \frac{2 - ty}{4 - t^2}$	137
30.2.3	$y' = -2xy$	138
30.2.4	Spirale of Cornu	139
30.2.5	Lotka-Volterra	140

	30.2.6	$y'' = y$	142
	30.2.7	$y'' = -y$	143
	30.2.8	The mechanical pendulum: $y'' = -\frac{g}{l} \sin(y)$	143
	30.2.9	$y'' = -\frac{y'}{4} - 2y$	144
31		<code>\psMatrixPlot</code>	145
32		<code>\psforeach</code>	147
33		<code>\resetOptions</code>	148
A		PostScript	148
B		List of all optional arguments for <code>pstricks-add</code>	149
C		Credits	152
D		Change log	153

Part I

pstricks

1 Numeric functions

All macronames contain a @ in their name, because they are only for internal use, but it is no problem to use it as the other macros. One can define another name without a @:

```
\makeatletter
\let\pstdivide\pst@divide
\makeatother
```

or put the macro inside of the \makeatletter – \makeatother sequence.

1.1 \pst@divide

pstricks itself has its own divide macro, called \pst@divide which can divide two lengths and saves the quotient as a floating point number:

```
\pst@divide{<dividend>}{<divisor>}{<result as a macro>}
```

5.66666
-0.17647

```
\makeatletter
1 \pst@divide{34pt}{6pt}\quotient \quotient\\
2 \pst@divide{-6pt}{34pt}\quotient \quotient
3 \makeatother
```

this gives the output 5.66666. The result is not a length!

1.2 \pst@mod

pstricks-add defines an additional numeric function for the modulus:

```
\pst@mod{<integer>}{<integer>}{<result as a macro>}
```

4
1

```
\makeatletter
1 \pst@mod{34}{6}\modulo \modulo\\
2 \pst@mod{25}{-6}\modulo \modulo
3 \makeatother
```

this gives the output 4. Using this internal numeric functions in documents requires a setting inside the makeatletter and makeatother environment. It makes some sense to define a new macroname in the preamble to use it throughou, e.g. \let\modulo\pst@mod.

1.3 \pst@max

```
\pst@max{<integer>}{<integer>}{<result as count register>}
```

-6
11

```
1 \newcount\maxNo
2 \makeatletter
3 \pst@max{-34}{-6}\maxNo \the\maxNo\\
4 \pst@max{0}{11}\maxNo \the\maxNo
5 \makeatother
```

1.4 \pst@maxdim

```
\pst@maxdim{<dimension>}{<dimension>}{<result as dimension register>}
```

1234.0pt
967.39369pt

```
1 \newdimen\maxDim
2 \makeatletter
3 \pst@maxdim{34cm}{1234pt}\maxDim \the\maxDim\\
4 \pst@maxdim{34cm}{123pt}\maxDim \the\maxDim
5 \makeatother
```

1.5 \pst@abs

```
\pst@abs{<integer>}{<result as a count register>}
```

34
4

```
1 \newcount\absNo
2 \makeatletter
3 \pst@abs{-34}\absNo \the\absNo\\
4 \pst@abs{4}\absNo \the\absNo
5 \makeatother
```

1.6 \pst@absdim

```
\pst@absdim{<dimension>}{<result as a dimension register>}
```


967.39369pt
0.00006pt

```
1 \newdimen\absDim
2 \makeatletter
3 \pst@absdim{-34cm}\absDim \the\absDim\\
4 \pst@absdim{4sp}\absDim \the\absDim
5 \makeatother
```


2 Dashed Lines

Tobias Nähring implemented an enhanced feature for dashed lines. The number of arguments is no more limited.

```
dash=value1[unit] value2[unit] ...
```

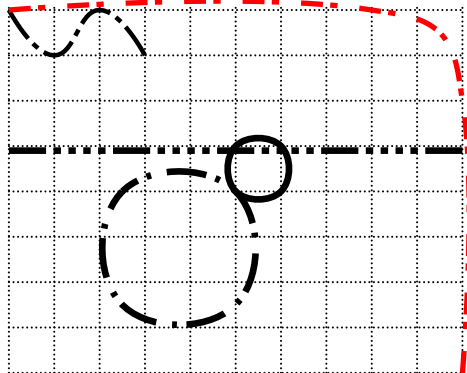


```
\psset{linewidth=2.5pt,unit=0.6}
\begin{pspicture}(-5,-4)(5,4)
\psgrid[subgriddiv=0,griddots=10,gridlabels=0pt]
\psset{linestyle=dashed}
\pscurve[dash=5mm 1mm 1mm 1mm,linewidth=0.1](-5,4)(-4,3)(-3,4)(-2,3)
\psline[dash=5mm 1mm 1mm 1mm 1mm 1mm 1mm 1mm 1mm 1mm](-5,0.9)(5,0.9)
\psccurve[linestyle=solid](0,0)(1,0)(1,1)(0,1)
\psccurve[linestyle=dashed,dash=5mm 2mm 0.1 0.2,linetype=0](0,0)(-2.5,0)(-2.5,-2.5)(0,-2.5)
\pscurve[dash=3mm 3mm 1mm 1mm,linecolor=red,linewidth=2pt](5,-4)(5,2)(4.5,3.5)(3,4)(-5,4)
\end{pspicture}
```

3 \rmultiput: a multiple \rput

PSTricks already knows a multirput, which puts a box n times with a difference of dx and dy relative to each other. It is not possible to put it with a different distance from one point to the next one. This is possible with `rmultiput`:

```
\rmultiput[<options>]{<any material>}(x1,y1)(x2,y2) ... (xn,yn)
\rmultiput*[<options>]{<any material>}(x1,y1)(x2,y2) ... (xn,yn)
```

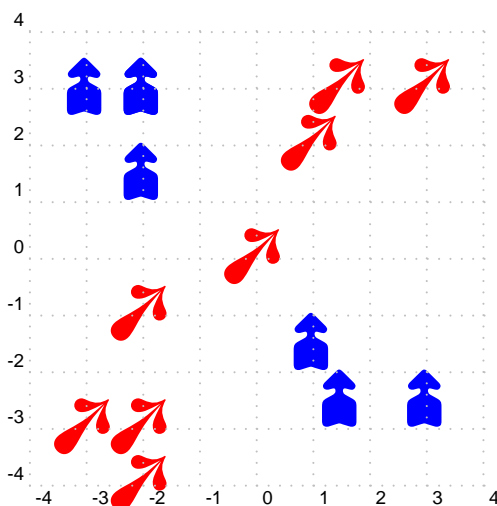


```
\psset{unit=0.75}
\begin{pspicture}(-4,-4)(4,4)
\rmultiput[rot=45]{\red\psscalebox{3}{\ding{250}}}%
(-2,-4)(-2,-3)(-3,-3)(-2,-1)(0,0)(1,2)(1.5,3)
(3,3)
\rmultiput[rot=90,ref=1C]{\blue\psscalebox{2}{\ding{253}}}%
(-2,2.5)(-2,2.5)(-3,2.5)(-2,1)(1,-2)(1.5,-3)
(3,-3)
\psgrid[subgriddiv=0,gridcolor=lightgray]
\end{pspicture}
```


4 \psrotate: Rotating objects

\rput also has an optional argument for rotating objects, but always depending to the \rput coordinates. With \psrotate the rotating center can be placed anywhere. The rotation is done with \pscustom, all optional arguments are only valid if they are part of the \pscustom macro.


```
\psrotate[options](x,y){rot angle}{<object>}
```

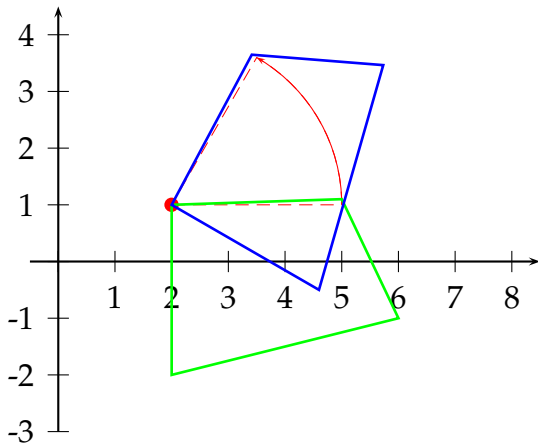

```
1 \psset{unit=0.75}
2 \begin{pspicture}(-0.5,-3.5)(8.5,4.5)
3   \psaxes{->}(0,0)(-0.5,-3)(8.5,4.5)
4   \psdots[linecolor=red,dotscale=1.5](2,1)
5   \psarc[linecolor=red,linewidth=0.4pt,showpoints=
6     true]
7     {->}(2,1){3}{0}{60}
8   \pspolygon[linecolor=green,linewidth=1pt](2,1)
9     (5,1.1)(6,-1)(2,-2)
10  \psrotate(2,1){60}{%
11    \pspolygon[linecolor=blue,linewidth=1pt](2,1)
12      (5,1.1)(6,-1)(2,-2)}
13 \end{pspicture}
```

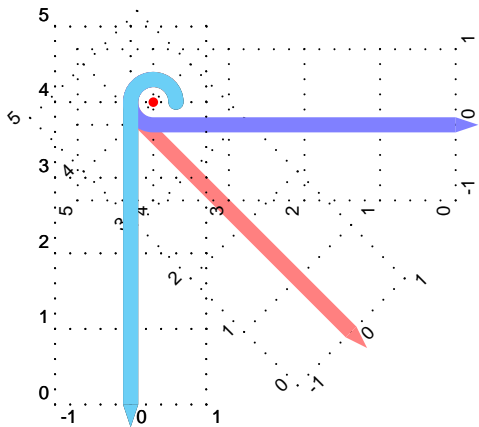

```
1 \def\canne{% Idea by Manuel Luque
2   \psgrid[subgriddiv=0](-1,0)(1,5)
3   \pscustom[linewidth=2mm]{\psline(0,4)\psarcn(0.3,4)
4     {0.3}{180}{360}}%
5   \pscircle*(0.6,4){0.1}\pstriangle*(0,0)(0.2,-0.3)}
6 \def\Object{}
7 \begin{pspicture}(-1,-1)(3,6)
8   \canne
9   \psrotate(0.3,4){45}{\psset{linecolor=red!50}\canne}
10  \psrotate(0.3,4){90}{\psset{linecolor=blue!50}\canne}
11  \psrotate(0.3,4){360}{\psset{linecolor=cyan!50}\canne}
12  \psdot[linecolor=red](0.3,4)
13 \end{pspicture}
```

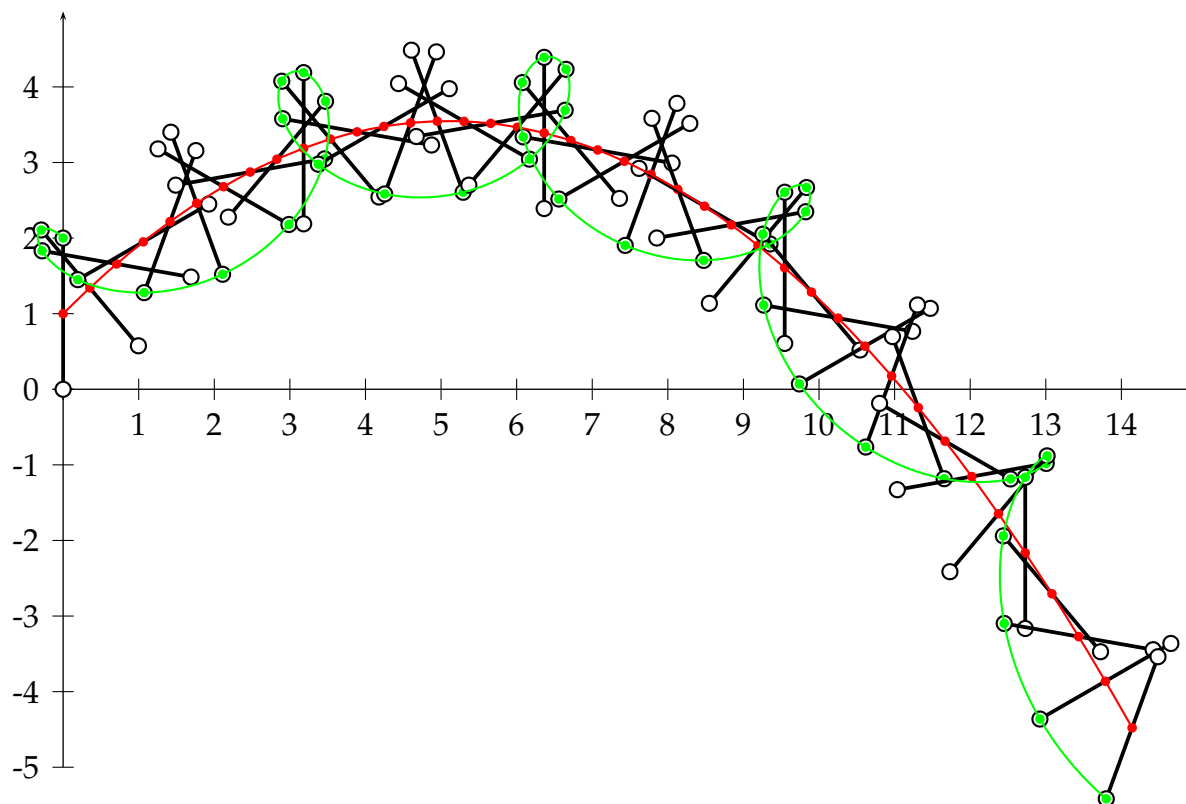


```

\def\majorette{\psline[linewidth=0.5mm](0,2)% Idea by Manuel Luque
\pscircle[fillstyle=solid]{0.1}
\pscircle[fillstyle=solid](0,2){0.1}}
\begin{pspicture}(0,-6)(15,5)
\psaxes[linewidth=0.5pt]{->}(0,0)(0,-5)(15,5)
\pstVerb{/V0 10 def /Alpha 45 def}% vitesse initiale, angle de lancement
\multido{\nT=0.0+0.05,\iA=0+40}{41}{%
\pstVerb{/nT \nT\space def}%
\rput(!V0 Alpha cos mul nT mul -9.81 2 div nT dup mul mul V0 Alpha sin mul nT mul add){%
\psrotate(0,1){\iA}{\majorette\psdot[linecolor=red](0,1)\psdot[linecolor=green](0,2)}}}
\parametricplot[linecolor=red]{0}{2}{% trajectoire du milieu
V0 Alpha cos mul t mul -9.81 2 div t dup mul mul V0 Alpha sin mul t mul add 1 add}
\parametricplot[linecolor=green,plotpoints=360]{0}{2}{% d'une extrême
V0 Alpha cos mul t mul 800 t mul sin sub % x(t)
-9.81 2 div t dup mul mul V0 Alpha sin mul t mul add 1 add 800 t mul cos add }%y(t)
\end{pspicture}

```

5 \psHomothetie: central dilatation

```
\psHomothetie[<options>](<center>){<factor>}{<object>}
```

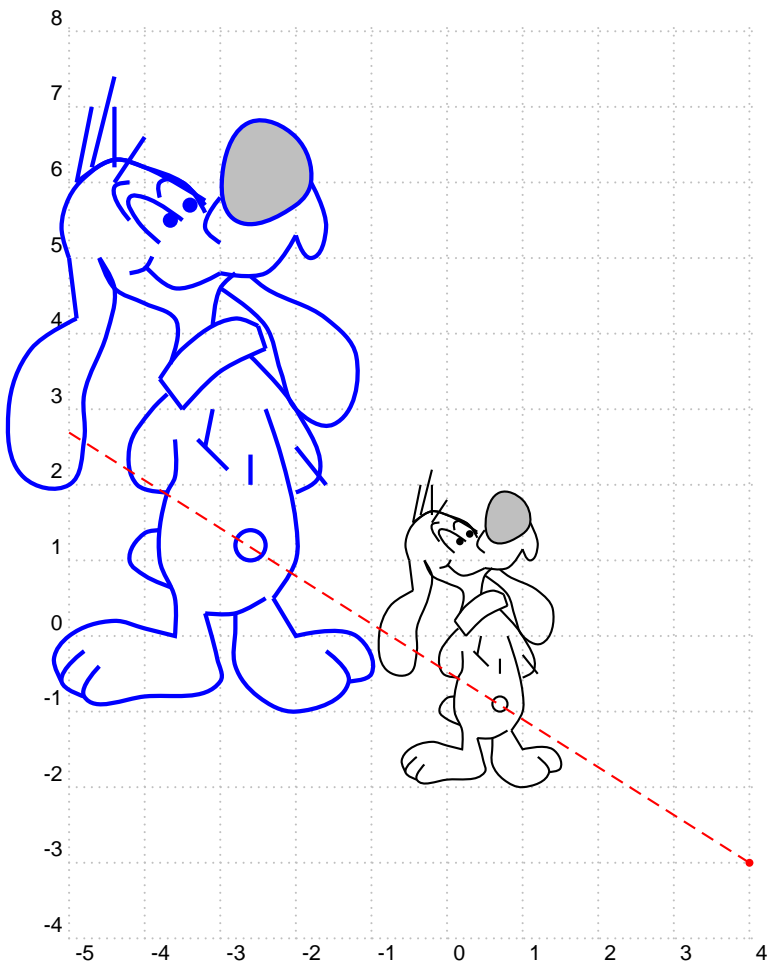


```
\begin{pspicture}[showgrid=true](-5,-4)(4,8)
\psBill% needs package pst-fun
\psHomothetie[linecolor=blue](4,-3){2}{\psBill}
\psdots[dotsize=3pt,linecolor=red](4,-3)
\pstVerb{ /m -3 -0.85 sub 4 0.6 sub div def }
\psplot[linestyle=dashed,linecolor=red]{-5}{4}{ m x mul m 4 mul sub 3 sub }
\psHomothetie[linecolor=green](4,-3){-0.2}{\psBill}
\end{pspicture}
```

6 \psbrace

6.1 Syntax

```
\psbrace[<options>](<A>)(<B>){<text>}
\psbrace*[<options>](<A>)(<B>){<text>}
```




```
\begin{pspicture}(4,4)
\psgrid[subgriddiv=0,griddots=10]
\pnode(0,0){A}
\pnode(4,4){B}
\psbrace[linecolor=red,ref=1C](A)(B){Text I}
\psbrace*[linecolor=blue,ref=1C](3,4)(0,1){Text II}
\psbrace[fillcolor=white](3,0)(3,4){III}
\end{pspicture}
```

The option `\specialCoor` is enabled, so that all types of coordinates are possible, (node-name), (x,y) , $(nodeA|nodeB)$, ... The star version fills the inner of the brace with the current linecolor. With the fillcolor white or any other background color the brace can be "unfilled".

6.2 Options


Additional to all other available options from `pstricks` or the other related packages, there are two new option, named `braceWidth` and `bracePos`. All important ones are shown in the following graphics and table.

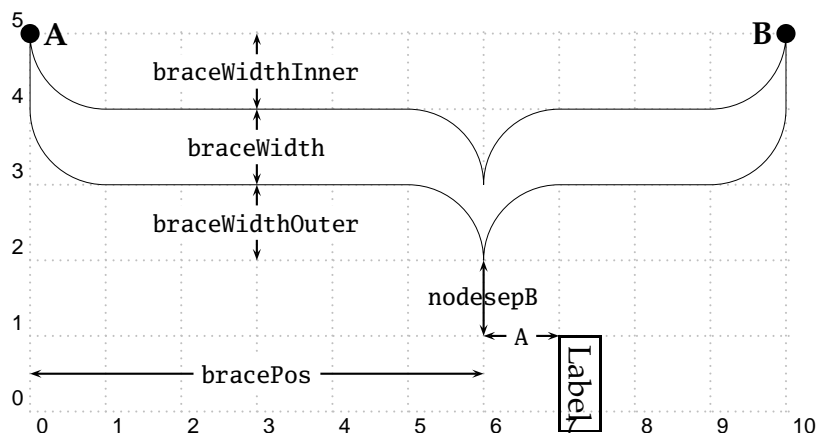

A positive value for `nodesepA` and `B` shifts the label to the right (`nodesepA`) and down (`nodesepB`). This does not depends the the value for the rotating of the label!

name	meaning
braceWidth	default is 2\pslinewidth
braceWidthInner	default is 10\pslinewidth
braceWidthOuter	default is 10\pslinewidth
bracePos	relative position (default is 0.5)
nodesepA	x-separation (default is 0pt)
nodesepB	y-separation (default is 0pt)
rot	additional rotating for the text (default is 0)
ref	reference point for the text (default is c)
fillcolor	default is black

By default the text is written perpendicular to the brace line and can be changed with the `pstricks` option `rot=...`. The text parameter can take any object and may also be empty. The reference point can be any value of the combination of l (left) or r (right) and b (bottom) or B (Baseline) or C (center) or t (top), where the default is c, the center of the object.

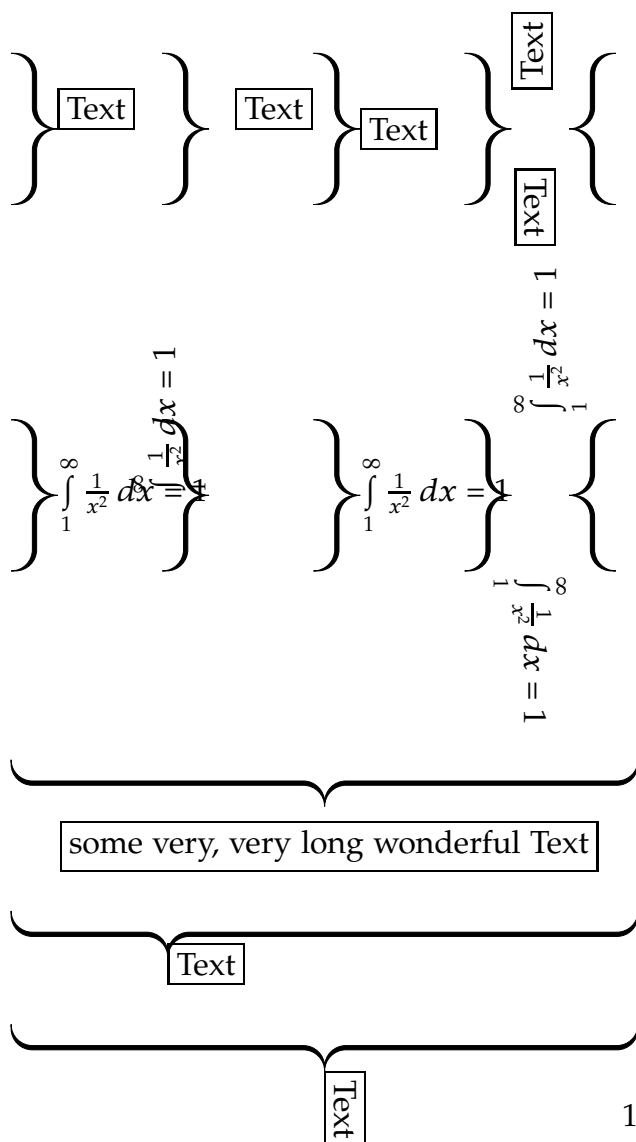

```

1 \begin{pspicture}(8,2.5)
2 \psbrace(0,0)(0,2){\fbox{Text}}%
3 \psbrace[nodesepA=10pt](2,0)(2,2){\fbox{
4   Text}}
5 \psbrace[ref=lC](4,0)(4,2){\fbox{Text}}
6 \psbrace[ref=lt,rot=90,nodesepB=-15pt
7   ](6,0)(6,2){\fbox{Text}}
8 \psbrace[ref=lt,rot=90,nodesepA=-5pt,
9   nodesepB=15pt](8,2)(8,0){\fbox{Text}}
10 \end{pspicture}

```

```


1 \def\someMath{$\int\limits_1^{\infty}\frac{1}{x^2}\,dx=1$}
2 \begin{pspicture}(8,2.5)
3 \psbrace[ref=lC](0,0)(0,2){\someMath}%
4 \psbrace[rot=90](2,0)(2,2){\someMath}
5 \psbrace[ref=lC](4,0)(4,2){\someMath}
6 \psbrace[ref=lt,rot=90,nodesepB=-30pt
7   ](6,0)(6,2){\someMath}
8 \psbrace[ref=lt,rot=90,nodesepB=30pt
9   ](8,2)(8,0){\someMath}
10 \end{pspicture}

```

```

1 \begin{pspicture}(\linewidth,5)
2 \psbrace(0,0.5)(\linewidth,0.5){\fbox{
3   Text}}%
4 \psbrace[bracePos=0.25,nodesepB=10pt,rot
5   =90](0,2)(\linewidth,2){\fbox{Text}}
6 \psbrace[ref=lC,nodesepA=-3.5cm,nodesepB
7   =15pt,rot=90](0,4)(\linewidth,4){%
8   \fbox{some very, very long wonderful
9     Text}}
10 \end{pspicture}


```

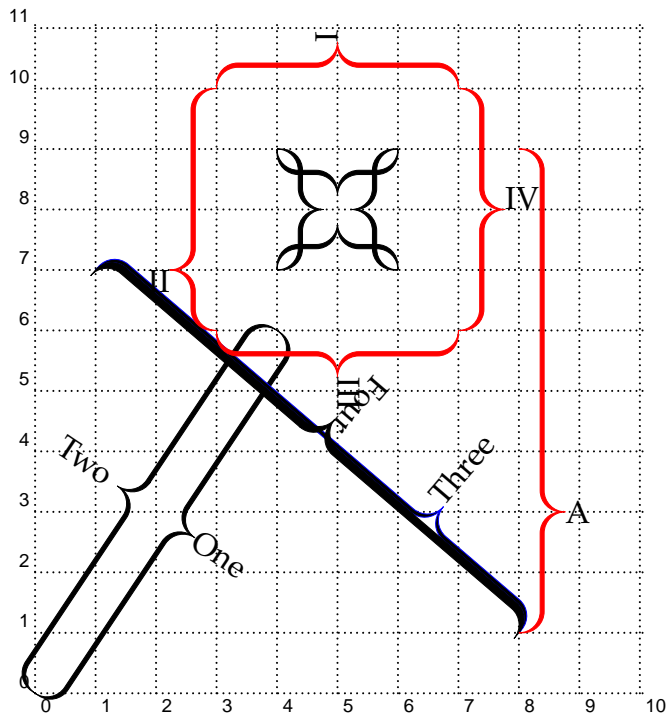

```

1 \psset{unit=0.8}
2 \begin{pspicture}(10,11)
3 \psgrid[subgriddiv=0,griddots=10]
4 \pnode(0,0){A}
5 \pnode(4,6){B}
6 \psbrace[ref=lc](A)(B){One}
7 \psbrace[rot=180,nodesepA=-5pt,ref=rb](B)(A){Two}
8 \psbrace[linecolor=blue,bracePos=0.25,ref=lb](8,1)
9 (1,7){Three}
10 \psbrace[braceWidth=-1mm,rot=180,ref=rB](8,1)(1,7){
11 Four}
12 \psbrace*[lineararc=0.5,linecolor=red,linewidth=3pt,
13 braceWidth=1.5pt,
14 bracePos=0.25,ref=lc](8,1)(8,9){A}
15 \psbrace(4,9)(6,9){}
16 \psbrace(6,9)(6,7){}
17 \psbrace(6,7)(4,7){}
18 \psbrace(4,7)(4,9){}
19 \psset{linecolor=red}
20 \psbrace*[ref=lb](7,10)(3,10){I}
21 \psbrace*[ref=lb,bracePos=0.75](3,10)(3,6){II}
22 \psbrace*[ref=lb](3,6)(7,6){III}
23 \psbrace*[ref=lb](7,6)(7,10){IV}
24 \end{pspicture}

```



```

\[\begin{pmatrix}
&\Rnode[vref=2ex]{A}{~1}&\\
&&\ddots&\\
&&&\Rnode[href=2]{B}{1}&\\
&&&&\Rnode[vref=2ex]{C}{0}&\\
&&&&&\ddots&\\
&&&&&&\Rnode[href=2]{D}{0}\sim&
\end{pmatrix}
\]
\psbrace[rot=-90,nodesepB=-0.5,nodesepA=-0.2](B)(A){\small n times}
\psbrace[rot=-90,nodesepB=-0.5,nodesepA=-0.2](D)(C){\small n times}
```

It is also possible to put a vertical brace around a default paragraph. This works with setting two invisible nodes at the beginning and the end of the paragraph. Inentation is possible with a minipage.

Some nonsense text, which is nothing more than nonsense. Some nonsense text, which is nothing more than nonsense.

Some nonsense text, which is nothing more than nonsense. Some nonsense text, which is nothing more than nonsense. Some nonsense text, which is nothing more than nonsense. Some nonsense text, which is nothing more than nonsense. Some nonsense text, which is nothing more than nonsense. Some nonsense text, which is nothing more than nonsense. Some nonsense text, which is nothing more than nonsense.

Some nonsense text, which is nothing more than nonsense. Some nonsense text, which is nothing more than nonsense.

Some nonsense text, which is nothing more than nonsense. Some nonsense text, which is nothing more than nonsense. Some nonsense text, which is nothing more than nonsense. Some nonsense text, which is nothing more than nonsense. Some nonsense text, which is nothing more than nonsense. Some nonsense text, which is nothing more than nonsense. Some nonsense text, which is nothing more than nonsense.

```

1 \begin{framed}
2 Some nonsense text, which is nothing more than nonsense.
3 Some nonsense text, which is nothing more than nonsense.
4
5 \noindent\rnode{A}{}
6
7 \vspace*{-1ex}
8 Some nonsense text, which is nothing more than nonsense.
9 Some nonsense text, which is nothing more than nonsense.
10 Some nonsense text, which is nothing more than nonsense.
11 Some nonsense text, which is nothing more than nonsense.
12 Some nonsense text, which is nothing more than nonsense.
13 Some nonsense text, which is nothing more than nonsense.
14 Some nonsense text, which is nothing more than nonsense.
15 Some nonsense text, which is nothing more than nonsense.
16
17 \vspace*{-2ex}\noindent\rnode{B}{}\psbrace[linecolor=red](A)(B){}
18
19 Some nonsense text, which is nothing more than nonsense.
20 Some nonsense text, which is nothing more than nonsense.
21
22 \medskip\hfill\begin{minipage}{0.95\linewidth}
23 \noindent\rnode{A}{}
24

```



```

25 \vspace*{-1ex}
26 Some nonsense text, which is nothing more than nonsense.
27 Some nonsense text, which is nothing more than nonsense.
28 Some nonsense text, which is nothing more than nonsense.
29 Some nonsense text, which is nothing more than nonsense.
30 Some nonsense text, which is nothing more than nonsense.
31 Some nonsense text, which is nothing more than nonsense.
32 Some nonsense text, which is nothing more than nonsense.
33 Some nonsense text, which is nothing more than nonsense.
34
35 \vspace*{-2ex}\noindent\rnode{B}{}\psbrace[linecolor=red](A)(B){}
36 \end{minipage}
37 \end{framed}

```


7 Random dots

The syntax of the new macro `\psRandom` is:


```
\psRandom[<option>]{}
\psRandom[<option>]{<clip path>}
\psRandom[<option>](<xMax,yMax>){<clip path>}
\psRandom[<option>](<xMin,yMin>)(<xMax,yMax>){<clip path>}
```

If there is no area for the dots defined, then $(0,0)(1,1)$ in the actual scale is used for placing the dots. This area should be greater than the clipping path to be sure that the dots are placed over the full area. The clipping path can be everything. If no clipping path is given, then the frame $(0,0)(1,1)$ in user coordinates is used. The new options are:

name	default	
randomPoints	1000	number of random dots
color	false	random color

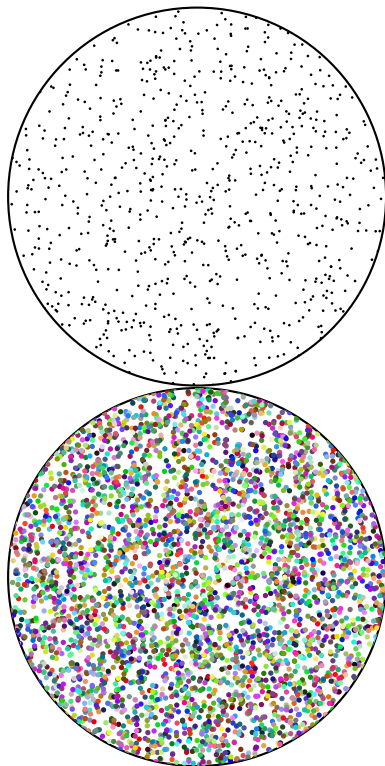



```
\psset{unit=5cm}
\begin{pspicture}(1,1)
\psRandom[dotsize=1pt,fillstyle=solid](1,1){\pscircle
(0.5,0.5){0.5}}
\end{pspicture}
\begin{pspicture}(1,1)
\psRandom[dotsize=2pt,randomPoints=5000,color,%
fillstyle=solid](1,1){\pscircle(0.5,0.5){0.5}}
\end{pspicture}
```

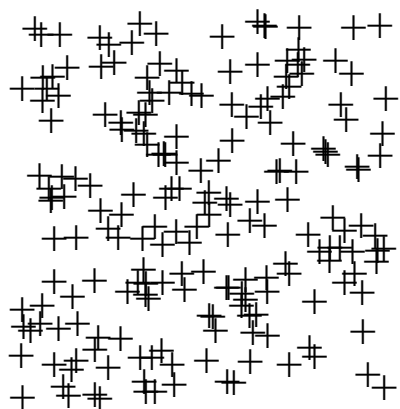

```

1 \psset{unit=5cm}
2 \begin{pspicture}(1,1)
3   \psRandom[randomPoints=200,dotsize=8pt,dotstyle
4     =+]{}
5 \end{pspicture}
6 \begin{pspicture}(1.5,1)
7   \psRandom[dotsize=5pt,color](0,0)(1.5,0.8){\
8     psellipse(0.75,0.4)(0.75,0.4)}
9 \end{pspicture}

```

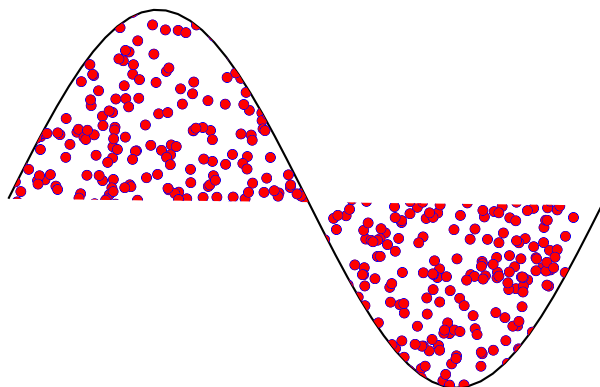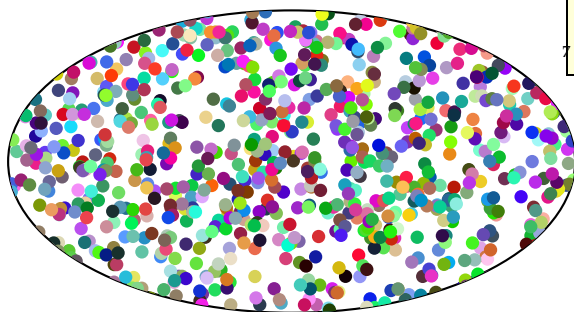

```

1 \psset{unit=2.5cm}
2 \begin{pspicture}(0,-1)(3,1)
3   \psRandom[dotsize=4pt,dotstyle=o,
4     linecolor=blue,fillcolor=red,%
5     fillstyle=solid,randomPoints=1000]{%
6     (0,-1)(3,1){\psplot{0}{3.14}{ x 114
7       mul sin }}
8 \end{pspicture}

```

8 Arrows

8.1 Definition

pstricks-add defines the following "arrows":

Value	Example	Name
-		None
<->		Arrowheads.
>-<		Reverse arrowheads.
<<->>		Double arrowheads.
>>-<<		Double reverse arrowheads.
-		T-bars, flush to endpoints.
* - *		T-bars, centered on endpoints.
[-]		Square brackets.
] - [Reversed square brackets.
(-)		Rounded brackets.
) - (Reversed rounded brackets.
o - o		Circles, centered on endpoints.
* - *		Disks, centered on endpoints.
oo - oo		Circles, flush to endpoints.
** - **		Disks, flush to endpoints.
<->		T-bars and arrows.
>-<		T-bars and reverse arrows.
h - h		left/right hook arrows.
H - H		left/right hook arrows.
v - v		left/right inside vee arrows.
V - V		left/right outside vee arrows.
f - f		left/right inside filled arrows.
F - F		left/right outside filled arrows.
t - t		left/right inside slash arrows.
T - T		left/right outside slash arrows.

You can also mix and match, e.g., `->`, `*->` and `[->` are all valid values of the `arrows` parameter. The parameter can be set with

```
\psset{arrows=<type>}
```

or for some macros with a special option, like

```
\psline[<general options>]{<arrow type>}(A)(B)
```

```
\psline[linecolor=red,linewidth=2pt]{|->}(0,0)(0,2)
```




8.2 Multiple arrows

There are two new options which are only valid for the arrow type `<<` or `>>`. `nArrow` sets both, the `nArrowA` and the `nArrowB` parameter. The meaning is declared in the following tables. Without setting one of these parameters the behaviour is like the one described in the old PSTricks manual.

Value	Meaning
<code>->></code>	-A
<code><<->></code>	A-A
<code><<-</code>	A-
<code>>>-</code>	B-
<code>-<<</code>	-B
<code>>>-<<</code>	B-B
<code>>>->></code>	B-A
<code><<-<<</code>	A-B

Value	Example
<code>\psline{->>}(0,1ex)(2.3,1ex)</code>	
<code>\psline[nArrowsA=3]{->>}(0,1ex)(2.3,1ex)</code>	
<code>\psline[nArrowsA=5]{->>}(0,1ex)(2.3,1ex)</code>	
<code>\psline{<<-}(0,1ex)(2.3,1ex)</code>	
<code>\psline[nArrowsA=3]{<<-}(0,1ex)(2.3,1ex)</code>	
<code>\psline[nArrowsA=5]{<<-}(0,1ex)(2.3,1ex)</code>	
<code>\psline{<<->>}(0,1ex)(2.3,1ex)</code>	
<code>\psline[nArrowsA=3]{<<->>}(0,1ex)(2.3,1ex)</code>	
<code>\psline[nArrowsA=5]{<<->>}(0,1ex)(2.3,1ex)</code>	
<code>\psline{<<- }(0,1ex)(2.3,1ex)</code>	
<code>\psline[nArrowsA=3]{<<-<<}(0,1ex)(2.3,1ex)</code>	
<code>\psline[nArrowsA=5]{<<-o}(0,1ex)(2.3,1ex)</code>	
<code>\psline[nArrowsA=3,nArrowsB=4]{<<-<<}(0,1ex)(2.3,1ex)</code>	
<code>\psline[nArrowsA=3,nArrowsB=4]{>>->>}(0,1ex)(2.3,1ex)</code>	
<code>\psline[nArrowsA=1,nArrowsB=4]{>>->>}(0,1ex)(2.3,1ex)</code>	

8.3 hookarrow

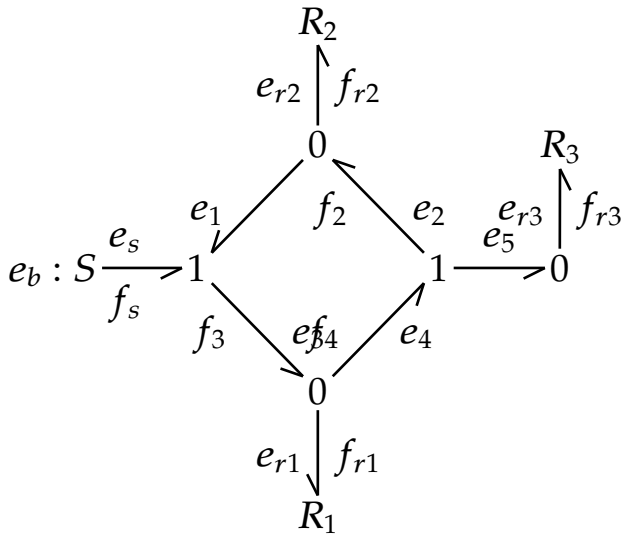

```

\psset{arrowsize=8pt,arrowlength=1,
linewidth=1pt,nodesep=2pt,shortput=
tablr}

\large
\begin{psmatrix}[colsep=12mm,rowsep=10mm]
    & & $R_2$ & & \\
    & & 0 & & $R_3$ \\
$e_b:S$ & 1 & & 1 & 0 \\
    & & 0 & & \\
    & & $R_1$ & & \\
\end{psmatrix}

\ncline[h-]{1,3}{2,3}<{$e_{r2}$}>{$f_{r2}$}

\ncline[h-]{2,3}{3,2}<{$e_1$}

\ncline[h-]{3,1}{3,2}^{$e_s$}_{$f_s$}

\ncline[h-]{3,2}{4,3}>{$e_3$}<{$f_3$}

\ncline[h-]{4,3}{3,4}>{$e_4$}<{$f_4$}

\ncline[h-]{3,4}{2,3}>{$e_2$}<{$f_2$}

\ncline[h-]{3,4}{3,5}^{$e_5$}

\ncline[h-]{3,5}{2,5}<{$e_{r3}$}>{$f_{r3}$}

\ncline[h-]{4,3}{5,3}<{$e_{r1}$}>{$f_{r1}$}


```

8.4 hookrightarrow and hookleftarrow

This is another type of an arrow and abbreviated with `H`. The length and width of the hook is set by the new options `hooklength` and `hookwidth`, which are by default set to

`\psset{hooklength=3mm, hookwidth=1mm}`


If the line begins with a right hook then the line ends with a left hook and vice versa:



```

1 \begin{pspicture}(3,4)
2 \psline[linewidth=5pt,linestyle=blue,hooklength=5mm,hookwidth=-3mm]{H
   ->}(0,3.5)(3,3.5)
3 \psline[linewidth=5pt,linestyle=red,hooklength=5mm,hookwidth=3mm]{H
   ->}(0,2.5)(3,2.5)
4 \psline[linewidth=5pt,hooklength=5mm,hookwidth=3mm]{H-H}(0,1.5)
   (3,1.5)
5 \psline[linewidth=1pt]{H-H}(0,0.5)(3,0.5)
6 \end{pspicture}

```

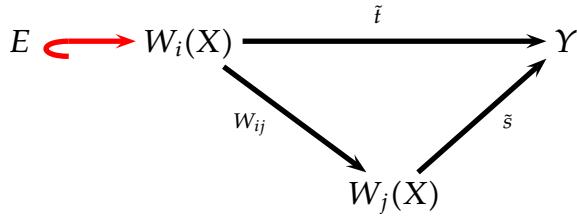

```

1 $\begin{psmatrix}
2 E&W_i(X)&&Y\\
3 &&W_j(X)
4 \psset{arrows=->,nodesep=3pt,linewidth=2pt}
5 \everypsbox{\scriptstyle}
6 \ncline[linewidth=red,arrows=H->,%
7   hooklength=4mm,hookwidth=2mm]{1,1}{1,2}
8 \ncline{1,2}{1,4}^{\tilde{t}}
9 \ncline{1,2}{2,3}<\{W_{ij}\}
10 \ncline{2,3}{1,4}>\{\tilde{s}\}
11 \end{psmatrix}$

```

8.5 ArrowInside Option

It is now possible to have arrows inside the lines and not only at the beginning or the end. The new defined options

Name	Example	Output
ArrowInside	<code>\psline[ArrowInside=->](0,0)(2,0)</code>	
ArrowInsidePos	<code>\psline[ArrowInside=->,% ArrowInsidePos=0.25](0,0)(2,0)</code>	
ArrowInsidePos	<code>\psline[ArrowInside=->,% ArrowInsidePos=10](0,0)(2,0)</code>	
ArrowInsideNo	<code>\psline[ArrowInside=->,% ArrowInsideNo=2](0,0)(2,0)</code>	
ArrowInsideOffset	<code>\psline[ArrowInside=->,% ArrowInsideNo=2,% ArrowInsideOffset=0.1](0,0)(2,0)</code>	
ArrowInside	<code>\psline[ArrowInside=->]{->}(0,0)(2,0)</code>	
ArrowInsidePos	<code>\psline[ArrowInside=->,% ArrowInsidePos=0.25]{->}(0,0)(2,0)</code>	
ArrowInsidePos	<code>\psline[ArrowInside=->,% ArrowInsidePos=10]{->}(0,0)(2,0)</code>	
ArrowInsideNo	<code>\psline[ArrowInside=->,% ArrowInsideNo=2]{->}(0,0)(2,0)</code>	
ArrowInsideOffset	<code>\psline[ArrowInside=->,% ArrowInsideNo=2,% ArrowInsideOffset=0.1]{->}(0,0)(2,0)</code>	
ArrowFill	<code>\psline[ArrowFill=false,% arrowinset=0]{->}(0,0)(2,0)</code>	
ArrowFill	<code>\psline[ArrowFill=false,% arrowinset=0]{<->}(0,0)(2,0)</code>	
ArrowFill	<code>\psline[ArrowInside=->,% arrowinset=0,% ArrowFill=false,% ArrowInsideNo=2,% ArrowInsideOffset=0.1]{->}(0,0)(2,0)</code>	

Without the default arrow definition there is only the one inside the line, defined by the type and the position. The position is relative to the length of the whole line. 0.25 means at 25% of the line length. The peak of the arrow gets the coordinates which are calculated by the macro. If you want arrows with an absolute position difference, then choose a value greater than 1, e.g. 10 which places an arrow every 10 pt. The default unit pt cannot be changed.

The ArrowInside takes only arrow definitions like \rightarrow into account. Arrows from right to left (\leftarrow) are not possible and ignored. If you need such arrows, change the order of the pairs of coordinates for the line or curve macro.

8.6 ArrowFill Option

By default all arrows are filled polygons. With the option ArrowFill=false there are "white" arrows. Only for the beginning/end arrows they are empty, the inside arrows are overpainted with the line.



```
\psset{arrowscale=3}
\psline[linecolor=red,arrowsinset=0]{<->}(0,0)(3,0)
```



```
\psset{arrowscale=3}
\psline[linecolor=red,arrowsinset=0,ArrowFill=false]{<->}(0,0)(3,0)
```




```
\psset{arrowscale=3}
\psline[linecolor=red,arrowsinset=0,arrowsize=0.2,ArrowFill=false]
{<->}(0,0)(3,0)
```



```
\psset{arrowscale=3}
\psline[linecolor=blue,arrowscale=6,ArrowFill=true]{>>->}(0,0)
(3,0)
```



```
\psset{arrowscale=3}
\psline[linecolor=blue,arrowscale=6,ArrowFill=false]{>>->}(0,0)
(3,0)
\rule{3cm}{0pt}\[30pt]
```



```
\psset{arrowscale=3}
\psline[linecolor=blue,arrowscale=6,ArrowFill=true]{>|->|}(0,0)
(3,0)
```

```
\psset{arrowscale=3}
\psline[linecolor=blue,arrowscale=6,ArrowFill=false]{>|->|}(0,0)
(3,0)%
```


8.7 Examples

All examples are printed with `\psset{arrowscale=2,linecolor=red}`.

8.7.1 \psline



```
\begin{pspicture}(2,2)
\psset{arrowscale=2,ArrowFill=true}
\psline[ArrowInside=->]{|<->|}(2,1)
\end{pspicture}
```




```
\begin{pspicture}(2,2)
\psset{arrowscale=2,ArrowFill=true}
\psline[ArrowInside=-|]{|<->|}(2,1)
\end{pspicture}
```




```
\begin{pspicture}(2,2)
\psset{arrowscale=2,ArrowFill=true}
\psline[ArrowInside=->,ArrowInsideNo=2]{->}(2,1)
\end{pspicture}
```




```
\begin{pspicture}(2,2)
\psset{arrowscale=2,ArrowFill=true}
\psline[ArrowInside=->,ArrowInsideNo=2,ArrowInsideOffset=0.1]{->}(2,1)
\end{pspicture}
```

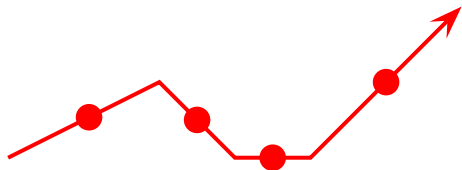

```
\begin{pspicture}(6,2)
\psset{arrowscale=2,ArrowFill=true}
\psline[ArrowInside=-*]{->}(0,0)(2,1)(3,0)(4,0)
(6,2)
\end{pspicture}
```

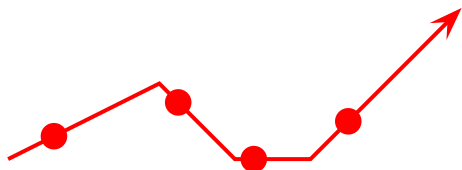


```
\begin{pspicture}(6,2)
\psset{arrowscale=2,ArrowFill=true}
\psline[ArrowInside=-*,ArrowInsidePos=
0.25]{->}(0,0)(2,1)(3,0)(4,0)(6,2)
\end{pspicture}
```

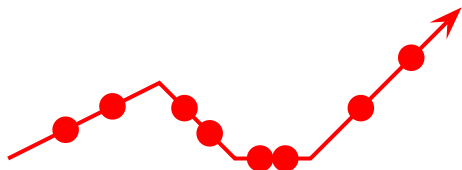


```
\begin{pspicture}(6,2)
\psset{arrowscale=2,ArrowFill=true}
\psline[ArrowInside=-*,ArrowInsidePos=0.25,
ArrowInsideNo=2]{->}%
(0,0)(2,1)(3,0)(4,0)(6,2)
\end{pspicture}
```




```
\begin{pspicture}(6,2)
\psset{arrowscale=2,ArrowFill=true}
\psline[ArrowInside=->,ArrowInsidePos=0.25]{->}%
(0,0)(2,1)(3,0)(4,0)(6,2)
\end{pspicture}
```

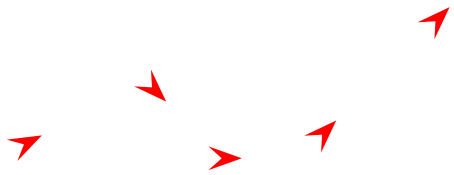


```
\begin{pspicture}(6,2)
\psset{arrowscale=2,ArrowFill=true}
\psline[linestyle=none,ArrowInside=->,
ArrowInsidePos=0.25]{->}%
(0,0)(2,1)(3,0)(4,0)(6,2)
\end{pspicture}
```

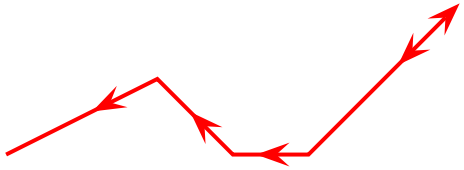


```
\begin{pspicture}(6,2)
\psset{arrowscale=2,ArrowFill=true}
\psline[ArrowInside=-<, ArrowInsidePos=0.75]{->}%
(0,0)(2,1)(3,0)(4,0)(6,2)
\end{pspicture}
```

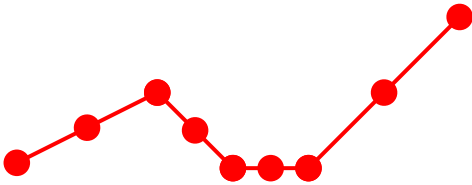

```
\begin{pspicture}(6,2)
\psset{arrowscale=2,ArrowFill=true,ArrowInside=-*}
\psline(0,0)(2,1)(3,0)(4,0)(6,2)
\psset{linestyle=none}
\psline[ArrowInsidePos=0](0,0)(2,1)(3,0)(4,0)(6,2)
\psline[ArrowInsidePos=1](0,0)(2,1)(3,0)(4,0)(6,2)
\end{pspicture}
```

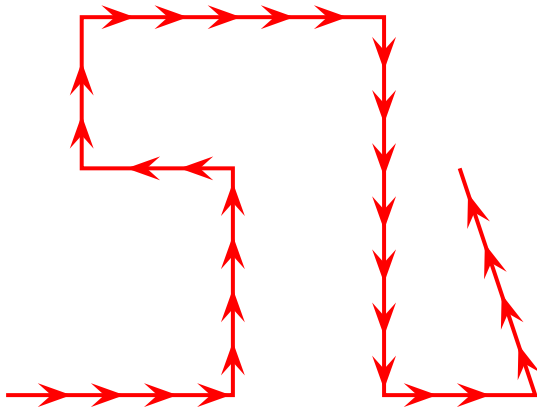


```
\begin{pspicture}(6,5)
\psset{arrowscale=2,ArrowFill=true}
\psline[ArrowInside=->,ArrowInsidePos=20](0,0)
(3,0)%
(3,3)(1,3)(1,5)(5,5)(5,0)(7,0)(6,3)
\end{pspicture}
```

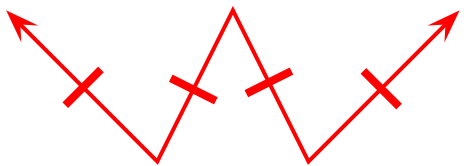


```
\begin{pspicture}(6,2)
\psset{arrowscale=2,ArrowFill=true}
\psline[ArrowInside=-|]{<->}(0,2)(2,0)(3,2)(4,0)
(6,2)
\end{pspicture}
```

8.7.2 \pspolygon

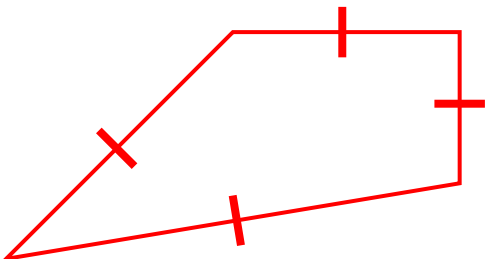


```
\begin{pspicture}(6,3)
\psset{arrowscale=2}
\pspolygon[ArrowInside=-|](0,0)(3,3)(6,3)(6,1)
\end{pspicture}
```

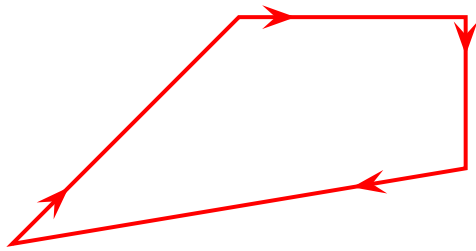

```

1 \begin{pspicture}(6,3)
2 \psset{arrowscale=2}
3 \pspolygon[ArrowInside=->,ArrowInsidePos=0.25]%
4   (0,0)(3,3)(6,3)(6,1)
5 \end{pspicture}


```

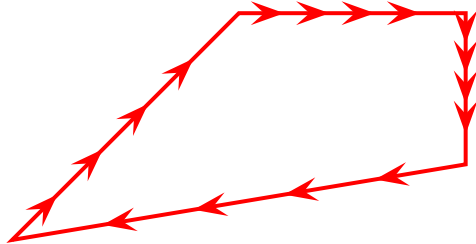

```

1 \begin{pspicture}(6,3)
2 \psset{arrowscale=2}
3 \pspolygon[ArrowInside=->,ArrowInsideNo=4]%
4   (0,0)(3,3)(6,3)(6,1)
5 \end{pspicture}


```

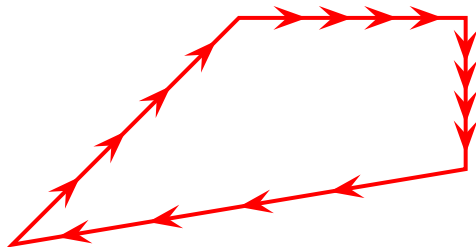

```

1 \begin{pspicture}(6,3)
2 \psset{arrowscale=2}
3 \pspolygon[ArrowInside=->,ArrowInsideNo=4,%
4   ArrowInsideOffset=0.1](0,0)(3,3)(6,3)(6,1)
5 \end{pspicture}


```

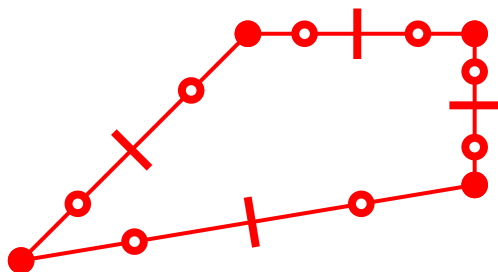

```

1 \begin{pspicture}(6,3)
2 \psset{arrowscale=2}
3 \pspolygon[ArrowInside=-|](0,0)(3,3)(6,3)(6,1)
4 \psset{linestyle=none,ArrowInside=-*}
5 \pspolygon[ArrowInsidePos=0](0,0)(3,3)(6,3)(6,1)
6 \pspolygon[ArrowInsidePos=1](0,0)(3,3)(6,3)(6,1)
7 \psset{ArrowInside=-o}
8 \pspolygon[ArrowInsidePos=0.25](0,0)(3,3)(6,3)
9   (6,1)
10 \pspolygon[ArrowInsidePos=0.75](0,0)(3,3)(6,3)
11   (6,1)
12 \end{pspicture}

```

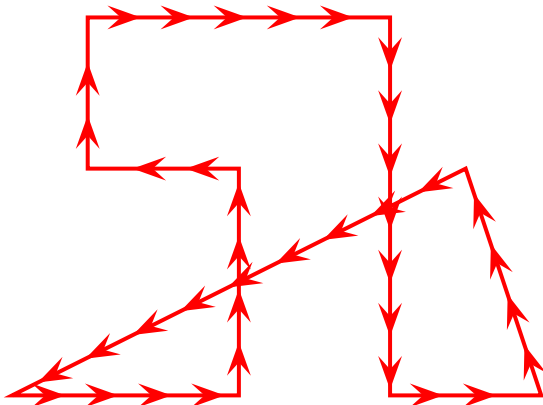


```

1 \begin{pspicture}(6,5)
2 \psset{arrowscale=2}
3 \pspolygon[ArrowInside=->,ArrowInsidePos=20]%
4   (0,0)(3,0)(3,3)(1,3)(1,5)(5,5)(5,0)(7,0)(6,3)
5 \end{pspicture}

```


8.7.3 \psbezier



```

1 \begin{pspicture}(3,3)
2 \psset{arrowscale=2}
3 \psbezier[ArrowInside=-|](1,1)(2,2)(3,3)
4 \psset{linestyle=none,ArrowInside=-o}
5 \psbezier[ArrowInsidePos=0.25](1,1)(2,2)(3,3)
6 \psbezier[ArrowInsidePos=0.75](1,1)(2,2)(3,3)
7 \psset{linestyle=none,ArrowInside=-*}
8 \psbezier[ArrowInsidePos=0](1,1)(2,2)(3,3)
9 \psbezier[ArrowInsidePos=1](1,1)(2,2)(3,3)
10 \end{pspicture}


```



```

1 \begin{pspicture}(4,3)
2 \psset{arrowscale=2}
3 \psbezier[ArrowInside==>,showpoints=true]
4   {*-}(2,3)(3,0)(4,2)
5 \end{pspicture}


```



```

1 \begin{pspicture}(4,3)
2 \psset{arrowscale=2}
3 \psbezier[ArrowInside==>,showpoints=true,%
4   ArrowInsideNo=2](2,3)(3,0)(4,2)
5 \end{pspicture}


```



```

1 \begin{pspicture}(4,3)
2 \psset{arrowscale=2}
3 \psbezier[ArrowInside==>,showpoints=true,%
4   ArrowInsideNo=2,ArrowInsideOffset=-0.2]{->}(2,3)(3,0)
5   (4,2)
6 \end{pspicture}


```

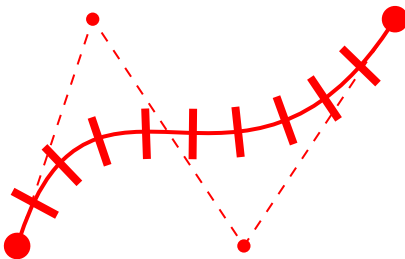

```

1 \begin{pspicture}(5,3)
2 \psset{arrowscale=2}
3 \psbezier[ArrowInsideNo=9,ArrowInside=-|,%
4   showpoints=true]{*-}(1,3)(3,0)(5,3)
5 \end{pspicture}


```



```

1 \begin{pspicture}(4,3)
2 \psset{arrowscale=2}
3 \psset{ArrowInside=-|}
4 \psbezier[ArrowInsidePos=0.25,showpoints=true]{*-}(2,3)
5   (3,0)(4,2)
6 \psset{linestyle=none}
7 \psbezier[ArrowInsidePos=0.75](2,3)(3,0)(4,2)
8 \end{pspicture}


```

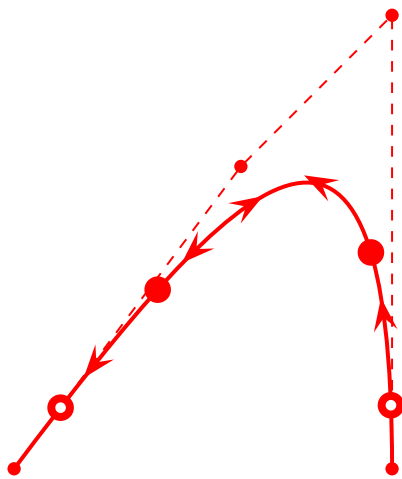

```

\begin{pspicture}(5,6)
2 \psset{arrowscale=2}
3 \pnode(3,4){A}\pnode(5,6){B}\pnode(5,0){C}
4 \psbezier[ArrowInside=->,%
5   showpoints=true](A)(B)(C)
6 \psset{linestyle=none,ArrowInside=-<}
7 \psbezier[ArrowInsideNo=4](A)(B)(C)
8 \psset{ArrowInside=-o}
9 \psbezier[ArrowInsidePos=0.1](A)(B)(C)
10 \psbezier[ArrowInsidePos=0.9](A)(B)(C)
11 \psset{ArrowInside=-*}
12 \psbezier[ArrowInsidePos=0.3](A)(B)(C)
13 \psbezier[ArrowInsidePos=0.7](A)(B)(C)
14 \end{pspicture}

```

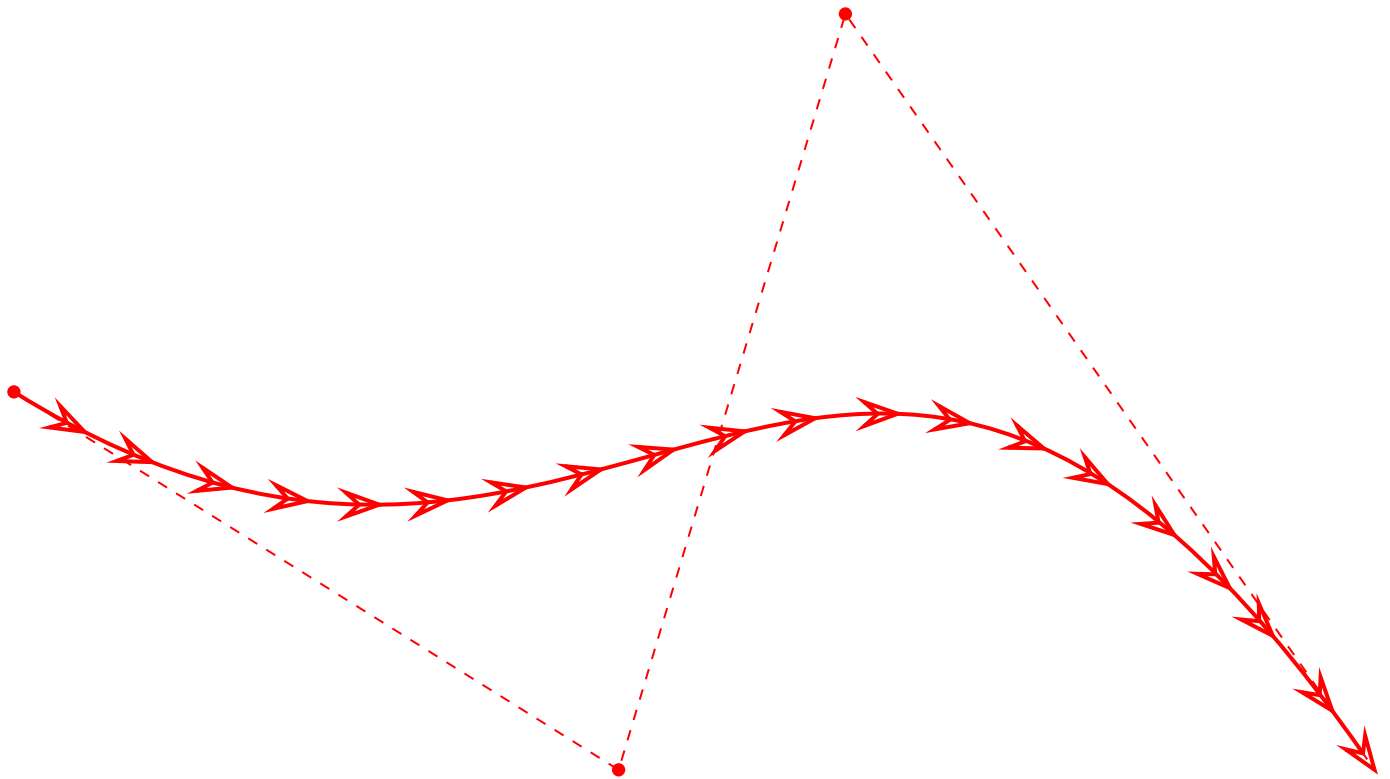

```

\begin{pspicture}(-3,-5)(15,5)
2 \psbezier[ArrowInsideNo=19,%
3   ArrowInside=->,ArrowFill=false,%
4   showpoints=true]{->}(-3,0)(5,-5)(8,5)(15,-5)
5 \end{pspicture}

```

8.7.4 \pcline


These examples need the package pst-node.



```
\begin{pspicture}(2,1)
\psset{arrowscale=2}
\pcline[ArrowInside=->](0,0)(2,1)
\end{pspicture}
```




```
\begin{pspicture}(2,1)
\psset{arrowscale=2}
\pcline[ArrowInside=->]{<->}(0,0)(2,1)
\end{pspicture}
```



```
\begin{pspicture}(2,1)
\psset{arrowscale=2}
\pcline[ArrowInside=-|,ArrowInsidePos=0.75]{|-|}(0,0)(2,1)
\end{pspicture}
```




```
\psset{arrowscale=2}
\pcline[ArrowInside=->,ArrowInsidePos=0.65]{*-*}(0,0)(2,0)
\naput[labelsep=0.3]{\large g$}
```




```
\psset{arrowscale=2}
\pcline[ArrowInside=->,ArrowInsidePos=10]{|-|}(0,0)(2,0)
\naput[labelsep=0.3]{\large l$}
```

8.7.5 \pccurve


These examples also need the package pst-node.



```
\begin{pspicture}(2,2)
\psset{arrowscale=2}
\pccurve[ArrowInside=->,ArrowInsidePos=0.65,showpoints=true]{*-*}(0,0)
(2,2)
\naput[labelsep=0.3]{\large h$}
```



```
\begin{pspicture}(2,2)
\psset{arrowscale=2}
\pccurve[ArrowInside=->,ArrowInsideNo=3,showpoints=true]{|->}(0,0)(2,2)
\naput[labelsep=0.3]{\large i$}
```

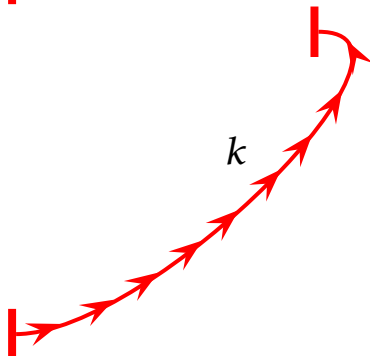


```
\begin{pspicture}(4,4)
\psset{arrowscale=2}
\pccurve[ArrowInside=->,ArrowInsidePos=20]{|-|}(0,0)(4,4)
\naput[labelsep=0.3]{\large k$}
```

8.8 Special arrows v-V,t-T, and f-F

Possible optional arguments are


name	meaning
veearrowlength	default is 3mm
veearrowangle	default is 30
veearrowlinewidth	default is 0.35mm
filledveearrowlength	default is 3mm
filledveearrowangle	default is 15
filledveearrowlinewidth	default is 0.35mm
tickarrowlength	default is 1.5mm
tickarrowlinewidth	default is 0.35mm



```

\psset{unit=5mm}
\begin{pspicture}(4,6)
\psset{dimen=middle,arrows=c-c,
arrowscale=2,linewidth=.25mm}
\psline[linecolor=red,linewidth=.05mm](0,0)(0,6)
\psline[linecolor=red,linewidth=.05mm](4,0)(4,6)
\psline{v-v}(0,6)(4,6)
\psline{v-V}(0,4)(4,4)
\psline{V-v}(0,2)(4,2)
\psline{V-V}(0,0)(4,0)
\end{pspicture}


```



```

\psset{unit=5mm}
\begin{pspicture}(4,6)
\psset{dimen=middle,arrows=c-c,
arrowscale=2,linewidth=.25mm}
\psline[linecolor=red,linewidth=.05mm](0,0)(0,6)
\psline[linecolor=red,linewidth=.05mm](4,0)(4,6)
\psline{f-f}(0,6)(4,6)
\psline{f-F}(0,4)(4,4)
\psline{F-f}(0,2)(4,2)
\psline{F-F}(0,0)(4,0)
\end{pspicture}

```




```

\psset{unit=5mm}
\begin{pspicture}(4,6)
\psset{dimen=middle,arrows=c-c,linewidth=.25mm}
\psline[linecolor=red,linewidth=.05mm](0,0)(0,6)
\psline[linecolor=red,linewidth=.05mm](4,0)(4,6)
\psline{t-t}(0,6)(4,6)
\psline{t-T}(0,4)(4,4)
\psline{T-t}(0,2)(4,2)
\psline{T-T}(0,0)(4,0)
\end{pspicture}

```

8.9 Special arrow option arrowLW

Only for the arrowtype o and * it is possible to set the arrowlinewidth with the optional keyword arrowLW. Otherwise



```
\begin{pspicture}(4,6)
\psline[arrowscale=3,arrows=-o](0,5)(4,5)
\psline[arrowscale=3,arrows=-o,
arrowLW=0.5pt](0,3)(4,3)
\psline[arrowscale=3,arrows=-o,
arrowLW=0.3333\pslinewidth](0,1)(4,1)
\end{pspicture}
```


9 `\psFormatInt`

There exist some packages and a lot of code to format an integer like 1 000 000 or 1,234,567 (in Europe 1.234.567). But all packages expect a real number as argument and cannot handle macros as an argument. For this case `psstricks-add` has a macro `psFormatInt` which can handle both:

1,234,567	1 <code>\psFormatInt{1234567}\</code>
1,234,567	2 <code>\psFormatInt[intSeparator={,}]{1234567}\</code>
1.234.567	3 <code>\psFormatInt[intSeparator=.]{1234567}\</code>
1-234-567	4 <code>\psFormatInt[intSeparator=\$\color{blue}{\cdot}\$]{1234567}\</code>
965,432	5 <code>\def\temp{965432}</code>
	6 <code>\psFormatInt{\temp}</code>

With the option `intSeparator` the symbol can be changed to any non-number character.

10 Color

10.1 Transparent colors


Transparency is now part of the main `psstricks` package. But pay attention, the names and syntax changed and you need to run `ps2pdf` with the option `-dCompatibilityLevel=1.4`.

10.2 „Manipulating Transparent colors“

`psstricks-add` simulates transparency with hatch lines:

```
1 \def\defineTColor{\ifnextchar[{\defineTColor@i}{\defineTColor@i[]}}
2 \def\defineTColor@i[#1]#2#3{% transparency "Colors"
3   \newpsstyle{#2}{%
4     fillstyle=vlines,hatchwidth=0.1\pslinewidth,
5     hatchsep=1\pslinewidth,hatchcolor=#3,#1%
6   }%
7 }
8 \defineTColor{TRed}{red}
9 \defineTColor{TGreen}{green}
10 \defineTColor{TBlue}{blue}
```

There are three predefined "transparent" colors TRed, TGreen, TBlue. They are used as `PSTricksstyles` and not as colors:

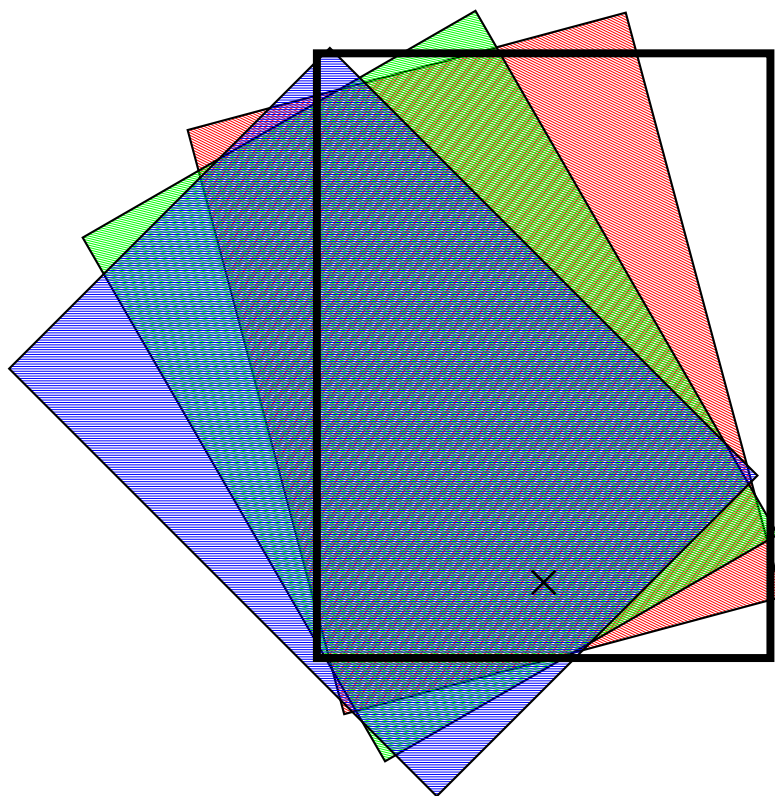

```

1 \begin{pspicture}(-3,-5)(5,5)
2 \psframe(-1,-3)(5,5) % objet de base
3 \psrotate(2,-2){15}{%
4   \psframe[style=TRed](-1,-3)(5,5)}
5 \psrotate(2,-2){30}{%
6   \psframe[style=TGreen](-1,-3)(5,5)}
7 \psrotate(2,-2){45}{%
8   \psframe[style=TBlue](-1,-3)(5,5)}
9 \psframe[linewidth=3pt](-1,-3)(5,5)
10 \psdots[dotstyle=+,dotangle=45,dotscale=3](2,-2) % centre de la rotation
11 \end{pspicture}


```

10.3 Calculated colors

The xcolor package (version 2.6) has a new feature for defining colors:

```
\definecolor[ps]{<name>}{<model>}{< PS code >}
```


model can be one of the color models, which PostScript will understand, e.g. rgb. With this definition the color is calculated on PostScript side.

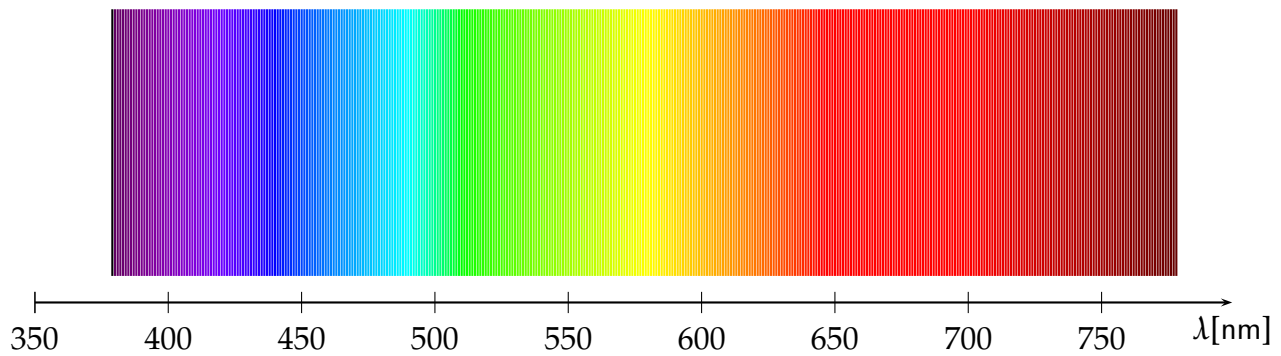

```

1 \definecolor[ps]{bl}{rgb}{tx@addDict begin Red Green Blue end}%
2 \psset{unit=1bp}
3 \begin{pspicture}(0,-30)(400,100)
4 \multido{\iLAMBDA=0+1}{400}{%
5   \pstVerb{
6     \iLAMBDA\space 379 add dup /lambda exch def
7     tx@addDict begin wavelengthToRGB end
8   }%
9   \psline[linecolor=bl](\iLAMBDA,0)(\iLAMBDA,100)%
10 }
11 \psaxes[yAxis=false,Ox=350,dx=50bp,Dx=50]{->}{-29,-10}(420,100)
12 \uput[-90](420,-10){$\lambda$[\textsf{nm}]}
13 \end{pspicture}

```

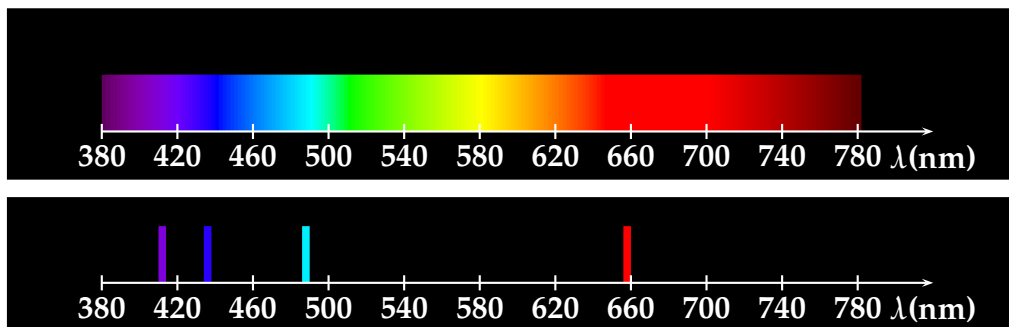

Spectrum of hydrogen emission (Manuel Luque)

```

1 \newcommand{\Touch}{%
2 \psframe[linestyle=none,fillstyle=solid,fillcolor=bl,dimen=middle](0.1,0.75)}
3 \definecolor[ps]{bl}{rgb}{tx@addDict begin Red Green Blue end}%
4 % Echelle 1cm <-> 40 nm
5 % 1 nm <-> 0.025 cm
6 \psframebox[fillstyle=solid,fillcolor=black]{%
7 \begin{pspicture}(-1,-0.5)(12,1.5)
8 \multido{\iLAMBDA=380+2}{200}{%
9   \pstVerb{
10    /lambda \iLAMBDA\space def
11    lambda
12    tx@addDict begin wavelengthToRGB end
13  }%
14  \rput(! lambda 0.025 mul 9.5 sub 0){\Touch}
15 }

```

```

16 \multido{\n=0+1,\iDiv=380+40}{11}{%
17   \psline[linecolor=white](\n,0.1)(\n,-0.1)
18   \uput[270](\n,0){\textbf{\white\iDiv}}
19   \psline[linecolor=white]{->}(11,0)
20   \uput[270](11,0){\textbf{\white$\lambda$(nm)}}
21 \end{pspicture}}
22
23 \psframebox[fillstyle=solid,fillcolor=black]{%
24 \begin{pspicture}(-1,-0.5)(12,1)
25   \pstVerb{
26     /lambda 656 def
27     lambda
28     tx@addDict begin wavelengthToRGB end
29   }%
30   \rput(! 656 0.025 mul 9.5 sub 0){\Touch}
31   \pstVerb{
32     /lambda 486 def
33     lambda
34     tx@addDict begin wavelengthToRGB end
35   }%
36   \rput(! 486 0.025 mul 9.5 sub 0){\Touch}
37   \pstVerb{
38     /lambda 434 def
39     lambda
40     tx@addDict begin wavelengthToRGB end
41   }%
42   \rput(! 434 0.025 mul 9.5 sub 0){\Touch}
43   \pstVerb{
44     /lambda 410 def
45     lambda
46     tx@addDict begin wavelengthToRGB end
47   }%
48   \rput(! 410 0.025 mul 9.5 sub 0){\Touch}
49 \multido{\n=0+1,\iDiv=380+40}{11}{%
50   \psline[linecolor=white](\n,0.1)(\n,-0.1)
51   \uput[270](\n,0){\textbf{\white\iDiv}}
52   \psline[linecolor=white]{->}(11,0)
53   \uput[270](11,0){\textbf{\white$\lambda$(nm)}}
54 \end{pspicture}}
55
56 Spectrum of hydrogen emission (Manuel Luque)

```


10.4 Gouraud shading

Gouraud shading is a method used in computer graphics to simulate the differing effects of light and colour across the surface of an object. In practice, Gouraud shading is used to achieve smooth lighting on low-polygon surfaces without the heavy computational requirements of calculating lighting for each pixel. The technique was first presented by Henri Gouraud in 1971.


<http://www.wikipedia.org>

PostScript level 3 supports this kind of shading and it could only be seen with Acroread 7 or younger. Die Syntax is easy:


```
\psGTriangle(x1,y1)(x2,y2)(x3,y3){color1}{color2}{color3}
```

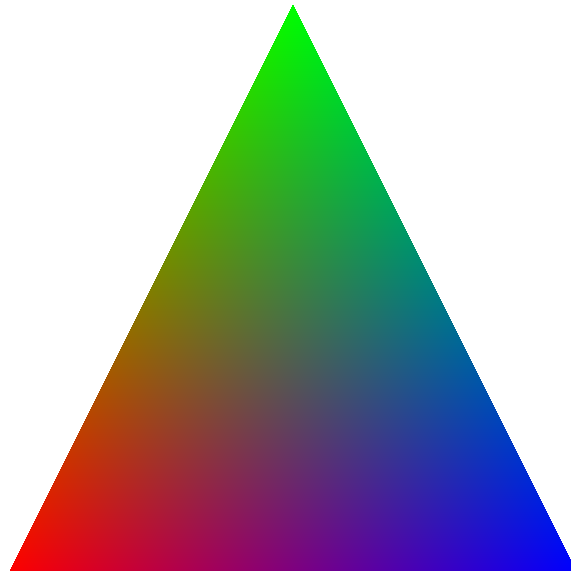

```
1 \begin{pspicture}(0,-.25)(10,10)  
2   \psGTriangle(0,0)(5,10)(10,0){red}{green}{blue}  
3 \end{pspicture}
```

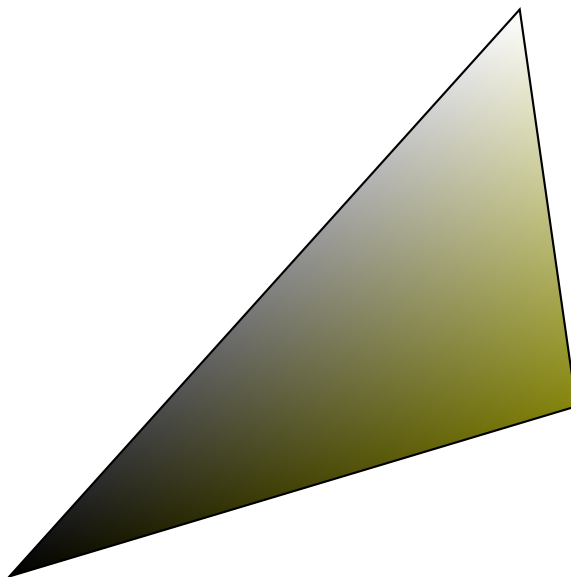


```
1 \begin{pspicture}(0,-.25)(10,10)  
2   \psGTriangle*(0,0)(9,10)(10,3){black}{white!50}{red!50!green!95}  
3 \end{pspicture}
```

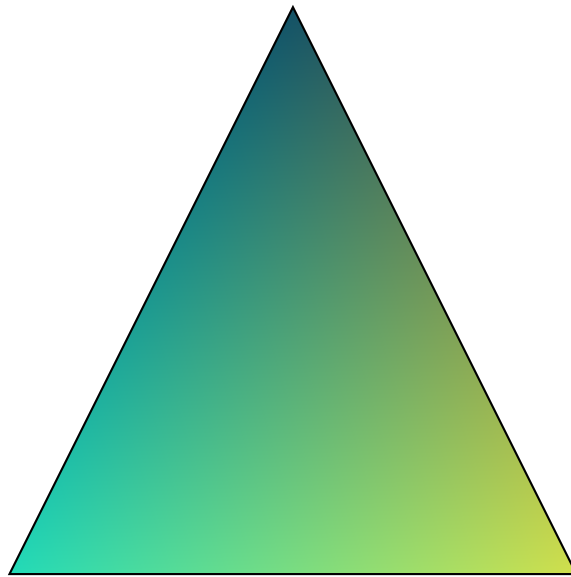

```

1 \begin{pspicture}(0,-.25)(10,10)
2   \psGTriangle*(0,0)(5,10)(10,0){-red!100!green!84!blue!86}
3                                     {-red!80!green!100!blue!40}
4                                     {-red!60!green!30!blue!100}
5 \end{pspicture}

```

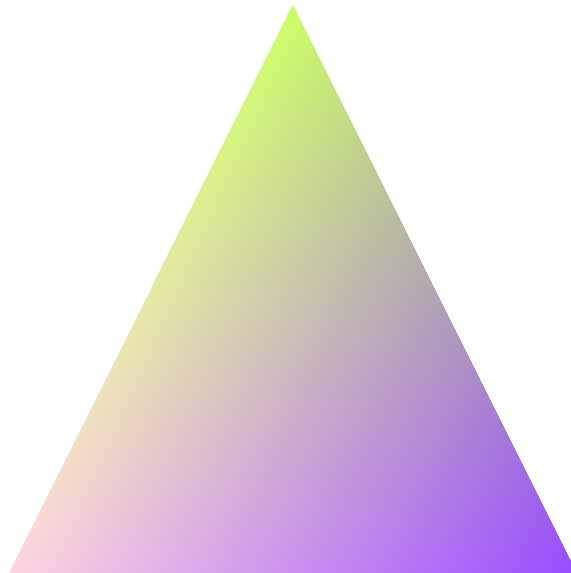

```

1 \definecolor{rose}{rgb}{1.00, 0.84, 0.88}
2 \definecolor{vertpommepasmure}{rgb}{0.80, 1.0, 0.40}
3 \definecolor{fushia}{rgb}{0.60, 0.30, 1.0}
4 \begin{pspicture}(0,-.25)(10,10)
5   \psGTriangle(0,0)(5,10)(10,0){rose}{vertpommepasmure}{fushia}
6 \end{pspicture}


```

Part II

pst-node

11 Relative nodes with \psGetNodeCenter

The command `\psGetNodeCenter{node}` makes only sense on PostScript level, it defines the two variables `node.x` and `node.y` which can be used to define relative nodes. The following example defines the node `MyNode` and a second one relative to the first one, with 4 units left and 4 units up. `node` must be an existing node name.




```
\begin{pspicture}[showgrid=true,arrowscale=2](5,5)
\pnode(4.5,0.5){MyNode}
\psdot(MyNode)
\pnode(! \psGetNodeCenter{MyNode}
MyNode.x 4 sub MyNode.y 4 add){MySecondNode}
\psdot(MySecondNode)
\ncline[linecolor=red]{<->}{MyNode}{MySecondNode}
\end{pspicture}
```

12 \ncdiag and \pcdiag

With the new option `lineAngle` the lines drawn by the `ncdiag` macro can now have a specified gradient. Without this option one has to define the two arms (which maybe zero) and `PSTricks` draws the connection between them. Now there is only a static `armA`, the second one `armB` is calculated when an angle `lineAngle` is defined. This angle is the gradient of the intermediate line between the two arms. The syntax of `ncdiag` is

```
\ncdiag[<options>]{<Node A>}{<Node B>}
\pcdiag[<options>](<Node A>)(<Node B>)
```

name	meaning
lineAngle	angle of the intermediate line segment. Default is 0, which is the same than using <code>ncdiag</code> without the <code>lineAngle</code> option.

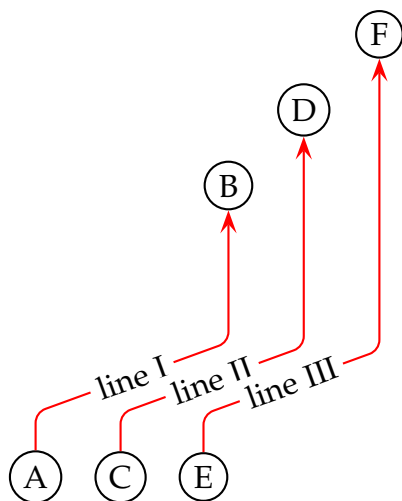


```

1 \begin{pspicture}(5,6)
2   \circnode{A}{A}\quad\circnode{C}{C}%
3   \quad\circnode{E}{E}
4   \rput(0,4){\circnode{B}{B}}
5   \rput(1,5){\circnode{D}{D}}
6   \rput(2,6){\circnode{F}{F}}
7   \psset{arrowscale=2,lineararc=0.2,%
8     linecolor=red,armA=0.5, angleA=90,angleB=-90}
9   \ncdiag[lineAngle=20]{->}{A}{B}
10  \ncput*[nrot=:U]{line I}
11  \ncdiag[lineAngle=20]{->}{C}{D}
12  \ncput*[nrot=:U]{line II}
13  \ncdiag[lineAngle=20]{->}{E}{F}
14  \ncput*[nrot=:U]{line III}
15 \end{pspicture}

```


The `ncdiag` macro sets the `armB` dynamically to the calculated value. Any user setting of `armB` is overwritten by the macro. The `armA` could be set to a zero length:



```

1 \begin{pspicture}(4,3)
2   \rput(0.5,0.5){\circnode{A}{A}}
3   \rput(3.5,3){\circnode{B}{B}}
4   {\psset{linecolor=red,arrows=<-,arrowscale=2}
5     \ncdiag[lineAngle=60,%
6       armA=0,angleA=0,angleB=180]{A}{B}
7     \ncdiag[lineAngle=60,%
8       armA=0,angleA=90,angleB=180]{A}{B}}
9 \end{pspicture}


```



```

1 \begin{pspicture}(4,3)
2   \rput(1,0.5){\circnode{A}{A}}
3   \rput(4,3){\circnode{B}{B}}
4   {\psset{linecolor=red,arrows=<-,arrowscale=2}
5     \ncdiag[lineAngle=60,%
6       armA=0.5,angleA=0,angleB=180]{A}{B}
7     \ncdiag[lineAngle=60,%
8       armA=0,angleA=70,angleB=180]{A}{B}
9     \ncdiag[lineAngle=60,%
10      armA=0.5,angleA=180,angleB=180]{A}{B}}
11 \end{pspicture}

```
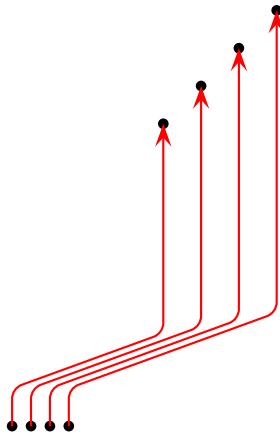
```

1 \begin{pspicture}(4,5.5)
2   \cnode*(0,0){2pt}{A}%
3   \cnode*(0.25,0){2pt}{C}%
4   \cnode*(0.5,0){2pt}{E}%
5   \cnode*(0.75,0){2pt}{G}%
6   \cnode*(2,4){2pt}{B}%
7   \cnode*(2.5,4.5){2pt}{D}%
8   \cnode*(3,5){2pt}{F}%
9   \cnode*(3.5,5.5){2pt}{H}%
10  {\psset{arrowscale=2,lineararc=0.2,%
11    linecolor=red,armA=0.5, angleA=90,angleB=-90}
12  \pcdiag[lineAngle=20]{->}{A}(B)
13  \pcdiag[lineAngle=20]{->}{C}(D)
14  \pcdiag[lineAngle=20]{->}{E}(F)
15  \pcdiag[lineAngle=20]{->}{G}(H)}
16 \end{pspicture}

```


13 \ncdiag and \pcdiag

This is nearly the same than \ncdiag except that armB=0 and the angleB value is computed by the macro, so that the line ends at the node with an angle like a \pcdiag line. The syntax of ncdiag/pcdiag is

```

\ncdiag[<options>]{<Node A>}{<Node B>}
\pcdiag[<options>](<Node A>)(<Node B>)


```

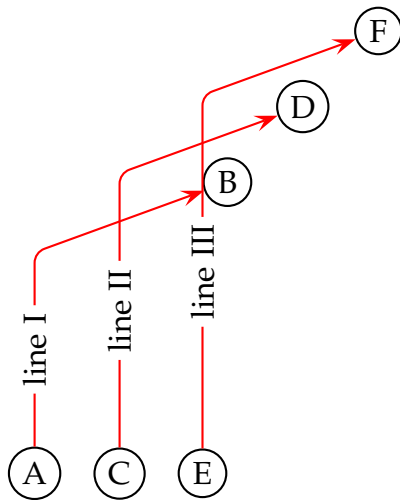

```

1 \begin{pspicture}(4,6)
2   \psset{linecolor=black}
3   \circlenode{A}{A}%
4   \quad\circlenode{C}{C}%
5   \quad\circlenode{E}{E}
6   \rput(0,4){\circlenode{B}{B}}
7   \rput(1,5){\circlenode{D}{D}}
8   \rput(2,6){\circlenode{F}{F}}
9   {\psset{arrowscale=2,lineararc=0.2,linecolor=red,armA=0.5,
10     angleA=90}
11   \ncdiag[lineAngle=-160]{->}{A}{B}
12   \ncput*[nrot=:U]{line I}
13   \ncdiag[lineAngle=-160]{->}{C}{D}
14   \ncput*[nrot=:U]{line II}
15   \ncdiag[lineAngle=-160]{->}{E}{F}
16   \ncput*[nrot=:U]{line III}}
17 \end{pspicture}

```

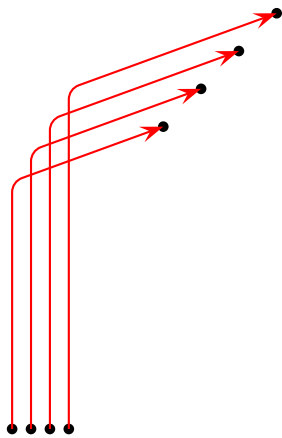


```

1 \begin{pspicture}(4,6)
2   \psset{linecolor=black}
3   \cnode*(0,0){2pt}{A}%
4   \cnode*(0.25,0){2pt}{C}%
5   \cnode*(0.5,0){2pt}{E}%
6   \cnode*(0.75,0){2pt}{G}%
7   \cnode*(2,4){2pt}{B}%
8   \cnode*(2.5,4.5){2pt}{D}%
9   \cnode*(3,5){2pt}{F}%
10  \cnode*(3.5,5.5){2pt}{H}%
11  {\psset{arrowscale=2,lineararc=0.2,linecolor=red,armA=0.5,
12    angleA=90}
13  \pcdiagg[lineAngle=20]{->}(A)(B)
14  \pcdiagg[lineAngle=20]{->}(C)(D)
15  \pcdiagg[lineAngle=20]{->}(E)(F)
16  \pcdiagg[lineAngle=20]{->}(G)(H)}
17 \end{pspicture}

```


The only catch for `\ncdiagg` is, that you need the right value for `lineAngle`. If the node connection is on the wrong side of the second node, then choose the corresponding angle, e.g.: if 20 is wrong then take -160 , the corresponding to 180.



```

1 \begin{pspicture}(4,1.5)
2   \cirlenode{a}{A}
3   \rput[1](3,1){\rnode{b}{H}}
4   \ncdiagg[lineAngle=60,angleA=180,armA=.5,nodesepA=3pt,
5     linecolor=blue]{b}{a}
6 \end{pspicture}


```



```

1 \begin{pspicture}(4,1.5)
2   \cirlenode{a}{A}
3   \rput[1](3,1){\rnode{b}{H}}
4   \ncdiagg[lineAngle=60,armA=.5,nodesepB=3pt,linecolor=blue]{a}{
5     b}
6 \end{pspicture}

```




```

1 \begin{pspicture}(4,1.5)
2   \cirlenode{a}{A}
3   \rput[1](3,1){\rnode{b}{H}}
4   \ncdiagg[lineAngle=-120,armA=.5,nodesepB=3pt,linecolor=blue]{a
5     }{b}
6 \end{pspicture}

```

14 `\ncbarr`


This has the same behaviour as `ncbar`, but has 5 segments and all are horizontal ones. This is the reason why `angleA` must be 0 or alternative 180. All other values are set to 0 by the macro. The intermediate horizontal line is symmetrical to the distance of the two nodes.



```

1 \psset{arrowscale=2}%
2 \circlenode{X}{X}\[1cm]
3 \circlenode{Y}{Y}
4 \ncbarr[angleA=0,arrows=->,arrowscale=2]{X}{Y}


```



```

1 \psset{arrowscale=2}%
2 \ovalnode{X}{Xxxxx}\[1cm]
3 \circlenode{Y}{Yyyy}
4 \ncbarr[angleA=180,arrows=->,arrowscale=2,linecolor=red]{X}{Y}

```



```

1 \psset{arrowscale=2}%
2 \ovalnode{X}{Xxxxx}\[1cm]
3 \circlenode{Y}{Yyyy}
4 \ncbarr[angleA=20,arm=1cm,arrows=->,arrowscale=2]{X}{Y}

```

15 \psRelNode and \psDefPSPNodes

With these macros it is possible to put a node relative to a given line or given pspicture-environment. In the frist case the parameters are the angle and the length factor:


```

\psRelNode(<P0>)(<P1>){<length factor>}{<end node name>}
\psRelLine[<options>](<P0>)(<P1>){<length factor>}{<end node name>}

```

The length factor depends to the distance of $\overline{P_0P_1}$ and the end node name must be a valid nodename and shouldn't contain any of the special PostScript characters. There are two valid options:

name	default	meaning
angle	0	angle between the given line P_0P_1 and the new one $P_0P_{endNode}$
trueAngle	false	defines whether the angle depends to the seen line or to the mathematical one, which respect the scaling factors xunit and yunit.

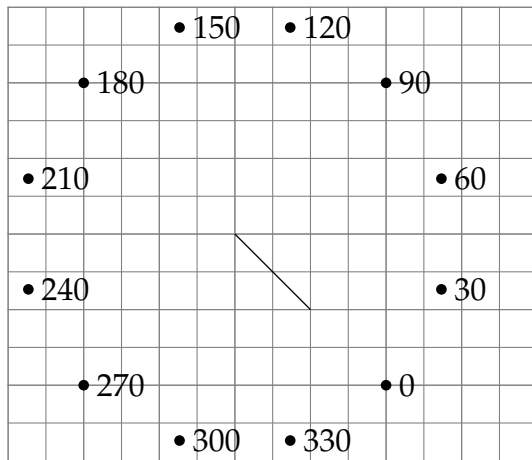


```

\begin{pspicture}(7,6)
  \psgrid[gridwidth=0pt,gridcolor=gray,
    gridlabels=0pt,subgriddiv=2]
  \pnode(3,3){A}\pnode(4,2){B}
  \psline[nodesep=-3,linewidth=0.5pt](A)(B)
  \multido{\iA=0+30}{12}{%
    \psRelNode[angle=\iA](A)(B){2}{C}%
    \qdisk(C){2pt}
    \uput[0](C){\iA}}
\end{pspicture}

```

In the second case the new macro `\psDefPSPNodes` defines nine nodes that corresponds to nine particular points (namely bottom left, bottom center, bottom right, center left, center center, center right, top left, top center, top right) of the `pspicture` box.

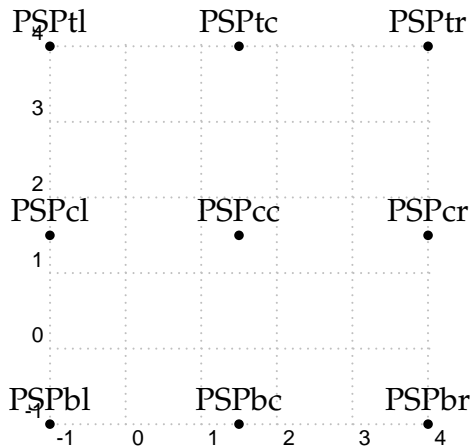

```

\begin{pspicture}[showgrid=true](-1,-1)(4,4)
  \psDefPSPNodes
  \psdots(PSPbl)(PSPbc)(PSPbr)
    (PSPcl)(PSPcc)(PSPcr)(PSPtl)(PSPtc)(PSPtr)
  \uput[90](PSPbl){PSPbl} \uput[90](PSPbc){PSPbc}
  \uput[90](PSPbr){PSPbr} \uput[90](PSPcl){PSPcl}
  \uput[90](PSPcc){PSPcc} \uput[90](PSPcr){PSPcr}
  \uput[90](PSPtl){PSPtl} \uput[90](PSPtc){PSPtc}
  \uput[90](PSPtr){PSPtr}
\end{pspicture}

```

The name of the nodes are predefined as:

```

\psset[pst-PSPNodes]{blName=PSPbl,bcName=PSPbc,brName=PSPbr,
  clName=PSPcl,ccName=PSPcc,crName=PSPcr,tlName=PSPtl,tcName=PSPtc,trName=PSPtr}

```

and can be modified in the same way.

16 \psRelLine

With this macro it is possible to plot lines relative to a given one. Parameter are the angle and the length factor:


```

\psRelLine(<P0>)(<P1>){<length factor>}{<end node name>}
\psRelLine{<arrows>}(<P0>)(<P1>){<length factor>}{<end node name>}
\psRelLine[<options>](<P0>)(<P1>){<length factor>}{<end node name>}
\psRelLine[<options>]{<arrows>}(<P0>)(<P1>){<length factor>}{<end node name>}

```

The length factor depends to the distance of $\overline{P_0P_1}$ and the end node name must be a valid nodename and shouldn't contain any of the special PostScript characters. There are two valid options which are described in the forgoing section for `\psRelNode`.


The following two figures show the same, the first one with a scaling different to 1 : 1, this is the reason why the end points are on an ellipse and not on a circle like in the second figure.

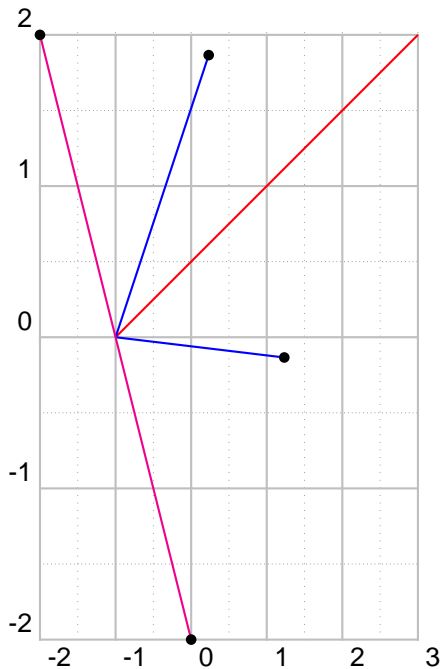

```

1 \psset{yunit=2,xunit=1}
2 \begin{pspicture}(-2,-2)(3,2)
3 \psgrid[subgriddiv=2,subgriddots=10,gridcolor=lightgray]
4 \pnode(-1,0){A}\pnode(3,2){B}
5 \psline[linecolor=red](A)(B)
6 \psRelLine[linecolor=blue,angle=30](-1,0)(B){0.5}{EndNode}
7 \qdisk(EndNode){2pt}
8 \psRelLine[linecolor=blue,angle=-30](A)(B){0.5}{EndNode}
9 \qdisk(EndNode){2pt}
10 \psRelLine[linecolor=magenta,angle=90](-1,0)(3,2){0.5}{
    EndNode}
11 \qdisk(EndNode){2pt}
12 \psRelLine[linecolor=magenta,angle=-90](A)(B){0.5}{EndNode
    }
13 \qdisk(EndNode){2pt}
14 \end{pspicture}

```

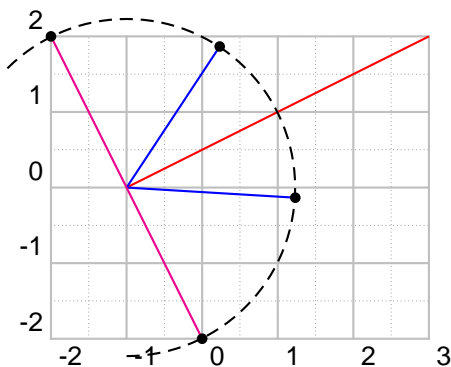


```

1 \begin{pspicture}(-2,-2)(3,2)
2 \psgrid[subgriddiv=2,subgriddots=10,gridcolor=lightgray]
3 \pnode(-1,0){A}\pnode(3,2){B}
4 \psline[linecolor=red](A)(B)
5 \psarc[linestyle=dashed](A){2.23}{-90}{135}
6 \psRelLine[linecolor=blue,angle=30](-1,0)(B){0.5}{EndNode}
7 \qdisk(EndNode){2pt}
8 \psRelLine[linecolor=blue,angle=-30](A)(B){0.5}{EndNode}
9 \qdisk(EndNode){2pt}
10 \psRelLine[linecolor=magenta,angle=90](-1,0)(3,2){0.5}{
    EndNode}
11 \qdisk(EndNode){2pt}
12 \psRelLine[linecolor=magenta,angle=-90](A)(B){0.5}{EndNode
    }
13 \qdisk(EndNode){2pt}
14 \end{pspicture}

```

The following figure has also a different scaling, but has set the option `trueAngle`, all angles depends to what "you see".

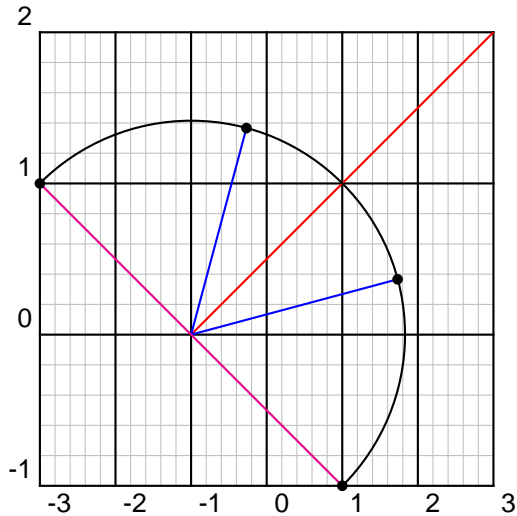


```

1 \psset{yunit=2,xunit=1}
2 \begin{pspicture}(-3,-1)(3,2)\psgrid[subgridcolor=
   lightgray]
3 \pnode(-1,0){A}\pnode(3,2){B}
4 \psline[linecolor=red](A)(B)
5 \psarc(A){2.83}{-45}{135}
6 \psRelLine[linecolor=blue,angle=30,trueAngle](A)(B)
   {0.5}{EndNode}
7 \qdisk(EndNode){2pt}
8 \psRelLine[linecolor=blue,angle=-30,trueAngle](A)(
   B){0.5}{EndNode}
9 \qdisk(EndNode){2pt}
10 \psRelLine[linecolor=magenta,angle=90,trueAngle](A
   )(B){0.5}{EndNode}
11 \qdisk(EndNode){2pt}
12 \psRelLine[linecolor=magenta,angle=-90,trueAngle](
   A)(B){0.5}{EndNode}
13 \qdisk(EndNode){2pt}
14 \end{pspicture}

```


Two examples with using `\multido` to show the behaviour of the options `trueAngle` and `angle`.

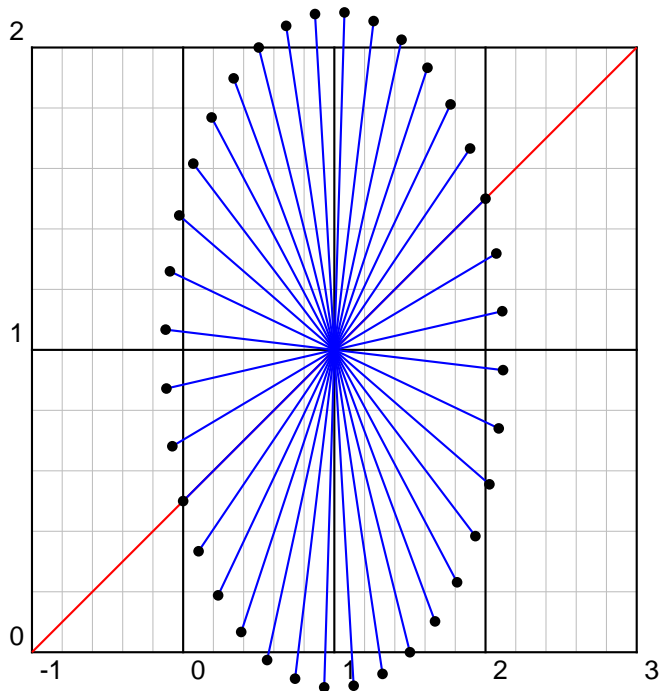

```

1 \psset{yunit=4,xunit=2}
2 \begin{pspicture}(-1,0)(3,2)\psgrid[
   subgridcolor=lightgray]
3 \pnode(-1,0){A}\pnode(1,1){B}
4 \psline[linecolor=red](A)(3,2)
5 \multido{\iA=0+10}{36}{%
6   \psRelLine[linecolor=blue,angle=\iA](B)(
   A){-0.5}{EndNode}
7   \qdisk(EndNode){2pt}
8 }
9 \end{pspicture}


```

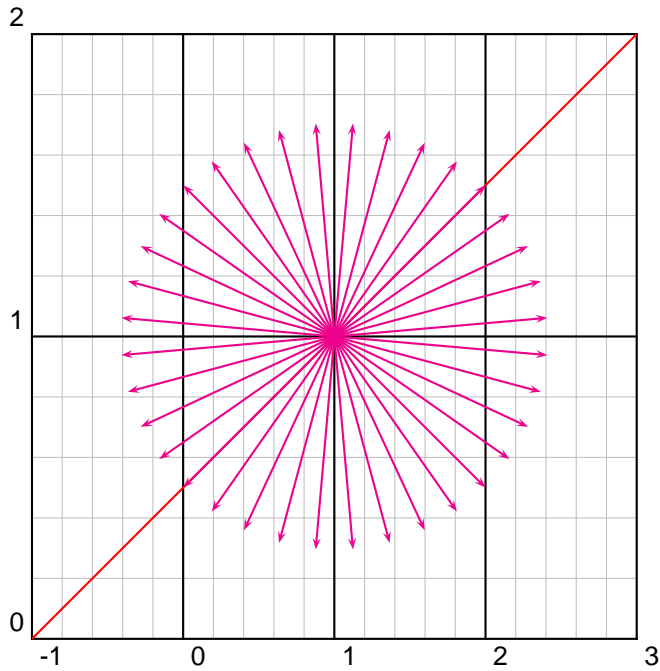

```

\psset{yunit=4,xunit=2}
\begin{pspicture}(-1,0)(3,2)\psgrid[
  subgridcolor=lightgray]
\pnode(-1,0){A}\pnode(1,1){B}
\psline[linecolor=red](A)(3,2)
\multido{\iA=0+10}{36}{%
  \psRelLine[linecolor=magenta,angle=\iA,
    trueAngle]{->}(B)(A){-0.5}{EndNode}
}
\end{pspicture}

```

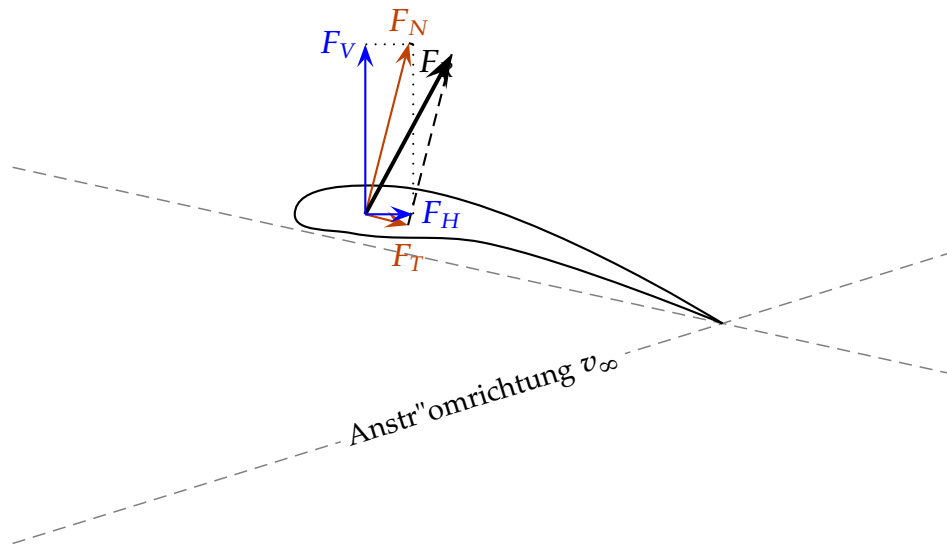

```

1 \psset{xunit=0.75\linewidth,yunit=0.75\linewidth,trueAngle}%
2 \end{center}
3 \begin{pspicture}(1,0.6)\psgrid
4   \pnode(.3,.35){Vk} \pnode(.375,.35){D} \pnode(0,.4){DST1} \pnode(1,.18){DST2}
5   \pnode(0,.1){A1} \pnode(1,.31){A1}
6   { \psset{linewidth=.02,linestyle=dashed,linecolor=gray}%
7     \pcline(DST1)(DST2) % <- Druckseitentangente
8     \pcline(A2)(A1) % <- Anstr"omrichtung
9     \lput*{:U}{\small Anstr"omrichtung  $v_{\infty}$ } }%
10  \psIntersectionPoint(A1)(A2)(DST1)(DST2){Hk}
11  \pscurve(Hk)(.4,.38)(Vk)(.36,.33)(.5,.32)(Hk)
12  \psParallelLine[linecolor=red!75!green,arrows=->,arrowscale=2](Vk)(Hk)(D){.1}{FtE}
13  \psRelLine[linecolor=red!75!green,arrows=->,arrowscale=2,angle=90](D)(FtE){4}{Fn}%
    why "4"?

```

```

14 \psParallelLine[linestyle=dashed](D)(FtE)(Fn){.1}{Fnr1}
15 \psRelLine[linestyle=dashed,angle=90](FtE)(D){-4}{Fnr2} % why "-4"?
16 \psline[linewidth=1.5pt,arrows=>,arrowscale=2](D)(Fnr2)
17 \psIntersectionPoint(D)([nodesep=2]D)(Fnr1)([offset=-4]Fnr1){Fh}
18 \psIntersectionPoint(D)([offset=2]D)(Fnr1)([nodesep=4]Fnr1){Fv}
19 \psline[linecolor=blue,arrows=>,arrowscale=2](D)(Fh)
20 \psline[linecolor=blue,arrows=>,arrowscale=2](D)(Fv)
21 \psline[linestyle=dotted](Fh)(Fnr1) \psline[linestyle=dotted](Fv)(Fnr1)
22 \uput{.1}[0](Fh){\blue $F_{\text{H}}$} \uput{.1}[180](Fv){\blue $F_{\text{V}}$}
23 \uput{.1}[-45](Fnr1){$F_{\text{R}}$} \uput{.1}[90](Fn){\color{red!75!green}$F_{\text{N}}$}
24 \uput{.25}[-90](FtE){\color{red!75!green}$F_{\text{T}}$}
25 \end{pspicture}

```

17 \psParallelLine


With this macro it is possible to plot lines relative to a given one, which is parallel. There is no special parameter here.

```

\psParallelLine(<P0>)(<P1>)(<P2>){<length>}{<end node name>}
\psParallelLine{<arrows>}(P0>)(P1>)(P2>){<length>}{<end node name>}
\psParallelLine[<options>](P0>)(P1>)(P2>){<length>}{<end node name>}
\psParallelLine[<options>]{<arrows>}(P0>)(P1>)(P2>){<length>}{<end node name>}

```


The line starts at P_2 , is parallel to $\overline{P_0P_1}$ and the length of this parallel line depends to the length factor. The end node name must be a valid nodename and shouldn't contain any of the special PostScript characters.

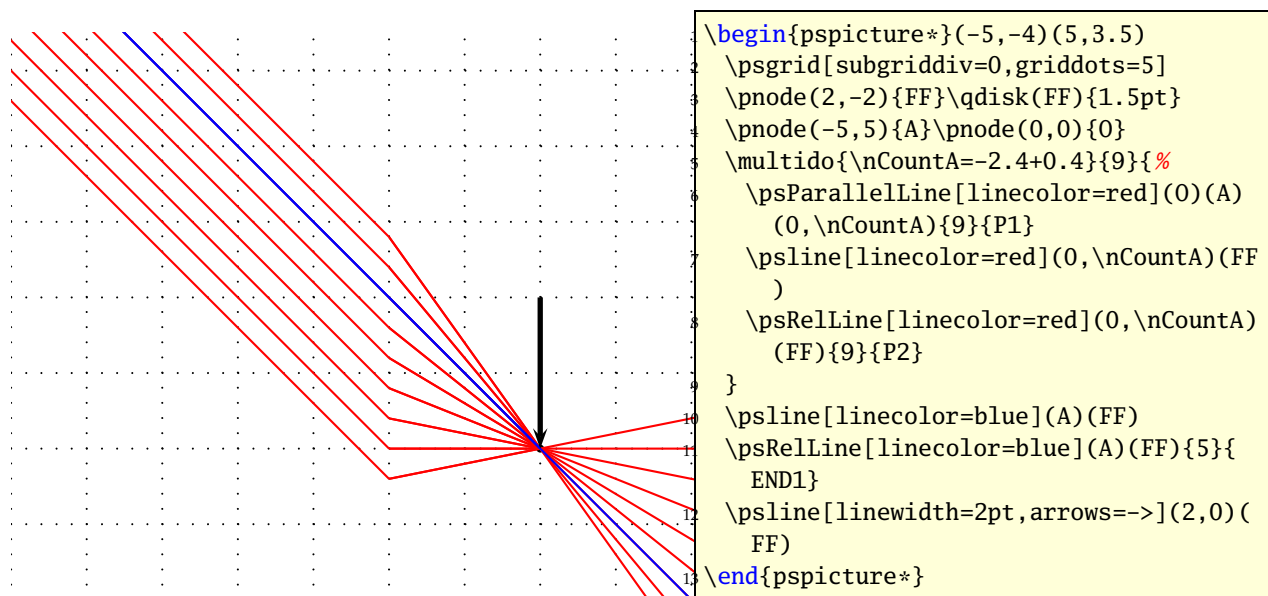

18 `\psIntersectionPoint`

This macro calculates the intersection point of two lines, given by the four coordinates. There is no special parameter here.

```
\psIntersectionPoint(<P0>)(<P1>)(<P2>)(<P3>){<node name>}
```

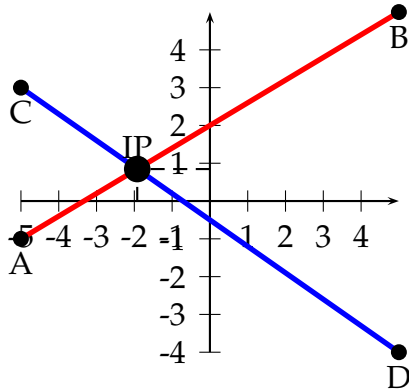

```


1 \psset{unit=0.5cm}
2 \begin{pspicture}(-5,-4)(5,5)
3   \psaxes{>}(0,0)(-5,-4)(5,5)
4   \psline[linecolor=red,linewidth=2pt](-5,-1)(5,5)
5   \psline[linecolor=blue,linewidth=2pt](-5,3)(5,-4)
6   \qdisk(-5,-1){3pt}\uput[-90](-5,-1){A}
7   \qdisk(5,5){3pt}\uput[-90](5,5){B}
8   \qdisk(-5,3){3pt}\uput[-90](-5,3){C}
9   \qdisk(5,-4){3pt}\uput[-90](5,-4){D}
10  \psIntersectionPoint(-5,-1)(5,5)(-5,3)(5,-4){IP}
11  \qdisk(IP){5pt}\uput{0.3}[90](IP){IP}
12  \psline[linestyle=dashed](IP|0,0)(IP)(0,0|IP)
13 \end{pspicture}

```

19 `\psLNode` and `\psLCNode`

`\psLNode` interpolates the Line \overline{AB} by the given value and sets a node at this point. The syntax is


```
\psLNode(P1)(P2){value}{Node name}
```

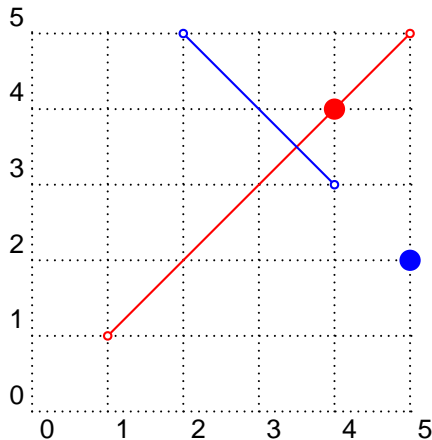

```
\begin{pspicture}(5,5)
\psgrid[subgriddiv=0,griddots=10]
\psset{linecolor=red}
\psline{o-o}(1,1)(5,5)
\psLNode(1,1)(5,5){0.75}{PI}
\qdisk(PI){4pt}
\psset{linecolor=blue}
\psline{o-o}(4,3)(2,5)
\psLNode(4,3)(2,5){-0.5}{PII}
\qdisk(PII){4pt}
\end{pspicture}
```

The `\psLCNode` macro builds the linear combination of the two given vectors and stores the end of the new vector as a node. All vectors start at (0,0), so a `\rput` maybe appropriate. The syntax is

```
\psLCNode(P1){value 1}(P2){value 2}{Node name}
```

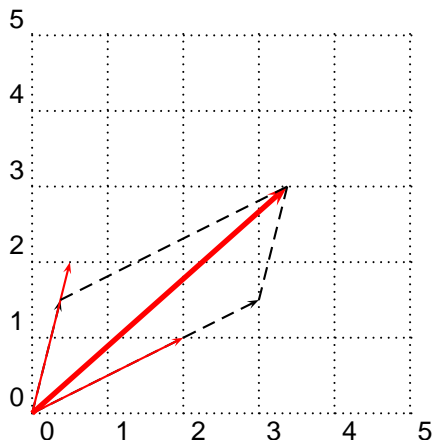


```
\begin{pspicture}(5,5)
\psgrid[subgriddiv=0,griddots=10]
\psset{linecolor=black}
\psline[linestyle=dashed]{->}(3,1.5)
\psline[linestyle=dashed]{->}(0.375,1.5)
\psset{linecolor=red}
\psline{->}(2,1)\psline{->}(0.5,2)
\psLCNode(2,1){1.5}(0.5,2){0.75}{PI}
\psline[linewidth=2pt]{->}(PI)
\psset{linecolor=black}
\psline[linestyle=dashed](3,1.5)(PI)
\psline[linestyle=dashed](0.375,1.5)(PI)
\end{pspicture}
```

20 \nlput and \psLDNode

\ncput allows to set a label relative to the first node of the last node connection. With \nlput this can be done absolute to a given node. The syntax is different to the other node connection makros. It uses internally the macro \psLDNode which places a node absolute to two given points, starting from the first one.

```
\nlput[options](A)(B){distance}{text}  
\psLDNode[options](A)(B){distance}{node name}
```

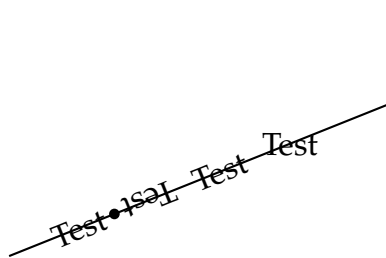

```
1 \begin{pspicture}(5,2)  
2 \pnode(0,0){A}  
3 \pnode(5,2){B}  
4 \ncline{A}{B}  
5 \psLDNode(A)(B){1.5cm}{KN}\qdisk(KN){2pt}  
6 \nlput[nrot=:U](A)(B){1cm}{Test}  
7 \nlput[nrot=:D](A)(B){2cm}{Test}  
8 \nlput[nrot=:U](A)(B){3cm}{Test}  
9 \nlput(A)(B){4cm}{Test}  
10 \end{pspicture}
```

Part III

pst-plot

21 New options

The axes macro has now two additional optional arguments for placing labels at the end of the axes:

```
\psaxes[settings]{arrows}(x0,y0)(x1,y1)(x2,y2)[Xlabel,Xangle][Ylabel,Yangle]
```

It has now four optional arguments, one for the setting, one for the arrows, one for the x-label and one for the y-label. If you want only a y-label, then leave the x one empty. A missing y label is possible. The following examples show how it can be used.

The option `tickstyle=full|top|bottom` is no more working in the `pstricks-add` package, because everything can be set by the `ticksize` option. When using the `comma` or `trigLabels` option, the macros `\pslabel` and `\psvlabel` shouldn't be redefined, because the package does it itself in these cases.

Table 2: All new parameters for pst-plot





Name	Type	Default
labelFontSize	<fontsize macro>	{}
algebraic	false true	false
comma	false true	false
xAxis	false true	true
yAxis	false true	true
xyAxes	false true	true
xDecimals	<number> or empty	{}
yDecimals	<number> or empty	{}
xyDecimals	<number> or empty	{}
ticks	<all x y none>	all
labels	<all x y none>	all
subticks	<number>	0
xsubticks	<number>	0
ysubticks	<number>	0
ticksize	<length [length]>	-4pt 4pt
subticksize	<number>	0.75
tickwidth	<length>	0.5\pslinewidth
subtickwidth	<length>	0.25\pslinewidth
tickcolor	<color>	black
xtickcolor	<color>	black
ytickcolor	<color>	black
subtickcolor	<color>	darkgray

Name	Type	Default
xsubtickcolor	<color>	darkgray
ysubtickcolor	<color>	darkgray
ticklinestyle	solid dashed dotted none	solid
subticklinestyle	solid dashed dotted none	solid
xlabelFactor	<anything>	{\ empty}
ylabelFactor	<anything>	{\ empty}
xlogBase	<number> or empty	{}
ylogBase	<number> or empty	{}
xylogBase	<number> or empty	{}
logLines	<none x y all>	none
ignoreLines	<number>	0
nStep	<number>	1
nStart	<number>	0
nEnd	<number> or empty	{}
xStep	<number>	0
yStep	<number>	0
xStart	<number> or empty	{}
yStart	<number> or empty	{}
xEnd	<number> or empty	{}
yEnd	<number> or empty	{}
plotNo	<number>	1
plotNoMax	<number>	1
xAxisLabel	<anything>	{\ empty}
yAxisLabel	<anything>	{\ empty}
xAxisLabelPos	<(x,y)> or empty	{\ empty}
yAxisLabelPos	<(x,y)> or empty	{\ empty}
llx	<length>	0pt
lly	<length>	0pt
urx	<length>	0pt
ury	<length>	0pt
polarplot	false true	false
trigLabels	false true	false
trigLabelBase	<number>	0
ChangeOrder	false true	false

21.1 Changing the label font size with `labelFontSize`

This option sets the horizontal **and** vertical font size for the labels. It will be overwritten when another package or a user defines

```
\def\pshlabel#1{...}
\def\psvlabel#1{...}
```

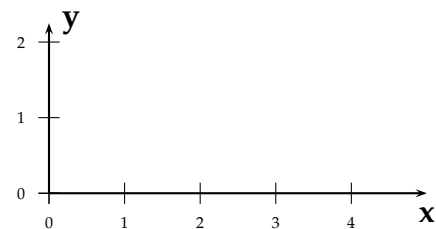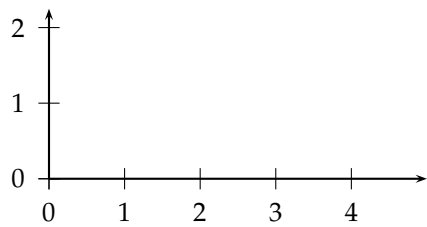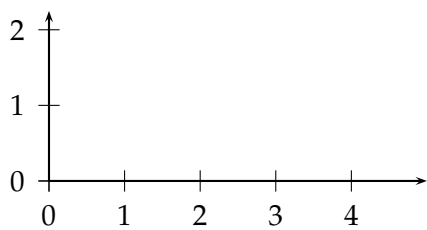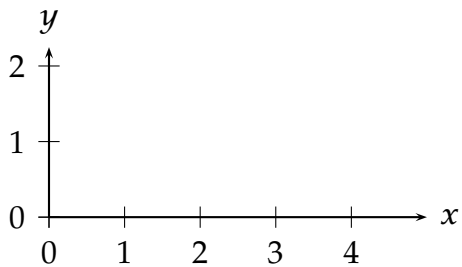

```
1 \begin{pspicture}(-0.25,-0.25)(5,2.25)
2 \psaxes{->}(5,2.25)[$x$,0][$y$,90]
3 \end{pspicture}\\[20pt]
4 \begin{pspicture}(-0.25,-0.25)(5,2.25)
5 \psaxes[labelFontSize=\small]{->}(5,2.25)
6 \end{pspicture}\\[20pt]
7 \begin{pspicture}(-0.25,-0.25)(5,2.25)
8 \psaxes[labelFontSize=\footnotesize]{->}(5,2.25)
9 \end{pspicture}\\[20pt]
10 \begin{pspicture}(-0.25,-0.25)(5,2.25)
11 \psaxes[labelFontSize=\tiny]{->}(5,2.25)[\textbf{x}
12 \end{pspicture}%
```

21.2 algebraic¹

By default the function of `\psplot` has to be described in Reversed Polish Notation. The option `algebraic` allows to do this in the common algebraic notation. E.g.:

RPN	algebraic
<code>x ln</code>	<code>ln(x)</code>
<code>x cos 2.71 x neg 10 div exp mul</code>	<code>cos(x)*2.71^(-x/10)</code>
<code>1 x div cos 4 mul</code>	<code>4*cos(1/x)</code>
<code>t cos t sin</code>	<code>cos(t) sin(t)</code>


Setting the option `algebraic` to true, allow the user to describe all expression to be written in the classical algebraic notation (infix notation). The four arithmetic operations are obviously defined `+-*/`, and also the exponential operator `^`. The natural priorities are used : $3 + 4 \times 5^5 = 3 + (4 \times (5^5))$, and by default the computation is done from left to right. The following functions are defined :

<code>sin, cos, tan, acos, asin</code>	in radians
<code>log, ln</code>	
<code>ceiling, floor, truncate, round</code>	
<code>sqrt</code>	square root
<code>abs</code>	absolute value
<code>fact</code>	for the factorial
<code>Sum</code>	for building sums
<code>IfTE</code>	for an easy case structure

These options can be used with **all** plot macros.


Using the option `algebraic` implies that all angles have to be used in the radian unit!

For the `\parametricplot` the two parts must be divided by the `|` character:



```
\begin{pspicture}(-0.5,-0.5)(0.5,0.5)
\parametricplot[algebraic,linecolor=red]{-3.14}{3.14}{cos(t)|sin(t)}
\end{pspicture}
```


¹This part is adapted from the package `pst-eqdf`, written by Dominique Rodriguez.

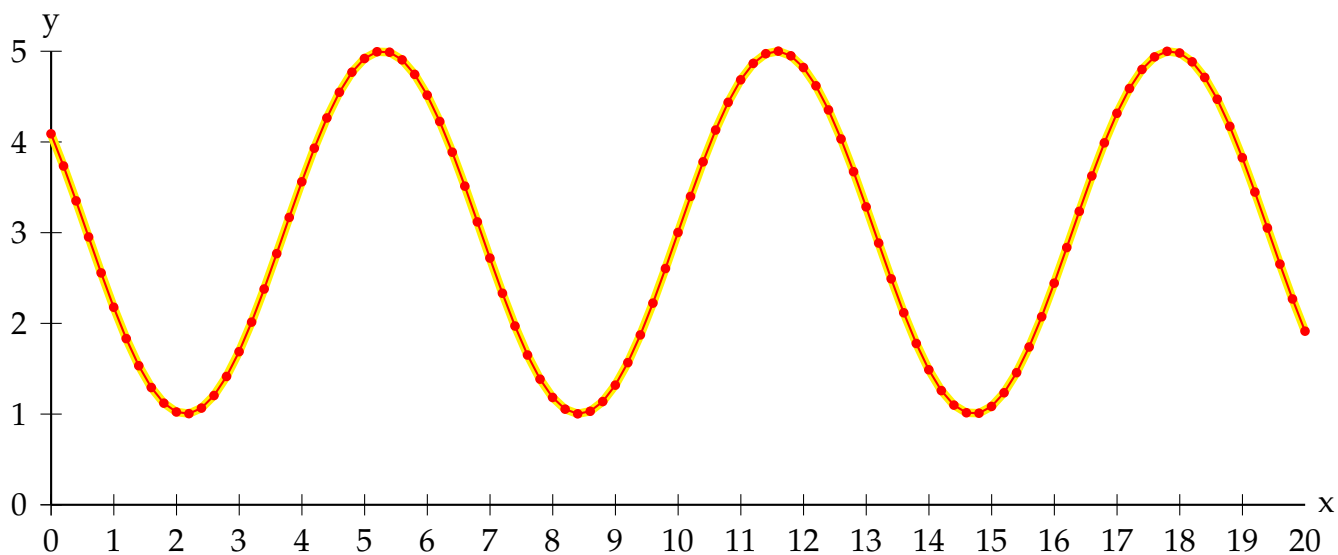

```

1 \psset{lly=-0.5cm}
2 \psgraph(-10,-3)(10,2){\linewidth}{6cm}
3 \psset{algebraic,plotpoints=101}
4 \psplot[linecolor=yellow,linewidth=4\pslinewidth]{-10}{10}{2*sin(x)}%
5 \psplot[linecolor=red,showpoints=true]{-10}{10}{2*sin(x)}
6 \endpsgraph

```

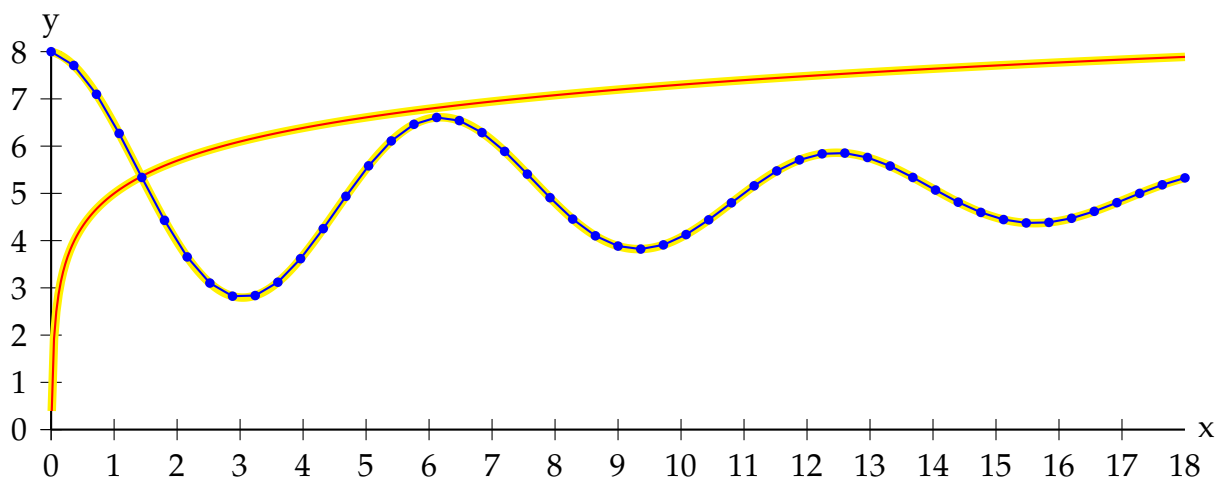

```


1 \psset{lly=-0.5cm}
2 \psgraph(0,-5)(18,3){15cm}{5cm}
3 \psset{algebraic,plotpoints=501}
4 \psplot[linecolor=yellow,linewidth=4\pslinewidth]{0.01}{18}{ln(x)}%
5 \psplot[linecolor=red]{0.01}{18}{ln(x)}
6 \psplot[linecolor=yellow,linewidth=4\pslinewidth]{0}{18}{3*cos(x)*2.71^(-x/10)}
7 \psplot[linecolor=blue,showpoints=true,plotpoints=51]{0}{18}{3*cos(x)*2.71^(-x/10)}
8 \endpsgraph

```


21.2.1 Using the Sum function

Syntax: Sum(<index name>,<start>,<step>,<end>,<function>)

Let's plot the first development of cosine with polynomials: $\sum_{n=0}^{+\infty} \frac{(-1)^n x^{2n}}{n!}$.

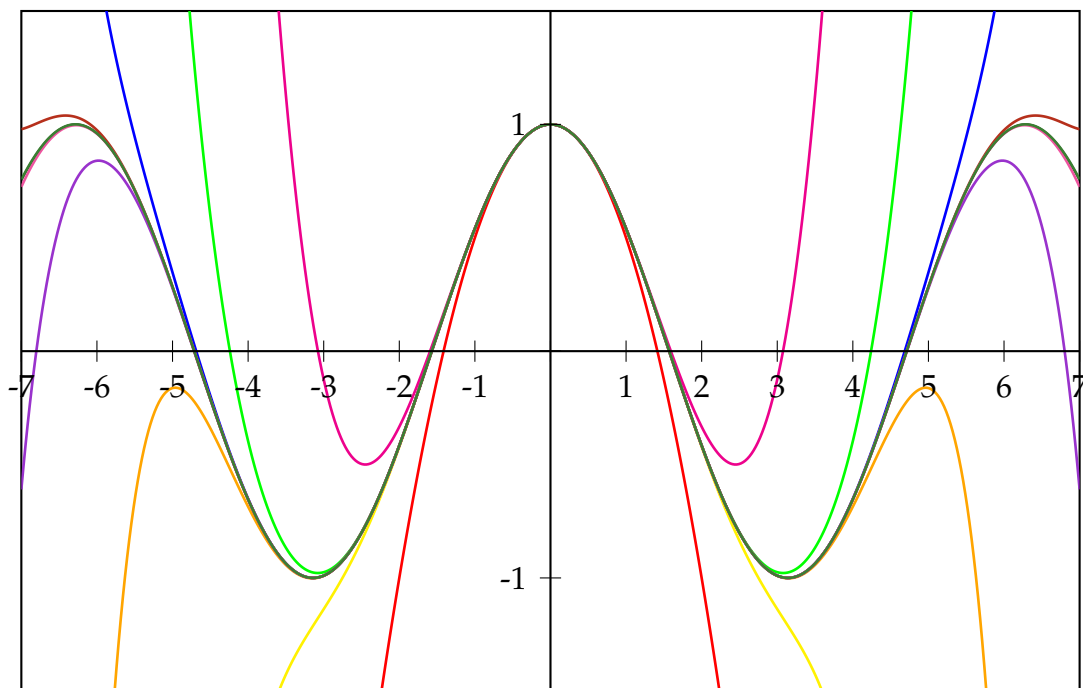

```

1 \psset{algebraic, plotpoints=501, yunit=3}
2 \def\getColor#1{\ifcase#1 black\or red\or magenta\or yellow\or green\or Orange\or blue\
3   or
4   DarkOrchid\or BrickRed\or Rhodamine\or OliveGreen\fi}
5 \begin{pspicture}(-7,-1.5)(7,1.5)
6   \psclip{\psframe(-7,-1.5)(7,1.5)}
7   \psplot{-7}{7}{cos(x)}
8   \multido{\n=1+1}{10}{%
9     \psplot[linewidth=1pt, linecolor=\getColor{\n}]{-7}{7}{%
10      Sum(ijk,0,1,\n,(-1)^ijk*x^(2*ijk)/fact(2*ijk))}}
11   \endpsclip
12   \psaxes(0,0)(-7,-1.5)(7,1.5)
13 \end{pspicture}

```

21.2.2 Using the IfTE function


Syntax: IfTE(<condition>,<true part>,<>false part>)

Nesting of several IfTE are possible and seen in the following examples. A classical example is a piece wise linear function.



```
1 \begin{pspicture}(-7.5,-2.5)(7.5,6)\psgrid[subgriddiv=1,gridcolor=lightgray]
2 \psset{algebraic=true, plotpoints=21,linewidth=2pt}
3 \psplot[linecolor=blue]{-7.5}{7.5}{IfTE(x<-6,8+x,IfTE(x<0,-x/3,IfTE(x<3,2*x,9-x)))}
4 \psplot[linecolor=red, plotpoints=101]{-7.5}{7.5}{%
5     IfTE(2*x<-2^2*sqrt(9),7+x,IfTE(x<0,x^2/18-1,IfTE(x<3,2*x^2/3-1,8-x)))}%
6 \end{pspicture}
```

When you program a piece-wise defined function you must take care that a plotting point must be put on each point where the description changes. Use showpoints=true to see what's going on, when there is a problem. You are on the save side, when you choose a big number for plotpoints.

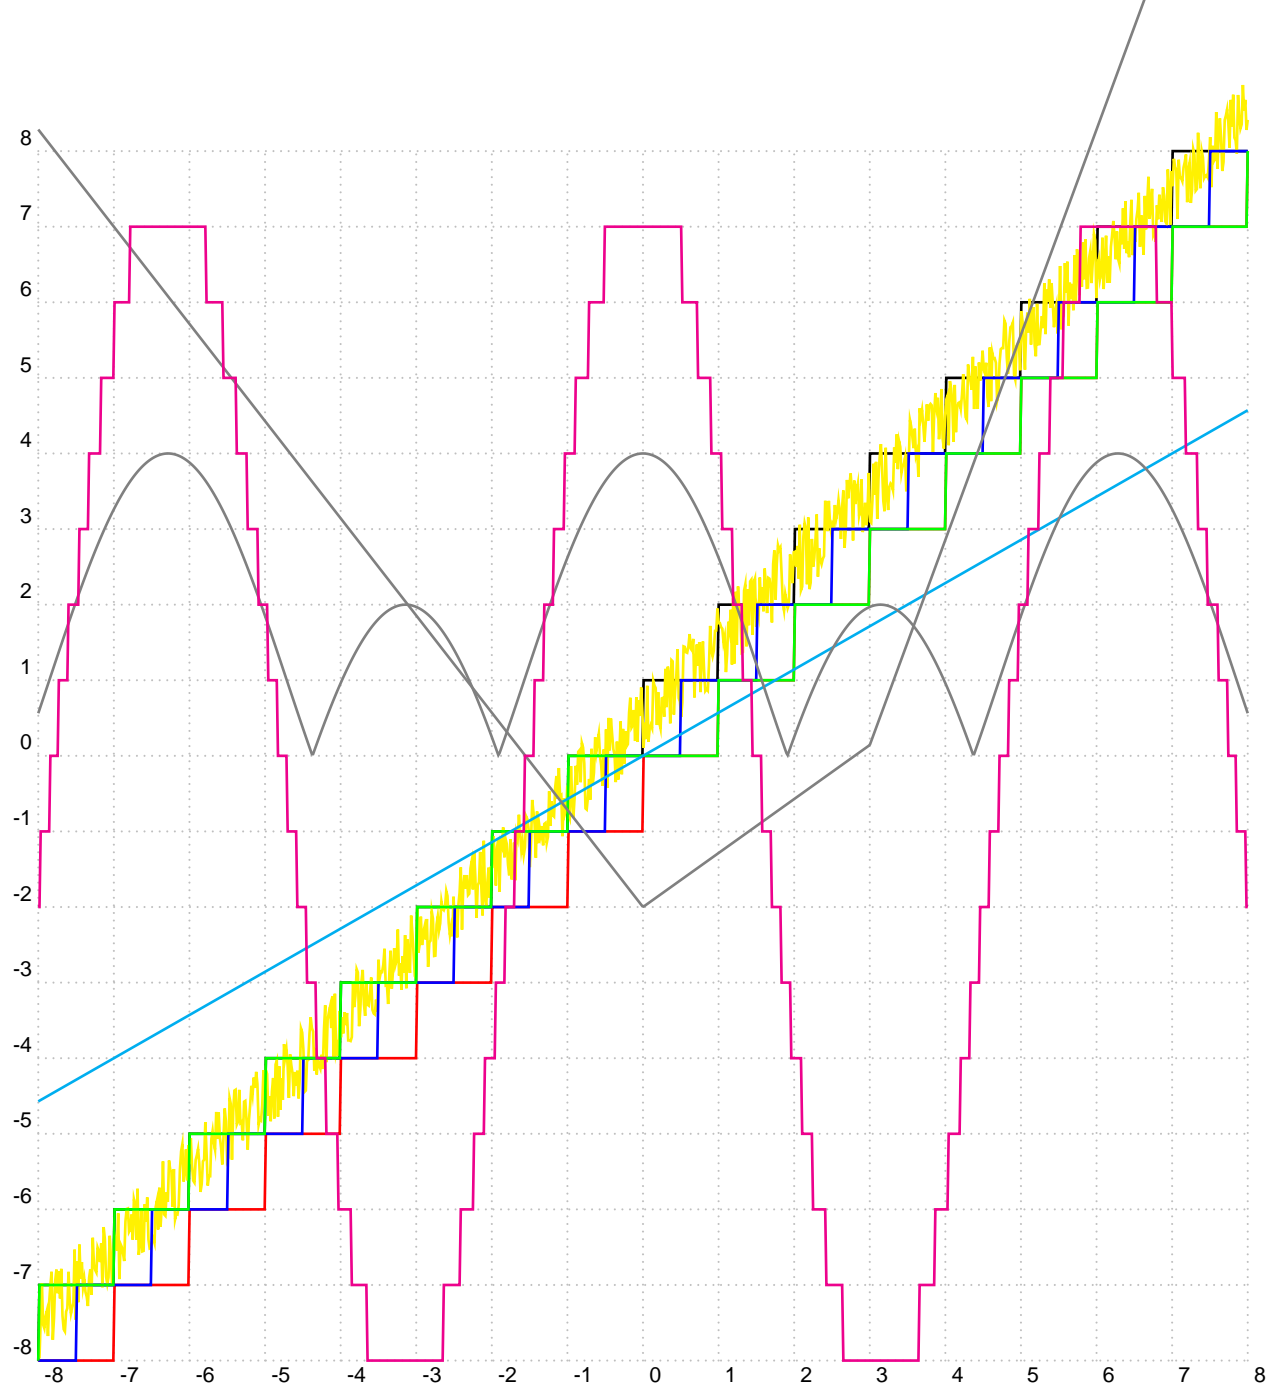

```

1 \begin{pspicture}[showgrid=true](-8,-8)(8,8)
2   \psset{plotpoints=1000,linewidth=1pt}
3   \psplot[algebraic, linecolor=yellow]{-8}{8}{rand/(2^31-1)+x}
4   \psplot[algebraic]{-8}{8}{ceiling(x)}
5   \psplot[algebraic, linecolor=red]{-8}{8}{floor(x)}
6   \psplot[algebraic, linecolor=blue]{-8}{8}{round(x)}
7   \psplot[algebraic, linecolor=green]{-8}{8}{truncate(x)}
8   \psplot[algebraic, linecolor=cyan]{-8}{8}{div(mul(4,x),7)}
9   \psplot[algebraic, linecolor=gray]{-8}{8}{abs(x)+abs(x-3)-abs(5-5*x/7)}
10  \psplot[algebraic, linecolor=gray]{-8}{8}{abs(3*cos(x)+1)}
11  \psplot[algebraic, linecolor=magenta]{-8}{8}{floor(8*cos(x))}
12 \end{pspicture}


```

21.3 comma

Syntax:

```
comma=false|true
```

Setting this option to true gives labels with a comma as a decimal separator instead of the dot. comma and comma=true is the same.

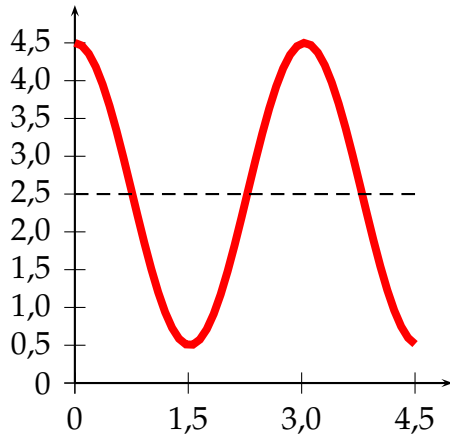


```
\begin{pspicture}(-0.5,-0.5)(5,5.5)
\psaxes[Dx=1.5,Dy=0.5,comma]{->}(5,5)
\psplot[linecolor=red,linewidth=3pt]{0}{4.5}{%
  {x 180 mul 1.52 div cos 2 mul 2.5 add}
\psline[linestyle=dashed](0,2.5)(4.5,2.5)
\end{pspicture}
```

21.4 xyAxes, xAxis and yAxis

Syntax:

```
xyAxes=true|false
xAxis=true|false
yAxis=true|false
```

Sometimes there is only a need for one axis with ticks. In this case you can set one of the following options to false. The xyAxes makes only sense, when you want to set both, x and y to true with only one command again to the default, because with xyAxes=false you get nothing with the psaxes macro.

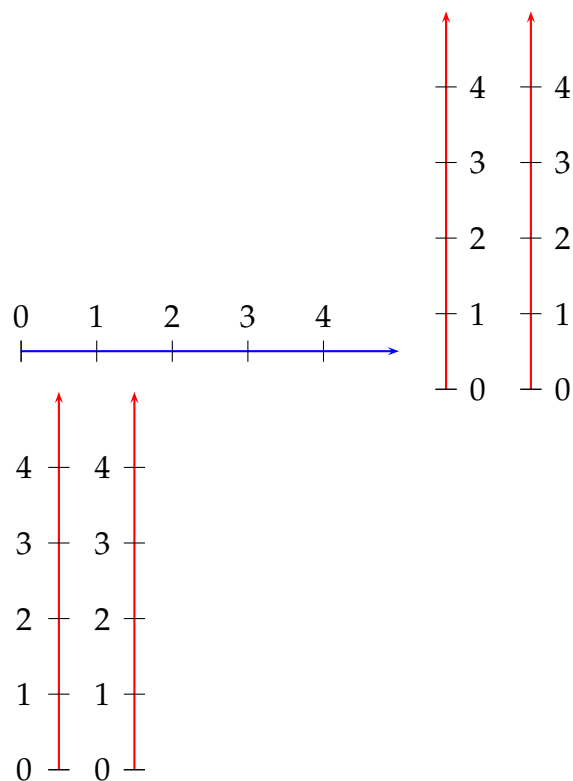

```

1 \begin{pspicture}(5,1)
2 \psaxes[yAxis=false,linecolor=blue
3   ]{->}(0,0.5)(5,0.5)
4 \end{pspicture}
5 \begin{pspicture}(1,5)
6 \psaxes[xAxis=false,linecolor=red
7   ]{->}(0.5,0)(0.5,5)
8 \end{pspicture}
9 \begin{pspicture}(1,5)
10 \psaxes[xAxis=false,linecolor=red,
11   labelsep=-20pt]{->}(0.5,0)(0.5,5)
12 \end{pspicture}%
13 \begin{pspicture}(1,5)
14 \psaxes[xAxis=false,linecolor=red
15   ]{->}(0.5,0)(0.501,5)
16 \end{pspicture}%

```

As seen in the example, a single y axis gets the labels on the right side. This can be changed in two ways, first with the option `labelsep` and second with a very short and therefore invisible x-axis (right example).

21.5 xyDecimals, xDecimals and yDecimals


Syntax:

```

xyDecimals=<number>
xDecimals=<any>
yDecimals=<any>

```


By default the labels of the axes get numbers with or without decimals, just depending to the numbers. With these options `xyDecimals` it is possible to determine the decimals, where the option `xyDecimals` sets this identical for both axes. The default setting `{}` means, that you'll get the standard behaviour.

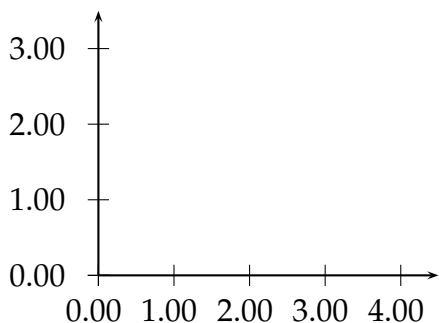

```

1 \begin{pspicture}(-1.5,-0.5)(5,3.75)
2 \psaxes[xyDecimals=2]{->}(0,0)(4.5,3.5)
3 \end{pspicture}

```

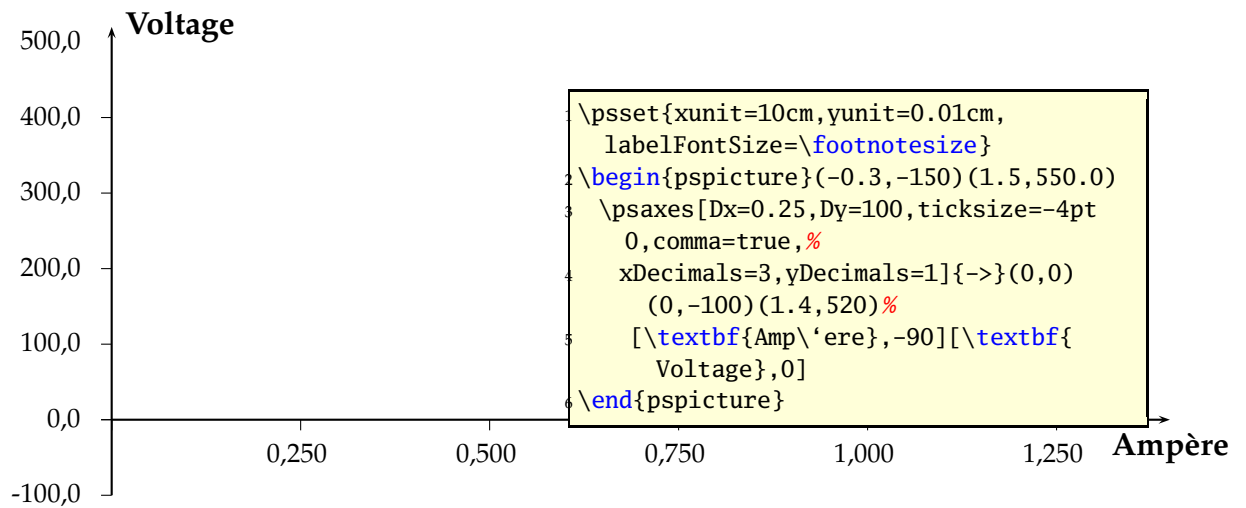


21.6 ticks

Syntax:

`ticks=all|x|y|none`


This option is also already in the `pst-plot` package and only mentioned here for some completeness.



```

1 \psset{ticks=6pt}
2 \begin{pspicture}(-1,-1)(2,2)
3 \psaxes[ticks=all,subticks=5]{->}(0,0)(-1,-1)(2,2)
4 \end{pspicture}


```



```

1 \begin{pspicture}(-1,-1)(2,2)
2 \psaxes[ticks=y,subticks=5]{->}(0,0)(-1,-1)(2,2)
3 \end{pspicture}


```



```

1 \begin{pspicture}(-1,-1)(2,2)
2 \psaxes[ticks=x,subticks=5]{->}(0,0)(2,2)(-1,-1)
3 \end{pspicture}

```



```

1 \begin{pspicture}(-1,-1)(2,2)
2 \psaxes[ticks=none,subticks=5]{->}(0,0)(2,2)(-1,-1)
3 \end{pspicture}


```

Single ticks can be set with the two macros

```

\psxTick[options](x value){label}
\psyTick[options](y value){label}

```

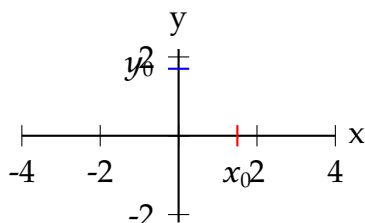

```

1 \begin{psgraph}[Dx=2,Dy=2](0,0)(-4,-2.2)
2   (4,2.2){.5\textwidth}{!}
3   \psxTick[linecolor=red](1.5){$x_0$}
4   \psyTick[linecolor=blue](1.7){$y_0$}
5 \end{psgraph}


```

21.7 labels

Syntax:

```
labels=all|x|y|none
```


This option is also already in the pst-plot package and only mentioned here for some completeness.



```

1 \psset{ticks=6pt}
2 \begin{pspicture}(-1,-1)(2,2)
3 \psaxes[labels=all,subticks=5]{->}(0,0)(-1,-1)(2,2)
4 \end{pspicture}


```



```

1 \begin{pspicture}(-1,-1)(2,2)
2 \psaxes[labels=y,subticks=5]{->}(0,0)(-1,-1)(2,2)
3 \end{pspicture}


```



```

1 \begin{pspicture}(-1,-1)(2,2)
2 \psaxes[labels=x,subticks=5]{->}(0,0)(2,2)(-1,-1)
3 \end{pspicture}

```



```

1 \begin{pspicture}(-1,-1)(2,2)
2 \psaxes[labels=none,subticks=5]{->}(0,0)(2,2)(-1,-1)
3 \end{pspicture}

```

21.8 ticksize, xticksize, yticksize

With this new option the recent tickstyle option of pst-plot is obsolete and no more supported by psticks-add.


Syntax:

```

ticksize=value[unit]
ticksize=value[unit] value[unit]
xticksize=value[unit]
xticksize=value[unit] value[unit]
yticksize=value[unit]
yticksize=value[unit] value[unit]

```


ticksize sets both values. The first one is left/below and the optional second one is right/above of the coordinate axis. The old setting tickstyle=bottom is now easy to realize, e.g.: ticksize=-6pt 0, or vice versa, if the coordinates are set from positive to negative values.

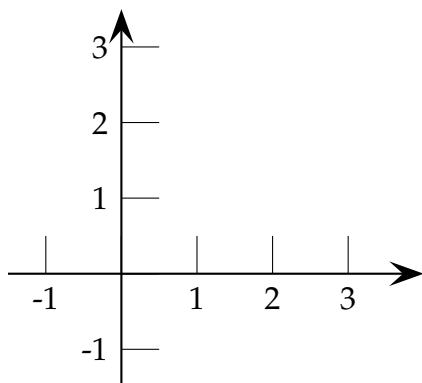

```

1 \psset{arrowscale=3}
2 \begin{pspicture}(-1.5,-1.5)(4,3.5)
3   \psaxes[ticksize=0.5cm]{->}(0,0)(-1.5,-1.5)(4,3.5)
4 \end{pspicture}

```

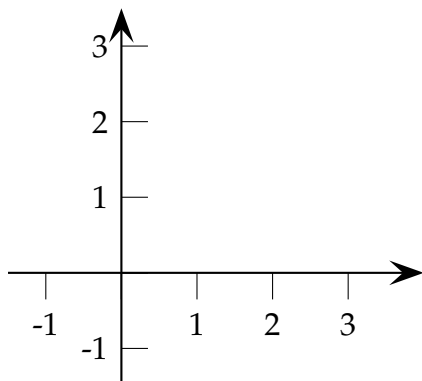


```

1 \psset{arrowscale=3}
2 \begin{pspicture}(-1.5,-1.5)(4,3.5)
3   \psaxes[xticksize=-10pt 0,yticksize=0 10pt]
4     {->}(0,0)(-1.5,-1.5)(4,3.5)
5 \end{pspicture}

```


A grid is also possible by setting the values to the max/min coordinates.

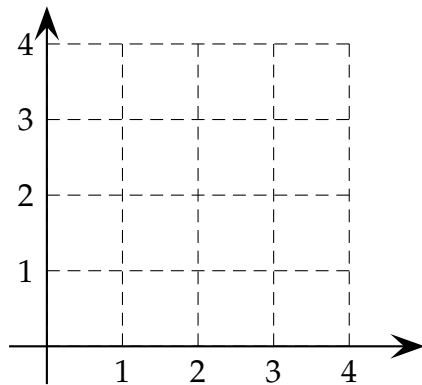

```

1 \psset{arrowscale=3}
2 \begin{pspicture}(-.5,-.5)(5,4.5)
3   \psaxes[ticklinestyle=dashed,ticksiz=0.4cm
4     ]{->}(0,0)(-.5,-.5)(5,4.5)
5 \end{pspicture}


```

21.9 subticks

Syntax:

```
subticks=<number>
```


By default subticks cannot have labels.



```

1 \psset{ticksiz=6pt}
2 \begin{pspicture}(-1,-1)(2,2)
3   \psaxes[ticks=all,subticks=5]{->}(0,0)(-1,-1)(2,2)
4 \end{pspicture}


```



```

1 \begin{pspicture}(-1,-1)(2,2)
2   \psaxes[ticks=y,subticks=5]{->}(0,0)(-1,-1)(2,2)
3 \end{pspicture}


```



```

1 \begin{pspicture}(-1,-1)(2,2)
2   \psaxes[ticks=x,subticks=5]{->}(0,0)(2,2)(-1,-1)
3 \end{pspicture}

```



```

1 \begin{pspicture}(-1,-1)(2,2)
2 \psaxes[ticks=none,subticks=5]{->}(0,0)(2,2)(-1,-1)
3 \end{pspicture}

```

21.10 subticksize, xsubticksize, ysubticksize


Syntax:

```

subticksize=value
xsubticksize=value
ysubticksize=value

```

subticksize sets both values, which are relative to the ticksize length and can have any number. 1 sets it to the same length as the main ticks.

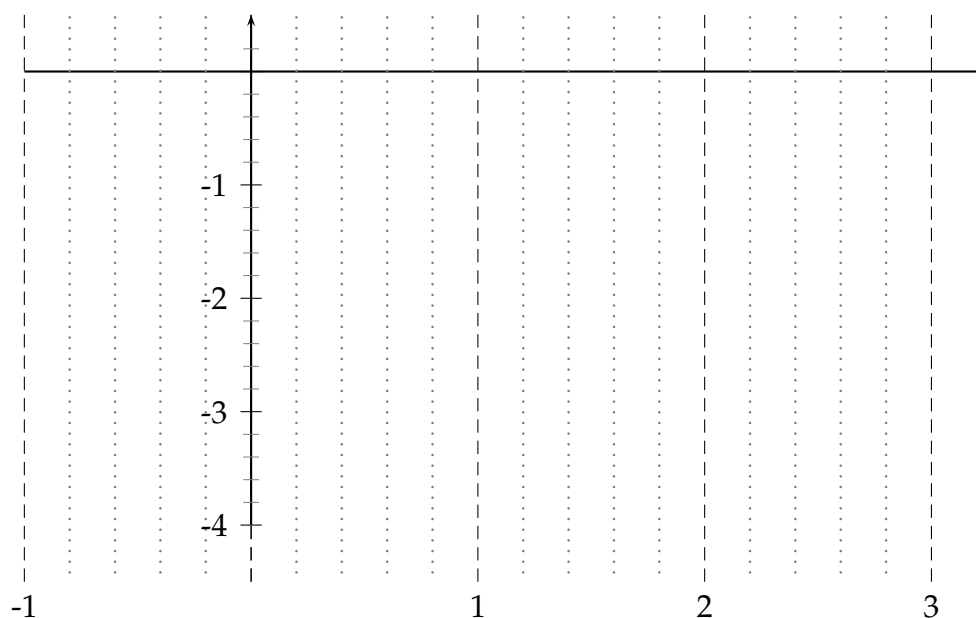

```

1 \psset{yunit=1.5cm,xunit=3cm}
2 \begin{pspicture}(-1.25,-4.75)(3.25,.75)
3 \psaxes[xticks=-4.5 0.5,ticklinestyle=dashed,subticks=5,xsubticksize=1,%
4 ysubticksize=0.75,xsubticklinestyle=dotted,xsubtickwidth=1pt,
5 subtickcolor=gray]{->}(0,0)(-1,-4)(3.25,0.5)
6 \end{pspicture}


```

21.11 tickcolor, subtickcolor


Syntax:

```
tickcolor=<color>
xtickcolor=<color>
ytickcolor=<color>
subtickcolor=<color>
xsubtickcolor=<color>
ysubtickcolor=<color>
```

tickcolor and subtickcolor set both for the x- and the y-Axis.



```
1 \begin{pspicture}(0,-0.75)(10,1)
2 \psaxes[labelsep=2pt,yAxis=false,labelFontSize=\footnotesize,%
3 labelsep=-10pt,ticksize=0 10mm,subticks=10,subticksize=0.75,%
4 tickcolor=red,subtickcolor=blue,tickwidth=1pt,%
5 subtickwidth=0.5pt](10.01,0)
6 \end{pspicture}
```




```
1 \begin{pspicture}(5,-0.75)(10,1)
2 \psaxes[labelsep=2pt,yAxis=false,labelFontSize=\
3 \footnotesize,%
4 labelsep=5pt,ticksize=0 -10mm,subticks=10,subticksize
5 =0.75,%
6 tickcolor=red,subtickcolor=blue,tickwidth=1pt,%
7 subtickwidth=0.5pt,0x=5](5,0)(5,0)(10.01,0)
8 \end{pspicture}
```

21.12 ticklinestyle and subticklinestyle

Syntax:

```
ticklinestyle=solid|dashed|dotted|none
xticklinestyle=solid|dashed|dotted|none
yticklinestyle=solid|dashed|dotted|none
subticklinestyle=solid|dashed|dotted|none
xsubticklinestyle=solid|dashed|dotted|none
ysubticklinestyle=solid|dashed|dotted|none
```

ticklinestyle and subticklinestyle set both values for the x and y axis. The value none doesn't really makes sense, because it is the same to [sub]ticklines=0

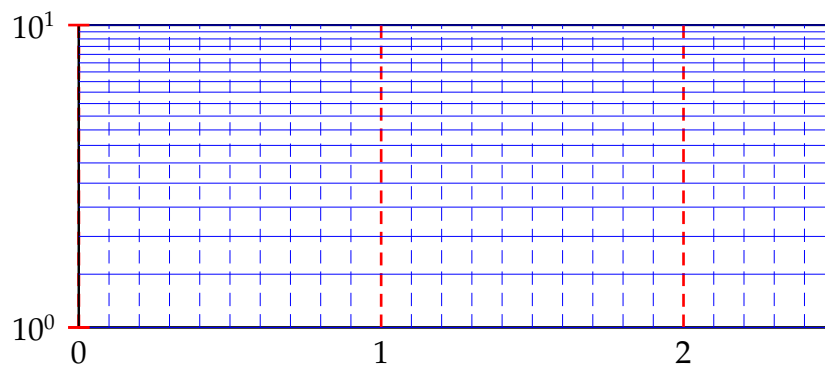

```


1 \psset{unit=4cm}
2 \pspicture(-0.15,-0.15)(2.5,1)
3 \psaxes[axesstyle=frame,logLines=y,xticks=0 1,xsubticks=1,%
4   ylogBase=10,tickcolor=red,subtickcolor=blue,tickwidth=1pt,%
5   subticks=20,xsubticks=10,xticklinestyle=dashed,%
6   xsubticklinestyle=dashed](2.5,1)
7 \endpspicture

```

21.13 loglines

Syntax:


```
loglines=all|x|y
```

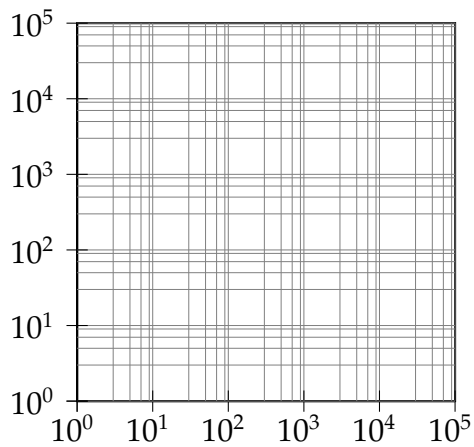

```

1 \pspicture(0,-1)(5,5)
2 \psaxes[subticks=5,axesstyle=frame,xylogBase=10,
3   logLines=all](5,5)
4 \endpspicture


```

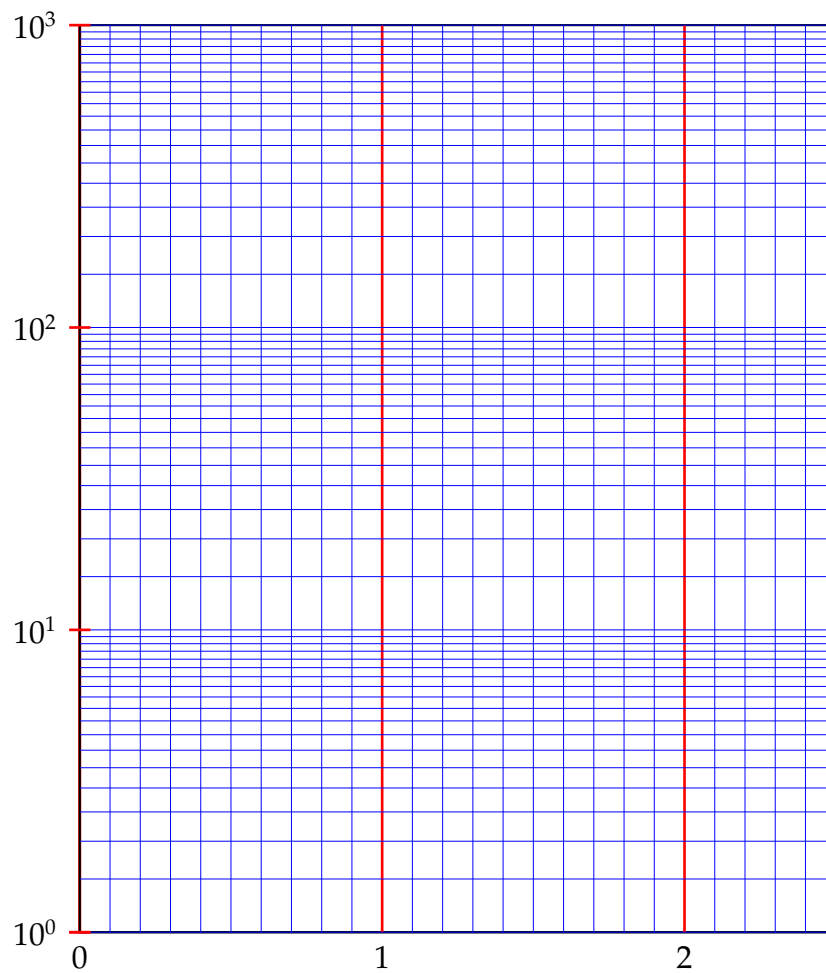

```

1 \psset{unit=4cm}
2 \pspicture(-0.15,-0.15)(2.5,3)
3   \psaxes[axesstyle=frame,logLines=y,xticks=0 3,xsubticks=1,%
4     ylogBase=10,tickcolor=red,subtickcolor=blue,tickwidth=1pt,%
5     subticks=20,xsubticks=10](2.5,3)
6 \endpspicture

```

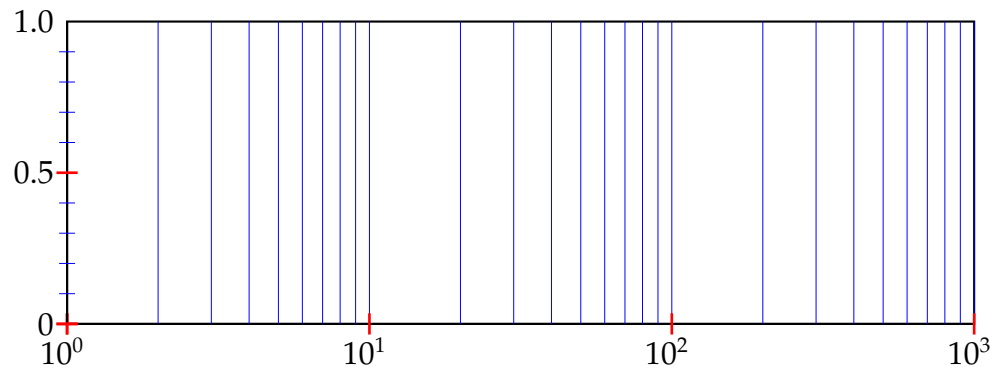

```

1 \psset{unit=4}
2 \pspicture(-0.5,-0.3)(3,1.2)
3   \psaxes[axesstyle=frame,logLines=x,xlogBase=10,Dy=0.5,%
4     tickcolor=red,subtickcolor=blue,tickwidth=1pt,ysubticks=5,xsubticks=10](3,1)
5 \endpspicture


```

21.14 xylogBase, xlogBase and ylogBase

There are additional options `xylogBase` `xlogBase` | `ylogBase` | to get one or both axes with logarithm labels. For an interval of $[10^{-3}...10^2]$ choose a `pstricks` interval of $[-3,2]$. `pstricks` takes 0 as the origin of this axes, which is wrong if we want to have a logarithm axes. With the options `0y` and `0x` we can set the origin to -3 , so that the first label gets 10^{-3} . If this is not done by the user then `pstricks-add` does it by default. An alternative is to set these parameters to empty values `0x={}`, `0y={}`, in this case `pstricks-add` does nothing.

21.14.1 xylogBase

This mode is in math also called double logarithm. It is a combination of the two forgoing modes and the function is now $y = \log x$ and is shown in the following example.

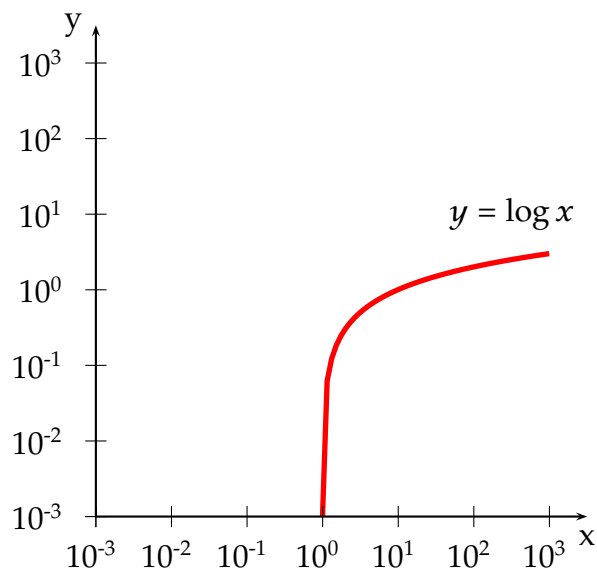

```

1 \begin{pspicture}(-3.5,-3.5)(3.5,3.5)
2   \psplot[linewidth=2pt,linecolor=red
3     ]{0.001}{3}{x log}
4   \psaxes[xylogBase=10,0y=-3,0x=-3]{->}(-3,-3)
5     (3.5,3.5)
6   \uput[-90](3.5,-3){x}
7   \uput[180](-3,3.5){y}
8   \rput(2.5,1){$y=\log x$}
9 \end{pspicture}

```


21.14.2 ylogBase

The values for the `psaxes` y-coordinate are now the exponents to the base 10 and for the right function to the base e : $10^{-3} \dots 10^1$ which corresponds to the given y-intervall $-3 \dots 1.5$, where only integers as exponents are possible. These logarithm labels have no effect to the internal used units. To draw the logarithm function we have to use the math function

$$y = \log\{\log x\}$$

$$y = \ln\{\ln x\}$$


with an drawing intervall of $1.001 \dots 6$.

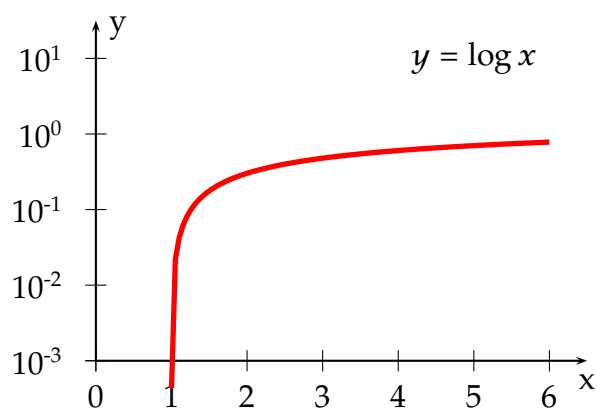

```

1 \begin{pspicture}(-0.5,-3.5)(6.5,1.5)
2   \psaxes[ylogBase=10,0y=-3]{->}(0,-3)(6.5,1.5)
3   \uput[-90](6.5,-3){x}
4   \uput[0](0,1.4){y}
5   \rput(5,1){$y=\log x$}
6   \psplot[linewidth=2pt,%
7     plotpoints=100,linecolor=red]{1.001}{6}{x log
8     log} % log(log(x))
9 \end{pspicture}


```

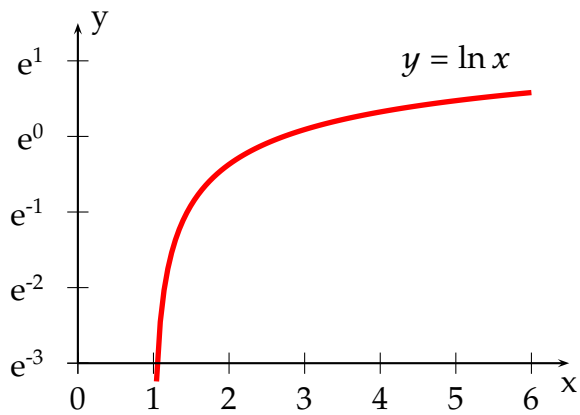

```

\begin{pspicture}(-0.5,-3.5)(6.5,1.5)
\psplot[linewidth=2pt,plotpoints=100,linecolor
=red]%
{1.04}{6}{/ln {log 0.4343 div} def x ln ln}
% log(x)
\psaxes[ylogBase=e,0y=-3]{->}(0,-3)(6.5,1.5)
\uput[-90](6.5,-3){x}
\uput[0](0,1.5){y}
\rput(5,1){$y=\ln x$}
\end{pspicture}


```

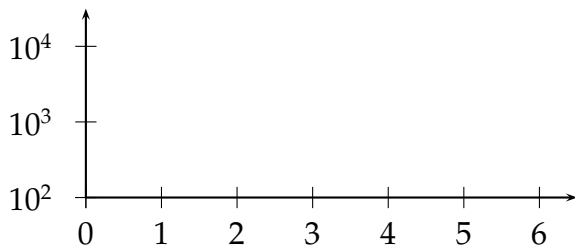

```

\begin{pspicture}(-0.5,1.75)(6.5,4.5)
\psaxes[ylogBase=10,0y=2]{->}(0,2)(0,2)
(6.5,4.5)
\end{pspicture}


```

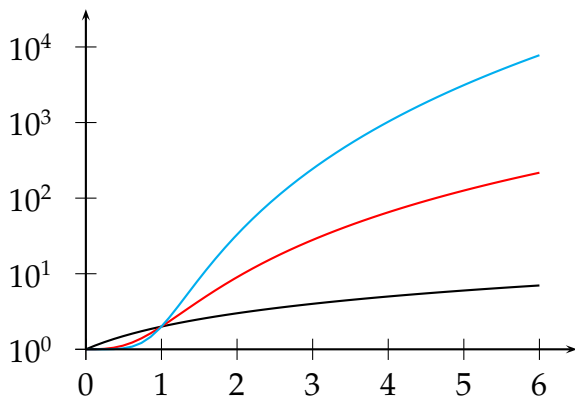

```

\begin{pspicture}(-0.5,-0.25)(6.5,4.5)
\psplot{0}{6}{x x cos add log} % x
+ cos(x)
\psplot[linecolor=red]{0}{6}{x 3 exp x cos
add log} % x^3 + cos(x)
\psplot[linecolor=cyan]{0}{6}{x 5 exp x cos
add log} % x^5 + cos(x)
\psaxes[ylogBase=10]{->}(6.5,4.5)
\end{pspicture}


```

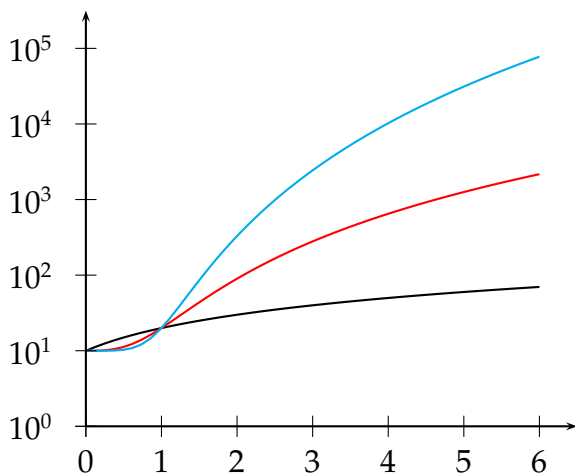

```

\begin{pspicture}(-0.5,-1.25)(6.5,4.5)
\psplot{0}{6}{x x cos add log} % x +
cos(x)
\psplot[linecolor=red]{0}{6}{x 3 exp x cos add
log} % x^3 + cos(x)
\psplot[linecolor=cyan]{0}{6}{x 5 exp x cos
add log} % x^5 + cos(x)
\psaxes[ylogBase=10]{->}(0,-1)(0,-1)(6.5,4.5)
\end{pspicture}


```

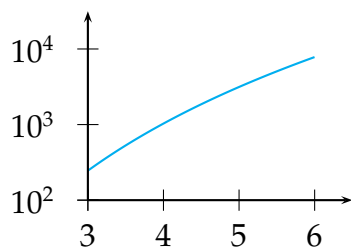
```
\begin{pspicture}(2.5,1.75)(6.5,4.5)
\psplot[linecolor=cyan]{3}{6}{x 5 exp x cos add log} % x^5 +
cos(x)
\psaxes[ylogBase=10,0x=3,0y=2]{->}(3,2)(3,2)(6.5,4.5)
\end{pspicture}
```

21.14.3 xlogBase

Now we have to use the easy math function $y = x$ because the x axis is still $\log x$.

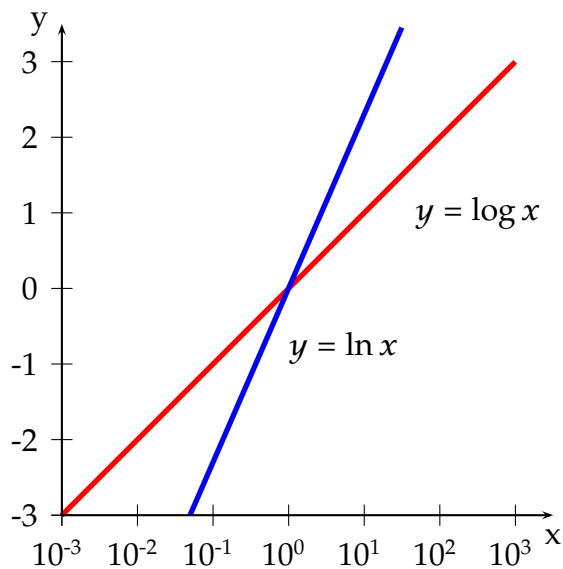


```
\begin{pspicture}(-3.5,-3.5)(3.5,3.5)
\psplot[linewidth=2pt,linecolor=red]{-3}{3}{x}
% log(x)
\psplot[linewidth=2pt,linecolor=blue]
{-1.3}{1.5}{x 0.4343 div} % ln(x)
\psaxes[xlogBase=10,0y=-3,0x=-3]{->}(-3,-3)
(3.5,3.5)
\uput[-90](3.5,-3){x}
\uput[180](-3,3.5){y}
\rput(2.5,1){$y=\log x$}
\rput[lb](0,-1){$y=\ln x$}
\end{pspicture}
```

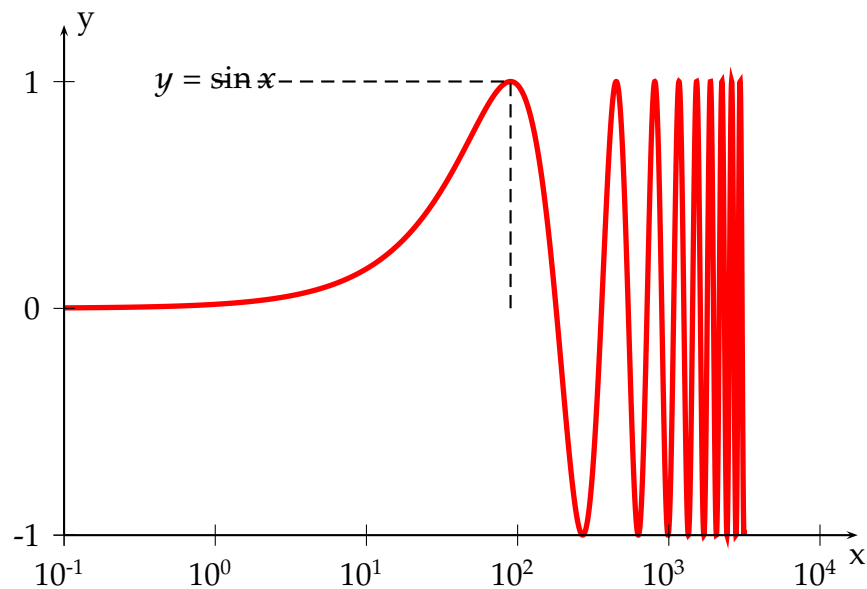

```

1 \psset{yunit=3cm,xunit=2cm}
2 \begin{pspicture}(-1.25,-1.25)(4.25,1.5)
3   \uput[-90](4.25,-1){x}
4   \uput[0](-1,1.25){y}
5   \rput(0,1){$y=\sin x$}
6   \psplot[linewidth=2pt,plotpoints=5000,linecolor=red]{-1}{3.5}{10 x exp sin }
7   \psaxes[xlogBase=10,0x=-1,0y=-1]{->}(-1,-1)(4.25,1.25)
8   \psline[linestyle=dashed](-1,0)(4,0)
9   \psline[linestyle=dashed](!-1 1)(!90 log 1)(!90 log -1)
10  \psline[linestyle=dashed](!90 log 1)(!180 log 1)(!180 log -1)
11 \end{pspicture}


```

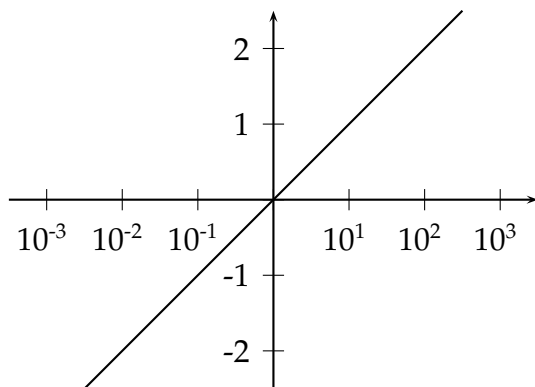

```

1 \begin{pspicture}(-3.5,-2.5)(3.5,2.5)
2   \psaxes[xlogBase=10]{->}(0,0)(-3.5,-2.5)
3   \psplot{-2.5}{2.5}{10 x exp log}
4 \end{pspicture}

```

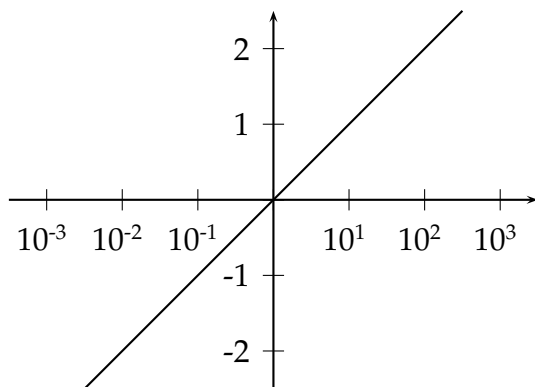


```

1 \begin{pspicture}(-3.5,-2.5)(3.5,2.5)
2   \psaxes[xlogBase=10,0x={},0y={}]{->}(0,0)
3   \psplot{-2.5}{2.5}{10 x exp log}
4 \end{pspicture}

```

21.14.4 No logstyle (xylogBase={})

This is only a demonstration that the default option `logBase={}` still works ... :-)

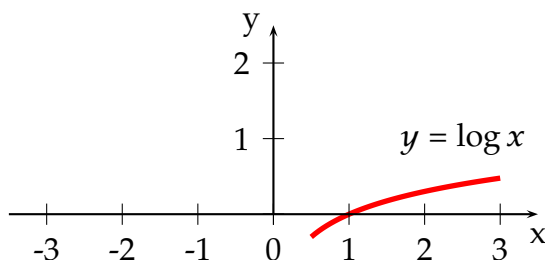


```

1 \begin{pspicture}(-3.5,-0.5)(3.5,2.5)
2   \psplot[linewidth=2pt,linecolor=red,xylogBase
3     ={}]{0.5}{3}{x log} % log(x)
4   \psaxes{->}(0,0)(-3.5,0)(3.5,2.5)
5   \uput[-90](3.5,0){x}
6   \uput[180](0,2.5){y}
7   \rput(2.5,1){$y=\log x$}
8 \end{pspicture}

```


21.15 subticks, tickwidth and subtickwidth

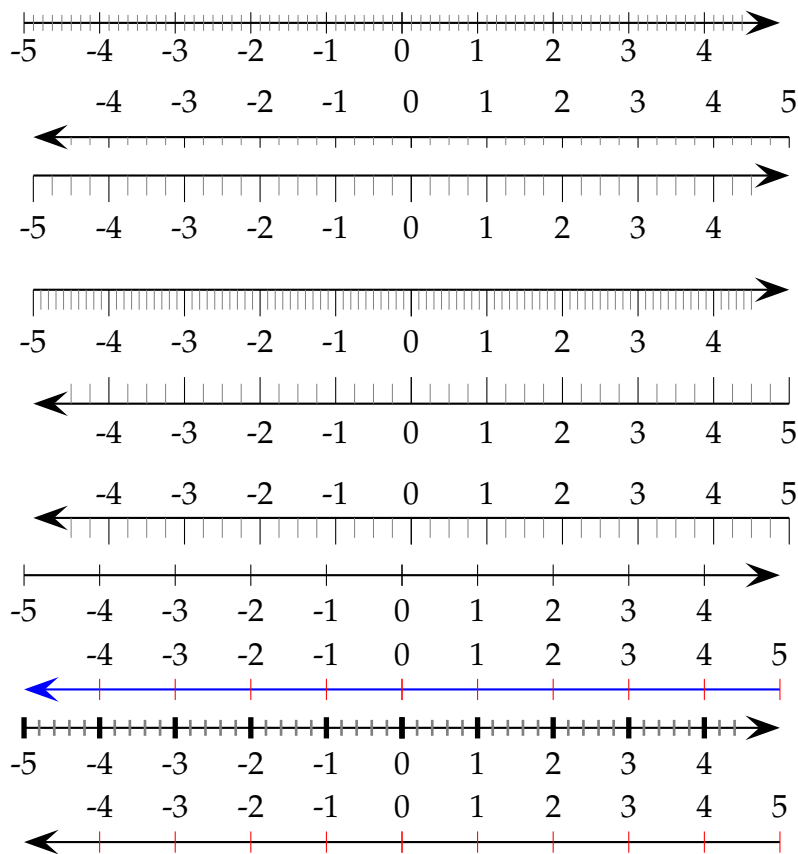

```

1 \psset{arrowscale=3}
2 \psaxes[labelsep=2pt,yAxis=false,subticks=8]{->}(0,0)(-5,-1)(5,1)\[1cm]
3 \psaxes[yAxis=false,subticks=4,ticksize=-4pt 0]{->}(0,0)(5,1)(-5,-1)\[1cm]
4 \psaxes[yAxis=false,subticks=4,ticksize=-10pt 0]{->}(0,0)(-5,-5)(5,5)\[1cm]
5 \psaxes[yAxis=false,subticks=10,ticksize=0 -10pt,labelsep=15pt]{->}(0,0)(-5,-5)(5,5)\[1cm]
6 \psaxes[yAxis=false,subticks=4,ticksize=0 10pt,labelsep=-15pt]{->}(0,0)(5,5)(-5,-5)\[1cm]
7 \psaxes[yAxis=false,subticks=4,ticksize=0 -10pt]{->}(0,0)(5,5)(-5,-5)\[0.25cm]
8 \psaxes[yAxis=false,subticks=0]{->}(0,0)(-5,-5)(5,5)\[1cm]
9 \psaxes[yAxis=false,subticks=0,tickcolor=red,linecolor=blue]{->}(0,0)(5,5)(-5,-5)\[1cm]
10 \psaxes[yAxis=false,subticks=5,tickwidth=2pt,subtickwidth=1pt]{->}(0,0)(-5,-5)(5,5)\[1cm]
11 \psaxes[yAxis=false,subticks=0,tickcolor=red]{->}(0,0)(5,5)(-5,-5)


```

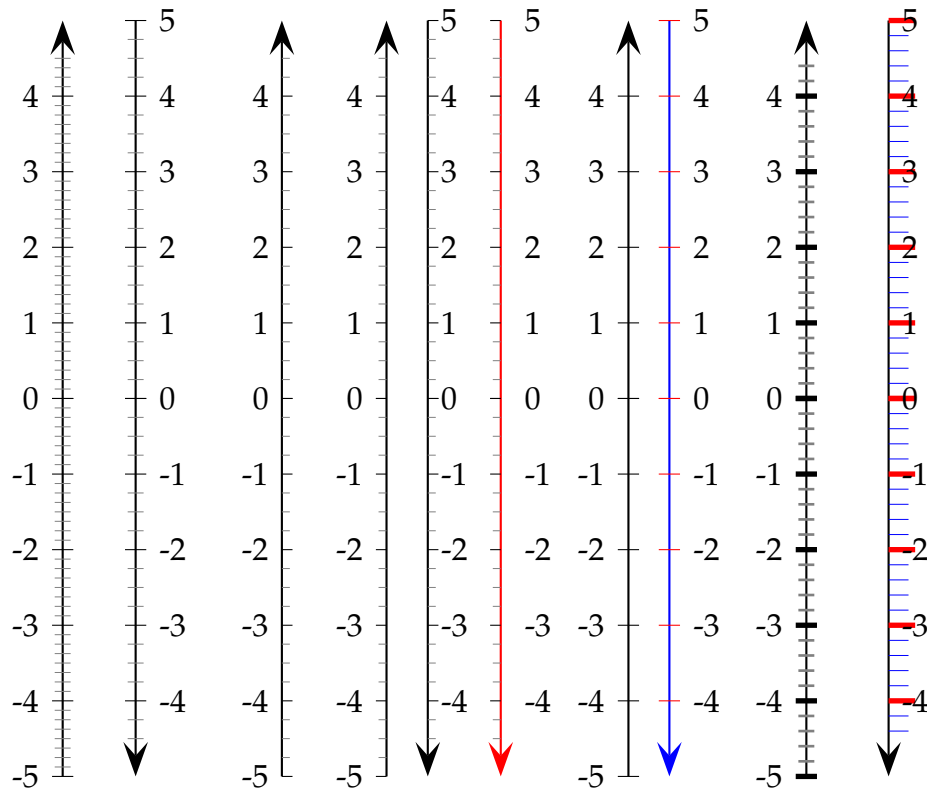

```

1 \psset{arrowscale=3}
2 \psaxes[xAxis=false,subticks=8]{->}(0,0)(-5,-5)(5,5)\hspace{2em}
3 \psaxes[xAxis=false,subticks=4]{->}(0,0)(5,5)(-5,-5)\hspace{4em}
4 \psaxes[xAxis=false,subticks=4,ticks=0]{->}(0,0)(-5,-5)(5,5)\hspace{3em}
5 \psaxes[xAxis=false,subticks=4,ticks=0]{->}(0,0)(-5,-5)(5,5)\hspace{1em}
6 \psaxes[xAxis=false,subticks=4,ticks=0]{->}(0,0)(5,5)(-5,-5)\hspace{2em}
7 \psaxes[xAxis=false,subticks=4,ticks=0,linewidth=2pt]{->}(0,0)(5,5)(-5,-5)\hspace{4em}
8 \psaxes[xAxis=false,subticks=0]{->}(0,0)(-5,-5)(5,5)\hspace{1em}
9 \psaxes[xAxis=false,subticks=0,tickcolor=red,linewidth=2pt]{->}(0,0)(5,5)(-5,-5)\hspace{4em}
10 \psaxes[xAxis=false,subticks=5,tickwidth=2pt,subtickwidth=1pt]{->}(0,0)(-5,-5)(5,5)\hspace{2em}
11 \psaxes[xAxis=false,subticks=5,tickcolor=red,tickwidth=2pt,%
12 ticksize=10pt,subtickcolor=blue,subticksize=0.75]{->}(0,0)(5,5)(-5,-5)


```

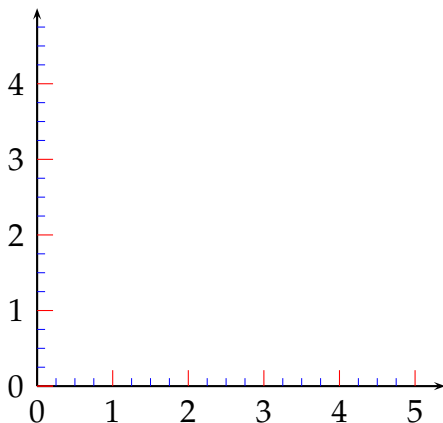


```

\pspicture(5,5.5)
\psaxes[subticks=4,ticks=6pt,subticks=0.5,%
tickcolor=red,subtickcolor=blue]{->}(5.4,5)
\endpspicture


```

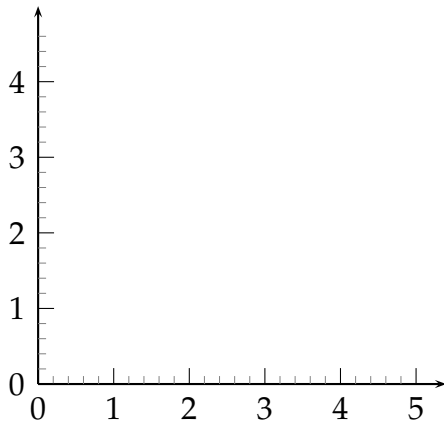


```
\pspicture(5,5.5)
\psaxes[subticks=5,ticks=0 6pt,subticksize
=0.5]{->}(5.4,5)
\endpspicture
```

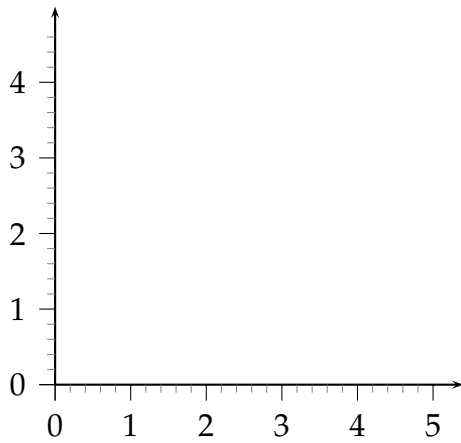


```
\pspicture(5,5.5)
\psaxes[subticks=5,ticks=-6pt 0,subticksize
=0.5]{->}(5.4,5)
\endpspicture
```

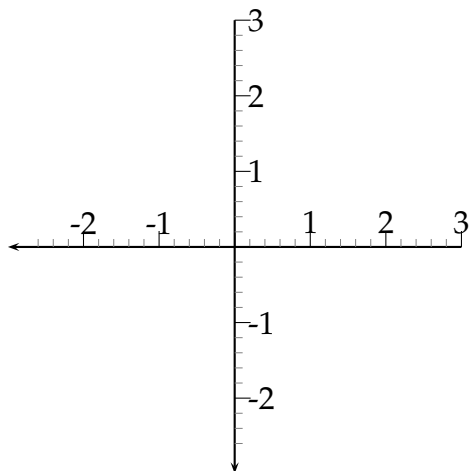

```
\pspicture(-3,-3)(3,3.5)
\psaxes[subticks=5,ticks=0 6pt,subticksize
=0.5]{->}(0,0)(3,3)(-3,-3)
\endpspicture
```




```
\pspicture(0,0.5)(-3,-3)
\psaxes[subticks=5,ticks=-6pt 0,subticksize
=0.5,linewidth=red]{->}(-3,-3)
\endpspicture
```

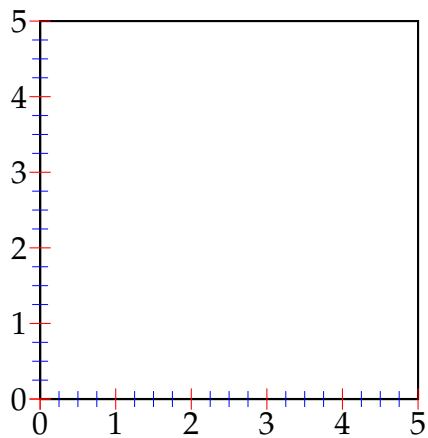

```

1 \psset{axesstyle=frame}
2 \pspicture(5,5.5)
3   \psaxes[subticks=4,tickcolor=red,subtickcolor=blue]
4   (5,5)
5 \endpspicture


```

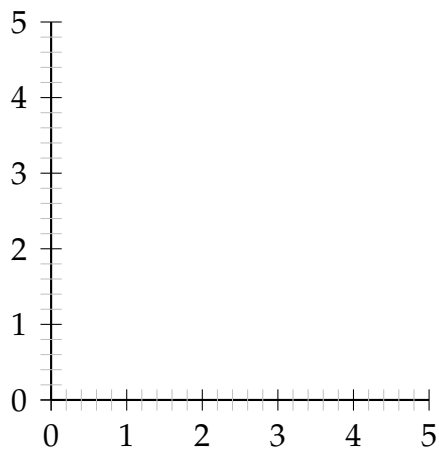

```

1 \pspicture(5,5.5)
2   \psaxes[subticks=5,subticks=1,subtickcolor=lightgray]
3   (5,5)
4 \endpspicture


```

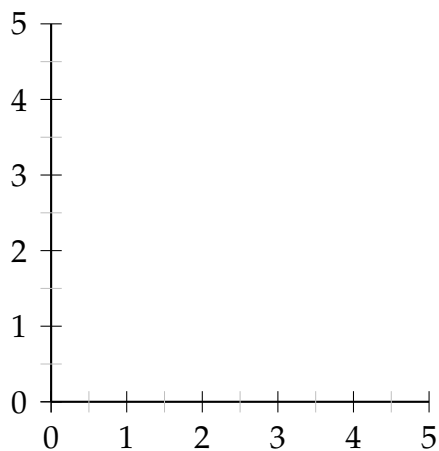

```

1 \pspicture(5,5.5)
2   \psaxes[subticks=2,subticks=1,subtickcolor=lightgray]
3   (5,5)
4 \endpspicture

```

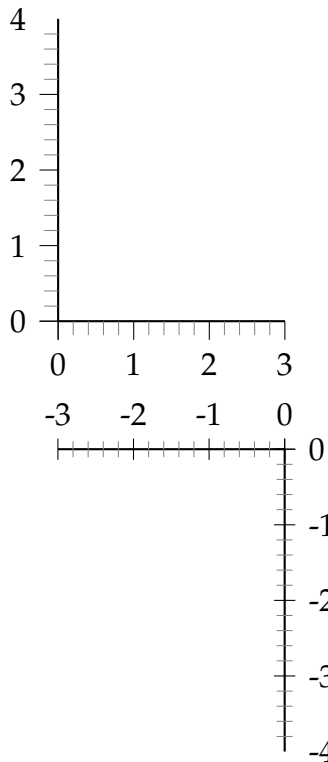

```


1 \pspicture(3,4.5)
2   \psaxes[subticks=5,ticks=-7pt 0](3,4)
3 \endpspicture

```

```

1 \pspicture(0,1)(-3,-4)
2   \psaxes[subticks=5](-3,-4)
3 \endpspicture

```

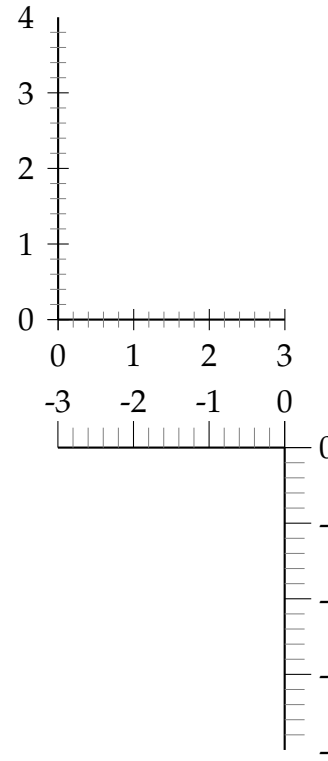

```

1 \pspicture(3,4.5)
2   \psaxes[axesstyle=axes,subticks=5](3,4)
3 \endpspicture

```


```

1 \pspicture(0,1)(-3,-4)
2   \psaxes[axesstyle=axes,subticks=5,%
3     ticksize=0 10pt,labelsep=13pt](-3,-4)
4 \endpspicture

```


21.16 xlabelFactor and ylabelFactor

When having big numbers as data records then it makes sense to write the values as $\langle number \rangle \cdot 10^{\langle exp \rangle}$. These new options allow to define the additional part of the value, but it must be set in math mode when using math operators!

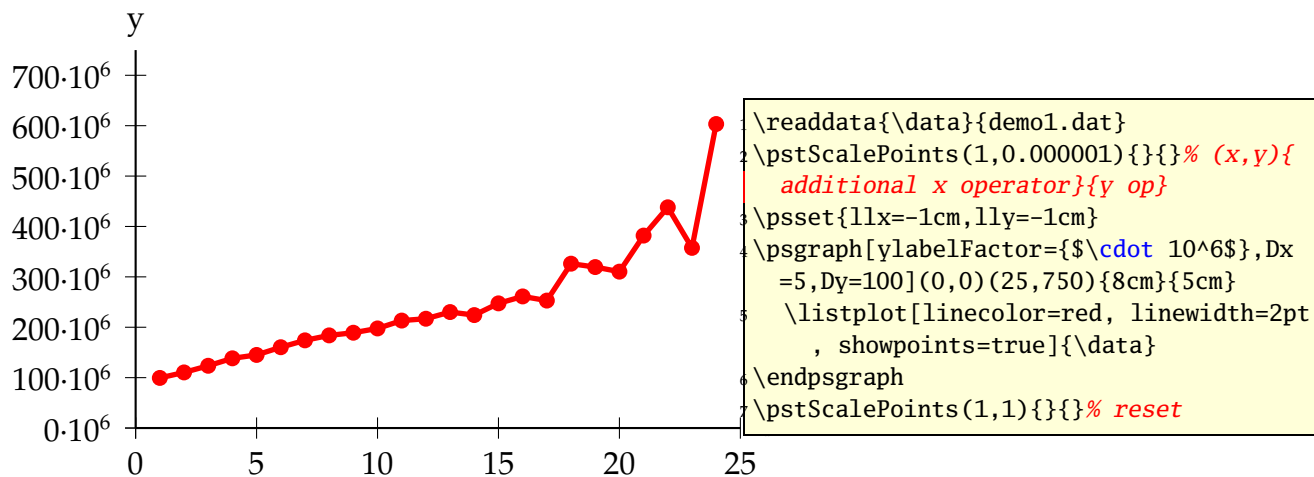

21.17 Plot style bar and option barwidth


This option allows to draw bars for the data records. The width of the bars is controlled by the option `barwidth`, which is set by default to value of 0.25cm, which is the total width.

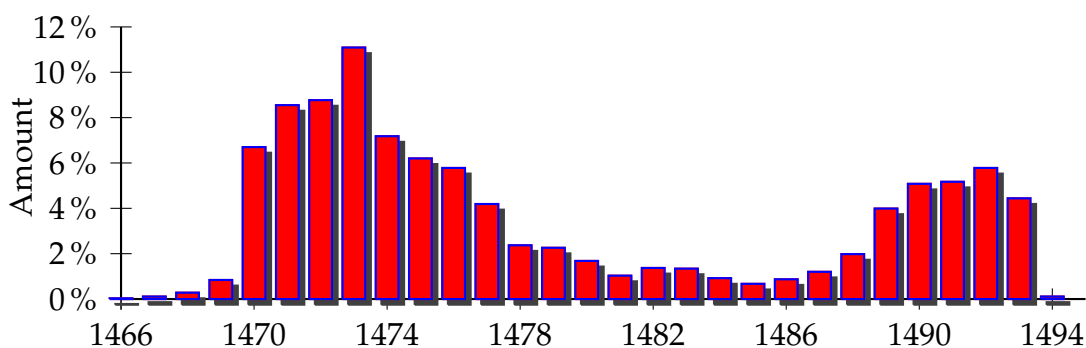

```

1 \psset{xunit=.44cm,yunit=.3cm}
2 \begin{pspicture}(-2,-3)(29,13)
3   \psaxes[axesstyle=axes, Ox=1466, Oy=0, Dx=4, Dy=2, %
4     ylabelFactor={\,%}{-}(29,12)
5   \listplot[shadow=true, linecolor=blue, plotstyle=bar, barwidth=0.3cm,
6     fillcolor=red, fillstyle=solid]{\barData}
7   \rput{90}(-3,6.25){Amount}
8 \end{pspicture}


```
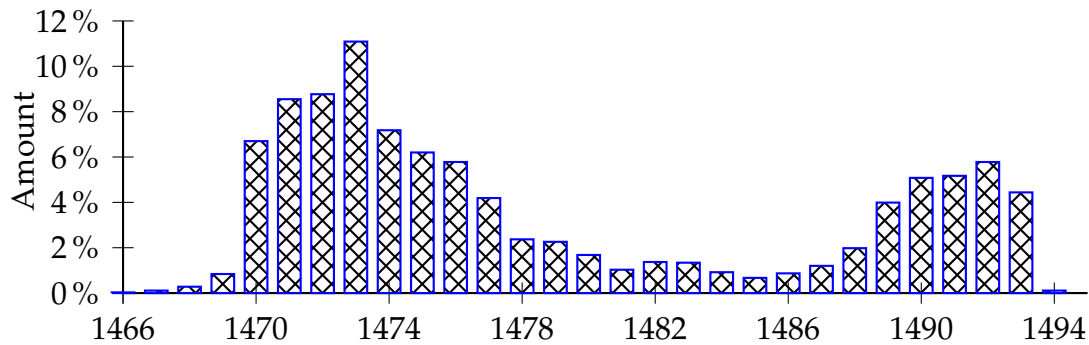
```

\psset{xunit=.44cm,yunit=.3cm}
\begin{pspicture}(-2,-3)(29,13)
\psaxes[axesstyle=axes,Ox=1466,Oy=0,Dx=4,Dy=2,%
ylabelFactor={\,%}](-3,6.25){Amount}
\listplot[linecolor=blue,plotstyle=bar,barwidth=0.3cm,
fillcolor=red,fillstyle=crosshatch]{\barData}
\end{pspicture}

```

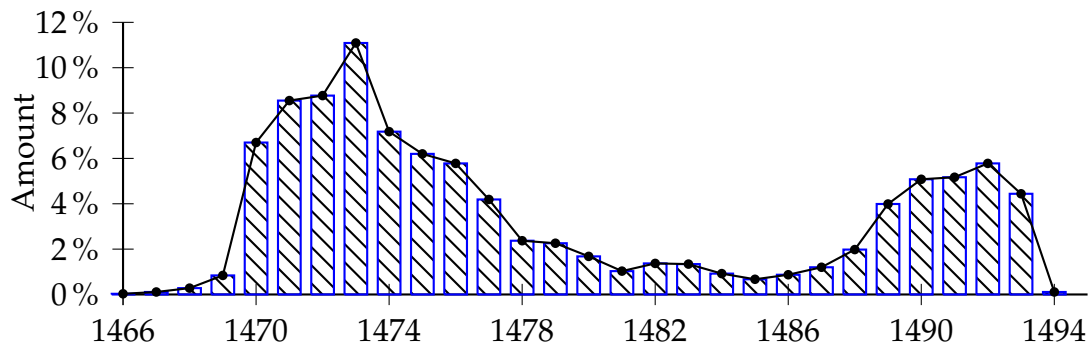

```

\psset{xunit=.44cm,yunit=.3cm}
\begin{pspicture}(-2,-3)(29,13)
\psaxes[axesstyle=axes,Ox=1466,Oy=0,Dx=4,Dy=2,%
ylabelFactor={\,%}](-3,6.25){Amount}
\listplot[linecolor=blue,plotstyle=bar,barwidth=0.3cm,
fillcolor=red,fillstyle=vlines]{\barData}
\listplot[showpoints=true]{\barData}
\end{pspicture}

```

21.18 trigLabels and trigLabelBase – axis with trigonometrical units

With the option `trigLabels=true` the labels on the x axis are trigonometrical ones. The option `trigLabelBase` set the demoninator of fraction. The default value of 0 is the same as no fraction. The following constants are defined in the package:

```

\def\psPiFour{12.566371}
\def\psPiTwo{6.283185}

```

```


\def\psPi{3.14159265}
\def\psPiH{1.570796327}
\newdimen\pstRadUnit
\newdimen\pstRadUnitInv
\pstRadUnit=1.047198cm % this is pi/3
\pstRadUnitInv=0.95493cm % this is 3/pi

```

Because it is a bit complicating to set the right values, we show some more examples here.

For **all** following examples in this section we did a global `\psset{trigLabels=true,labelFontSize=\small}`.

Translating the decimal ticks to geometrical makes no real sense, because every 1 xunit (1cm) is a tick and the last one at 6cm.

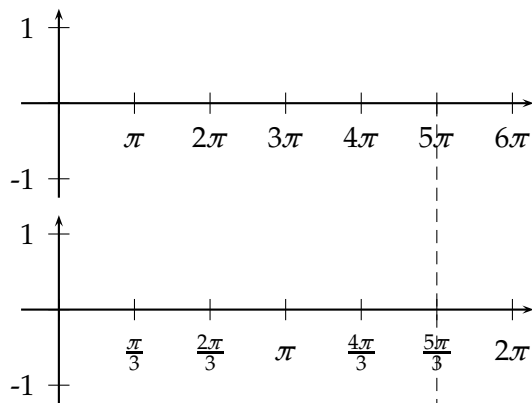

```

1 \begin{pspicture}(-0.5,-1.25)(6.5,1.25)%
2   \pnode(5,0){A}%
3   \psaxes{->}(0,0)(-0.5,-1.25)(\psPiTwo,1.25)
4 \end{pspicture}


```

```

1 \begin{pspicture}(-0.5,-1.25)(10,1.25)%
2   \psaxes[trigLabelBase=3]{->}(0,0)(-0.5,-1.25)(\psPiTwo,1.25)
3 \end{pspicture}

```

Modifying the ticks to have the last one exactly at the end is possible with a different dx value ($\frac{\pi}{3} \approx 1.047$):

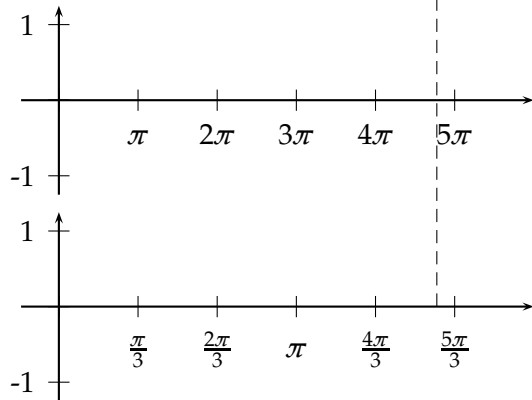

```

1 \begin{pspicture}(-0.5,-1.25)(6.5,1.25)\pnode(\psPiTwo,0){C}%
2   \psaxes[dx=\pstRadUnit]{->}(0,0)(-0.5,-1.25)(\psPiTwo,1.25)
3 \end{pspicture}%


```

```

1 \begin{pspicture}(-0.5,-1.25)(6.5,1.25)\pnode(5,0){B}%
2   \psaxes[dx=\pstRadUnit,trigLabelBase=3]{->}(0,0)(-0.5,-1.25)(\psPiTwo,1.25)
3 \end{pspicture}%

```


Set globally everything in radiant unit. Now 6 units on the x-axis are 6π . Using `trigLabelBase=3` reduces this value to 2π , a.s.o.

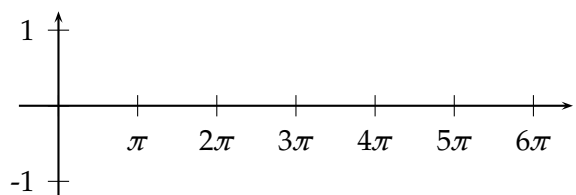

```

1 \psset{xunit=\pstRadUnit}%
2 \begin{pspicture}(-0.5,-1.25)(6.5,1.25)\nnode(6,0){D}%
3   \psaxes{->}(0,0)(-0.5,-1.25)(6.5,1.25)%
4 \end{pspicture}%


```

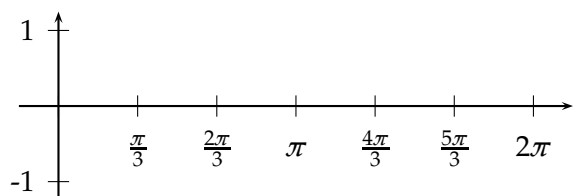

```

1 \psset{xunit=\pstRadUnit}%
2 \begin{pspicture}(-0.5,-1.25)(6.5,1.25)
3   \psaxes[trigLabelBase=3]{->}(0,0)(-0.5,-1.25)(6.5,1.25)
4 \end{pspicture}%


```

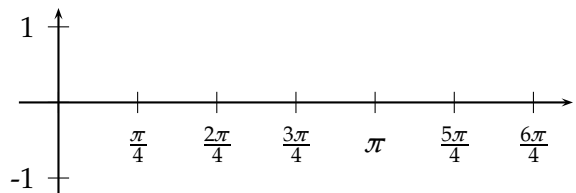

```

1 \psset{xunit=\pstRadUnit}%
2 \begin{pspicture}(-0.5,-1.25)(6.5,1.25)
3   \psaxes[trigLabelBase=4]{->}(0,0)(-0.5,-1.25)(6.5,1.25)
4 \end{pspicture}%

```

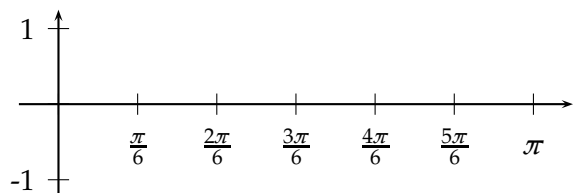


```

1 \psset{xunit=\pstRadUnit}%
2 \begin{pspicture}(-0.5,-1.25)(6.5,1.25)
3   \psaxes[trigLabelBase=6]{->}(0,0)(-0.5,-1.25)(6.5,1.25)
4 \end{pspicture}%

```


The best way seems to be setting the x -unit to `\pstRadUnit`. Plotting a function doesn't consider the value for `trigLabelBase`, it has to be done by the user. The first example sets the unit locally for the `\psplot` back to 1cm, which is needed, because we use this unit on PostScript side.

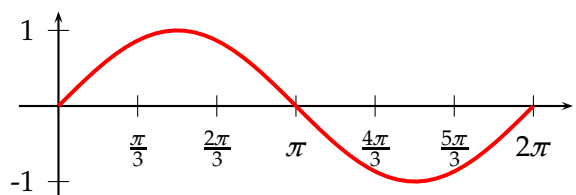

```

1 \psset{xunit=\pstRadUnit}%
2 \begin{pspicture}(-0.5,-1.25)(6.5,1.25)
3   \psaxes[trigLabelBase=3]{->}(0,0)(-0.5,-1.25)(6.5,1.25)
4   \psplot[xunit=1cm,linecolor=red,linewidth=1.5pt]{0}{\N
5     psPiTwo}{x RadtoDeg sin}
\end{pspicture}


```

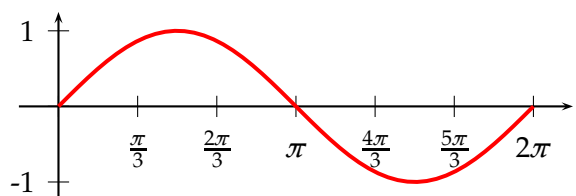

```

1 \psset{xunit=\pstRadUnit}%
2 \begin{pspicture}(-0.5,-1.25)(6.5,1.25)
3   \psaxes[trigLabelBase=3]{->}(0,0)(-0.5,-1.25)(6.5,1.25)
4   \psplot[linecolor=red,linewidth=1.5pt]{0}{6}{x
5     Pi 3 div
mul RadtoDeg sin}
\end{pspicture}


```

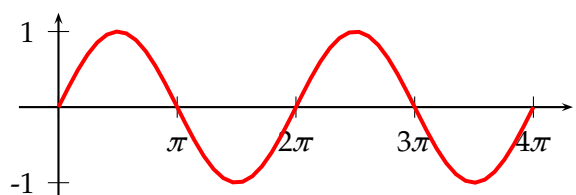

```

1 \psset{xunit=\pstRadUnit}%
2 \begin{pspicture}(-0.5,-1.25)(6.5,1.25)
3   \psaxes[dx=1.5]{->}(0,0)(-0.5,-1.25)(6.5,1.25)
4   \psplot[xunit=0.5cm,linecolor=red,linewidth=1.5pt]{0}{\N
5     psPiFour}{x RadtoDeg sin}
\end{pspicture}

```

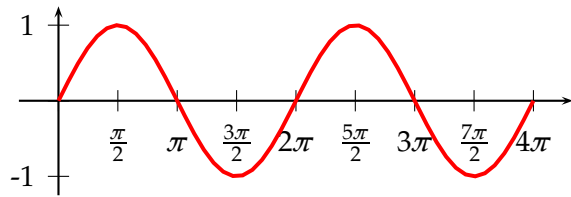


```

1 \psset{xunit=\pstRadUnit}%
2 \begin{pspicture}(-0.5,-1.25)(6.5,1.25)
3   \psaxes[dx=0.75,trigLabelBase=2]{->}(0,0)(-0.5,-1.25)
4   (6.5,1.25)
5   \psplot[xunit=0.5cm,linecolor=red,linewidth=1.5pt]{0}{\
    psPiFour}{x RadtoDeg sin}
6 \end{pspicture}

```


It is also possible to set the x unit and dx value to get the labels right. But this needs some more understanding how it really works. A $xunit=1.570796327$ sets the unit to $\pi/2$ and a $dx=0.666667$ then puts every $2/3$ of the unit a tick mark and a label. The length of the x -axis is 6.4 units which is $6.4 \cdot 1.570796327 \text{ cm} \approx 10 \text{ cm}$. The function then is plotted from 0 to $3\pi = 9.424777961$.

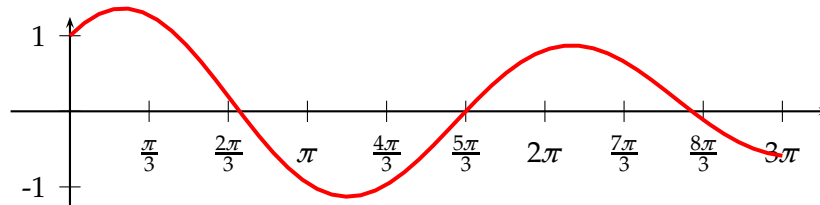

```

1 \begin{pspicture}(-0.5,-1.25)(10,1.25)
2   \psaxes[xunit=1.570796327,trigLabelBase=3,dx=0.666667]{->}(0,0)(-0.5,-1.25)(6.4,1.25)
3   \psplot[linecolor=red,linewidth=1.5pt]{0}{9.424777961}{%
4     x RadtoDeg dup sin exch 1.1 mul cos add}
5 \end{pspicture}


```

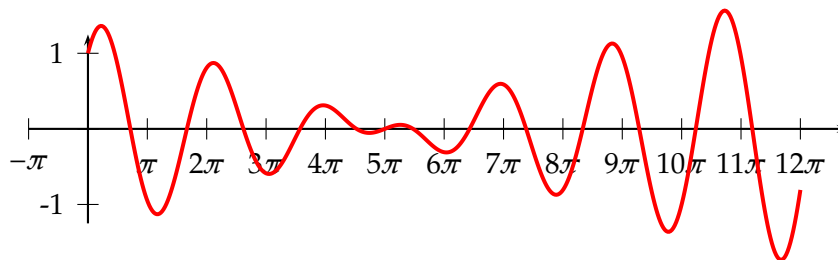

```

1 \psset{unit=1cm}
2 \psplot[xunit=0.25,plotpoints=500,linecolor=red,linewidth=1.5pt]{0}{37.70}{%
3   x RadtoDeg dup sin exch 1.1 mul cos add}
4 \end{pspicture}


```

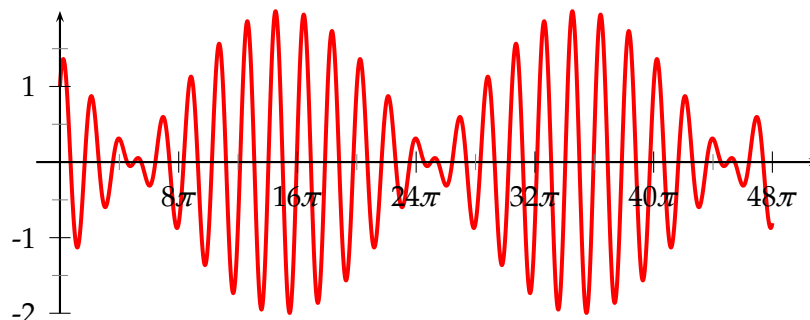

```

1 \psset{unit=1cm}
2 \begin{pspicture}(-0.5,-1.25)(10,1.25)
3   \psplot[xunit=0.0625,linecolor=red,linewidth=1.5pt,%
4     plotpoints=5000]{0}{150.80}%
5     {x RadtoDeg dup sin exch 1.1 mul cos add}
6   \psaxes[xunit=\psPi,dx=0.5,Dx=8]{->}(0,0)(-0.25,-1.25)(3.2,1.25)
7 \end{pspicture}


```

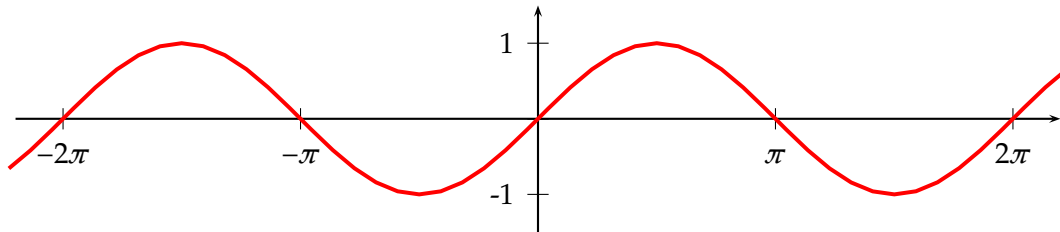

```

1 \begin{pspicture}(-7,-1.5)(7,1.5)
2   \psaxes[trigLabels=true,xunit=\psPi]{->}(0,0)(-2.2,-1.5)(2.2,1.5)
3   \psplot[linecolor=red,linewidth=1.5pt]{-7}{7}{x RadtoDeg sin}
4 \end{pspicture}

```

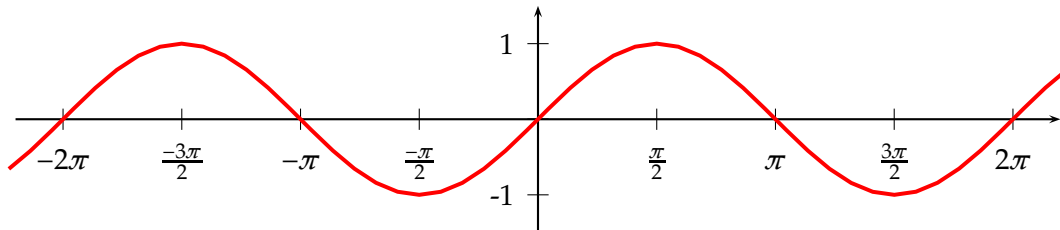

```

1 \begin{pspicture}(-7,-1.5)(7,1.5)
2   \psaxes[trigLabels=true,
3     trigLabelBase=2,dx=\psPiH,xunit=\psPi]{->}(0,0)(-2.2,-1.5)(2.2,1.5)
4   \psplot[linecolor=red,linewidth=1.5pt]{-7}{7}{x RadtoDeg sin}
5 \end{pspicture}

```

21.19 New options for \readdata

By default the macros `\readdata` reads every data record, which could be annoying when you have some text lines at top of your data files or when there are more than 10000 records to read.


`psricks-add` defines two additional keys `ignoreLines` and `nStep`, which allows to ignore preceeding lines, e.g. `ignoreLines=2`, or to read only a selected part of the data records, e.g. `nStep=10`, only every 10th records is saved.

```

1 \readdata[ignoreLines=2]{\dataA}{stressrawdata.dat}
2 \readdata[nStep=10]{\dataA}{stressrawdata.dat}

```

The default value for ignoreLines is 0 and for nStep is 1. the following data file has two text lines which shall be ignored by the \readdata macro:

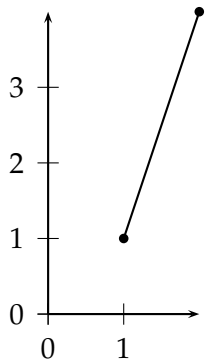

```

\begin{filecontents*}{pstricks-add-data9.dat}
some nonsense in this line i_2i_2i_2i_2time forcex forcey
0 0.2
1 1
2 4
\end{filecontents*}
\readdata[ignoreLines=2]{\data}{pstricks-add-data9.dat}
\pspicture(2,4)
\listplot[showpoints=true]{\data}
\psaxes{->}(2,4)
\endpspicture

```

21.20 New options for \listplot

By default the plot macros \dataplot, \fileplot and \listplot plot every data record. The package pst-plot-add defines additional keys nStep, nStart, nEnd and xStep, xStart, xEnd, which allows to plot only a selected part of the data records, e.g. nStep=10. These "n" options mark the number of the record to be plot (0, 1, 2, ...) and the "x" ones the x-values of the data records.

Name	Default setting
nStart	1
nEnd	{}
nStep	1
xStart	{}
xEnd	{}
yStart	{}
yEnd	{}
xStep	0
plotNo	1
plotNoMax	1
ChangeOrder	false
(plotstyle)	line

These new options are only available for the \listplot macro, which is not a real limitation, because all data records can be read from a file with the \readdata macro (see example files or [5]):

```

\readdata[nStep=10]{\data}{/home/voss/data/data1.dat}


```

The use `nStep` and `xStep` options make only real sense when also using the option `plotstyle=dots`. Otherwise the coordinates are connected by a line as usual. Also the `xStep` option needs increasing `x` values. Pay attention that `nStep` can be used for `\readdata` and for `\listplot`. If used in both macros than the effect is multiplied, e.g. `\readdata` with `nStep=5` and `\listplot` with `nStep=10` means, that only every 50th data records is read and plotted.


When both, `x/yStart/End` are defined then the values are also compared with both values.

21.20.1 Example for `nStep/xStep`

The datafile `data.dat` contains 1000 data records. The thin blue line is the plot of all records with the `plotstyle` option `curve`.

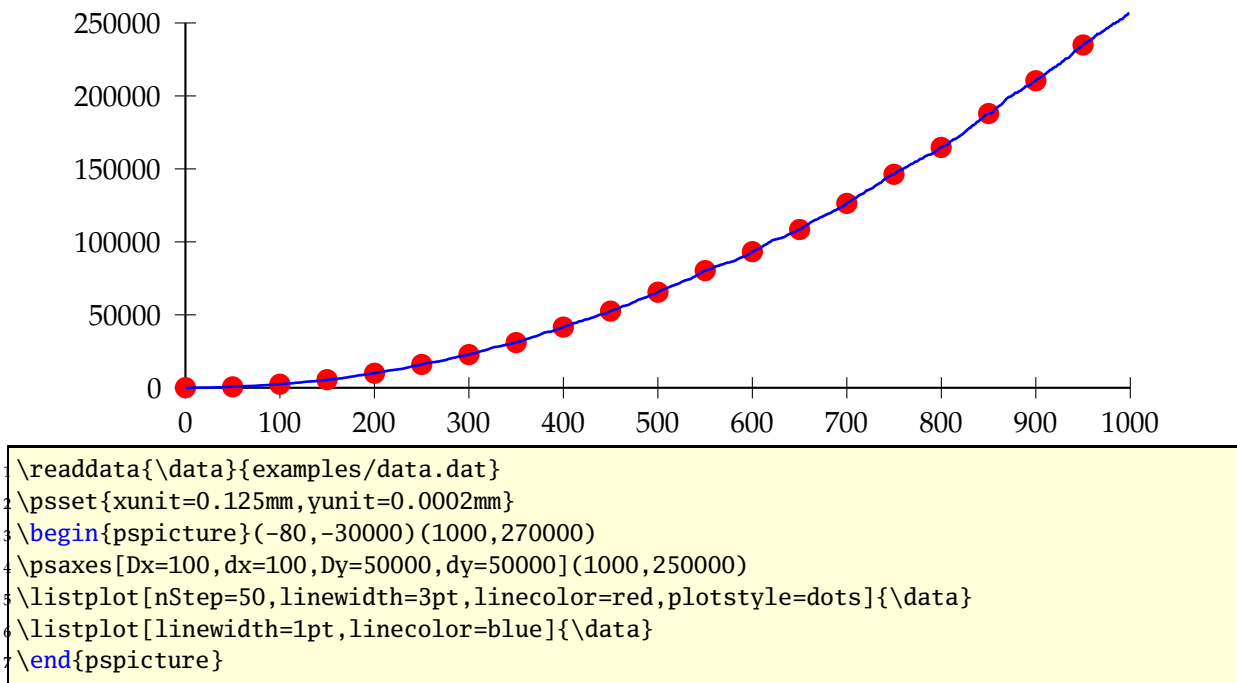

21.20.2 Example for `nStart/xStart`

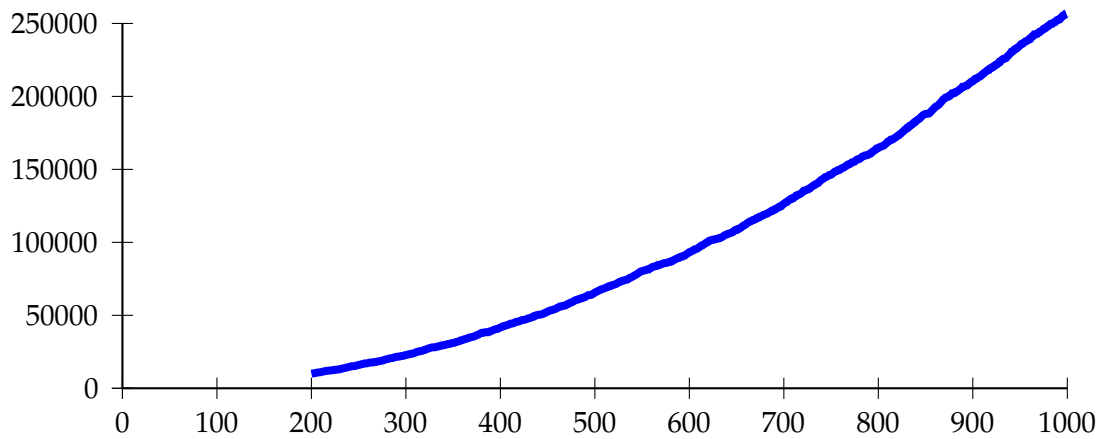


```

1 \readdata{\data}{examples/data.dat}
2 \psset{xunit=0.125mm,yunit=0.0002mm}
3 \begin{pspicture}(-80,-30000)(1000,270000)
4 \psaxes[Dx=100,dx=100,Dy=50000,dy=50000](1000,250000)
5 \listplot[nStart=200,linewidth=3pt,linecolor=blue]{\data}
6 \end{pspicture}

```

21.20.3 Example for nEnd/xEnd

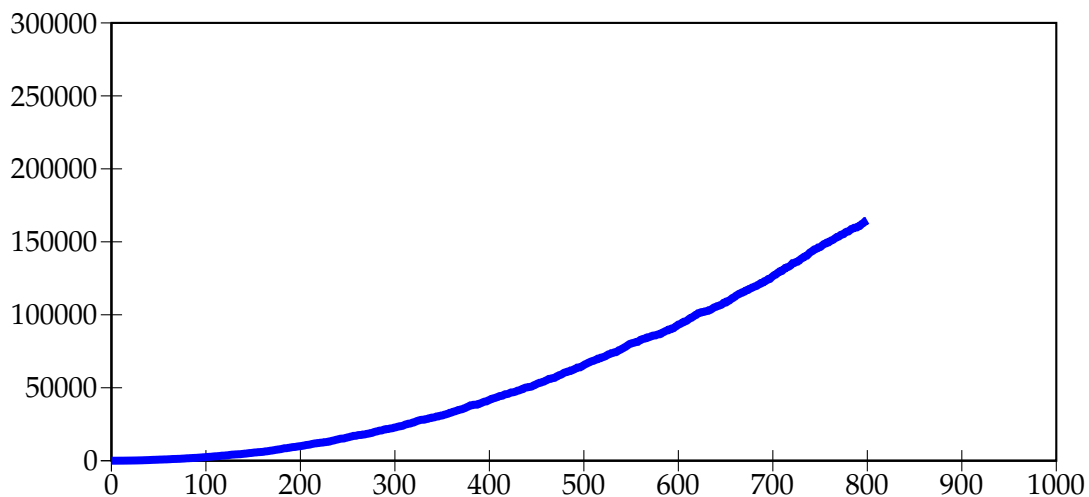


```

1 \readdata{\data}{examples/data.dat}
2 \psset{xunit=0.125mm,yunit=0.0002mm}
3 \begin{pspicture}(-80,-30000)(1000,310000)
4 \psaxes[axesstyle=frame,Dx=100,dx=100,Dy=50000,dy=50000](1000,300000)
5 \listplot[nEnd=800,linewidth=3pt,linecolor=blue]{\data}
6 \end{pspicture}

```


21.20.4 Example for all new options

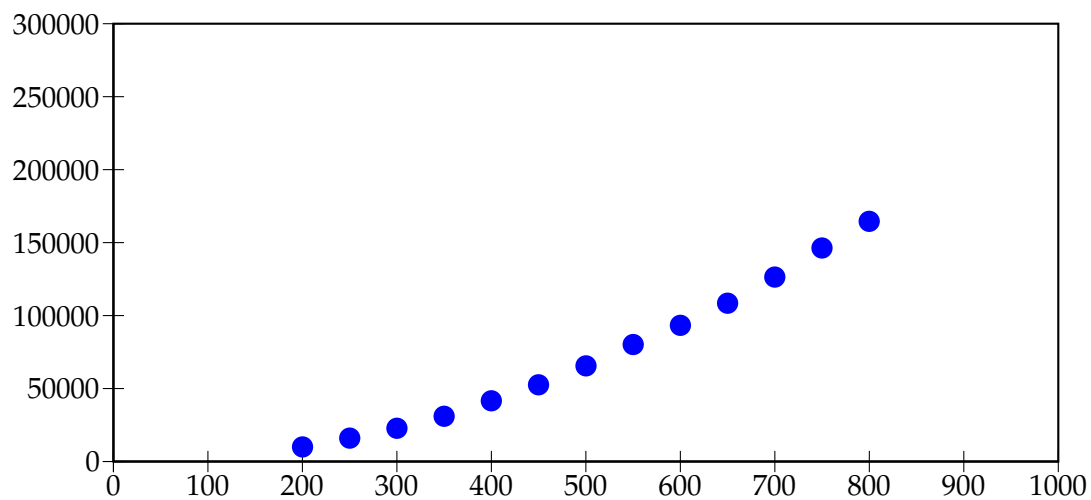

```
\readdata{\data}{examples/data.dat}
\psset{xunit=0.125mm,yunit=0.0002mm}
\begin{pspicture}(-80,-30000)(1000,310000)
\psaxes[axesstyle=frame,Dx=100,dx=100,Dy=50000,dy=50000](1000,300000)
\listplot[nStart=200, nEnd=800, nStep=50,linewidth=3pt,linecolor=blue,%
plotstyle=dots]{\data}
\end{pspicture}
```

21.20.5 Example for xStart

This example shows the use of the same plot with different units and different xStart value. The blue curve is the original plot of the data records. To show the important part of the curve there is another one plotted with a greater yunit and a start value of xStart=0.35. This makes it possible to have a kind of a zoom to the original graphic.

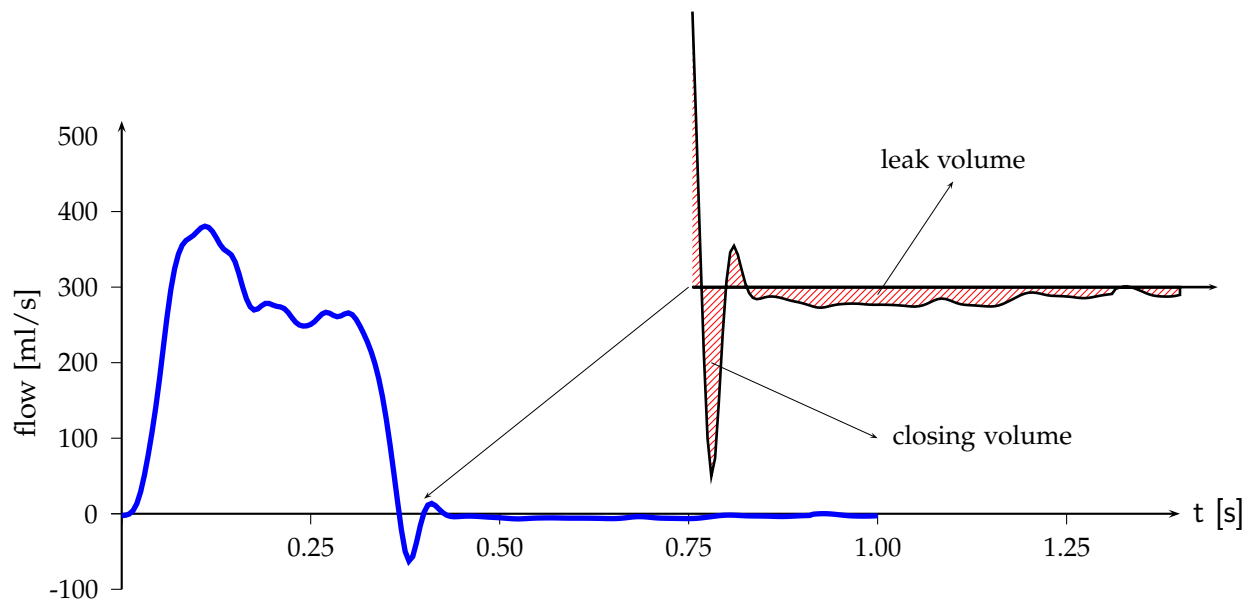


```

1 \psset{xunit=10cm, yunit=0.01cm}
2 \readdata{\data}{examples/data3.dat}
3 \begin{pspicture}(-0.1,-100)(1.5,700.0)
4   \psaxes[Dx=0.25,Dy=100,dy=100\psyunit,ticks=-4pt 0,%
5     labelFontSize={\footnotesize}]{->}(0,0)(0,-100)(1.4,520)
6   \uput[0](1.4,0){\textsf{t [s]}}
7   \rput(-0.125,200){\psrotateleft{\small flow [ml/s]}}
8   \listplot[linewidth=2pt, linecolor=blue]{\data}
9   \rput(0.4,300){
10     \pscustom[yunit=0.04cm, linewidth=1pt]{%
11       \listplot[xStart=0.355]{\data}
12       \psline(1,-2.57)(1,0)(0.355,0)
13       \fill[fillstyle=hlines,fillcolor=gray,hatchwidth=0.4pt,hatchsep=1.5pt,hatchcolor=
14         red]%
15       \psline[linewidth=0.5pt]{->}(0.7,0)(1.05,0)
16     }%
17   }
18   \psline[linewidth=.01]{->}(0.75,300)(0.4,20)
19   \psline[linewidth=.01]{->}(1,290)(1.1,440)
20   \rput(1.1,470){\footnotesize leak volume}
21   \psline[linewidth=.01]{->}(0.78,200)(1,100)
22   \rput[1](1.02,100){\footnotesize closing volume}
23 \end{pspicture}

```

21.20.6 Example for yStart/yEnd

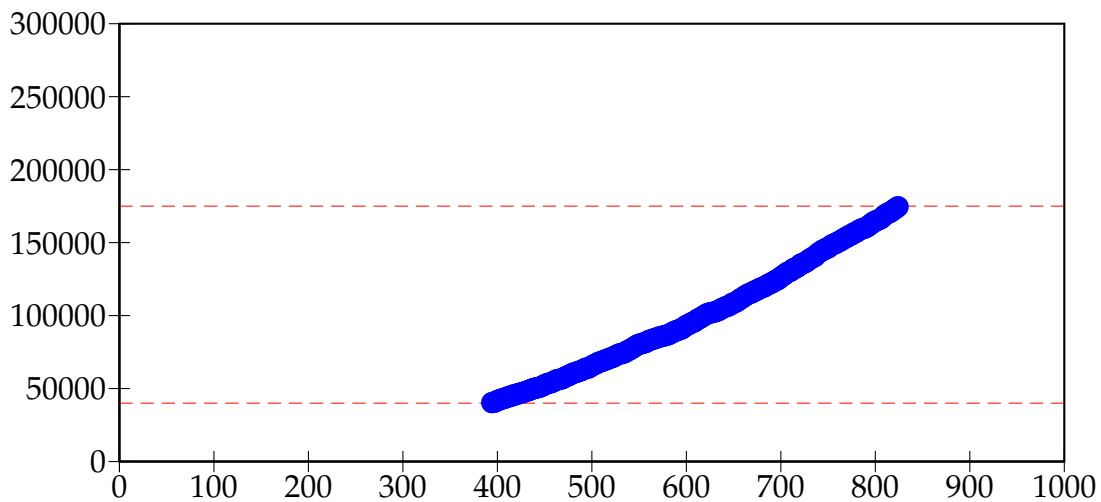

```

\readdata{\data}{examples/data.dat}
\psset{xunit=0.125mm,yunit=0.0002mm}
\begin{pspicture}(-80,-30000)(1000,310000)
  \psaxes[axesstyle=frame,Dx=100,Dy=50000](1000,300000)
  \psset{linewidth=0.1pt,linestyle=dashed,linecolor=red}
  \psline(0,40000)(1000,40000)
  \psline(0,175000)(1000,175000)
  \listplot[yStart=40000,yEnd=175000,linewidth=3pt,linecolor=blue,plotstyle=dots]{\data}
\end{pspicture}

```

21.20.7 Example for plotNo/plotNoMax

By default the plot macros expect $x|y$ data records, but when having data files with multiple values for y , like:

```

x y1 y2 y3 y4 ... yMax
x y1 y2 y3 y4 ... yMax
...

```

you can select the y value which should be plotted. The option `plotNo` marks the plotted value (default 1) and the option `plotNoMax` tells `pst-plot` how many y values are present. There are no real restrictions in the maximum number for `plotNoMax`.

We have the following data file:

```


[% file examples/data.dat
0 0 3.375 0.0625
10 5.375 7.1875 4.5
20 7.1875 8.375 6.25
30 5.75 7.75 6.6875
40 2.1875 5.75 5.9375
50 -1.9375 2.1875 4.3125
60 -5.125 -1.8125 0.875
70 -6.4375 -5.3125 -2.6875
80 -4.875 -7.1875 -4.875

```

```

90    0    -7.625    -5.625
100   5.5   -6.3125   -5.8125
110   6.8125  -2.75    -4.75
120   5.25    2.875   -0.75
]%
```

which holds data records for multiple plots (x y1 y2 y3). This can be plotted without any modification to the data file:

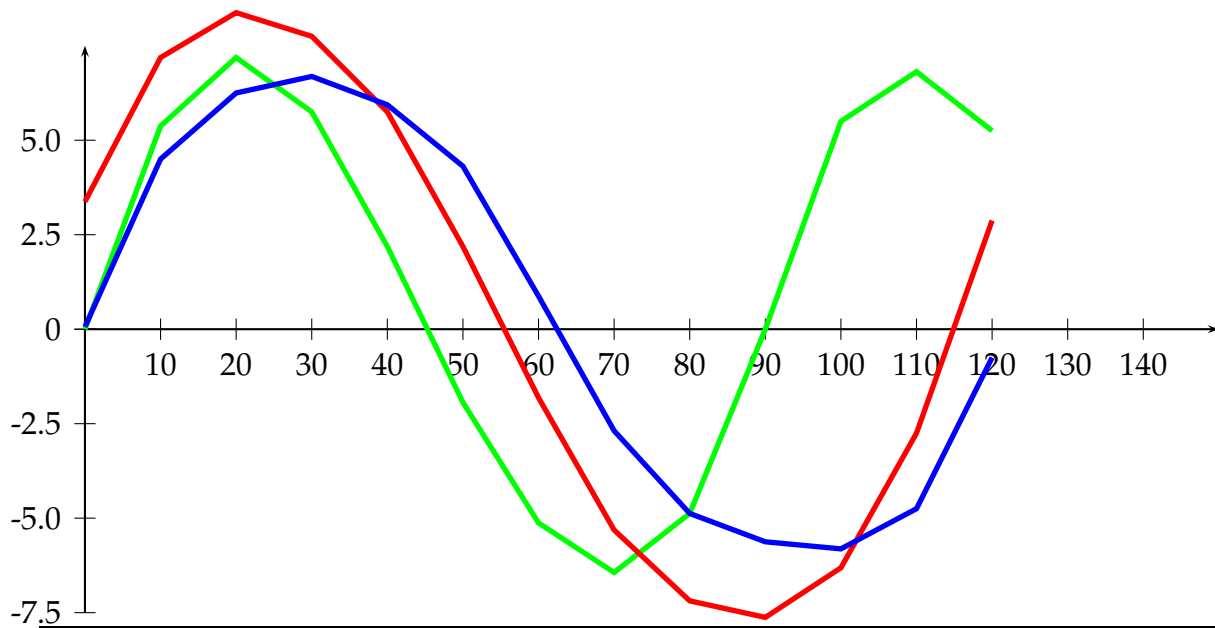


```

1 \readdata\Data{examples/dataMul.dat}
2 \psset{xunit=0.1cm, yunit=0.5cm,lly=-0.5cm}
3 \begin{pspicture}(0,-7.5)(150,10)
4 \psaxes[Dx=10,Dy=2.5]{->}(0,0)(0,-7.5)(150,7.5)
5 \psset{linewidth=2pt,plotstyle=line}
6 \listplot[linecolor=green,plotNo=1,plotNoMax=3]{\Data}
7 \listplot[linecolor=red,plotNo=2,plotNoMax=3]{\Data}
8 \listplot[linecolor=blue,plotNo=3,plotNoMax=3]{\Data}
9 \end{pspicture}
```

21.20.8 Example for changeOrder

It is only possible to fill the region between two listplots with \pscustom if one of both has the values in a reverse order. Otherwise we do not get a closed path. With the option ChangeOrder the values are used in a reverse order:

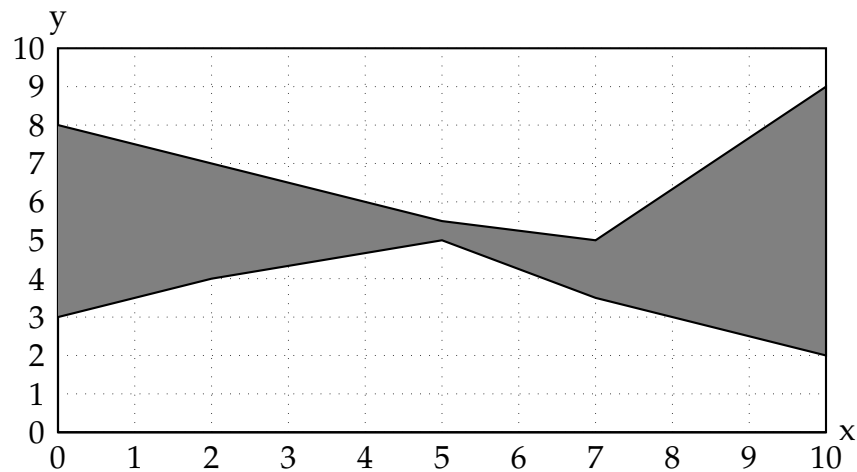


```

1 \begin{filecontents*}{test.dat}
2   0 3 8
3   2 4 7
4   5 5 5.5
5   7 3.5 5
6   10 2 9
7 \end{filecontents*}
8 \psset{lly=-.5cm}
9 \begin{psgraph}[axesstyle=frame,ticklinestyle=dotted,ticks=0 10](0,0)(10,10){4in}{2
   in}%
10  \readdata{\data}{test.dat}%
11  \pscustom[fillstyle=solid,fillcolor=gray]{%
12    \listplot[plotNo=2,plotNoMax=2]{\data}%
13    \listplot[plotNo=1,plotNoMax=2,ChangeOrder]{\data}}
14 \end{psgraph}

```


21.20.9 Example for plotstyle

The plotstyle option is defined in the package pst-plot, but its value LSM (Least Square **M**ethod) is only valid for the pstricks-add package. Instead of plotting the data records as dots or a line, the listplot macro calculates the values for a line $y = v \cdot x + u$ which fits best all data records.

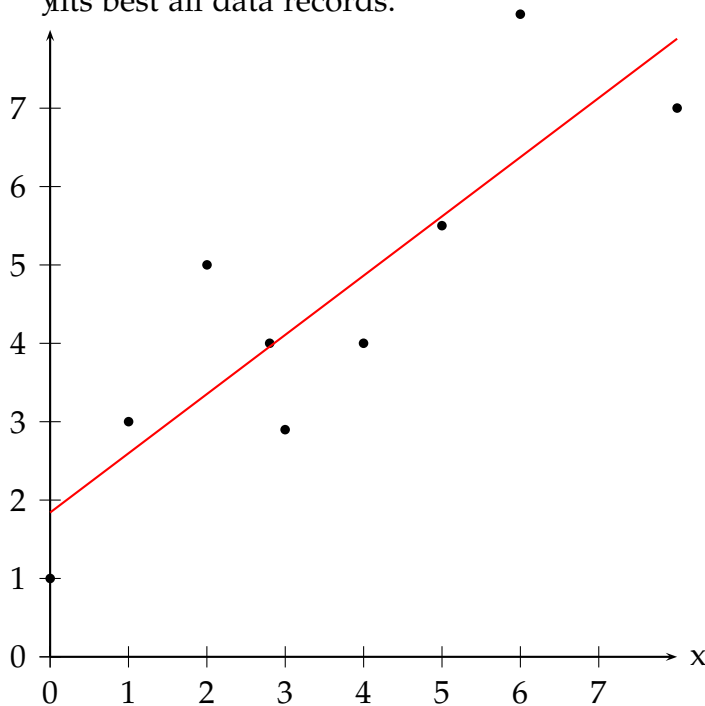

```
1 \begin{filecontents*}{LSM.dat}
2 0 1 1 3 2.8 4 3 2.9 2 5 4 4 5 5.5 6 8.2 8 7
3 \end{filecontents*}
4 \psset{lly=-.5cm}
5 \readdata{\data}{LSM.dat}
6 \begin{psgraph}[arrows=->](0,0)(0,0)(8,8){.5\textwidth}{!}
7   \listplot[plotstyle=dots]{\data}
8   \listplot[plotstyle=LSM,linecolor=red]{\data}
9 \end{psgraph}
```

The macro looks for the lowest and biggest x-value and draws the line for this interval. It is possible to pass another values to the macro by setting the xStart and/or xEnd options. They are preset with an empty value {}.

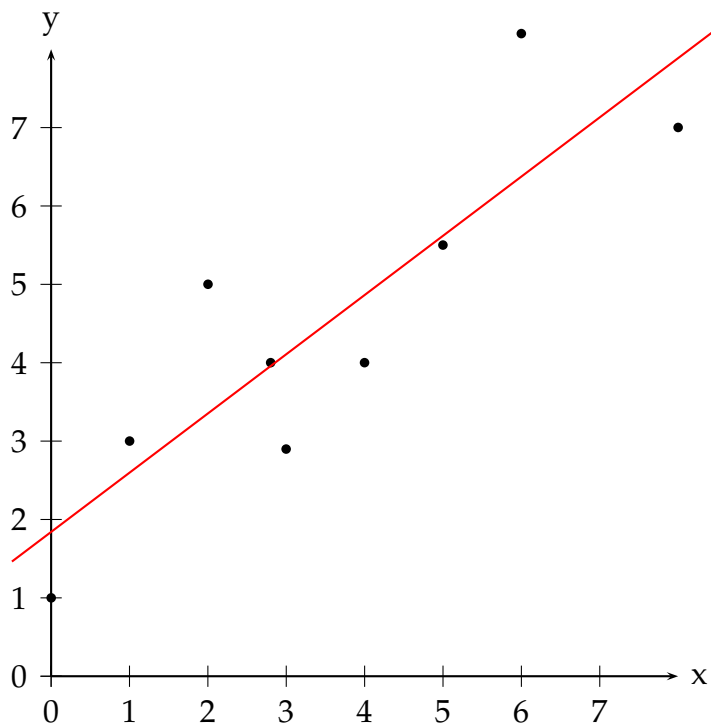


$$y=0.755679 x+1.84105$$

```

1 \begin{filecontents*}{LSM.dat}
2 0 1 1 3 2.8 4 3 2.9 2 5 4 4 5 5.5 6 8.2 8 7
3 \end{filecontents*}
4 \readdata{\data}{LSM.dat}
5 \psset{lly=-1.75cm}
6 \begin{psgraph}[arrows=->](0,0)(0,0)(8,8){.5\textwidth}{!}
7   \listplot[plotstyle=dots]{\data}
8   \listplot[PstDebug=1,plotstyle=LSM,xStart=-0.5,xEnd=8.5,linecolor=red]{\data}
9 \end{psgraph}

```

With PstDebug=1 one gets the equation $y = v \cdot x + u$ printed, beginning at the position (0|-50pt). This cannot be changed, because it is only for some kind of debugging. Pay attention for the correct xStart- and xEnd-values, when you use the \pstScalePoints-Macro. In the following example we use an x-interval from 0 to 3 to plot the values; first we subtract 0.003 from all x-values and then scale them with 10000. This is not taken into account for the xStart- and xEnd-values.

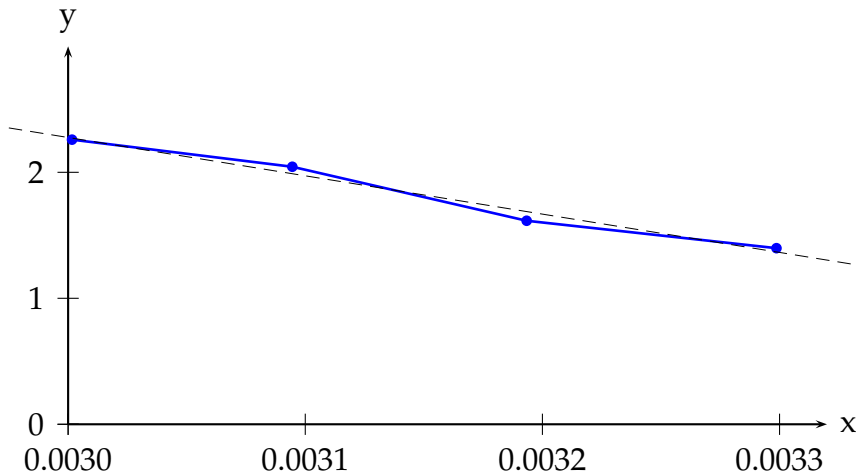

$$y = -0.161551x + 2.27634$$

```

1 \begin{filecontents*}{LSM.dat}
2 0.003298697 1.397785583
3 0.003193358 1.615489564
4 0.003094538 2.044019006
5 0.003001651 2.259240127
6 \end{filecontents*}
7 \readdata{\data}{LSM.dat}
8 \pstScalePoints(10000,1){ 0.003 sub }{}
9 \psset{lly=-1.75cm}
10 \psgraph[arrows=->,Ox=0.0030,Dx=0.0001,dx=\psxunit](0,0)(3.2,3){10cm}{5cm}
11 \listplot[showpoints=true,linewidth=1pt,linecolor=blue]{\data}
12 \listplot[PstDebug=1,plotstyle=LSM,linewidth=0.1pt,linestyle=dashed,%
13 xStart=-0.25,xEnd=3.3]{\data}
14 \endpsgraph

```


22 Polar plots

With the option `polarplot=false|true` it is possible to use `\psplot` in polar mode:

```
\psplot[polarplot=true,...]{<start angle>}{<end angle>}{<r(alpha)>}
```

The equation in PostScript code is interpreted as a function $r = f(\alpha)$, e.g. for the circle with radius 1 as $r = \sqrt{\sin^2 x + \cos^2 x}$:


```
x sin dup mul x cos dup mul add sqrt
```
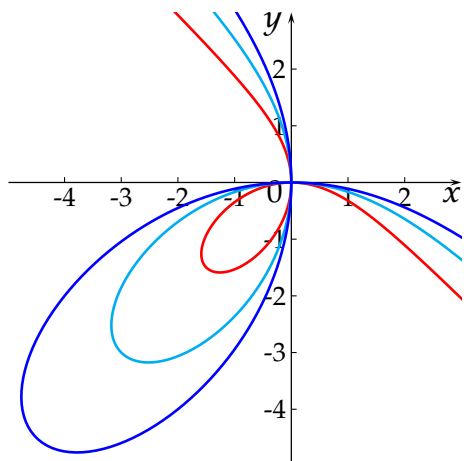
```

1 \resetOptions
2 \psset{plotpoints=200,unit=0.75}
3 \begin{pspicture}*(-5,-5)(3,3)
4   \psaxes[labelsep=.75mm,arrowlength=1.75,ticks=2
5     pt,%
6     labelFontSize=\footnotesize,%
7     linewidth=0.17mm]{->}(0,0)(-4.99,-4.99)(3,3)
8   \rput[Br](3,-.35){$x$}
9   \rput[tr](-.15,3){$y$}
10  \rput[Br](-.15,-.35){$0$}
11  \psset{linewidth=.35mm,polarplot=true}
12  \psplot[linecolor=red]{140}{310}{3 neg x sin mul x
13    cos mul x sin 3 exp x cos 3 exp add div}
14  \psplot[linecolor=cyan]{140}{310}{6 neg x sin mul x
15    cos mul x sin 3 exp x cos 3 exp add div}
16  \psplot[linecolor=blue]{140}{310}{9 neg x sin mul x
17    cos mul x sin 3 exp x cos 3 exp add div}
18 \end{pspicture}


```

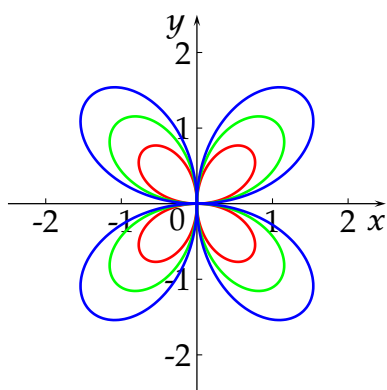

```

1 \resetOptions
2 \psset{plotpoints=200,unit=1}
3 \begin{pspicture}(-2.5,-2.5)(2.5,2.5)% Ulrich Dirr
4   \psaxes[labelsep=.75mm,arrowlength=1.75,%
5     ticks=2pt,linewidth=0.17mm]{->}(0,0)(-2.5,-2.5)
6     (2.5,2.5)
7   \rput[Br](2.5,-.35){$x$}
8   \rput[tr](-.15,2.5){$y$}
9   \rput[Br](-.15,-.35){$0$}
10  \psset{linewidth=.35mm,plotstyle=curve,polarplot=true}
11  \psplot[linecolor=red]{0}{360}{x cos 2 mul x sin mul}
12  \psplot[linecolor=green]{0}{360}{x cos 3 mul x sin mul}
13  \psplot[linecolor=blue]{0}{360}{x cos 4 mul x sin mul}
14 \end{pspicture}

```

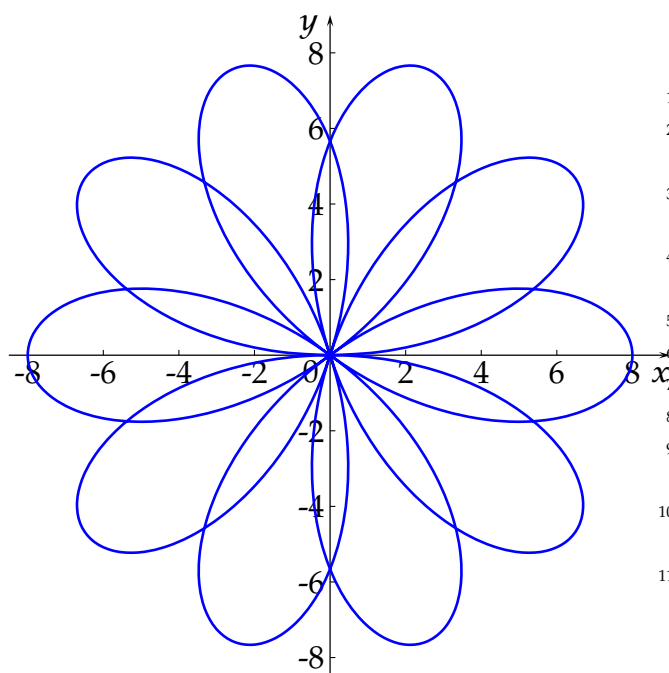

```

\psset{plotpoints=200,unit=0.5}
\begin{pspicture}(-8.5,-8.5)(9,9)% Ulrich
Dirr
\psaxes[Dx=2,dx=2,Dy=2,dy=2,labelsep=.75mm
,%
arrowlength=1.75,ticksiz=2pt,linewidth
=0.17mm]{->}(0,0)(-8.5,-8.5)(9,9)
\rput[Br](9,-.7){$x$}
\rput[tr](-.3,9){$y$}
\rput[Br](-.3,-.7){$O$}
%
\psset{linewidth=.35mm,plotstyle=curve,
polarplot=true}
\psplot[linecolor=blue]{0}{720}{8 2.5 x
mul sin mul}
\end{pspicture}


```

23 \pstScalePoints

The syntax is

```
\pstScalePoints(xScale,yScale){xPS}{yPS}
```

xScale,yScale are decimal values as scaling factors, the xPS and yPS are additional PostScript code to the x- and y-values of the data records. This macro is only valid for the \listplot macro!

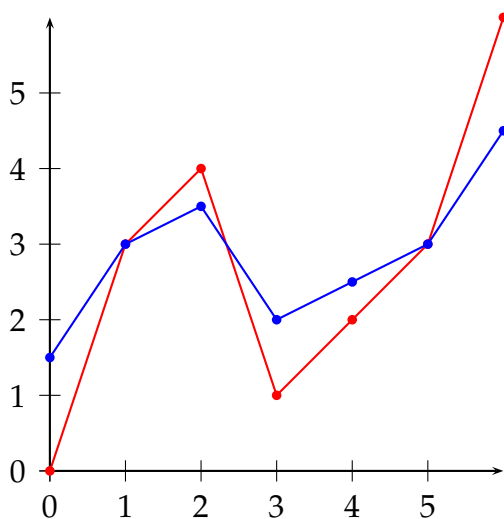

```

\def\data{%
  0 0 1 3 2 4 3 1
  4 2 5 3 6 6 }
\begin{pspicture}(-0.5,-1)(6,6)
\psaxes{->}(0,0)(6,6)
\listplot[showpoints=true,%
linecolor=red]{\data}
\pstScalePoints(1,0.5){}{3 add}
\listplot[showpoints=true,%
linecolor=blue]{\data}
\end{pspicture}

```

`\pstScalePoints(1,0.5){}{3 add}` means that **first** the value 3 is added to the y values and **second** this value is scaled with the factor 0.5. As seen for the blue line for $x = 0$ we get $y(0) = (0 + 3) \cdot 0.5 = 1.5$.

Changes with `\pstScalePoints` are always global to all following `\listplot` macros. This is the reason why it is a good idea to reset the values at the end of the `pspicture` environment.

```
\pstScalePoints(1,1){}{}{}
```

Part IV

New commands and environments

24 psgraph environment

This new environment does the scaling, it expects as parameter the values (without units!) for the coordinate system and the values of the physical width and height (with units!). The syntax is:


```
\psgraph[<axes options>]{<arrows>}%
  (xOrig,yOrig)(xMin,yMin)(xMax,yMax){xLength}{yLength}
...
\endpsgraph

\begin{psgraph}[<axes options>]{<arrows>}%
  (xOrig,yOrig)(xMin,yMin)(xMax,yMax){xLength}{yLength}
...
\end{psgraph}
```

where the options are valid **only** for the the `\psaxes` macro. The first two arguments have the usual PSTricks behaviour.

- if `(xOrig,yOrig)` is missing, it is substituted to `(xMin,xMax)`;
- if `(xOrig,yOrig)` **and** `(xMin,yMin)` are missing, they are both substituted to `(0,0)`.

The y-length maybe given as `!`, then the macro uses the same unit as for the x-axis.

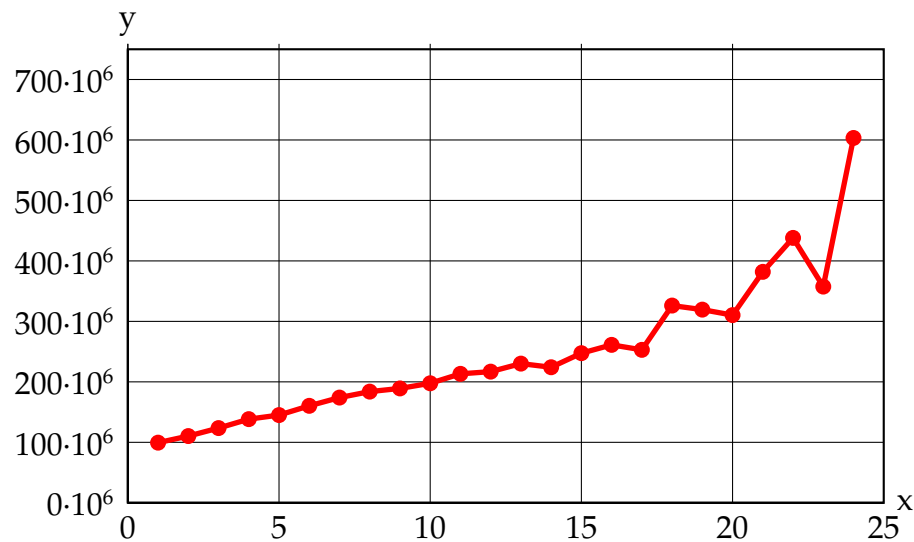


```

1 \readdata{\data}{demo1.dat}
2 \pstScalePoints(1,0.000001){}% (x,y){additional x operator}{y op}
3 \psset{llx=-1cm,llx=-1cm}
4 \begin{psgraph}[axesstyle=frame,xticks=0 759,yticks=0 25,%
5     subticks=0,ylabelFactor={\cdot 10^6},%
6     Dx=5,dy=100\psyunit,Dy=100](0,0)(25,750){10cm}{6cm} % parameters
7     \listplot[linecolor=red,linewidth=2pt,showpoints=true]{\data}
8 \end{psgraph}

```


In the following example, the y unit gets the same value as the one for the x-axis.

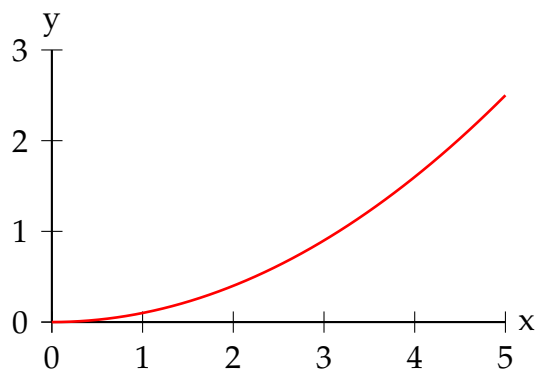

```

1 \psset{llx=-1cm,llx=-0.5cm,ury=0.5cm}
2 \begin{psgraph}(0,0)(5,3){6cm}{!} % x-y-axis with same unit
3     \psplot[linecolor=red,linewidth=1pt]{0}{5}{x dup mul 10 div}
4 \end{psgraph}


```

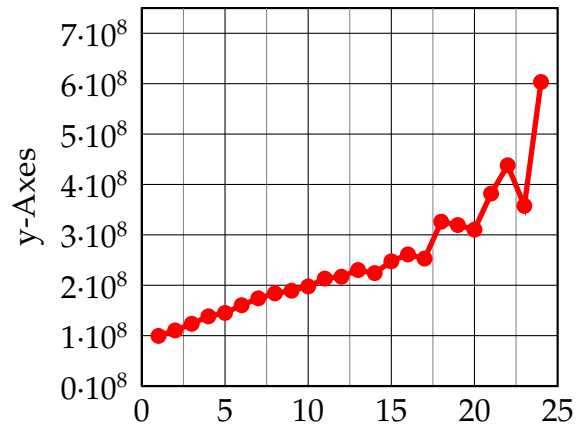

```

1 \readdata{\data}{demo1.dat}
2 \psset{xAxisLabel=x-Axes,yAxisLabel=y-Axes,llx=-.5cm,ury=0.5cm,
3   xAxisLabelPos={3cm,-1cm},yAxisLabelPos={-1.5cm,2.5cm}}
4 \pstScalePoints(1,0.0000001){}{}
5 \begin{psgraph}[axesstyle=frame,xticks=0 7.5,yticks=0 25,subticks=1,
6   ylabelFactor={\$ \cdot 10^8\$},Dx=5,Dy=1,xsubticks=2](0,0)(25,7.5){5.5cm}{5cm}
7   \listplot[linecolor=red,linewidth=2pt,showpoints=true]{\data}
8 \end{psgraph}


```

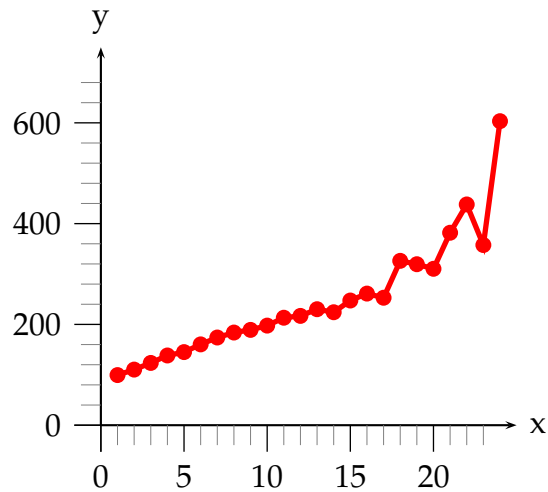

```

1 \readdata{\data}{demo1.dat}
2 \psset{llx=-0.5cm,lly=-1cm}
3 \pstScalePoints(1,0.000001){}{}
4 \psgraph[arrows=->,Dx=5,dy=200\psyunit,Dy=200,%
5   subticks=5,ticks=-10pt 0,tickwidth=0.5pt,%
6   subtickwidth=0.1pt](0,0)(25,750){5.5cm}{5cm}
7 \listplot[linecolor=red,linewidth=2pt,showpoints=true,]{\data}
8 \endpsgraph


```

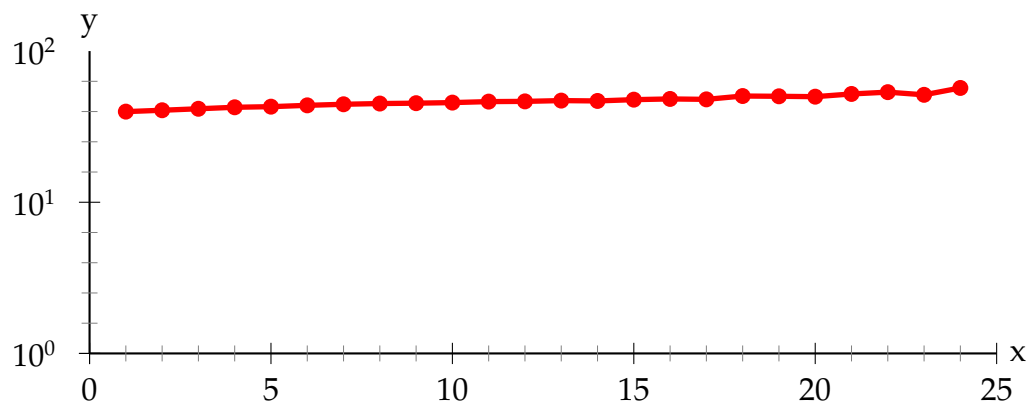

```

1 \readdata{\data}{demo1.dat}
2 \pstScalePoints(1,0.2){}{log}
3 \psset{lly=-0.75cm}
4 \psgraph[ylogBase=10,Dx=5,Dy=1,subticks=5](0,0)(25,2){12cm}{4cm}
5   \listplot[linecolor=red,linewidth=2pt,showpoints=true]{\data}
6 \endpsgraph


```

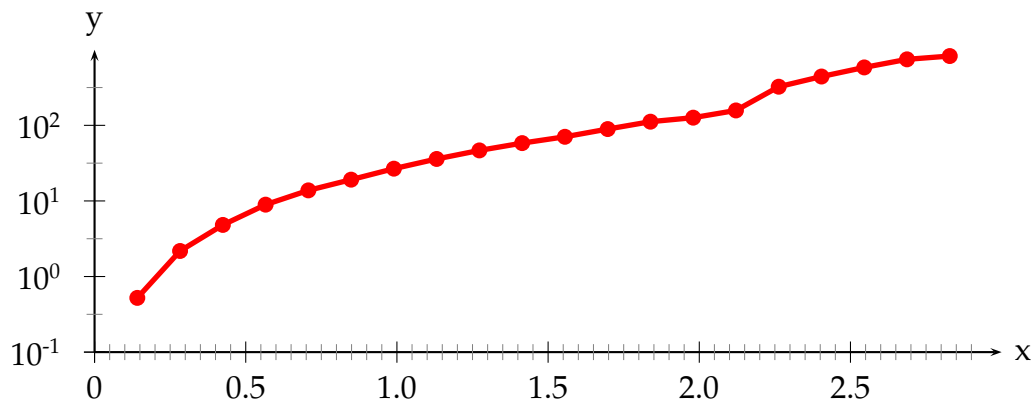

```

1 \readdata{\data}{demo0.dat}
2 \psset{lly=-0.75cm,ury=0.5cm}
3 \pstScalePoints(1,1){}{log}
4 \begin{psgraph}[arrows=->,Dx=0.5,ylogBase=10,Oy=-1,xsubticks=10,%
5   ysubticks=2](0,-3)(3,1){12cm}{4cm}
6   \listplot[linecolor=red,linewidth=2pt,showpoints=true]{\data}
7 \end{psgraph}


```

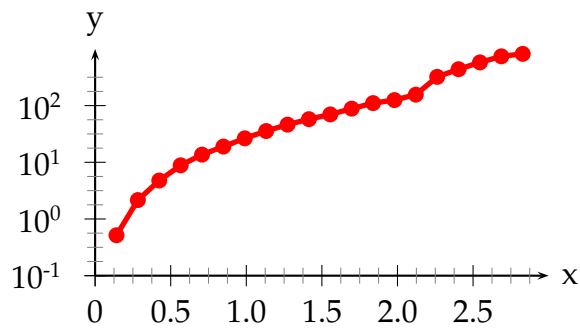

```

1 \psset{llx=-0.75cm,ury=0.5cm}
2 \readdata{\data}{demo0.dat}
3 \pstScalePoints(1,1){}{log}
4 \psgraph[arrows=->,Dx=0.5,ylogBase=10,Oy=-1,subticks=4](0,-3)(3,1){6cm}{3cm}
5 \listplot[linecolor=red,linewidth=2pt,showpoints=true]{\data}
6 \endpsgraph


```

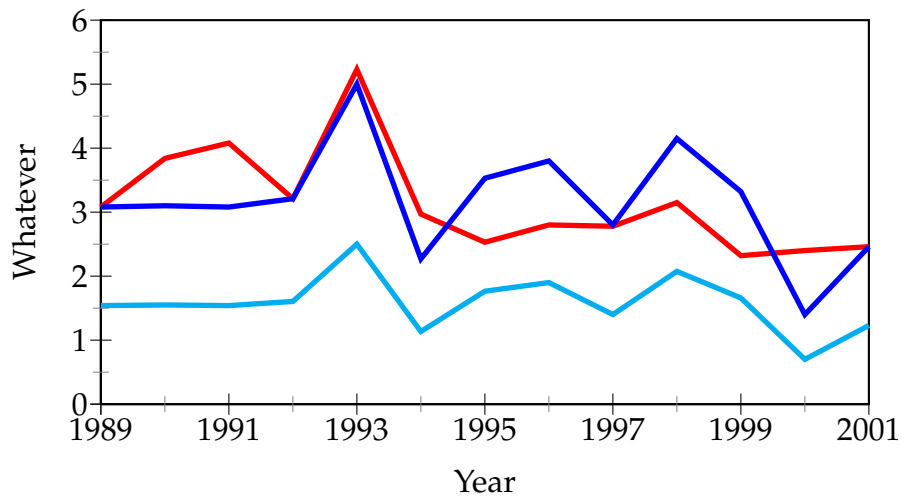

```

1 \readdata{\data}{demo2.dat}%
2 \readdata{\dataII}{demo3.dat}%
3 \pstScalePoints(1,1){1989 sub}{}
4 \psset{llx=-0.5cm,llx=-1cm, xAxisLabel=Year,yAxisLabel=Whatever,%
5 \xAxisLabelPos={2in,-0.4in},yAxisLabelPos={-0.4in,1in}}
6 \psgraph[axesstyle=frame,Dx=2,Ox=1989,subticks=2](0,0)(12,6){4in}{2in}%
7 \listplot[linecolor=red,linewidth=2pt]{\data}
8 \listplot[linecolor=blue,linewidth=2pt]{\dataII}
9 \listplot[linecolor=cyan,linewidth=2pt,yunit=0.5]{\dataII}
10 \endpsgraph

```

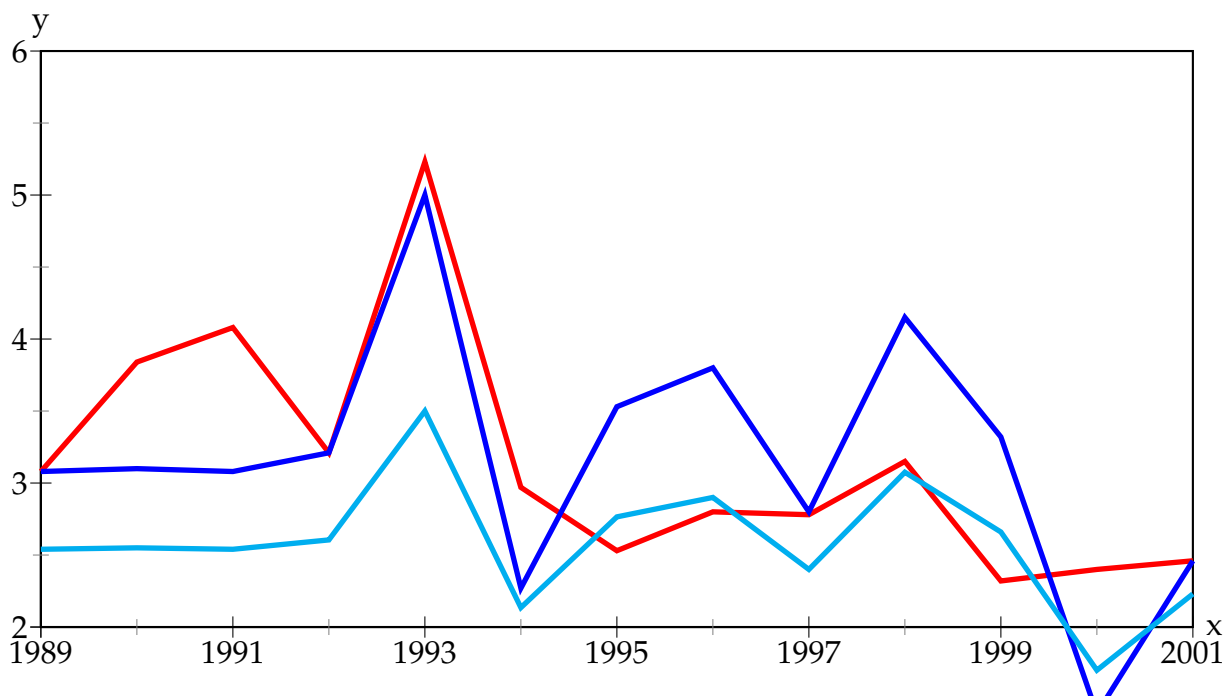


```

1 \readdata{\data}{demo2.dat}%
2 \readdata{\dataII}{demo3.dat}%
3 \psset{llx=-0.5cm, lly=-0.75cm}
4 \pstScalePoints(1,1){1989 sub}{2 sub}
5 \begin{psgraph}[axesstyle=frame,Dx=2,Ox=1989,Oy=2,subticks=2](0,0)(12,4){6in}{3in}%
6   \listplot[linecolor=red,linewidth=2pt]{\data}
7   \listplot[linecolor=blue,linewidth=2pt]{\dataII}
8   \listplot[linecolor=cyan,linewidth=2pt,yunit=0.5]{\dataII}
9 \end{psgraph}

```

An example with ticks on every side of the frame:

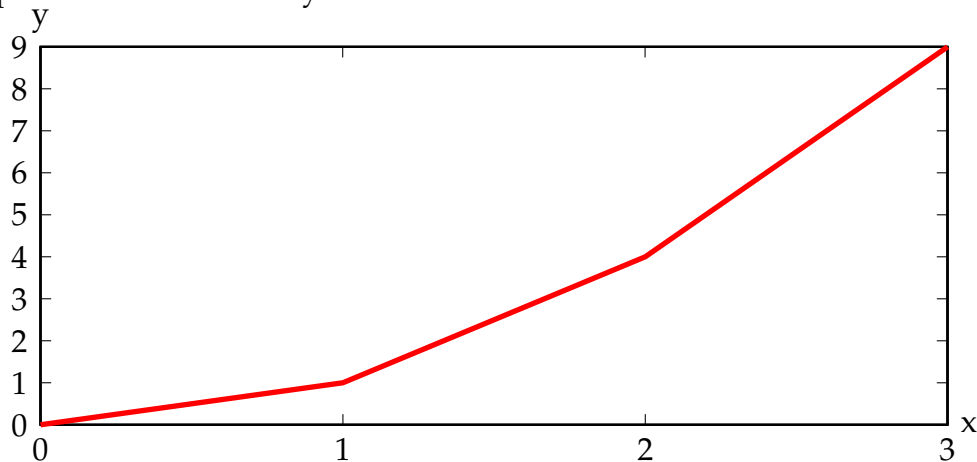

```


1 \def\data{0 0 1 1 2 4 3 9}
2 \psset{lly=-0.5cm}
3 \begin{psgraph}[axesstyle=frame,ticks=0 4pt](0,0)(3.0,9.0){12cm}{5cm}
4   \psaxes[axesstyle=frame,labels=none,ticks=-4pt 0](3,9)(0,0)(3,9)
5   \listplot[linecolor=red,linewidth=2pt]{\data}
6 \end{psgraph}

```


24.1 The new options

name	default	meaning
xAxisLabel	x	label for the x-axis
yAxisLabel	y	label for the y-axis
xAxisLabelPos	{}	where to put the x-label
yAxisLabelPos	{}	where to put the y-label
llx	0pt	trim for the lower left x
lly	0pt	trim for the lower left y
urx	0pt	trim for the upper right x
ury	0pt	trim for the upper right y

There is one restriction in using the trim parameters, they must be set **before** `psgraph` is called. They are senseless, when using as parameters of `psgraph` itself.

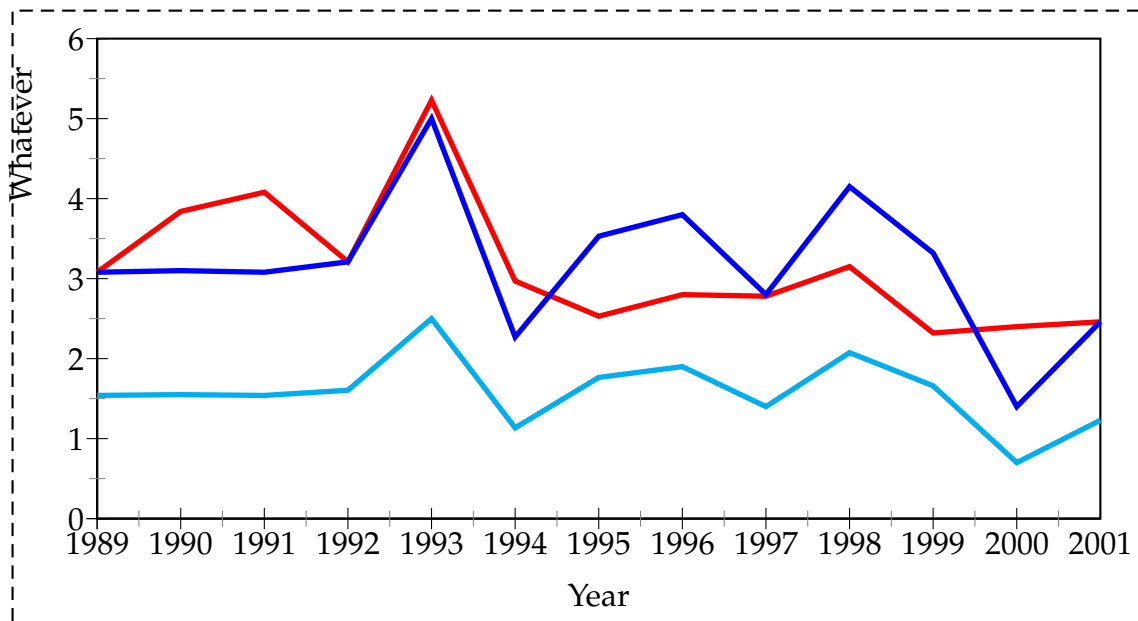


```

1 \readdata{\data}{demo2.dat}%
2 \readdata{\dataII}{demo3.dat}%
3 \psset{llx=-1cm,lly=-1.25cm,urx=0.5cm,ury=0.1in,xAxisLabel=Year,%
4   yAxisLabel=Whatever,xAxisLabelPos={.4\linewidth,-0.4in},%
5   yAxisLabelPos={-0.4in,2in}}
6 \pstScalePoints(1,1){1989 sub}{}
7 \psframebox[linestyle=dashed,boxsep=0pt]{}
8 \begin{psgraph}[axesstyle=frame,0x=1989,subticks=2](0,0)(12,6){0.8\linewidth}{2.5in}%
9   \listplot[linecolor=red,linewidth=2pt]{\data}%
10  \listplot[linecolor=blue,linewidth=2pt]{\dataII}%
11  \listplot[linecolor=cyan,linewidth=2pt,yunit=0.5]{\dataII}%
12 \end{psgraph}%
13 }
```

24.2 Problems

Floating point operations in $\text{T}_{\text{E}}\text{X}$ are a real mess, which causes a lot of problems when there are very small or very big units. With the options of `\pst-plot` it is possible to choose normal units (whatever this may be ...), but plotting the data as usual.

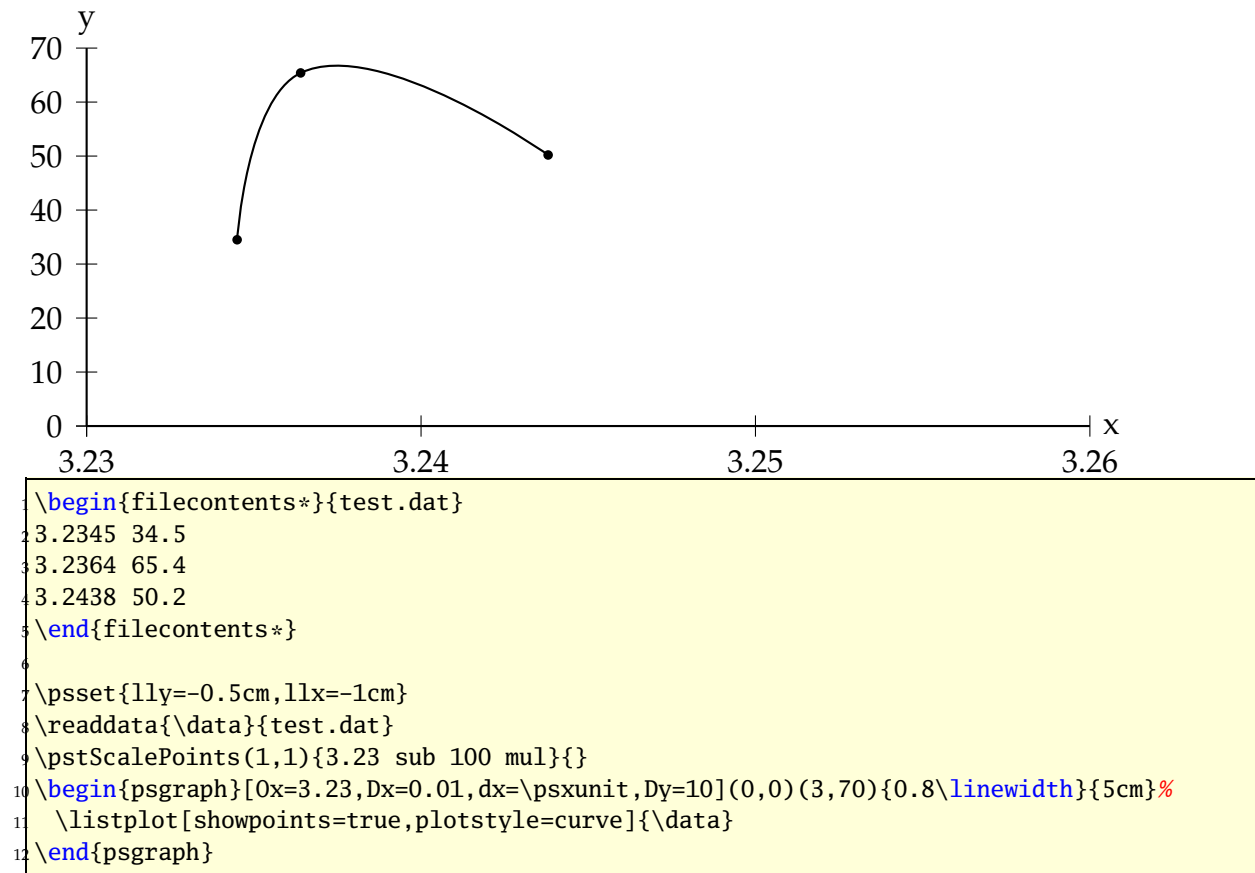

This example shows some important facts:

- `3.23 sub 100 mul`: the x values are now 0.45;0.64;1.38
- `Ox=3.23`: the origin of the x axis is set to 3.23
- `Dx=0.01`: the increment of the labels
- `dx=\psxunit`: uses the calculated unit value to get every unit a label
- `Dy=10`: increase the y labels by 10

Using the internal `\psxunit` one can have dynamical x-units, depending to the linewidth of the document.

25 \psStep


\psStep calculates a step function for the upper or lower sum or the max/min of the Riemann integral definition of a given function. The available option is

StepType=lower|upper|Riemann|infimum|supremum or alternative StepType=l|u|R|i|s

with lower as the default setting. The syntax of the function is

\psStep[options](x1,x2){n}{function}


(x1,x2) is the given Intervall for the step wise calculated function, n is the number of the rectangles and function is the mathematical function in postfix or algebraic notation (with algebraic=true).

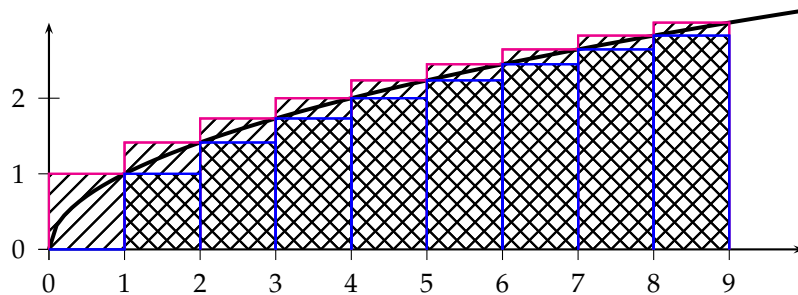

```

1 \begin{pspicture}(-0.5,-0.5)(10,3)
2 \psaxes[labelFontSize=\footnotesize]{->}(10,3)
3 \psplot[plotpoints=100,linewidth=1.5pt,algebraic]{0}{10}{sqrt(x)}
4 \psStep[linecolor=magenta,StepType=upper,fillstyle=hlines](0,9){9}{x sqrt}
5 \psStep[linecolor=blue,fillstyle=vlines](0,9){9}{x sqrt}
6 \end{pspicture}


```

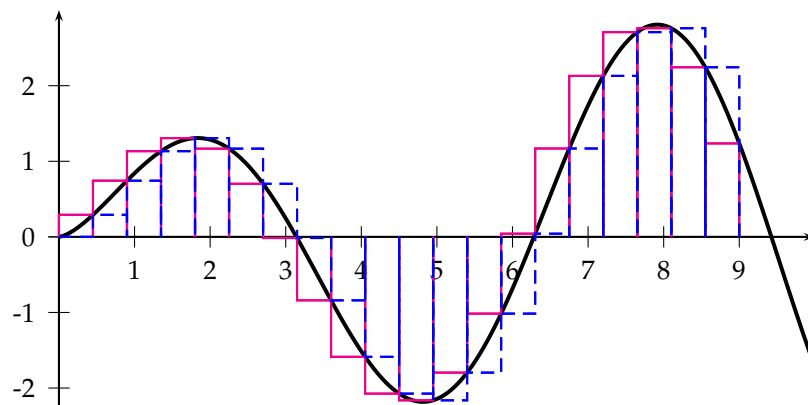

```

1 \psset{plotpoints=200}
2 \begin{pspicture}(-0.5,-2.25)(10,3)
3 \psaxes[labelFontSize=\footnotesize]{->}(0,0)(0,-2.25)(10,3)
4 \psplot[linewidth=1.5pt,algebraic]{0}{10}{sqrt(x)*sin(x)}
5 \psStep[algebraic,linecolor=magenta,StepType=upper](0,9){20}{sqrt(x)*sin(x)}
6 \psStep[linecolor=blue,linestyle=dashed](0,9){20}{x sqrt x RadtoDeg sin mul}
7 \end{pspicture}


```

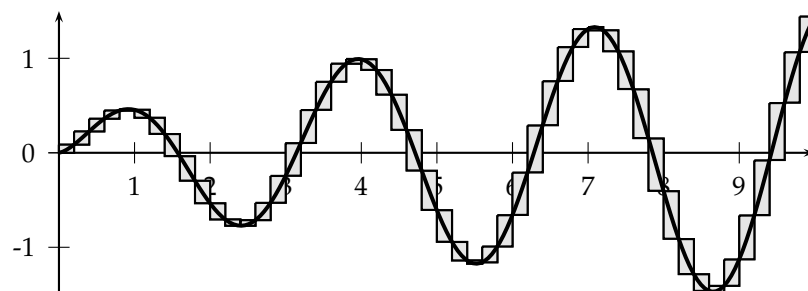

```

1 \psset{yunit=1.25cm,plotpoints=200}
2 \begin{pspicture}(-0.5,-1.5)(10,1.5)
3 \psaxes[labelFontSize=\footnotesize]{->}(0,0)(0,-1.5)(10,1.5)
4 \psStep[algebraic,StepType=Riemann,fillstyle=solid,fillcolor=black!10](0,10){50}%
5   {sqrt(x)*cos(x)*sin(x)}
6 \psplot[linewidth=1.5pt,algebraic]{0}{10}{sqrt(x)*cos(x)*sin(x)}
7 \end{pspicture}


```

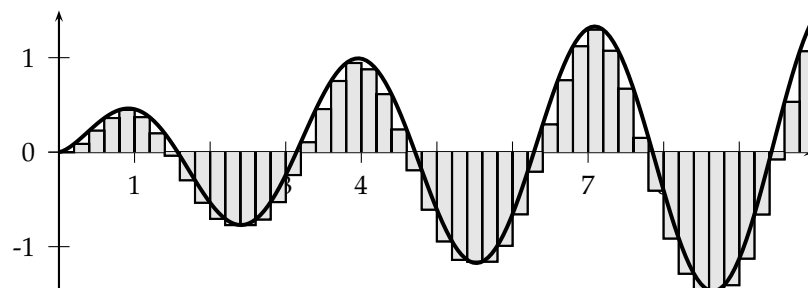

```

1 \psset{yunit=1.25cm,plotpoints=200}
2 \begin{pspicture}(-0.5,-1.5)(10,1.5)
3 \psaxes[labelFontSize=\footnotesize]{->}(0,0)(0,-1.5)(10,1.5)
4 \psStep[algebraic,StepType=infimum,fillstyle=solid,fillcolor=black!10](0,10){50}%
5   {sqrt(x)*cos(x)*sin(x)}
6 \psplot[linewidth=1.5pt,algebraic]{0}{10}{sqrt(x)*cos(x)*sin(x)}
7 \end{pspicture}


```

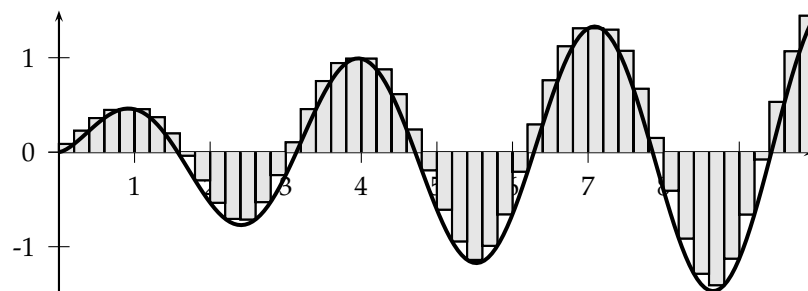

```

1 \psset{yunit=1.25cm,plotpoints=200}
2 \begin{pspicture}(-0.5,-1.5)(10,1.5)
3 \psaxes[labelFontSize=\footnotesize]{->}(0,0)(0,-1.5)(10,1.5)
4 \psStep[algebraic,StepType=supremum,fillstyle=solid,fillcolor=black!10](0,10){50}%
5   {sqrt(x)*cos(x)*sin(x)}
6 \psplot[linewidth=1.5pt,algebraic]{0}{10}{sqrt(x)*cos(x)*sin(x)}
7 \end{pspicture}

```

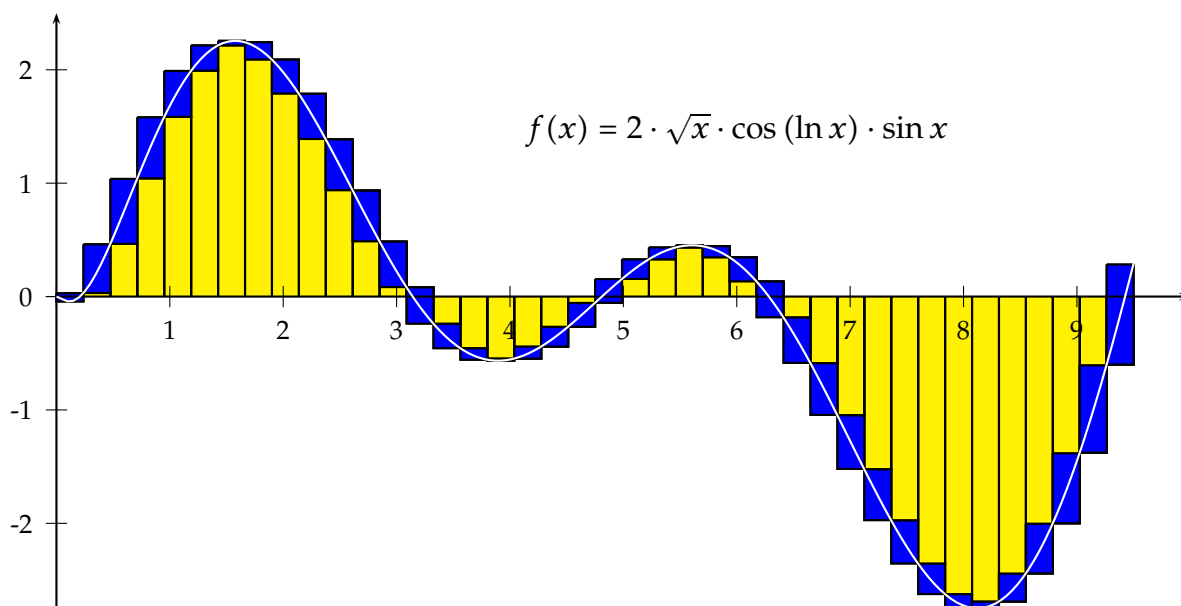

```

\psset{unit=1.5cm,plotpoints=200}
\begin{pspicture}[plotpoints=200](-0.5,-3)(10,2.5)
\psStep[algebraic,fillstyle=solid,fillcolor=yellow](0.001,9.5){40}{2*sqrt(x)*cos(ln(x))
*sin(x)}
\psStep[algebraic,StepType=Riemann,fillstyle=solid,fillcolor=blue](0.001,9.5){40}{2*
sqrt(x)*cos(ln(x))*sin(x)}
\psaxes[labelFontSize=\footnotesize]{->}(0,0)(0,-2.75)(10,2.5)
\psplot[algebraic,linecolor=white]{0.001}{9.75}{2*sqrt(x)*cos(ln(x))*sin(x)}
\uput[90](6,1.2){$f(x)=2\cdot\sqrt{x}\cdot\cos(\ln{x})\cdot\sin{x}$}
\end{pspicture}

```

26 \psplotTangent and option Tnormal

There is an additional option, named `Derive` vor an alternative function (see following example) to calculate the slope of the tangent. This will be in general the first derivation, but can also be any other function. If this option is different to to the default value `Derive=default`, then this function is taken to calculate the slope. For the other cases, `pstricks-add` builds a secant with $-0.00005 < x < 0.00005$, calculates the slope and takes this for the tangent. This maybe problematic in some cases of special functions or x values, then it may be appropriate to use the `Derivate` option.


The macro expects three parameters:

x : the x value of the function for which the tangent should be calculated

dx : the dx to both sides of the x value

$f(x)$: the function in infix (with option `algebraic`) or the default postfix (PostScript) notation


The following examples show the use of the algebraic option together with the Derive option. Remember that using the algebraic option implies that the angles have to be in the radian unit!

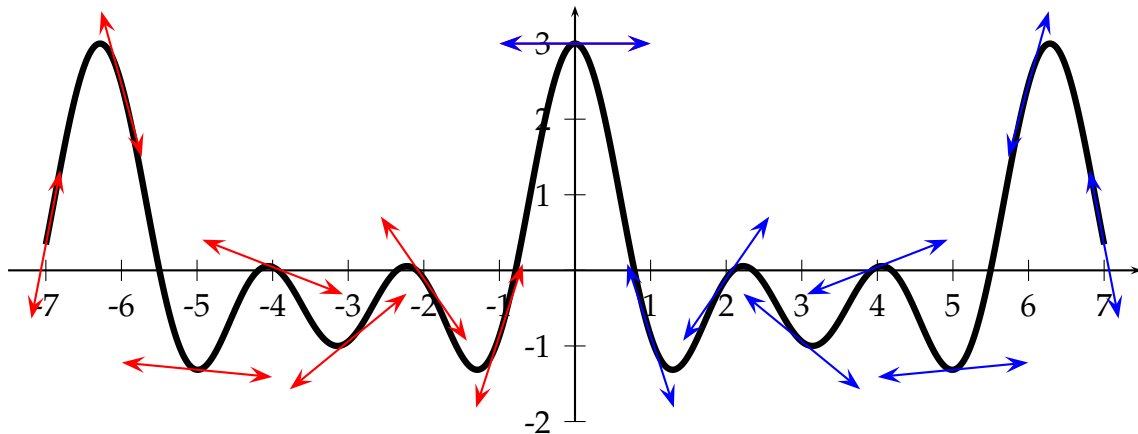

```

1 \def\F{x RadtoDeg dup dup cos exch 2 mul cos add exch 3 mul cos add}
2 \def\Fp{x RadtoDeg dup dup sin exch 2 mul sin 2 mul add exch 3 mul sin 3 mul add neg}
3 \psset{plotpoints=1001}
4 \begin{pspicture}(-7.5,-2.5)(7.5,4)%X\psgrid
5   \psaxes{->}(0,0)(-7.5,-2)(7.5,3.5)
6   \psplot[linewidth=3\pslinewidth]{-7}{7}{\F}
7   \psset{linecolor=red, arrows=<->, arrowscale=2}
8   \multido{\n=-7+1}{8}{\psplotTangent{\n}{1}{\F}}
9   \psset{linecolor=magenta, arrows=<->, arrowscale=2}%
10  \multido{\n=0+1}{8}{\psplotTangent[linecolor=blue, Derive=\Fp]{\n}{1}{\F}}
11 \end{pspicture}

```

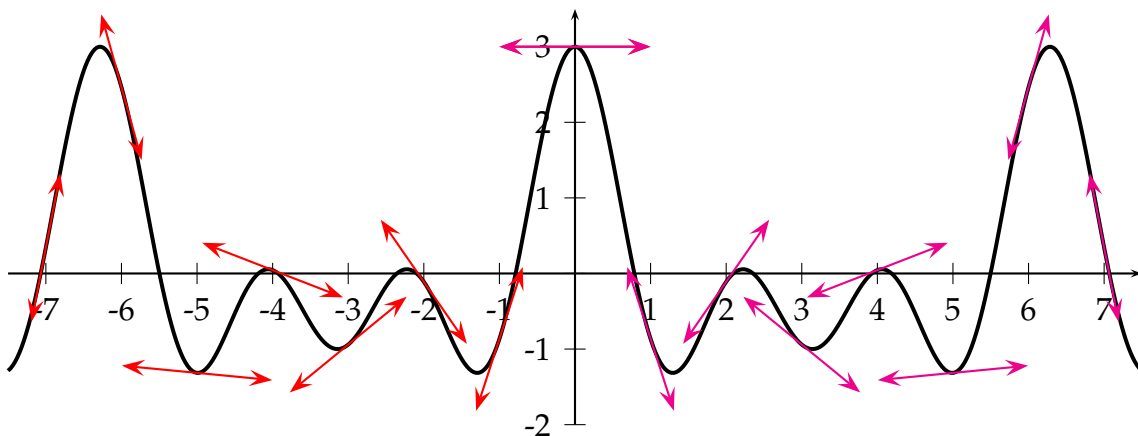


```

1 \def\Falg{\cos(x)+\cos(2*x)+\cos(3*x)} \def\Fpalg{-\sin(x)-2*\sin(2*x)-3*\sin(3*x)}
2 \begin{pspicture}(-7.5,-2.5)(7.5,4)%\psgrid
3 \psaxes{->}(0,0)(-7.5,-2)(7.5,3.5)
4 \psplot[linewidth=1.5pt,algebraic,plotpoints=500]{-7.5}{7.5}{\Falg}
5 \multido{\n=-7+1}{8}{\psplotTangent[linecolor=red,arrows=<->,arrowscale=2,algebraic
6 \multido{\n=0+1}{8}{\psplotTangent[linecolor=magenta,%
7 arrows=<->,arrowscale=2,algebraic,Derive={\Fpalg}]{\n}{1}{\Falg}}
8 \end{pspicture}

```

The next example shows the use of Derive option to draw the perpendicular line of the tangent.

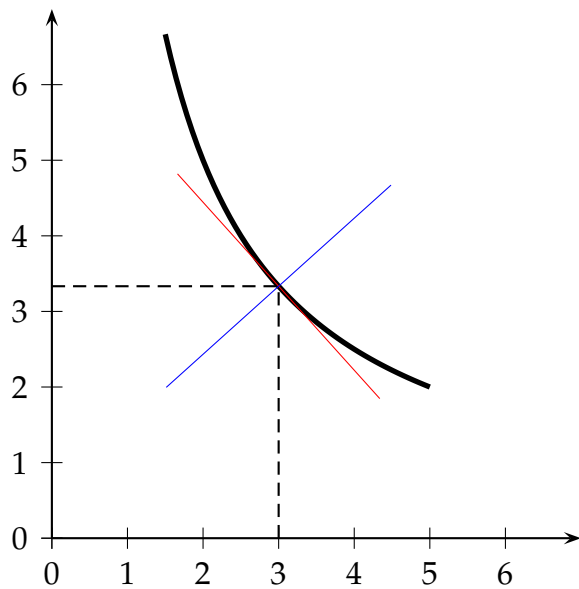


```

\begin{pspicture}(-0.5,-0.5)(7.25,7.25)
\def\Func{10 x div}
\psaxes[arrowscale=1.5]{->}(7,7)
\psplot[linewidth=2pt,algebraic]{1.5}{5}{10/x}
\psplotTangent[linewidth=.5\pslinewidth,linecolor=
red,algebraic]{3}{2}{10/x}
\psplotTangent[linewidth=.5\pslinewidth,linecolor=
blue,algebraic,Derive=(x*x)/10]{3}{2}{10/x}
\psline[linestyle=dashed](!0 /x 3 def \Func)(!3 /x
3 def \Func)(3,0)
\end{pspicture}

```

With setting the optional argument Tnormal one can plot the normal of the tangent line. It always starts at the given point.

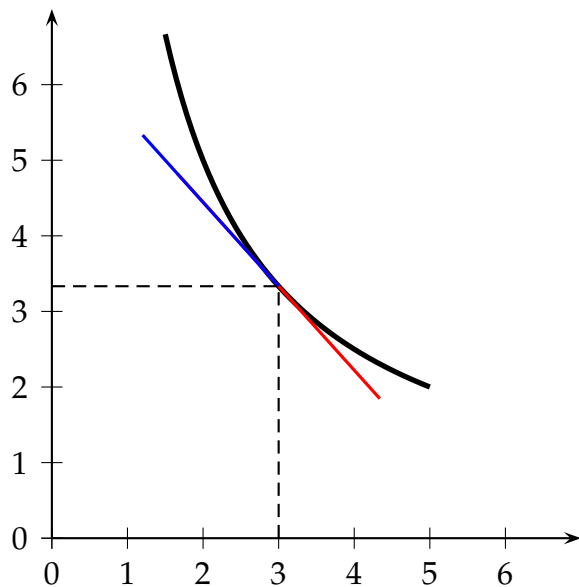

```

\begin{pspicture}(-0.5,-0.5)(7.25,7.25)
\def\Func{10 x div}
\psaxes[arrowscale=1.5]{->}(7,7)
\psplot[linewidth=2pt]{1.5}{5}{\Func}
\psplotTangent[linewidth=1.5\pslinewidth,linecolor
=red]{3}{2}{\Func}
\psplotTangent[linewidth=1.5\pslinewidth,linecolor
=blue,Tnormal]{3}{2}{\Func}
\psline[linestyle=dashed](!0 /x 3 def \Func)(!3 /x
3 def \Func)(3,0)
\end{pspicture}


```

26.1 A polarplot example

Let's work with the classical cardioid : $\rho = 2(1 + \cos(\theta))$ and $\frac{d\rho}{d\theta} = -2\sin(\theta)$. The Derive option always expects the $\frac{d\rho}{d\theta}$ value and uses internally the equation for the derivation of implicit defined functions:

$$\frac{dy}{dx} = \frac{\rho' \cdot \sin \theta + x}{\rho' \cdot \cos \theta - y}$$


where $x = r \cdot \cos \theta$ and $y = r \cdot \sin \theta$

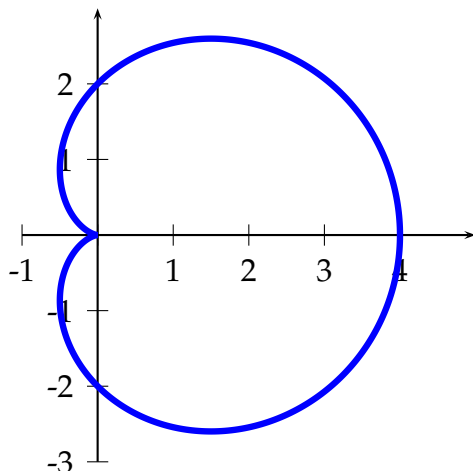

```

\begin{pspicture}(-1,-3)(5,3)%\psgrid[subgridcolor=lightgray]
\psaxes{->}(0,0)(-1,-3)(5,3)
\psplot[polarplot,linewidth=3\pslinewidth,linecolor=blue,%
plotpoints=500]{0}{360}{1 x cos add 2 mul}
\end{pspicture}


```
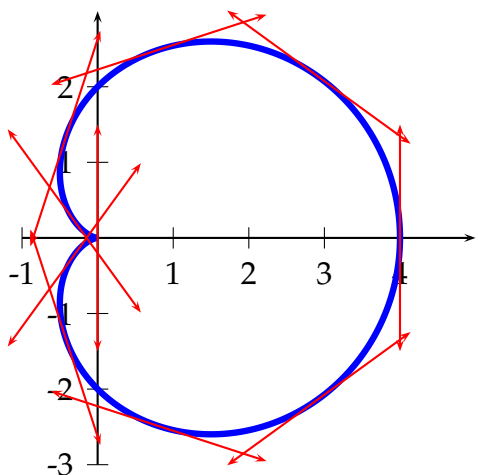
```

1 \begin{pspicture}(-1,-3)(5,3)%\psgrid[subgridcolor=lightgray]
2 \psaxes{->}(0,0)(-1,-3)(5,3)
3 \psplot[polarplot,linewidth=3\pslinewidth,linecolor=blue,
4 plotpoints=500]{0}{360}{1 x cos add 2 mul}
5 \multido{\n=0+36}{10}{%
6 \psplotTangent[polarplot,linecolor=red,arrows=<->]{\n
7 {1.5}{1 x cos add 2 mul} }
8 }
9 \end{pspicture}

```

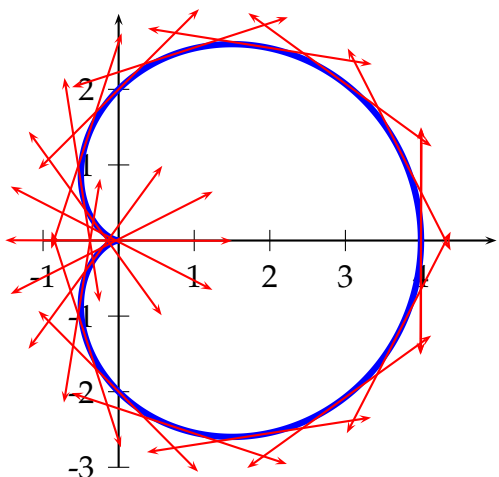

```


1 \begin{pspicture}(-1,-3)(5,3)%\psgrid[subgridcolor=lightgray]
2 \psaxes{->}(0,0)(-1,-3)(5,3)
3 \psplot[polarplot,linewidth=3\pslinewidth,linecolor=blue,
4 algebraic,plotpoints=500]{0}{6.289}{2*(1+cos(x))}
5 \multido{\r=0.000+0.314}{21}{%
6 \psplotTangent[polarplot,Derive=-2*sin(x),algebraic,
7 linecolor=red,arrows=<->]{\r}{1.5}{2*(1+cos(x))} }
8 }
9 \end{pspicture}

```

26.2 A \parametricplot example

Let's work with a Lissajou curve : $\begin{cases} x = 3.5 \cos(2t) \\ y = 3.5 \sin(6t) \end{cases}$ whose derivative is : $\begin{cases} x = -7 \sin(2t) \\ y = 21 \cos(6t) \end{cases}$

The parameter must be the letter t instead of x and when using the algebraic option divide the two equations by a $|$ (see example).

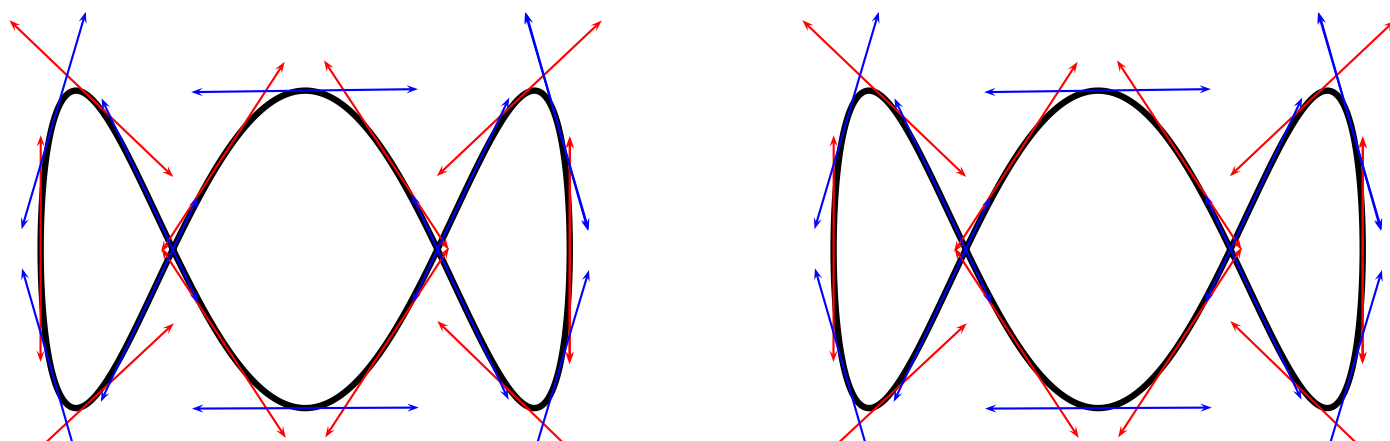

```

1 \def\Lissa{t dup 2 RadtoDeg mul cos 3.5 mul exch 6 mul RadtoDeg sin 3.5 mul}%
2 \psset{yunit=0.6}
3 \begin{pspicture}(-4,-4)(4,6)
4   \parametricplot[plotpoints=500,linewidth=3\pslinewidth]{0}{3.141592}{\Lissa}
5   \multido{\r=0.000+0.314}{11}{%
6     \psplotTangent[linecolor=red,arrows=<->]{\r}{1.5}{\Lissa} }
7   \multido{\r=0.157+0.314}{11}{%
8     \psplotTangent[linecolor=blue,arrows=<->]{\r}{1.5}{\Lissa} }
9 \end{pspicture}\hfill%
10 \def\LissaAlg{3.5*cos(2*t)|3.5*sin(6*t)} \def\LissaAlgDer{-7*sin(2*t)|21*cos(6*t)}%
11 \begin{pspicture}(-4,-4)(4,6)
12   \parametricplot[algebraic,plotpoints=500,linewidth=3\pslinewidth]{0}{3.141592}{\LissaAlg}
13   \multido{\r=0.000+0.314}{11}{%
14     \psplotTangent[algebraic,linecolor=red,arrows=<->]{\r}{1.5}{\LissaAlg} }
15   \multido{\r=0.157+0.314}{11}{%
16     \psplotTangent[algebraic,linecolor=blue,arrows=<->,%
17       Derive=\LissaAlgDer]{\r}{1.5}{\LissaAlg} }
18 \end{pspicture}

```

27 Successive derivatives of a function

The new PostScript function `Derive` has been added for plotting the successive derivatives of a function. It must be used with the `algebraic` option. This function has two arguments:


1. a positive integer with define the order of the derivative, obviously 0 means the function itself!
2. a function of variable x which can be any function using the common operators,

Do not think that the derivative is approximated, the internal PostScript engine will compute the real derivative using a formal derivative engine.


The following diagram contains the plot of the polynomial:

$$f(x) = \sum_{i=0}^{14} \frac{(-1)^i x^{2i}}{i!} = 1 - \frac{x^2}{2} + \frac{x^4}{4!} - \frac{x^6}{6!} + \frac{x^8}{8!} - \frac{x^{10}}{10!} + \frac{x^{12}}{12!} - \frac{x^{14}}{14!}$$

and of its 15 first derivatives. It is the sequence definition of the cosine.

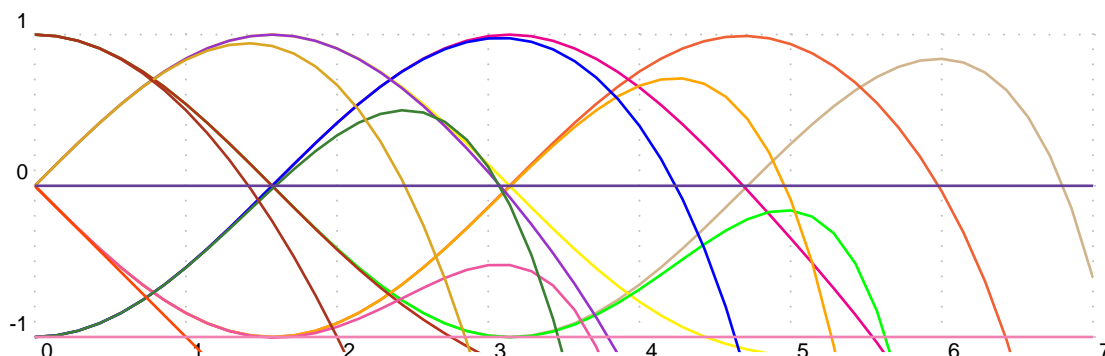

```
\psset{unit=2}
\def\getColor#1{\ifcase#1 Tan\or RedOrange\or magenta\or yellow\or green\or Orange\or blue\or
DarkOrchid\or BrickRed\or Rhodamine\or OliveGreen\or Goldenrod\or Mahogany\or
OrangeRed\or CarnationPink\or RoyalPurple\or Lavender\fi}
\begin{pspicture}[showgrid=true](0,-1.2)(7,1.5)
\psclip{\psframe[linestyle=none](0,-1.1)(7,1.1)}
\multido{\in=0+1}{16}{%
\psplot[linewidth=1pt,algebraic,linecolor=\getColor{\in}]{0}{7}
{Derive(\in,1-x^2/2+x^4/24-x^6/720+x^8/40320-x^10/3628800+x^12/479001600-x^14/87178291200)}}
\endpsclip
\end{pspicture}
```

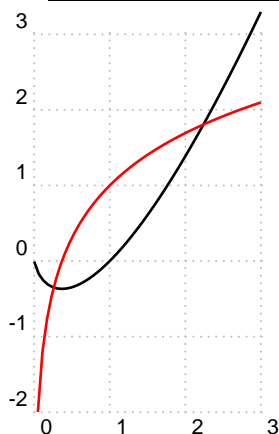

```
\begin{pspicture}[shift=-2.5,showgrid=true,linewidth=1pt](0,-2)
(3,3)
\psplot[algebraic]{.001}{3}{x*ln(x)} % f(x)
\psplot[algebraic,linecolor=red]{.05}{3}{Derive(1,x*ln(x))} % f'(x)
\end{pspicture}
```

28 Variable step for plotting a curve


28.1 Theory

As you know with the `\psplot` macro, the curve is plotted using a piece wise linear curve. The step is given by the parameter `plotpoints`. For each step between x_i and x_{i+1} , the

area defined between the curve and its approximation (a segment) is majored by this formula :

$$|\varepsilon| \leq \frac{M_2(f)(x_{i+1} - x_i)^3}{12}$$


$M_2(f)$ is a majorant of the second derivative of f in the interval $[x_i; x_{i+1}]$.

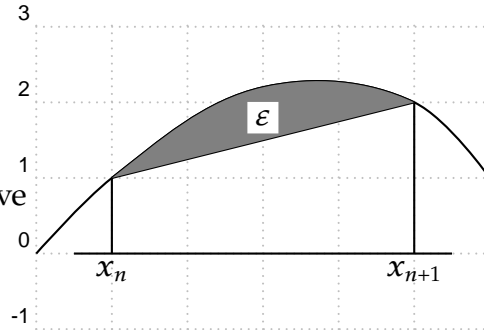

The parameter `VarStep` (false by default) activates the variable step algorithm. It is set to a tolerance defines by the parameter `VarStepEpsilon` (default by default, accept real value). If this parameter is not set by the user, then it is automatically computed using the default first step given by the parameter `plotpoints`. Then, for each step, $f''(x_n)$ and $f''(x_{n+1})$ are computed and the smaller is used as $M_2(f)$, and then the step is approximated. This means that the step is constant for a second order polynomials.

28.2 The cosine

Different value for the tolerance from 0.01 to 0.0001, a factor 10 between each of them. In black, there is the classical `psplot` behavior, and in magenta the default variable step behavior.

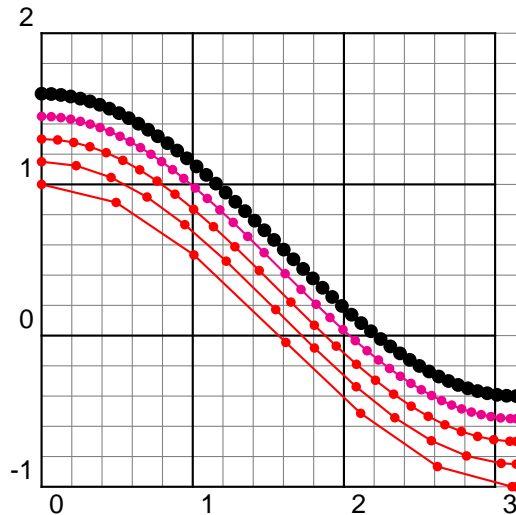


```

1 \psset{algebraic, VarStep=true, unit=2, showpoints=true, linecolor=red}
2 \begin{pspicture}[showgrid=true](-0,-1)(3.14,2)
3   \psplot[VarStepEpsilon=.01]{0}{3.14}{cos(x)}
4   \psplot[VarStepEpsilon=.001]{0}{3.14}{cos(x)+.15}
5   \psplot[VarStepEpsilon=.0001]{0}{3.14}{cos(x)+.3}
6   \psplot[linecolor=magenta]{0}{3.14}{cos(x)+.45}
7   \psplot[VarStep=false,linewidth=1pt,linecolor=black]{-0}{3.14}{cos(x)+.6}
8 \end{pspicture}

```

28.3 The neperian Logarithm

A really classical example wich gives a bad beginning, the tolerance is set to 0.001.

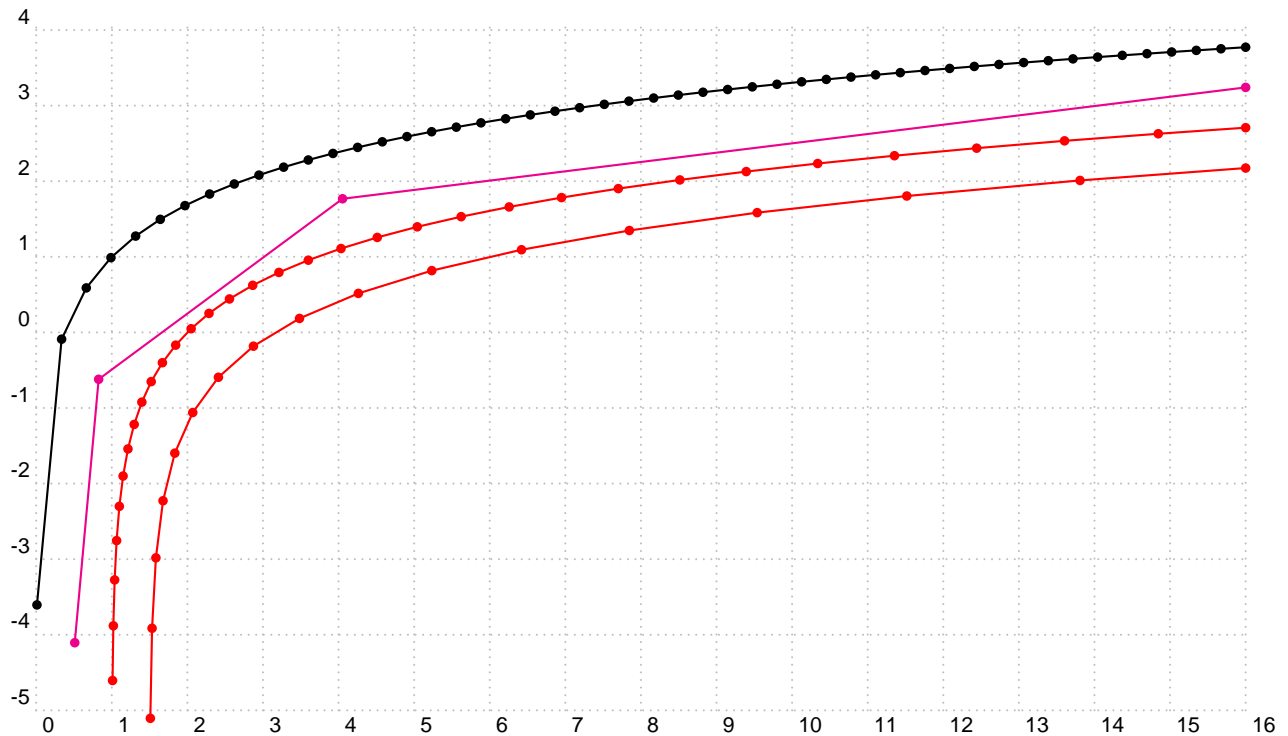


```

1 \psset{algebraic, VarStep=true, linecolor=red, showpoints=true}
2 \begin{pspicture}[showgrid=true](0,-5)(16,4)
3   \psplot[VarStep=false, linecolor=black]{.01}{16}{ln(x)+1}
4   \psplot[linecolor=magenta]{.51}{16}{ln(x-1/2)+1/2}
5   \psplot[VarStepEpsilon=.001]{1.01}{16}{ln(x-1)}
6   \psplot[VarStepEpsilon=.01]{1.51}{16}{ln(x-1.5)-100/200}
7 \end{pspicture}

```

28.4 Sinus of the inverse of x

Impossible to draw, but let's try!

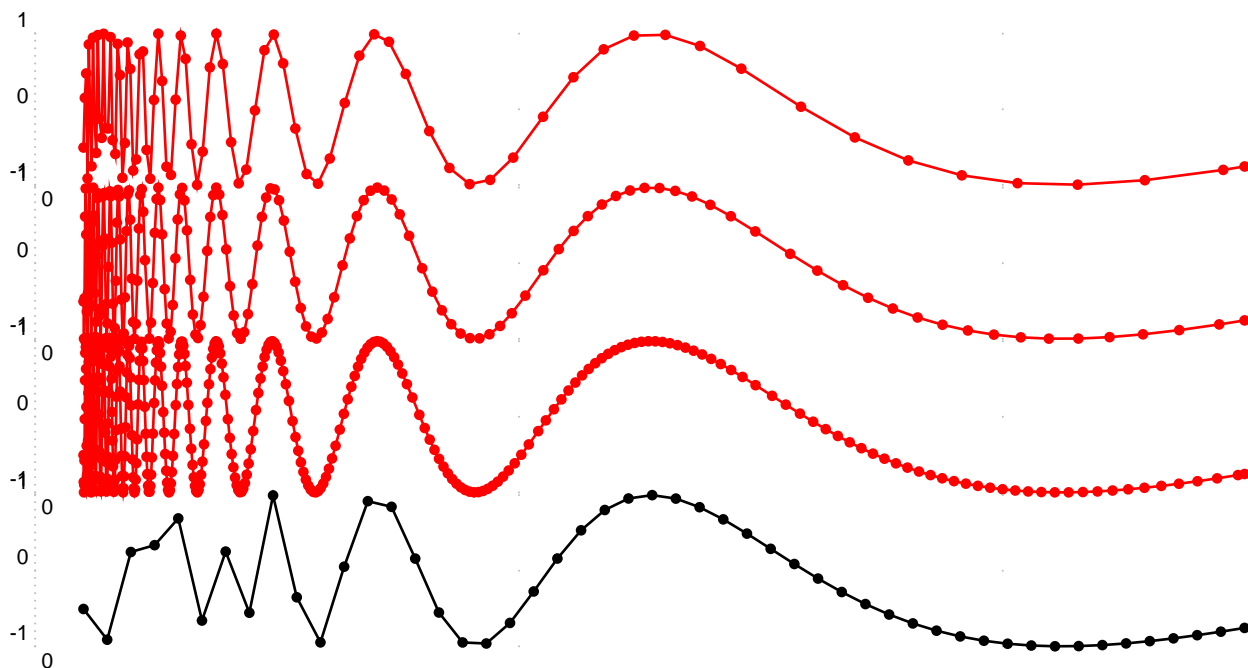

```


1 \psset{xunit=64,algebraic,VarStep,linecolor=red,showpoints=true,linewidth=1pt}
2 \begin{pspicture}[showgrid=true](0,-1)(.5,1)
3   \psplot[VarStepEpsilon=.0001]{.01}{.25}{sin(1/x)}
4 \end{pspicture}
5 \begin{pspicture}[showgrid=true](0,-1)(.5,1)
6   \psplot[VarStepEpsilon=.00001]{.01}{.25}{sin(1/x)}
7 \end{pspicture}
8 \begin{pspicture}[showgrid=true](0,-1)(.5,1)
9   \psplot[VarStepEpsilon=.000001]{.01}{.25}{sin(1/x)}
10 \end{pspicture}
11 \begin{pspicture}[showgrid=true](0,-1)(.5,1)
12   \psplot[VarStep=false, linecolor=black]{.01}{.25}{sin(1/x)}
13 \end{pspicture}

```

28.5 A really complex function

Just appreciate the difference between the normal behavior and the plotting with the varStep option. The function is :

$$f(x) = x - \frac{x^2}{10} + \ln(x) + \cos(2x) + \sin(x^2) - 1$$

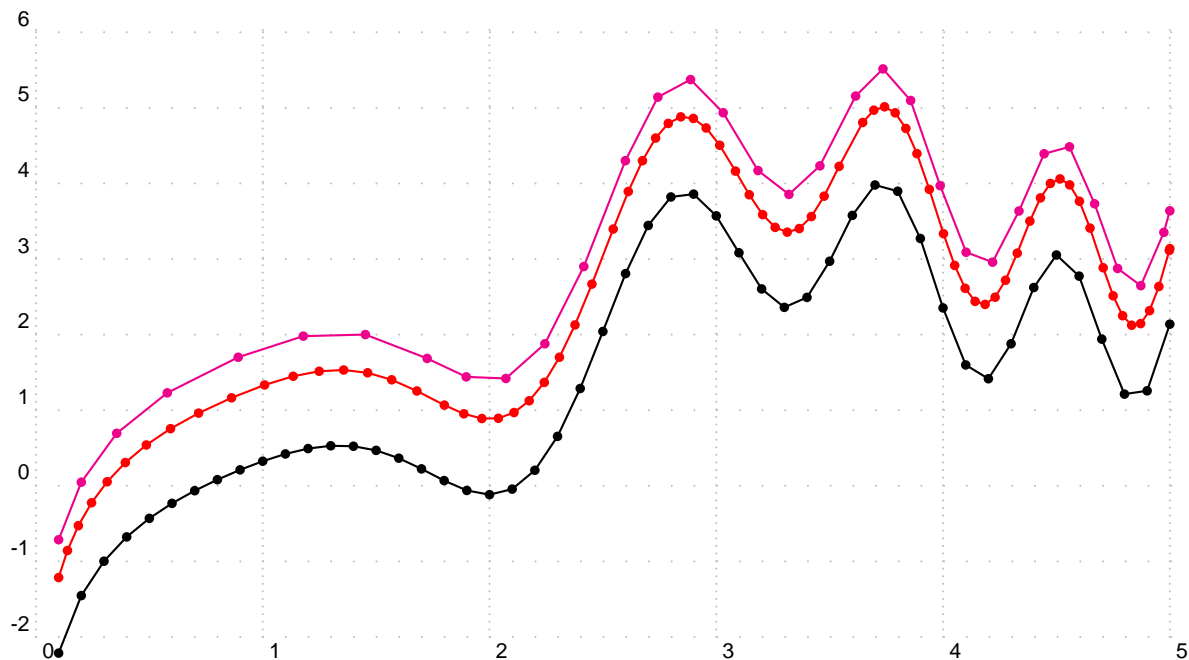


```

1 \psset{xunit=3, algebraic, VarStep, showpoints=true}
2 \begin{pspicture}[showgrid=true](0,-2)(5,6)
3   \psplot[VarStepEpsilon=.0005, linecolor=red]{.1}{5}{x-x^2/10+ln(x)+cos(2*x)+sin(x^2)}
4   \psplot[linecolor=magenta]{.1}{5}{x-x^2/10+ln(x)+cos(2*x)+sin(x^2)+.5}
5   \psplot[VarStep=false]{.1}{5}{x-x^2/10+ln(x)+cos(2*x)+sin(x^2)-1}
6 \end{pspicture}

```

28.6 A hyperbola

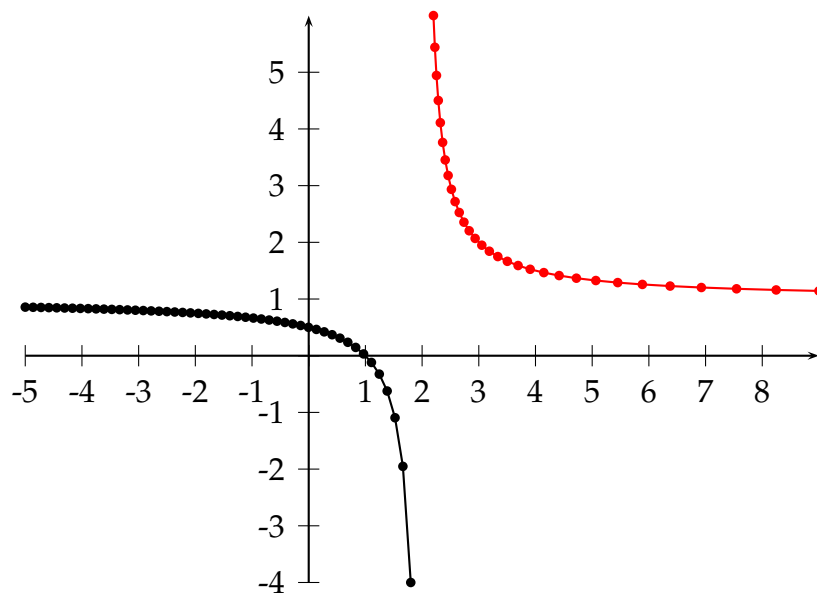

```

1 \psset{algebraic, showpoints=true, unit=0.75}
2 \begin{pspicture}(-5,-4)(9,6)


```

```

3 \psplot[linecolor=black]{-5}{1.8}{(x-1)/(x-2)}
4 \psplot[VarStep=true, VarStepEpsilon=.001, linecolor=red]{2.2}{9}{(x-1)/(x-2)}
5 \psaxes{->}(0,0)(-5,-4)(9,6)
6 \end{pspicture}

```

28.7 Successive derivatives of a polynomial

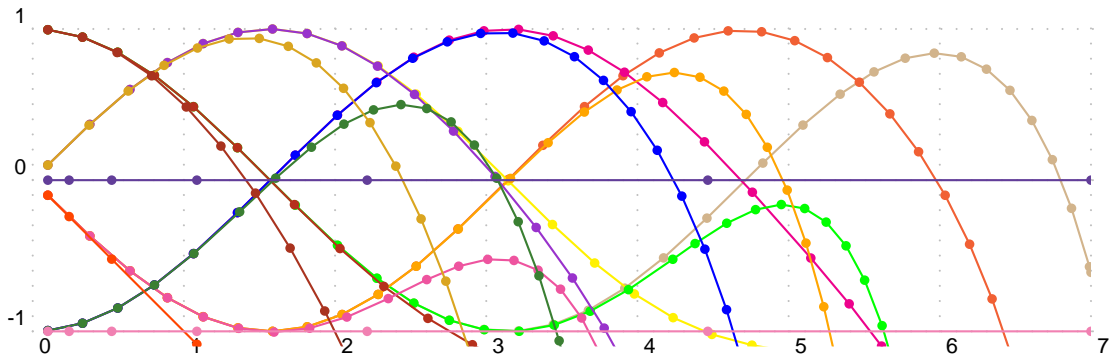


```

1 \psset{unit=2, algebraic=true, VarStep=true, showpoints=true, VarStepEpsilon=.001}
2 \def\getColor#1{\ifcase#1 Tan\or RedOrange\or magenta\or yellow\or green\or Orange\or
3   blue\or
4   DarkOrchid\or BrickRed\or Rhodamine\or OliveGreen\or Goldenrod\or Mahogany\or
5   OrangeRed\or CarnationPink\or RoyalPurple\or Lavender\fi}
6 \begin{pspicture}[showgrid=true](0,-1.2)(7,1.5)
7   \psclip{\psframe[linestyle=none](0,-1.1)(7,1.1)}
8   \multido{\in=0+1}{16}{%
9     \psplot[algebraic=true, linecolor=\getColor{\in}]{0.1}{7}
10    {Derive(\in,Sum(i,0,1,7,(-1)^i*x^(2*i)/Fact(2*i)))}}
11 \endpsclip
12 \end{pspicture}

```


28.8 The variable step algorithm together with the IfTE primitive

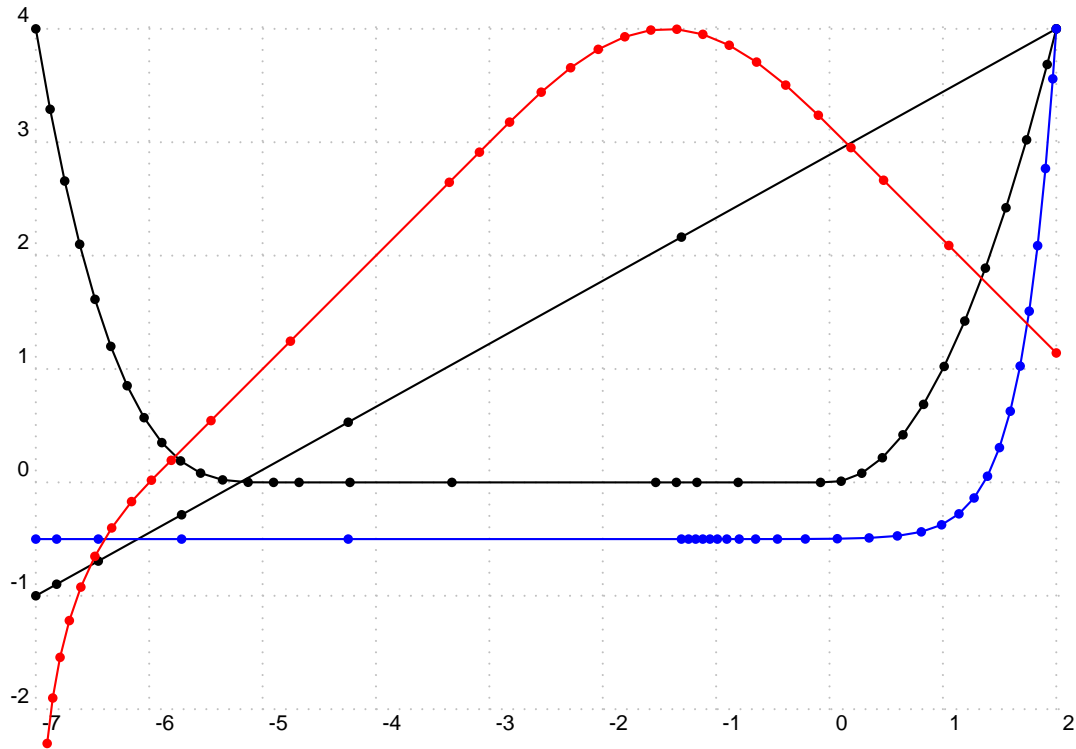


```

1 \psset{unit=1.5, algebraic, VarStep, showpoints=true, VarStepEpsilon=.001}
2 \begin{pspicture}[showgrid=true](-7,-2)(2,4)
3   \psplot{-7}{2}{IfTE(x<-5,-(x+5)^3/2,IfTE(x<0,0,x^2))}
4   \psplot{-7}{2}{5*x/9+26/9}
5   \psplot[linecolor=blue]{-7}{2}{(x+7)^30/9^30*4.5-1/2}
6   \psplot[linecolor=red]{-6.9}{2}
7     {IfTE(x<-6,ln(x+7),IfTE(x<-3,x+6,IfTE(x<0.1415926,sin(x+3)+3,3.1415926-x)))}
8 \end{pspicture}

```


28.9 Using \parametricplot

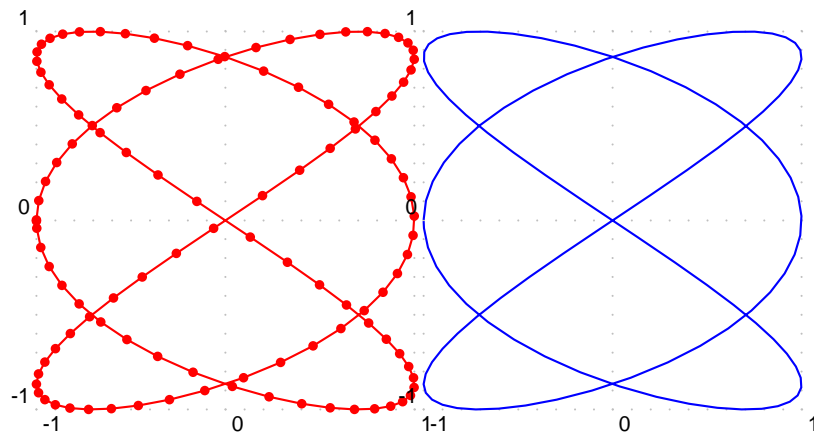

```

1 \psset{unit=3}
2 \begin{pspicture}[showgrid=true](-1,-1)(1,1)
3 \parametricplot[algebraic=true,linecolor=red,VarStep=true, showpoints=true,
4 VarStepEpsilon=.0001]
5 {-3.14}{3.14}{cos(3*t)|sin(2*t)}
6 \end{pspicture}
7 \begin{pspicture}[showgrid=true](-1,-1)(1,1)
8 \parametricplot[algebraic=true,linecolor=blue,VarStep=true, showpoints=false,
9 VarStepEpsilon=.0001]
10 {-3.14}{3.14}{cos(3*t)|sin(2*t)}
11 \end{pspicture}


```

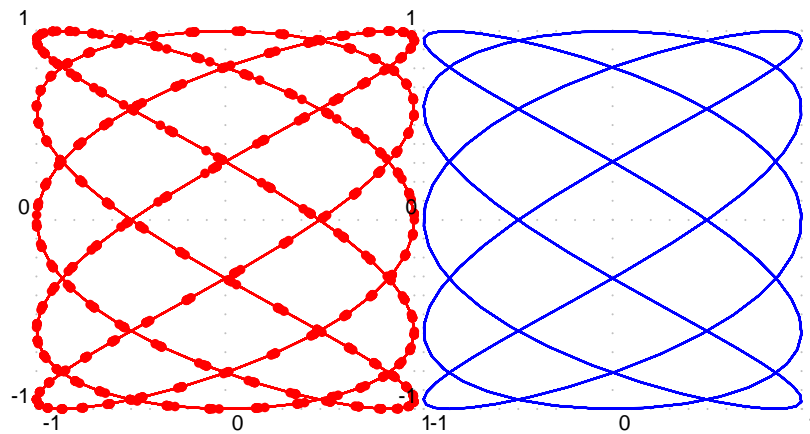

```

1 \psset{unit=2.5}
2 \begin{pspicture}[showgrid=true](-1,-1)(1,1)
3 \parametricplot[algebraic=true,linecolor=red,VarStep=true, showpoints=true,
4 VarStepEpsilon=.0001]
5 {0}{47.115}{cos(5*t)|sin(3*t)}
6 \end{pspicture}
7 \begin{pspicture}[showgrid=true](-1,-1)(1,1)
8 \parametricplot[algebraic=true,linecolor=blue,VarStep=true, showpoints=false,
9 VarStepEpsilon=.0001]
10 {0}{47.115}{cos(5*t)|sin(3*t)}
11 \end{pspicture}

```

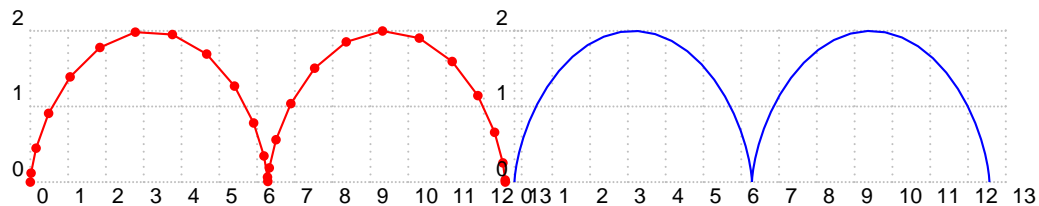

```

1 \psset{xunit=.5}
2 \begin{pspicture}[showgrid=true](0,0)(12.566,2)
3 \parametricplot[algebraic,linecolor=red,VarStep, showpoints=true,
4 VarStepEpsilon=.01]{0}{12.566}{t+cos(-t-Pi/2)|1+sin(-t-Pi/2)}
5 \end{pspicture}
6 %

```


```

7 \begin{pspicture}[showgrid=true](0,0)(12.566,2)
8 \parametricplot[algebraic,linecolor=blue,VarStep, showpoints=false,
9   VarStepEpsilon=.001]{0}{12.566}{t+cos(-t-Pi/2)|1+sin(-t-Pi/2)}
10 \end{pspicture}

```

29 New math functions and their derivative

29.1 The inverse sin and its derivative

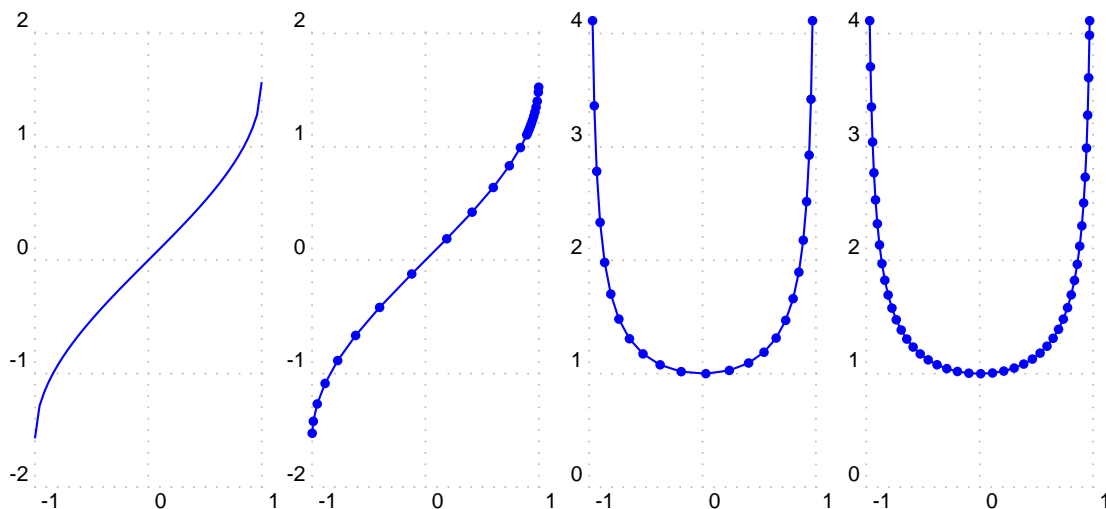


```

1 \psset{unit=1.5}
2 \begin{pspicture}[showgrid=true](-1,-2)(1,2)
3   \psplot[linecolor=blue,algebraic]{-1}{1}{asin(x)}
4 \end{pspicture}
5 \hspace{1em}
6 \psset{algebraic, VarStep, VarStepEpsilon=.001, showpoints=true}
7 \begin{pspicture}[showgrid=true](-1,-2)(1,2)
8   \psplot[linecolor=blue]{-.999}{.999}{asin(x)}
9 \end{pspicture}
10 \hspace{1em}
11 \begin{pspicture}[showgrid=true](-1,0)(1,4)
12   \psplot[linecolor=red]{-.97}{.97}{Derive(1,asin(x))}
13 \end{pspicture}
14 \hspace{1em}
15 \psset{algebraic, VarStep, VarStepEpsilon=.0001, showpoints=true}
16 \begin{pspicture}[showgrid=true](-1,0)(1,4)
17   \psplot[linecolor=red]{-.97}{.97}{Derive(1,asin(x))}
18 \end{pspicture}

```

29.2 The inverse cosine and its derivative

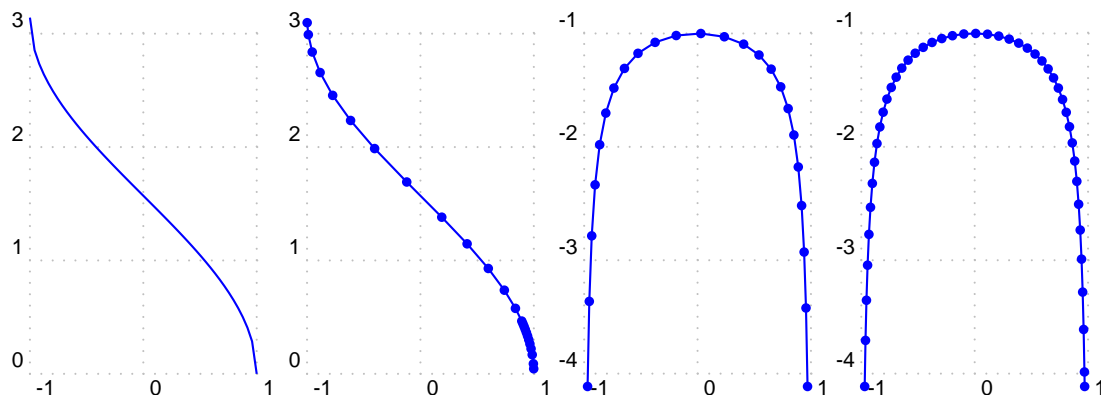


```

1 \psset{unit=1.5}
2 \begin{pspicture}[showgrid=true](-1,0)(1,3)
3   \psplot[linecolor=blue,algebraic]{-1}{1}{acos(x)}
4 \end{pspicture}
5 \hspace{1em}
6 \psset{algebraic, VarStep, VarStepEpsilon=.001, showpoints=true}
7 \begin{pspicture}[showgrid=true](-1,0)(1,3)
8   \psplot[linecolor=blue]{-.999}{.999}{acos(x)}
9 \end{pspicture}
10 \hspace{1em}
11 \begin{pspicture}[showgrid=true](-1,-4)(1,-1)
12   \psplot[linecolor=red]{-.97}{.97}{Derive(1,acos(x))}
13 \end{pspicture}
14 \hspace{1em}
15 \psset{algebraic, VarStep, VarStepEpsilon=.0001, showpoints=true}
16 \begin{pspicture}[showgrid=true](-1,-4)(1,-1)
17   \psplot[linecolor=red]{-.97}{.97}{Derive(1,acos(x))}
18 \end{pspicture}

```

29.3 The inverse tangent and its derivative

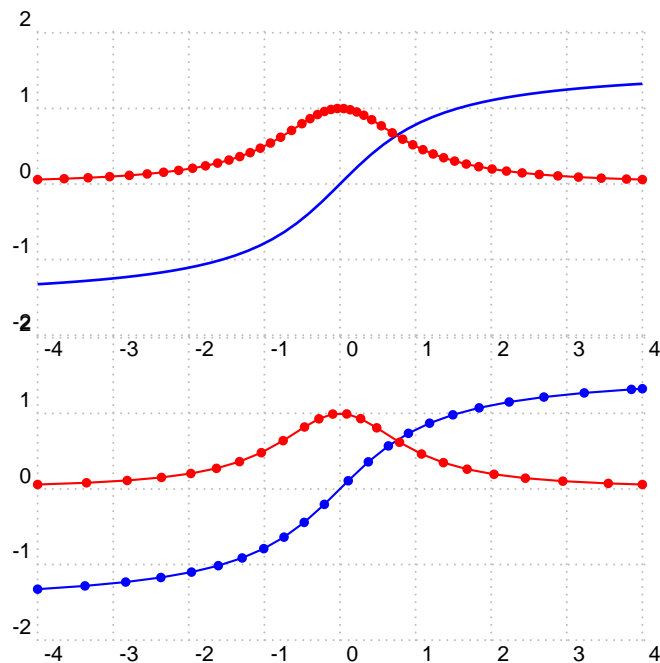


```

1 \begin{pspicture}[showgrid=true](-4,-2)(4,2)
2 \psset{algebraic=true}
3 \psplot[linecolor=blue,linewidth=1pt]{-4}{4}{atg(x)}
4 \psplot[linecolor=red,VarStep, VarStepEpsilon=.0001, showpoints=true]{-4}{4}{Derive
  (1,atg(x))}
5 \end{pspicture}
6 \hspace{1em}
7 \begin{pspicture}[showgrid=true](-4,-2)(4,2)
8 \psset{algebraic, VarStep, VarStepEpsilon=.001, showpoints=true}
9 \psplot[linecolor=blue]{-4}{4}{atg(x)}
10 \psplot[linecolor=red]{-4}{4}{Derive(1,atg(x))}
11 \end{pspicture}

```


29.4 Hyperbolique functions

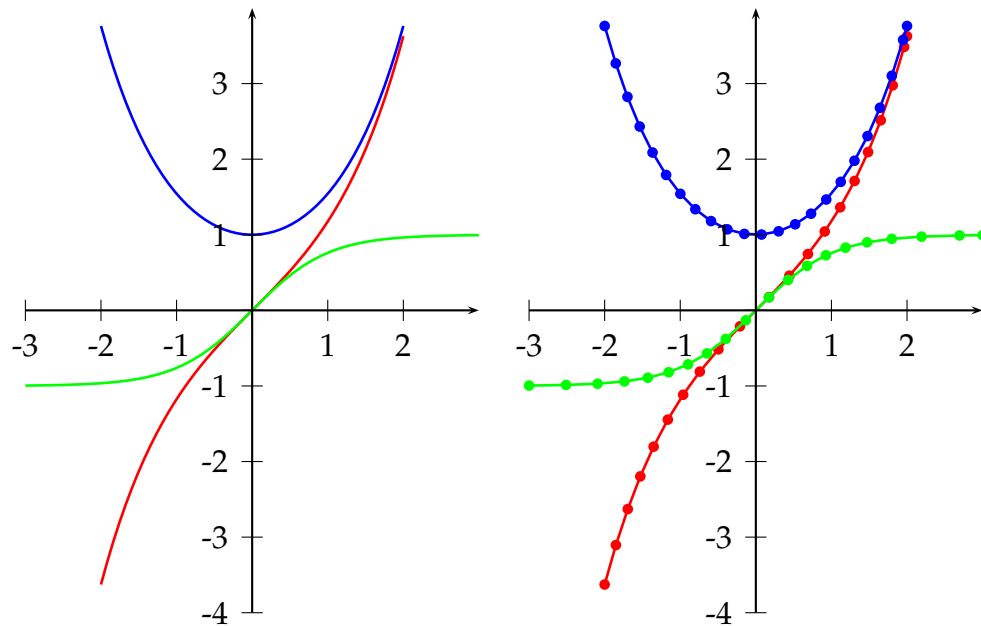

```

1 \begin{pspicture}(-3,-4)(3,4)
2 \psset{algebraic=true}
3 \psplot[linecolor=red,linewidth=1pt]{-2}{2}{sh(x)}
4 \psplot[linecolor=blue,linewidth=1pt]{-2}{2}{ch(x)}
5 \psplot[linecolor=green,linewidth=1pt]{-3}{3}{th(x)}
6 \psaxes{->}(0,0)(-3,-4)(3,4)
7 \end{pspicture}
8 \hspace{1em}
9 \begin{pspicture}(-3,-4)(3,4)
10 \psset{algebraic=true, VarStep=true, VarStepEpsilon=.001, showpoints=true}
11 \psplot[linecolor=red,linewidth=1pt]{-2}{2}{sh(x)}
12 \psplot[linecolor=blue,linewidth=1pt]{-2}{2}{ch(x)}
13 \psplot[linecolor=green,linewidth=1pt]{-3}{3}{th(x)}
14 \psaxes{->}(0,0)(-3,-4)(3,4)
15 \end{pspicture}


```

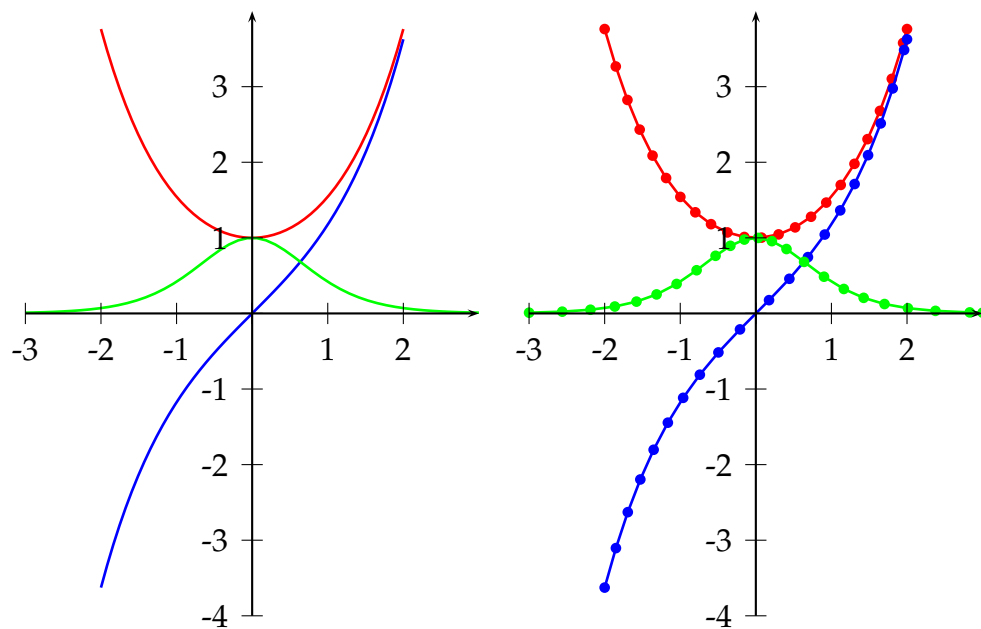


```

1 \begin{pspicture}(-3,-4)(3,4)
2 \psset{algebraic=true,linewidth=1pt}
3 \psplot[linecolor=red,linewidth=1pt]{-2}{2}{Derive(1,sh(x))}
4 \psplot[linecolor=blue,linewidth=1pt]{-2}{2}{Derive(1,ch(x))}
5 \psplot[linecolor=green,linewidth=1pt]{-3}{3}{Derive(1,th(x))}
6 \psaxes{->}(0,0)(-3,-4)(3,4)
7 \end{pspicture}
8 \hspace{1em}
9 \begin{pspicture}(-3,-4)(3,4)
10 \psset{algebraic=true, VarStep=true, VarStepEpsilon=.001, showpoints=true}
11 \psplot[linecolor=red,linewidth=1pt]{-2}{2}{Derive(1,sh(x))}
12 \psplot[linecolor=blue,linewidth=1pt]{-2}{2}{Derive(1,ch(x))}
13 \psplot[linecolor=green,linewidth=1pt]{-3}{3}{Derive(1,th(x))}
14 \psaxes{->}(0,0)(-3,-4)(3,4)
15 \end{pspicture}

```

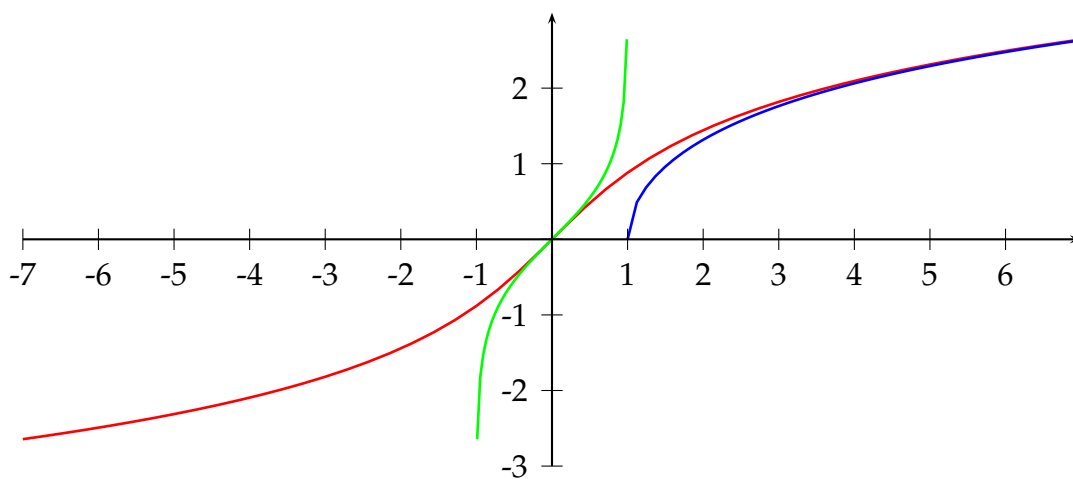


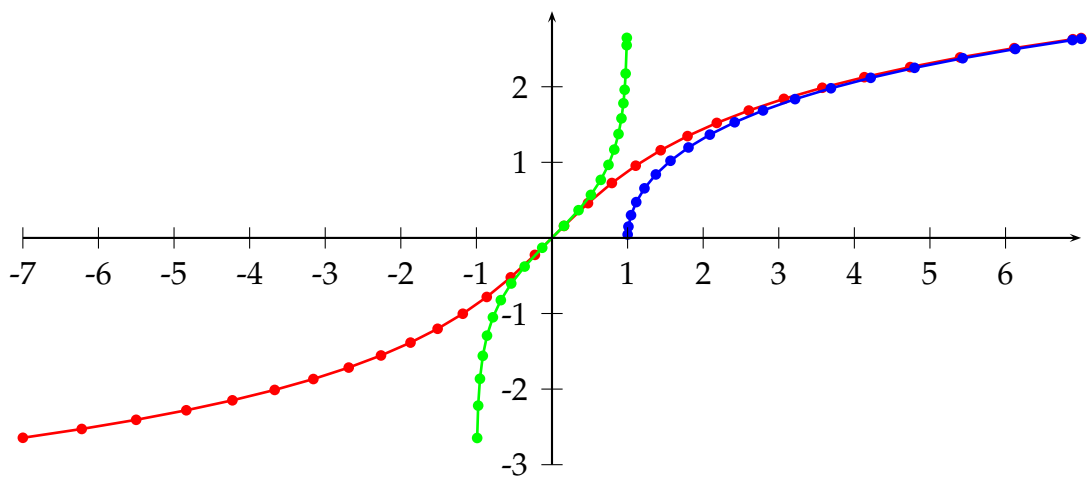


```

1 \begin{pspicture}(-7,-3)(7,3)
2 \psset{algebraic=true}
3 \psplot[linecolor=red,linewidth=1pt]{-7}{7}{Argsh(x)}
4 \psplot[linecolor=blue,linewidth=1pt]{1}{7}{Argch(x)}
5 \psplot[linecolor=green,linewidth=1pt]{-.99}{.99}{Argth(x)}
6 \psaxes{->}(0,0)(-7,-3)(7,3)
7 \end{pspicture}\[\baselineskip]
8 \begin{pspicture}(-7,-3)(7,3)
9 \psset{algebraic, VarStep, VarStepEpsilon=.001, showpoints=true}
10 \psplot[linecolor=red,linewidth=1pt]{-7}{7}{Argsh(x)}
11 \psplot[linecolor=blue,linewidth=1pt]{1.001}{7}{Argch(x)}
12 \psplot[linecolor=green,linewidth=1pt]{-.99}{.99}{Argth(x)}
13 \psaxes{->}(0,0)(-7,-3)(7,3)
14 \end{pspicture}

```

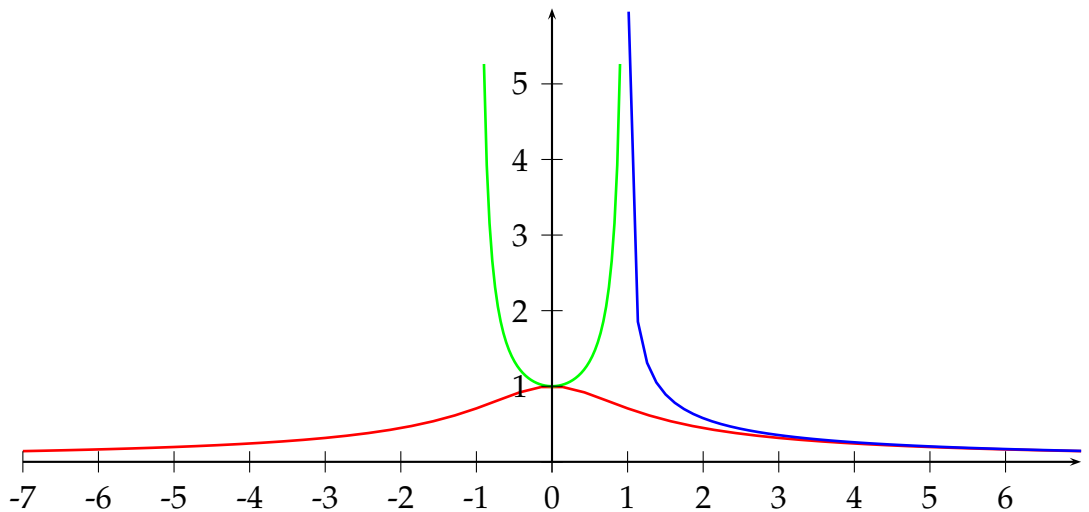

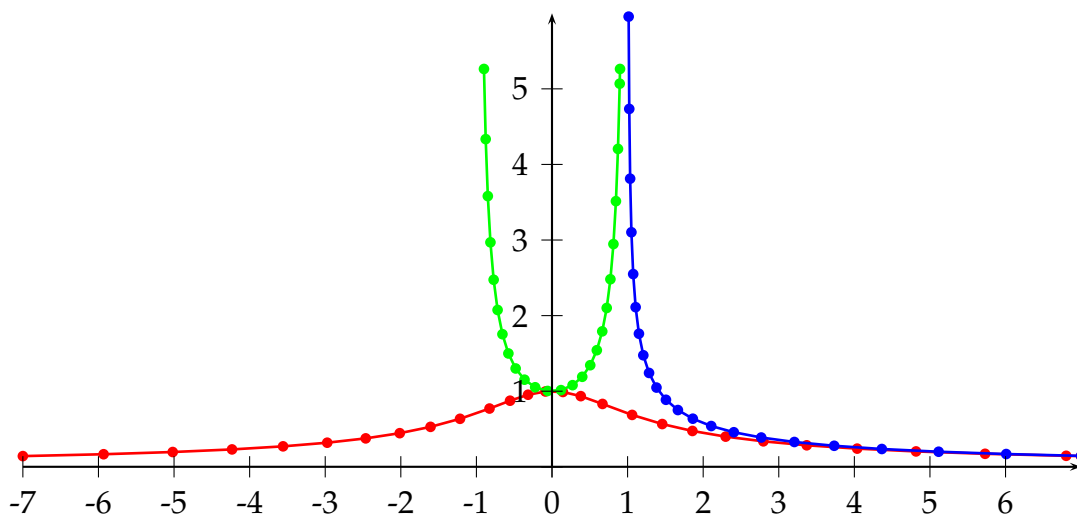

```

1 \begin{pspicture}(-7,-0.5)(7,6)
2 \psset{algebraic=true}
3 \psplot[linecolor=red,linewidth=1pt]{-7}{7}{Derive(1,Argsh(x))}
4 \psplot[linecolor=blue,linewidth=1pt]{1.014}{7}{Derive(1,Argch(x))}
5 \psplot[linecolor=green,linewidth=1pt]{-.9}{.9}{Derive(1,Argth(x))}
6 \psaxes{->}(0,0)(-7,0)(7,6)
7 \end{pspicture}\[\baselineskip]
8 \begin{pspicture}(-7,-0.5)(7,6)
9 \psset{algebraic=true}
10 \psset{algebraic=true, VarStep=true, VarStepEpsilon=.001, showpoints=true}
11 \psplot[linecolor=red,linewidth=1pt]{-7}{7}{Derive(1,Argsh(x))}
12 \psplot[linecolor=blue,linewidth=1pt]{1.014}{7}{Derive(1,Argch(x))}
13 \psplot[linecolor=green,linewidth=1pt]{-.9}{.9}{Derive(1,Argth(x))}
14 \psaxes{->}(0,0)(-7,0)(7,6)
15 \end{pspicture}

```

30 \psplotDiffEqn – solving differential equations

A differential euqation of first order is like

$$y' = f(x, y, y') \quad (1)$$

where y is a function of x . We define some vectors $Y = [y, y', \dots, y^{(n-1)}]$ und $Y' = [y', y'', \dots, y^{(n)}]$, depending to the order n . The syntax of the macro is

```
\psplotDiffEqn[options]{x0}{x1}{y0}{f(x,y,y',...)}{}
```

- options: the \psplotDiffEqn specific options and all other of PSTricks, which make sense;
- x_0 : the start value;
- x_1 : the end value of the definition interval;
- y_0 : the initial values for $y(x_0)$ $y'(x_0)$...;
- $f(x, y, y', \dots)$: the differential equation, depending to the number of initial values, e.g.: {0 1} for y_0 are two initial values, so that we have a differential equation of second order $f(x, y, y')$ and the macro leaves y y' on the stack.

The new options are:

- method: integration method (euler for order 1 euler method, rk4 for 4th order Runge-Kutta method);
- whichabs: select the abscissa for plotting the graph, by default it is x , but you can specify a number which represent a position in the vector y ;
- whichord: same as precedent for the ordinate, by default $y(0)$;
- plotfuncx: describe a ps function for the abscissa, parameter whichabs becomes useless;
- plotfuncy: idem for ordoinate;
- buildvector: boolean parameter for specifying the input-output of the f description:
 - true** (default): y is put on the stack element by element, y' must be given in the same way;
 - false** : y is put on the stack as a vector, y' must be returned in the same way;
- algebraic: algebraic description for f , buildvector parameter is useless when activating this option.

30.1 Variable step for differential equations

A new algorithm has been added for adjusting the step according to the variations of the curve. The parameter method has a new possible value : varrkiv to activate the RUNGE-KUTTA method with variable step, then the parameter varsteptol (real value; .01 by default) can control the tolerance of the algorithm.

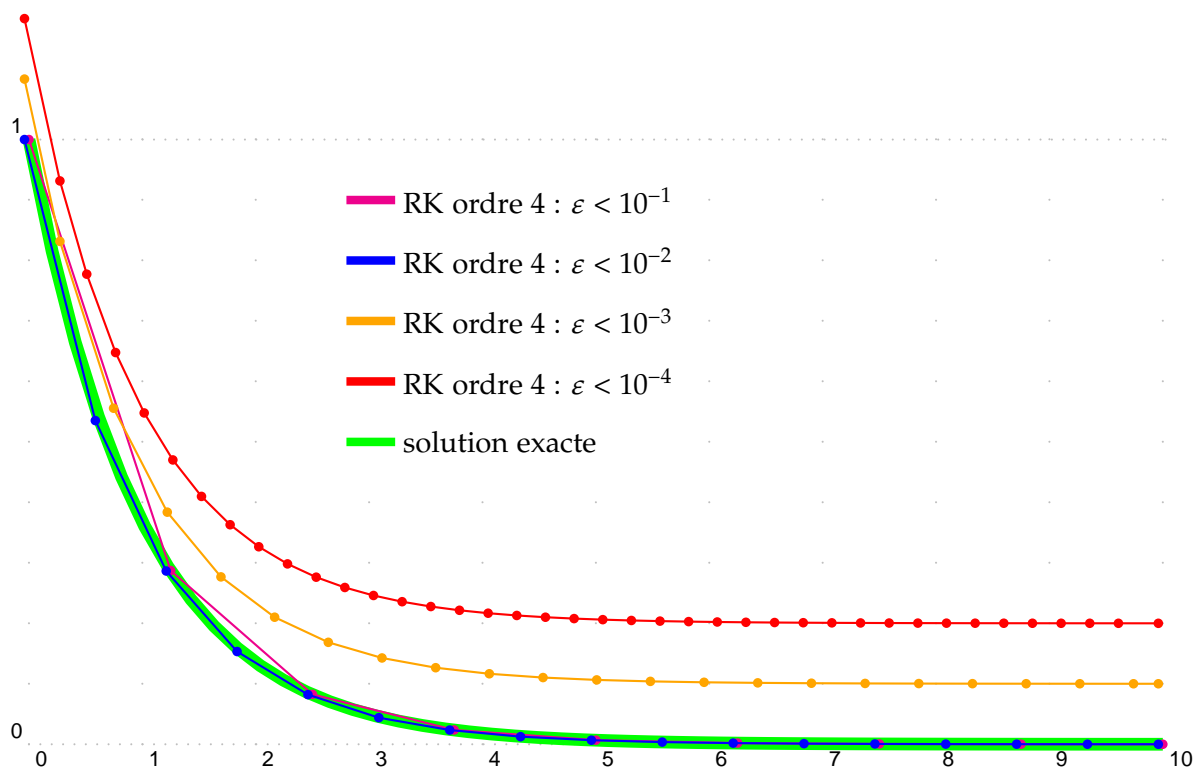


Figure 1: Equation $y' = -y$ with $y_0 = 1$.

```

1 \def\Funct{neg}\def\FunctAlg{-y[0]}
2 \psset{xunit=1.5, yunit=8, showpoints=true}
3 \begin{pspicture}[showgrid=true](0,0)(10,1.2)
4   \psplot[linewidth=6\pslinewidth, linecolor=green, showpoints=false]
5     {0}{10}{2.71828182846 x neg exp}
6   \psplotDiffEqn[linecolor=magenta, method=varrkiv, varsteptol=.1, plotpoints
7     =2]{0}{10}{1}{\Funct}
8   \rput(0,.0){\psplotDiffEqn[linecolor=blue, method=varrkiv, varsteptol=.01, plotpoints
9     =2]{0}{10}{1}{\Funct}}
10  \rput(0,.1){\psplotDiffEqn[linecolor=Orange, method=varrkiv, varsteptol=.001,
11    plotpoints=2]{0}{10}{1}{\Funct}}
12  \rput(0,.2){\psplotDiffEqn[linecolor=red, method=varrkiv, varsteptol=.0001,
13    plotpoints=2]{0}{10}{1}{\Funct}}
14  \psset{linewidth=4\pslinewidth, showpoints=false}
15  \rput*(3.3,.9){\psline[linecolor=magenta]{-.75cm,0}}
16  \rput*[1](3.3,.9){\small RK ordre 4 : $\varepsilon<10^{-1}$}
17  \rput*(3.3,.8){\psline[linecolor=blue]{-.75cm,0}}
18  \rput*[1](3.3,.8){\small RK ordre 4 : $\varepsilon<10^{-2}$}
19  \rput*(3.3,.7){\psline[linecolor=Orange]{-.75cm,0}}

```

```

15 \rput*[1](3.3,.7){\small RK ordre 4 : $\varepsilon < 10^{-3}$}
16 \rput*(3.3,.6){\psline[linecolor=red](-.75cm,0)}
17 \rput*[1](3.3,.6){\small RK ordre 4 : $\varepsilon < 10^{-4}$}
18 \rput*(3.3,.5){\psline[linecolor=green](-.75cm,0)}
19 \rput*[1](3.3,.5){\small solution exacte}
20 \end{pspicture}

```

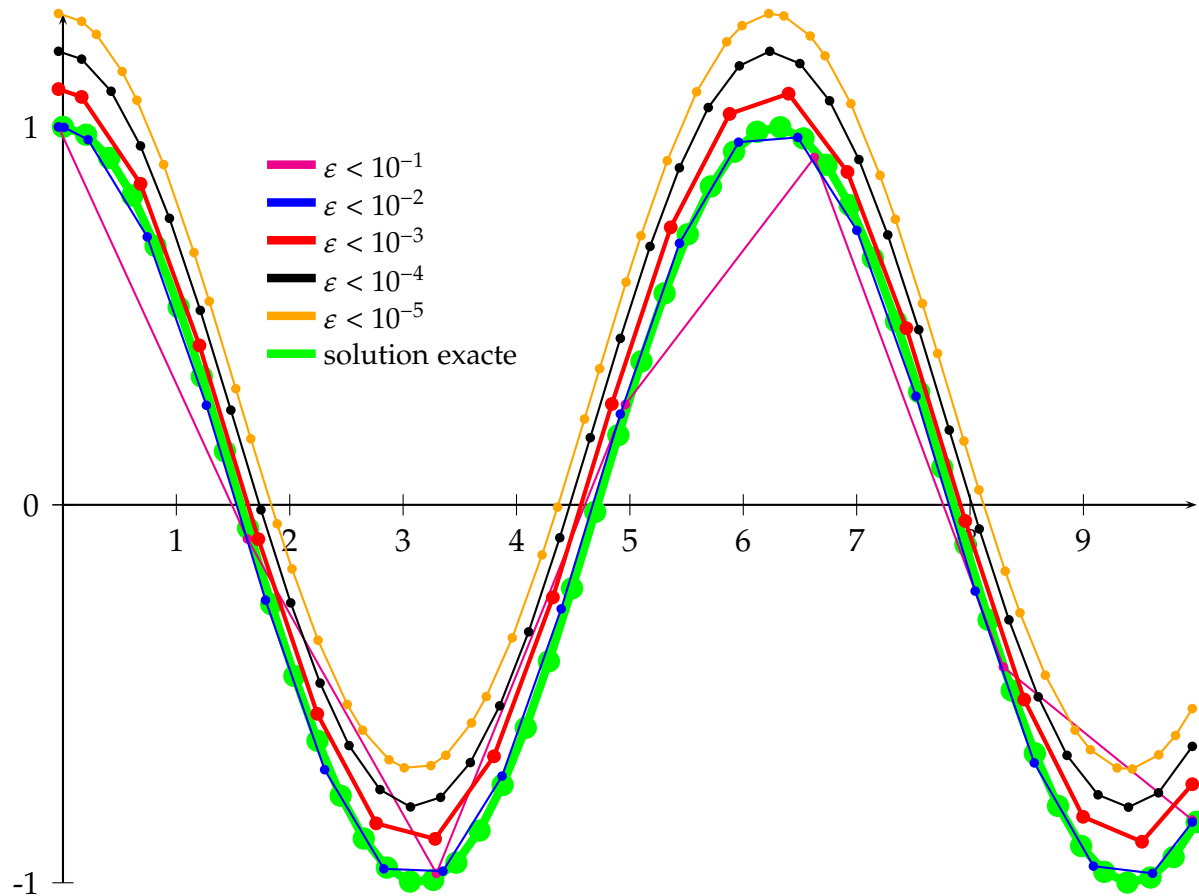


Figure 2: Equation $y'' = -y$

```

1 \def\Funct{exch neg}
2 \psset{xunit=1.5, yunit=5, method=varrkiv, showpoints=true}%%
3 \def\quatrepi{12.5663706144}
4 \begin{pspicture}(0,-1)(10,1.3)
5   \psaxes{->}(0,0)(0,-1)(10,1.3)
6   \psplot[linewidth=4\pslinewidth, linecolor=green, algebraic=true]{0}{10}{\cos(x)}
7   \rput(0,.0){\psplotDiffEqn[linecolor=magenta, plotpoints=7, varsteptol=.1]{0}{10}{1
8     0}{\Funct}}
9   \rput(0,.0){\psplotDiffEqn[linecolor=blue, plotpoints=201, varsteptol=.01]{0}{10}{1
10    0}{\Funct}}
11  \rput(0,.1){\psplotDiffEqn[linecolor=red, linewidth=2\pslinewidth, varsteptol
12    =.001]{0}{10}{1 0}{\Funct}}
13  \rput(0,.2){\psplotDiffEqn[linecolor=black, varsteptol=.0001]{0}{10}{1 0}{\Funct}}
14  \rput(0,.3){\psplotDiffEqn[linecolor=Orange, varsteptol=.00001]{0}{10}{1 0}{\Funct}}
15  \psset{linewidth=4\pslinewidth, showpoints=false}

```

```

13 \rput*(2.3,.9){\psline[linecolor=magenta]{-0.75cm,0}}
14 \rput*[1](2.3,.9){\small $\varepsilon<10^{-1}$}
15 \rput*(2.3,.8){\psline[linecolor=blue]{-0.75cm,0}}
16 \rput*[1](2.3,.8){\small $\varepsilon<10^{-2}$}
17 \rput*(2.3,.7){\psline[linecolor=red]{-0.75cm,0}}
18 \rput*[1](2.3,.7){\small $\varepsilon<10^{-3}$}
19 \rput*(2.3,.6){\psline[linecolor=black]{-0.75cm,0}}
20 \rput*[1](2.3,.6){\small $\varepsilon<10^{-4}$}
21 \rput*(2.3,.5){\psline[linecolor=orange]{-0.75cm,0}}
22 \rput*[1](2.3,.5){\small $\varepsilon<10^{-5}$}
23 \rput*(2.3,.4){\psline[linecolor=green]{-0.75cm,0}}
24 \rput*[1](2.3,.4){\small solution exacte}
25 \end{pspicture}

```

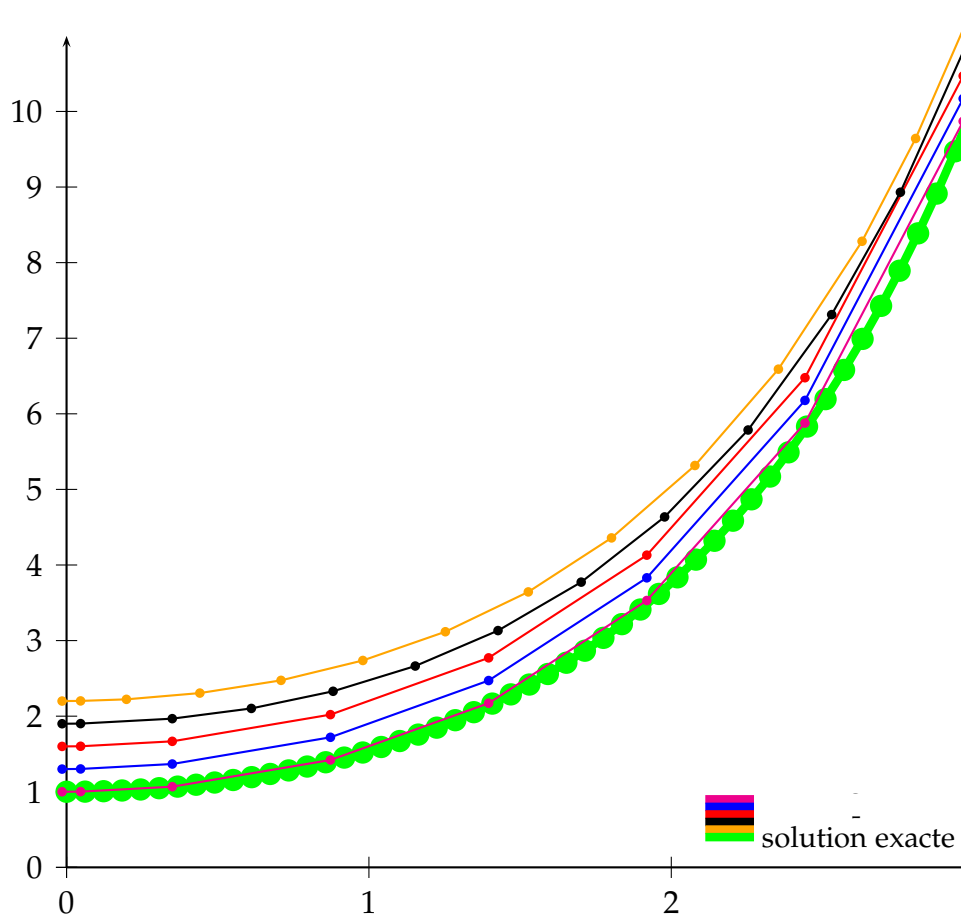


Figure 3: Equation $y'' = y$

```

1 \def\Funct{exch}
2 \psset{xunit=4, yunit=1, method=varrkiv, showpoints=true}%%
3 \def\quatrepi{12.5663706144}
4 \begin{pspicture}(0,-0.5)(3,11)
5   \psaxes{->}(0,0)(3,11)
6   \psplot[linewidth=4\pslinewidth, linecolor=green, algebraic=true]{0}{3}{ch(x)}
7   \rput(0,.0){\psplotDiffEqn[linecolor=magenta, varsteptol=.1]{0}{3}{1 0}{\Funct}}
8   \rput(0,.3){\psplotDiffEqn[linecolor=blue, varsteptol=.01]{0}{3}{1 0}{\Funct}}

```

```



9 \rput(0,.6){\psplotDiffEqn[linecolor=red, varsteptol=.001]{0}{3}{1 0}{\Funct}}
10 \rput(0,.9){\psplotDiffEqn[linecolor=black, varsteptol=.0001]{0}{3}{1 0}{\Funct}}
11 \rput(0,1.2){\psplotDiffEqn[linecolor=Orange, varsteptol=.00001]{0}{3}{1 0}{\Funct}}
12 \psset{linewidth=4\pslinewidth,showpoints=false}
13 \rput*(2.3,.9){\psline[linecolor=magenta]{-.75cm,0}}
14 \rput*[1](2.3,.9){\small $\varepsilon<10^{-1}$}
15 \rput*(2.3,.8){\psline[linecolor=blue]{-.75cm,0}}
16 \rput*[1](2.3,.8){\small $\varepsilon<10^{-2}$}
17 \rput*(2.3,.7){\psline[linecolor=red]{-.75cm,0}}
18 \rput*[1](2.3,.7){\small $\varepsilon<10^{-3}$}
19 \rput*(2.3,.6){\psline[linecolor=black]{-.75cm,0}}
20 \rput*[1](2.3,.6){\small $\varepsilon<10^{-4}$}
21 \rput*(2.3,.5){\psline[linecolor=Orange]{-.75cm,0}}
22 \rput*[1](2.3,.5){\small $\varepsilon<10^{-5}$}
23 \rput*(2.3,.4){\psline[linecolor=green]{-.75cm,0}}
24 \rput*[1](2.3,.4){\small solution exacte}
25 \end{pspicture}

```

30.2 Equation of second order

Here is the traditionnal simulation of two stars attracting each other according to the classical gravitation law in $\frac{1}{r^2}$. In 2-Dimensions, the system to be solved is composed of four second order differential equations. In order to be described, each of them gives two first order equations, then we obtain a 8 sized vectorial equation. In the following example the masses of the stars are 1 and 20.

$$\left\{ \begin{array}{l} x_1'' = \frac{M_2}{r^2} \cos(\theta) \\ y_1'' = \frac{M_2}{r^2} \sin(\theta) \\ x_2'' = \frac{M_1}{r^2} \cos(\theta) \\ y_2'' = \frac{M_1}{r^2} \sin(\theta) \end{array} \right. \text{ avec } \left\{ \begin{array}{l} r^2 = (x_1 - x_2)^2 + (y_1 - y_2)^2 \\ \cos(\theta) = \frac{(x_1 - x_2)}{r} \\ \sin(\theta) = \frac{(y_1 - y_2)}{r} \end{array} \right.$$

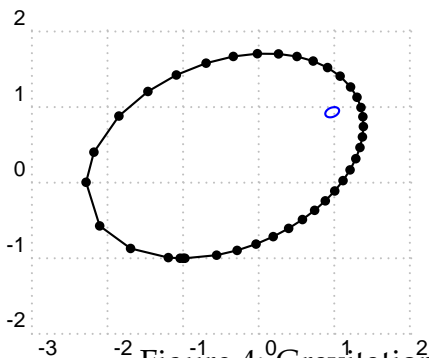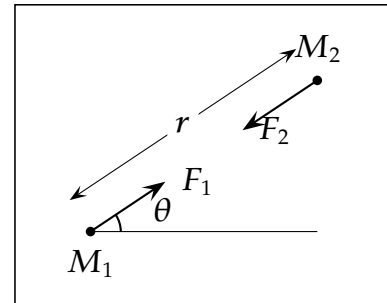

```

1 \def\InitCond{ 1 1 .1 0 -1 -1 -2 0}
2 \begin{pspicture}[shift=-2,showgrid=true](-3,-1.75)(2,1.5)
3 \psplotDiffEqn[whichabs=0, whichord=1, linecolor=blue, method=rk4,
4 plotpoints=100]{0}{3.95}{\InitCond}{\Grav}
5 \psset{showpoints=true,whichabs=4, whichord=5}
6 \psplotDiffEqn[linecolor=black, method=varrkiv, varsteptol=.0001,
7 plotpoints=200]{0}{3.9}{\InitCond}{\Grav}
8 \end{pspicture}

```


Figure 4: Gravitational interaction: fixed landmark, trajectory of the stars

	%% x1 y1 x'1 y'1 x2 y2 x'2 y'2
/yp2 exch def /xp2 exch def /ay2 exch def /ax2 exch def	%% mise en variables
/yp1 exch def /xp1 exch def /ay1 exch def /ax1 exch def	%% mise en variables
/ro2 ax2 ax1 sub dup mul ay2 ay1 sub dup mul add def	%% calcul de r*r
xp1 yp1	%%
ax2 ax1 sub ro2 sqrt div ro2 div	%% calcul de x''1
ay2 ay1 sub ro2 sqrt div ro2 div	%% calcul de y''1
xp2 yp2	%%
3 index -20 mul	%% calcul de x''2=-20x''1
3 index -20 mul	%% calcul de y''2=-20y''1

Table 3: PostScript source code for the gravitational interaction

y[2]	%% y'[0]
y[3]	%% y'[1]
(y[4]-y[0])/((y[4]-y[0])^2+(y[5]-y[1])^2)^1.5	%% y'[2]=y''[0]
(y[5]-y[1])/((y[4]-y[0])^2+(y[5]-y[1])^2)^1.5	%% y'[3]=y''[1]
y[6]	%% y'[4]
y[7]	%% y'[5]
20*(y[0]-y[4])/((y[4]-y[0])^2+(y[5]-y[1])^2)^1.5	%% y'[6]=y''[4]
20*(y[1]-y[5])/((y[4]-y[0])^2+(y[5]-y[1])^2)^1.5	%% y'[7]=y''[5]

Table 4: Algebraic description for the gravitational interaction

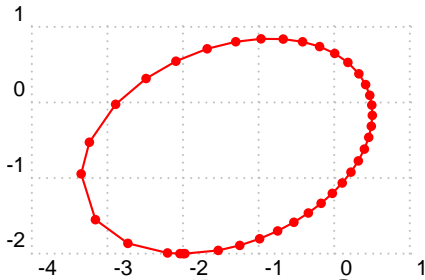

```

1 \def\InitCond{ 1 1 .1 0 -1 -1 -2 0}
2 \begin{pspicture}[shift=-1.5,showgrid=true](-4,-1.75)(1,1)
3   \psplotDiffEqn[linecolor=red, plotpoints=200,method=varrkiv,
4     varsteptol=.0001, showpoints=true,
5     plotfuncx=y dup 4 get exch 0 get sub,
6     plotfuncy=dup 5 get exch 1 get sub ]{0}{3.9}{\InitCond}{\Grav}
7 \end{pspicture}

```

Figure 5: Gravitational interaction : landmark defined by one star

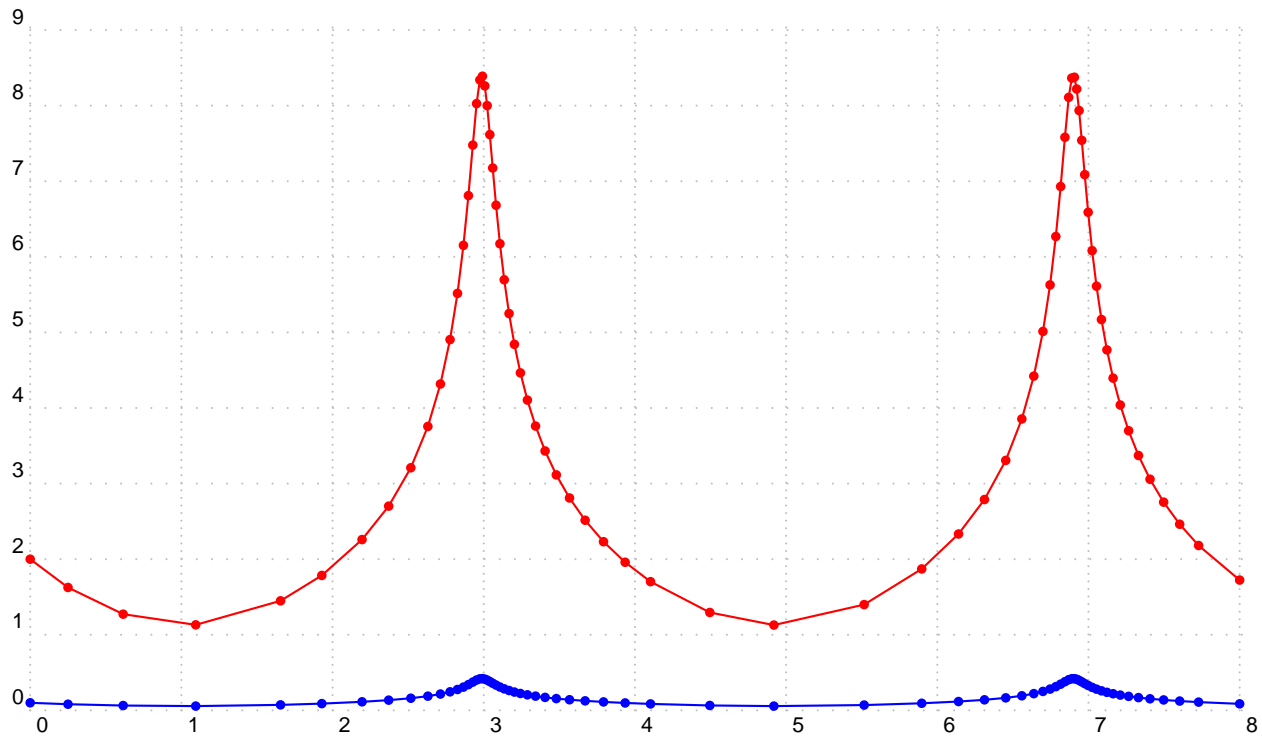


Figure 6: Gravitational interaction : vitessspeed of the stars


```

1 \psset{xunit=2}
2 \begin{pspicture}[showgrid=true](0,0)(8,9)
3   \psset{showpoints=true}
4   \psplotDiffEqn[linecolor=red, method=varrkiv, plotpoints=2, varsteptol=.0001,
5     plotfuncy=dup 6 get dup mul exch 7 get dup mul add sqrt]{0}{8}{\InitCond}{\Grav}
6   \psplotDiffEqn[linecolor=blue, method=varrkiv, plotpoints=2, varsteptol=.0001,
7     plotfuncy=dup 2 get dup mul exch 3 get dup mul add sqrt]{0}{8}{\InitCond}{\Grav}
8 \end{pspicture}

```

30.2.1 Simple equation of first order $y' = y$

For the initial value $y(0) = 1$ we have the solution $y(x) = e^x$. y is always on the stack, so we have to do nothing. Using the algebraic option, we write it as `y[0]`. The following example shows different solutions depending to the number of plotpoints with $y_0 = 1$:

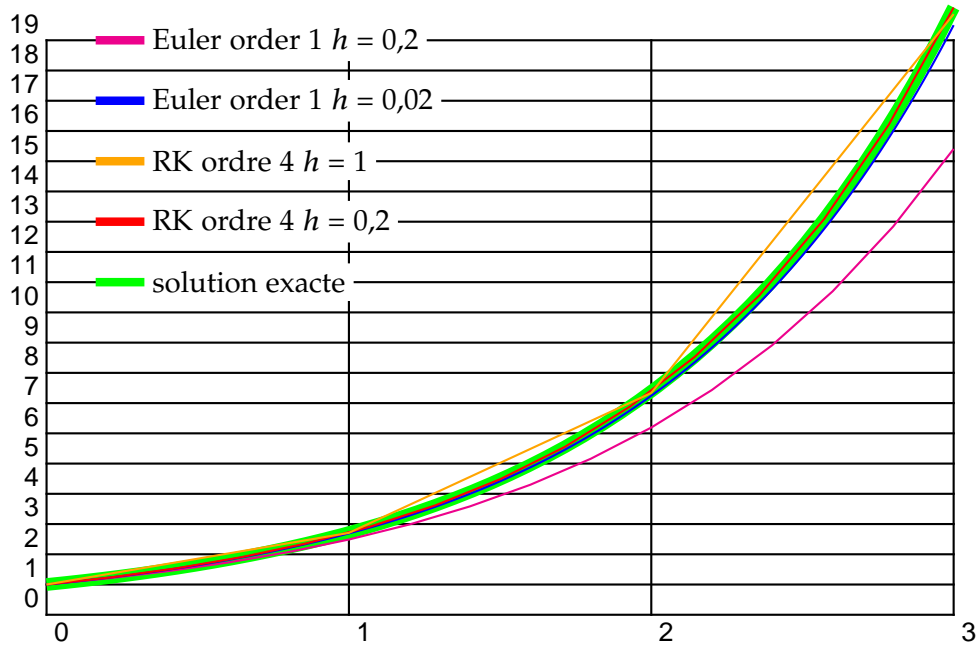

```

1 \psset{xunit=4, yunit=.4}
2 \begin{pspicture}(3,19)\psgrid[subgriddiv=1]
3   \psplot[linewidth=6\pslinewidth, linecolor=green]{0}{3}{Euler x exp}
4   \psplotDiffEqn[linecolor=magenta,plotpoints=16,algebraic=true]{0}{3}{1}{y[0]}
5   \psplotDiffEqn[linecolor=blue,plotpoints=151]{0}{3}{1}{y}
6   \psplotDiffEqn[linecolor=red,method=rk4,plotpoints=15]{0}{3}{1}{y}
7   \psplotDiffEqn[linecolor=Orange,method=rk4,plotpoints=4]{0}{3}{1}{y}
8   \psset{linewidth=4\pslinewidth}
9   \rput*(0.35,19){\psline[linecolor=magenta]{-.75cm,0}}
10  \rput*[l](0.35,19){\small Euler order 1 $h=0{,}2$}
11  \rput*(0.35,17){\psline[linecolor=blue]{-.75cm,0}}
12  \rput*[l](0.35,17){\small Euler order 1 $h=0{,}02$}
13  \rput*(0.35,15){\psline[linecolor=Orange]{-.75cm,0}}
14  \rput*[l](0.35,15){\small RK ordre 4 $h=1$}
15  \rput*(0.35,13){\psline[linecolor=red]{-.75cm,0}}
16  \rput*[l](0.35,13){\small RK ordre 4 $h=0{,}2$}
17  \rput*(0.35,11){\psline[linecolor=green]{-.75cm,0}}
18  \rput*[l](0.35,11){\small solution exacte}
19 \end{pspicture}

```

30.2.2 $y' = \frac{2 - ty}{4 - t^2}$

For the initial value $y(0) = 1$ the exact solution is $y(x) = \frac{t + \sqrt{4 - t^2}}{2}$. The function f described in PostScript code is like (y ist still on the stack):


```

x          %% y x
mul        %% x*y
2 exch sub %% 2-x*y
4 x dup mul %% 2-x*y 4 x^2
sub        %% 2-x*y 4-x^2
div        %% (2-x*y)/(4-x^2)

```

The following example uses $y_0 = 1$.


```
\newcommand{\InitCond}{1}
\newcommand{\Func}{x mul 2 exch sub 4 x dup mul sub div}
\newcommand{\FuncAlg}{(2-x*y[0])/(4-x^2)}
```

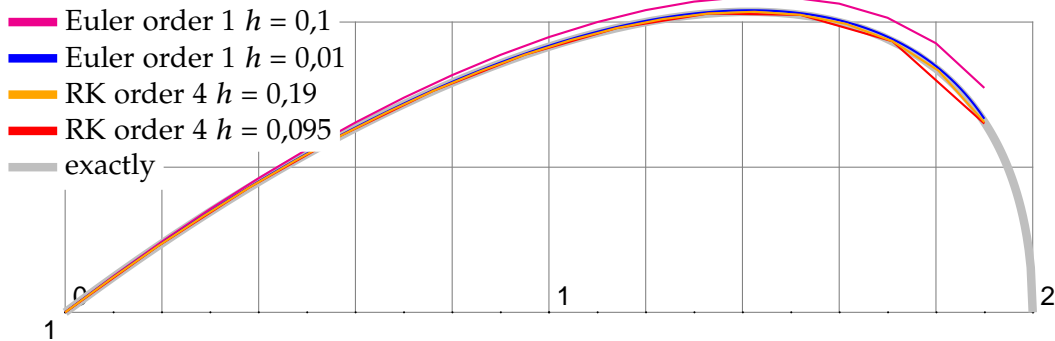

```
1 \psset{xunit=6.4, yunit=9.6, showpoints=false}
2 \begin{pspicture}(0,1)(2,1.7) \psgrid[subgriddiv=5]
3   { \psset{linewidth=4\pslinewidth,linecolor=lightgray}
4     \psplot{0}{1.8}{x dup dup mul 4 exch sub sqrt add 2 div}
5     \psplot{1.8}{2}{x dup dup mul 4 exch sub sqrt add 2 div} }
6   \def\InitCond{1}
7   \def\Func{x mul 2 exch sub 4 x dup mul sub div}
8   \psplotDiffEqn[linecolor=magenta, plotpoints=20]{0}{1.9}{\InitCond}{\Func}
9   \psplotDiffEqn[linecolor=blue, plotpoints=191]{0}{1.9}{\InitCond}{\Func}
10  \psplotDiffEqn[linecolor=red, method=rk4, plotpoints=11,%
11    algebraic=true]{0}{1.9}{\InitCond}{(2-x*y[0])/(4-x^2)}
12  \psplotDiffEqn[linecolor=Orange, method=rk4, plotpoints=21,%
13    algebraic=true]{0}{1.9}{\InitCond}{(2-x*y[0])/(4-x^2)}
14  \psset{linewidth=4\pslinewidth}
15  \rput*(0.3,1.6){\psline[linecolor=magenta](-.75cm,0)}\rput*[1](0.3,1.6){\small Euler order 1 $h$
16    =0{,}1$}
17  \rput*(0.3,1.55){\psline[linecolor=blue](-.75cm,0)}\rput*[1](0.3,1.55){\small Euler order 1 $h$
18    =0{,}01$}
19  \rput*(0.3,1.5){\psline[linecolor=Orange](-.75cm,0)}\rput*[1](0.3,1.5){\small RK order 4 $h$
20    =0{,}19$}
21  \rput*(0.3,1.45){\psline[linecolor=red](-.75cm,0)}\rput*[1](0.3,1.45){\small RK order 4 $h$
22    =0{,}095$}
23  \rput*(0.3,1.4){\psline[linecolor=lightgray](-.75cm,0)}\rput*[1](0.3,1.4){\small exactly}
24 \end{pspicture}
```

30.2.3 $y' = -2xy$

For $y(-1) = \frac{1}{e}$ we get $y(x) = e^{-x^2}$.

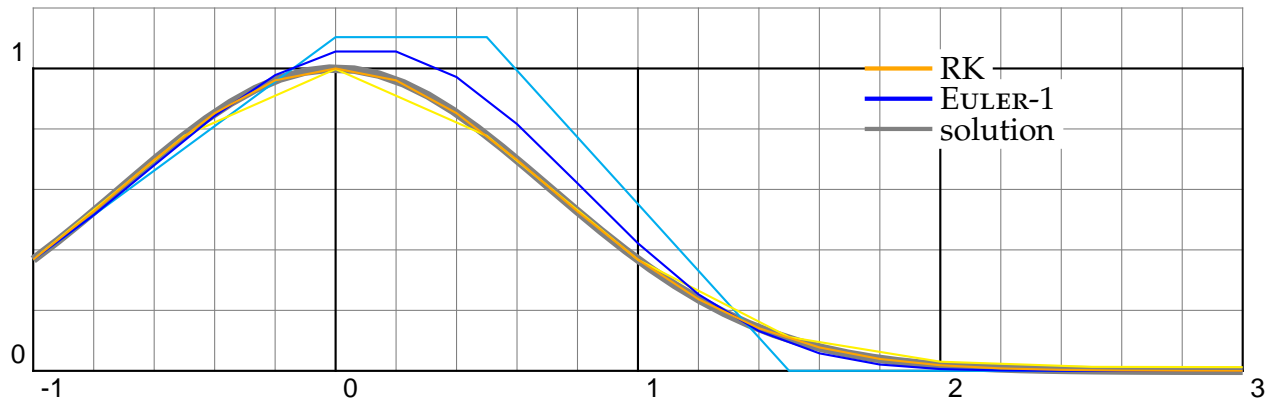

```

1 \psset{unit=4}
2 \begin{pspicture}(-1,0)(3,1.1)\psgrid
3   \psplot[linewidth=4\pslinewidth,linecolor=gray]{-1}{3}{Euler x dup mul neg exp}
4   \psset{plotpoints=9}
5   \psplotDiffEqn[linecolor=cyan]{-1}{3}{1 Euler div}{x -2 mul mul}
6   \psplotDiffEqn[linecolor=yellow, method=rk4]{-1}{3}{1 Euler div}{x -2 mul mul}
7   \psset{plotpoints=21}
8   \psplotDiffEqn[linecolor=blue]{-1}{3}{1 Euler div}{x -2 mul mul}
9   \psplotDiffEqn[linecolor=Orange, method=rk4]{-1}{3}{1 Euler div}{x -2 mul mul}
10  \psset{linewidth=2\pslinewidth}
11  \rput*(2,1){\psline[linecolor=Orange](-0.25,0)}
12  \rput*[l](2,1){RK}
13  \rput*(2,.9){\psline[linecolor=blue](-0.25,0)}
14  \rput*[l](2,.9){\textsc{Euler}-1}
15  \rput*(2,.8){\psline[linecolor=gray](-0.25,0)}
16  \rput*[l](2,.8){solution}
17 \end{pspicture}

```

30.2.4 Spirale of Cornu

The integrals of Fresnel :

$$x = \int_0^t \cos \frac{\pi t^2}{2} dt \quad (2)$$

$$y = \int_0^t \sin \frac{\pi t^2}{2} dt \quad (3)$$

with


$$\dot{x} = \cos \frac{\pi t^2}{2} \quad (4)$$

$$\dot{y} = \sin \frac{\pi t^2}{2} \quad (5)$$

```

1 \psset{unit=8}
2 \begin{pspicture}(1,1)\psgrid[subgriddiv=5]
3   \psplotDiffEqn[whichabs=0,whichord=1,linecolor=red,method=rk4,algebraic,%
4     plotpoints=500,showpoints=true]{0}{10}{0 0}{cos(Pi*x^2/2)|sin(Pi*x^2/2)}
5 \end{pspicture}

```

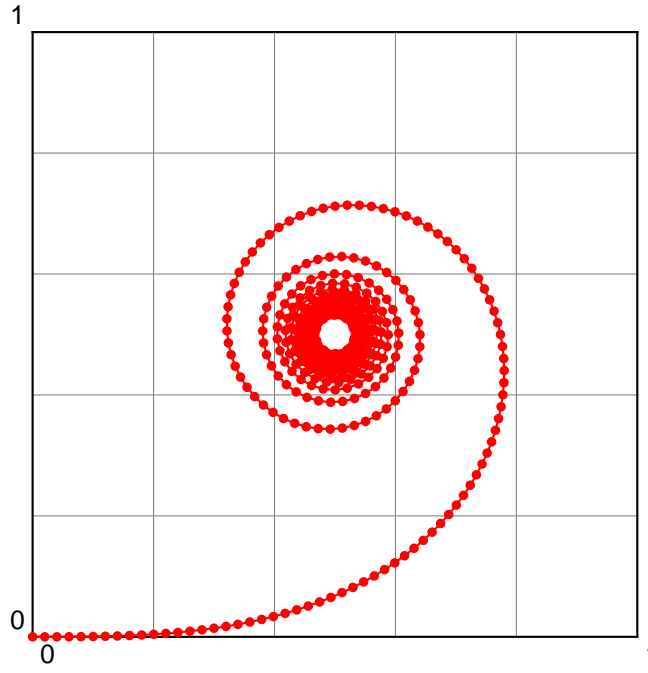

30.2.5 Lotka-Volterra

The Lotka-Volterra model describes interactions between two species in an ecosystem, a predator and a prey. This represents our first multi-species model. Since we are considering two species, the model will involve two equations, one which describes how the prey population changes and the second which describes how the predator population changes.

For concreteness let us assume that the prey in our model are rabbits, and that the predators are foxes. If we let $R(t)$ and $F(t)$ represent the number of rabbits and foxes, respectively, that are alive at time t , then the Lotka-Volterra model is:

$$\dot{R} = a \cdot R - b \cdot R \cdot F \quad (6)$$

$$\dot{F} = e \cdot b \cdot R \cdot F - c \cdot F \quad (7)$$

where the parameters are defined by:

a is the natural growth rate of rabbits in the absence of predation,


c is the natural death rate of foxes in the absence of food (rabbits),

b is the death rate per encounter of rabbits due to predation,

e is the efficiency of turning predated rabbits into foxes.

The Stella model representing the Lotka-Volterra model will be slightly more complex than the single species models we've dealt with before. The main difference is that

our model will have two stocks (reservoirs), one for each species. Each species will have its own birth and death rates. In addition, the Lotka-Volterra model involves four parameters rather than two. All told, the Stella representation of the Lotka-Volterra model will use two stocks, four flows, four converters and many connectors.

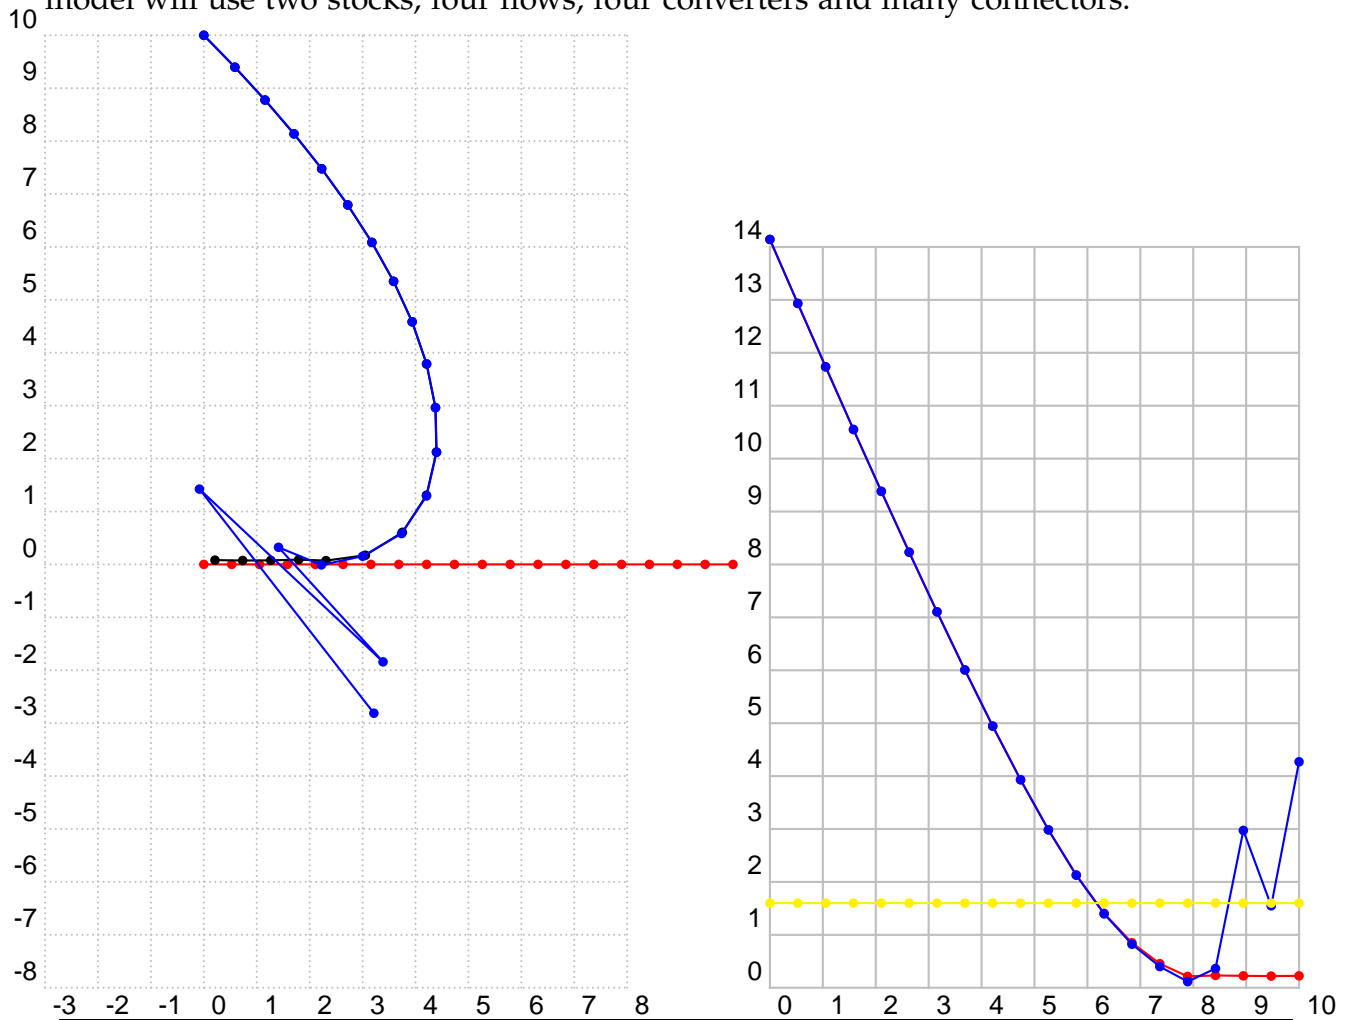

```

1 \def\InitCond{ 0 10 10}%% xa ya xl
2 \def\Faiglelapin{\Vaigle*(y[2]-y[0])/sqrt(y[1]^2+(y[2]-y[0])^2)|%
3   -\Vaigle*y[1]/sqrt(y[1]^2+(y[2]-y[0])^2)|%
4   -\Vlapin}
5 \def\Vlapin{1} \def\Vaigle{1.6}
6 \psset{unit=.7,subgriddiv=0,gridcolor=lightgray,method=adams,algebraic,%
7   plotpoints=20,showpoints=true}
8 \begin{pspicture}(-3,-8)(5,10)\psgrid[griddots=10]
9   \psplotDiffEqn[plotfuncy=pop 0,whichabs=2,linecolor=red]{0}{10}{\InitCond}{\
10    Faiglelapin}
11   \psplotDiffEqn[whichabs=0,whichord=1,linecolor=black,method=rk4]{0}{10}{\InitCond}{\
12    Faiglelapin}
13   \psplotDiffEqn[whichabs=0,whichord=1,linecolor=blue]{0}{10}{\InitCond}{\Faiglelapin}
14 \end{pspicture}\hfill
15 \begin{pspicture}(10,12)\psgrid
16   \psplotDiffEqn[plotfuncy=dup 1 get dup mul exch dup 0 get exch 2 get sub dup
17     mul add sqrt,linecolor=red,method=rk4]{0}{10}{\InitCond}{\Faiglelapin}
18   \psplotDiffEqn[plotfuncy=dup 1 get dup mul exch dup 0 get exch 2 get sub dup

```


```

17   mul add sqrt,linecolor=blue]{0}{10}{\InitCond}{\Faiglelapin}
18   \psplotDiffEqn[plotfuncy=pop Func aload pop pop dup mul exch dup mul add sqrt,
19     linecolor=yellow]{0}{10}{\InitCond}{\Faiglelapin}
20 \end{pspicture}

```

30.2.6 $y'' = y$

Beginning with the initial equation $y(x) = Ae^x + Be^{-x}$ we get the hyperbolic trigonometrical functions.

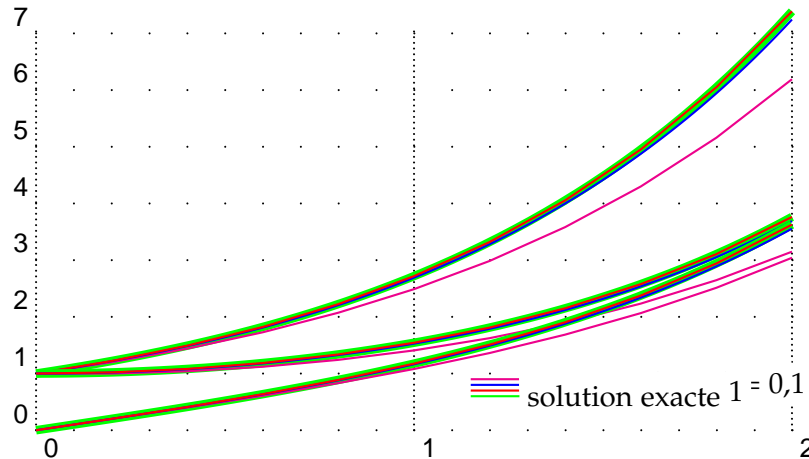


```

1 \def\Funct{exch} \psset{xunit=5cm, yunit=0.75cm}
2 \begin{pspicture}(0,-0.25)(2,7)\psgrid[subgriddiv=1,griddots=10]
3   \psplot[linewidth=4\pslinewidth, linecolor=green]{0}{2}{Euler x exp} %%e^x
4   \psplotDiffEqn[linecolor=magenta, plotpoints=11]{0}{2}{1 1}{\Funct}
5   \psplotDiffEqn[linecolor=blue, plotpoints=101]{0}{2}{1 1}{\Funct}
6   \psplotDiffEqn[linecolor=red, method=rk4, plotpoints=11]{0}{2}{1 1}{\Funct}
7   \psplot[linewidth=4\pslinewidth, linecolor=green]{0}{2}{Euler dup x exp} %%ch(x)
8   exch x neg exp add 2 div}
9   \psplotDiffEqn[linecolor=magenta, plotpoints=11]{0}{2}{1 0}{\Funct}
10  \psplotDiffEqn[linecolor=blue, plotpoints=101]{0}{2}{1 0}{\Funct}
11  \psplotDiffEqn[linecolor=red, method=rk4, plotpoints=11]{0}{2}{1 0}{\Funct}
12  \psplot[linewidth=4\pslinewidth, linecolor=green]{0}{2}{Euler dup x exp
13    exch x neg exp sub 2 div} %%sh(x)
14  \psplotDiffEqn[linecolor=magenta, plotpoints=11]{0}{2}{0 1}{\Funct}
15  \psplotDiffEqn[linecolor=blue, plotpoints=101]{0}{2}{0 1}{\Funct}
16  \psplotDiffEqn[linecolor=red, method=rk4, plotpoints=11]{0}{2}{0 1}{\Funct}
17  \rput*(1.3,.9){\psline[linecolor=magenta]{-0.75cm,0}\rput*[l](1.3,.9){\small\textsc{
18    Euler} ordre 1 $h=1$}
19  \rput*(1.3,.8){\psline[linecolor=blue]{-0.75cm,0}\rput*[l](1.3,.8){\small\textsc{Euler
20    } ordre 1 $h=0$,1$}
21  \rput*(1.3,.7){\psline[linecolor=red]{-0.75cm,0}\rput*[l](1.3,.7){\small RK ordre 4 $h
22    =1$}
23  \rput*(1.3,.6){\psline[linecolor=green]{-0.75cm,0}\rput*[l](1.3,.6){\small solution
24    exacte}
25 \end{pspicture}

```

30.2.7 $y'' = -y$

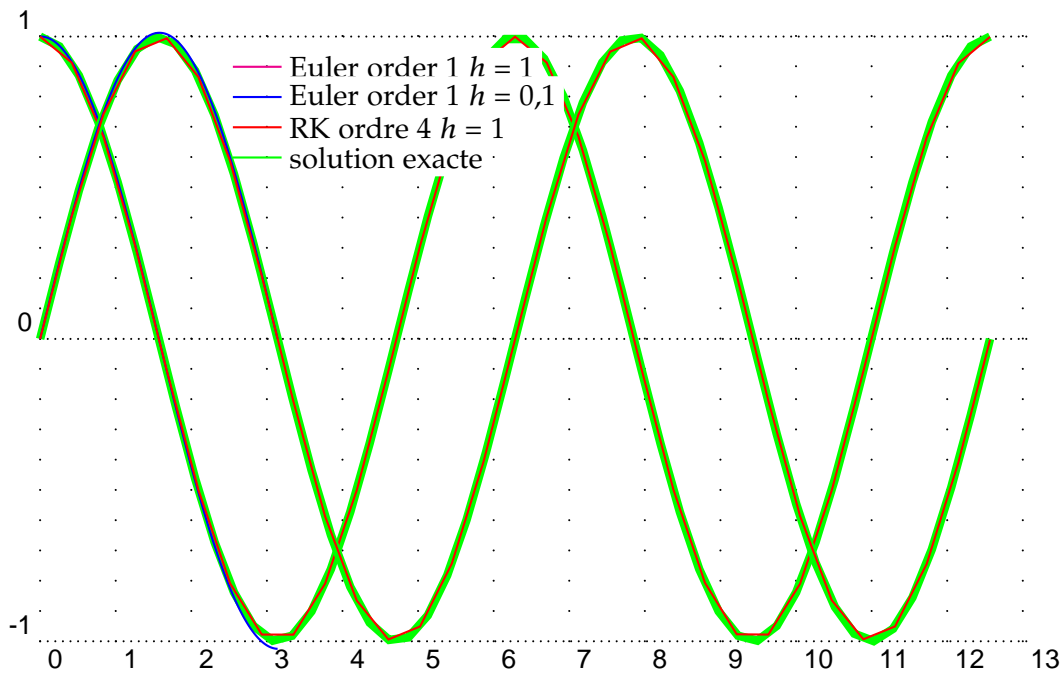

```

1 \def\Funct{exch neg}
2 \psset{xunit=1, yunit=4}
3 \def\quatrepi{12.5663706144} %%4pi=12.5663706144
4 \begin{pspicture}(0,-1.25)(\quatrepi,1.25)\psgrid[subgriddiv=1,griddots=10]
5 \psplot[linewidth=4\pslinewidth,linecolor=green]{0}{\quatrepi}{x RadtoDeg cos}%%cos(x)
6 \psplotDiffEqn[linecolor=blue, plotpoints=201]{0}{3.1415926}{1 0}{\Funct}
7 \psplotDiffEqn[linecolor=red, method=rk4, plotpoints=31]{0}{\quatrepi}{1 0}{\Funct}
8 \psplot[linewidth=4\pslinewidth,linecolor=green]{0}{\quatrepi}{x RadtoDeg sin} %%sin(
  x)
9 \psplotDiffEqn[linecolor=blue,plotpoints=201]{0}{3.1415926}{0 1}{\Funct}
10 \psplotDiffEqn[linecolor=red,method=rk4, plotpoints=31]{0}{\quatrepi}{0 1}{\Funct}
11 \rput*(3.3,.9){\psline[linecolor=magenta]{-.75cm,0}\rput*[1](3.3,.9){\small Euler
  order 1 $h=1$}
12 \rput*(3.3,.8){\psline[linecolor=blue]{-.75cm,0}\rput*[1](3.3,.8){\small Euler order
  1 $h=0$,1$}
13 \rput*(3.3,.7){\psline[linecolor=red]{-.75cm,0}\rput*[1](3.3,.7){\small RK ordre 4 $h
  =1$}
14 \rput*(3.3,.6){\psline[linecolor=green]{-.75cm,0}\rput*[1](3.3,.6){\small solution
  exacte}
15 \end{pspicture}

```


30.2.8 The mechanical pendulum: $y'' = -\frac{g}{l} \sin(y)$

Pour des faibles oscillations $\sin(y) \simeq y$:

$$y(x) = y_0 \cos \left(\sqrt{\frac{g}{l}} x \right)$$

The function f is written in PostScript code:

```
exch RadtoDeg sin -9.8 mul %% y' -gsin(y)
```

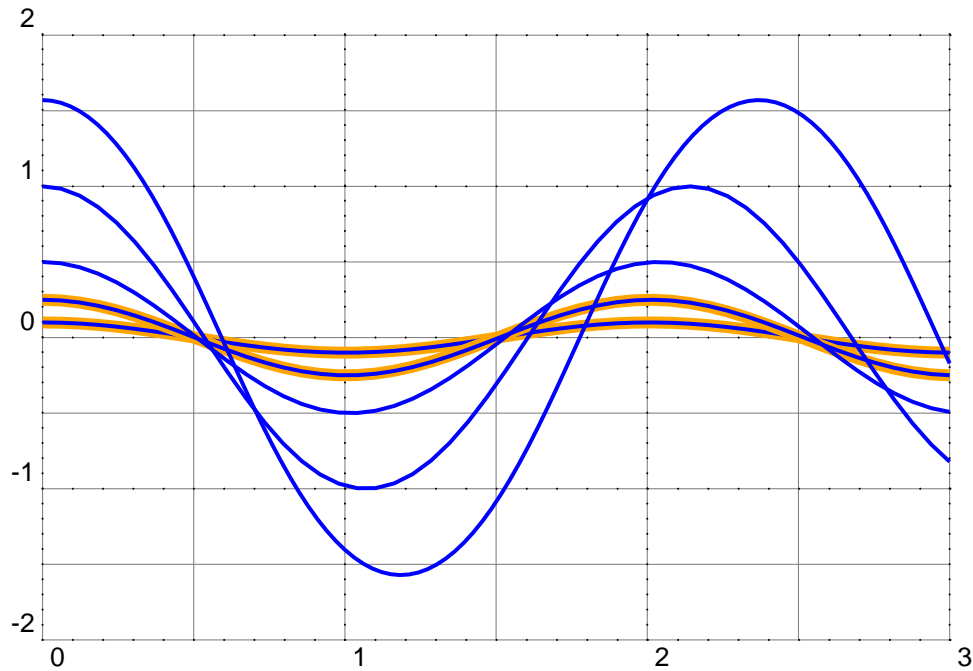


```
1 \def\Func{y[1]|-9.8*sin(y[0])}
2 \psset{yunit=2,xunit=4,algebraic=true,linewidth=1.5pt}
3 \begin{pspicture}(0,-2.25)(3,2.25)\psgrid[subgriddiv=2,griddots=10]
4   \psplot[linewidth=3\pslinewidth, linecolor=Orange]{0}{3}{.1*cos(sqrt(9.8)*x)}
5   \psset{method=rk4,plotpoints=50,linecolor=blue}
6   \psplotDiffEqn{0}{3}{.1 0}{\Func}
7   \psplot[linewidth=3\pslinewidth,linecolor=Orange]{0}{3}{.25*cos(sqrt(9.8)*x)}
8   \psplotDiffEqn{0}{3}{.25 0}{\Func}
9   \psplotDiffEqn{0}{3}{.5 0}{\Func}
10  \psplotDiffEqn{0}{3}{1 0}{\Func}
11  \psplotDiffEqn[plotpoints=100]{0}{3}{Pi 2 div 0}{\Func}
12 \end{pspicture}
```

30.2.9 $y'' = -\frac{y'}{4} - 2y$

Pour $y_0 = 5$ et $y'_0 = 0$ la solution est :

$$5e^{-\frac{x}{8}} \left(\cos(\omega x) + \frac{\sin(\omega x)}{8\omega} \right) \text{ avec } \omega = \frac{\sqrt{127}}{8}$$

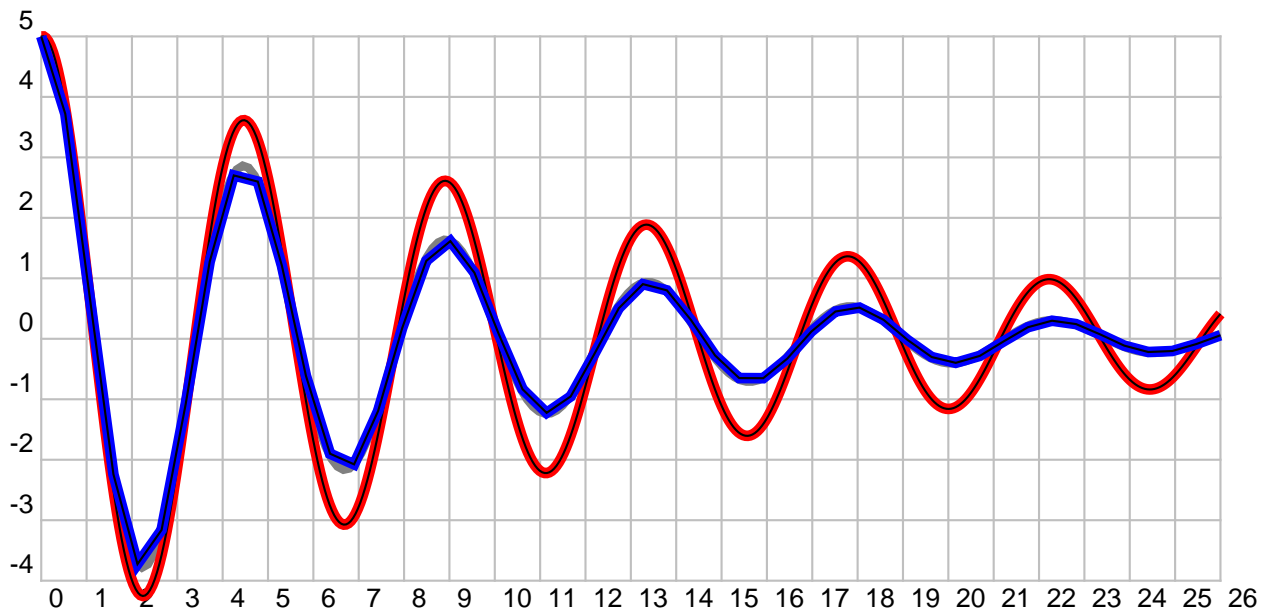

```

1 \psset{xunit=.6,yunit=0.8,plotpoints=500}
2 \begin{pspicture}(0,-4.25)(26,5.25)
3   \psgrid[subgriddiv=0,gridcolor=lightgray,linewidth=1.5pt]
4   \psplot[plotpoints=200,linewidth=4\pslinewidth,linecolor=gray]{0}{26}{%
5     Euler x -8 div exp x 127 sqrt 8 div mul RadtoDeg dup cos 5 mul exch sin 127 sqrt
6     div 5 mul add mul}
7   \psplotDiffEqn[linecolor=red,linewidth=5\pslinewidth]{0}{26}{5 0}
8     {dup 3 1 roll -4 div exch 2 mul sub}
9   \psplotDiffEqn[linecolor=black,algebraic]{0}{26}{5 0} {y[1]|-y[1]/4-2*y[0]}
10  \psset{method=rk4, plotpoints=50}
11  \psplotDiffEqn[linecolor=blue,linewidth=5\pslinewidth]{0}{26}{5 0}{%
12    dup 3 1 roll -4 div exch 2 mul sub}
13  \psplotDiffEqn[linecolor=black,algebraic=true]{0}{26}{5 0}{y[1]|-y[1]/4-2*y[0]}
14 \end{pspicture}

```

31 \psMatrixPlot

This macro allows to visualize a matrix. The datafile must be defined as a PostScript matrix named /dotmatrix:

```


/dotmatrix [ % <----- important line
0 1 1 0 0 0 0 1 1 1
0 1 1 0 1 1 1 0 1 0
1 0 1 1 0 0 0 1 1 0
0 0 1 0 0 0 0 0 1 1
1 1 1 1 1 0 1 0 0 1
0 0 1 1 0 1 0 1 1 1
1 0 0 0 1 1 0 0 0 1
0 0 0 1 1 1 0 1 1 0
1 1 0 0 0 0 1 0 0 1
1 0 1 0 0 1 1 1 0 0
] def % <----- important line

```


Important is only the value 0, in this case there happens nothing and for all other cases a dot is printed. The syntax of the macro is:

```
\psMatrixPlot[options]{rows}{columns}{data file}
```

The matrix is scanned line by line from the the first one to the last. In general it looks vice versa than the above listed matrix, the first row 0110000111 is the first plotted line ($y = 1$). With the option `ChangeOrder=true` it looks exactly like the above view.

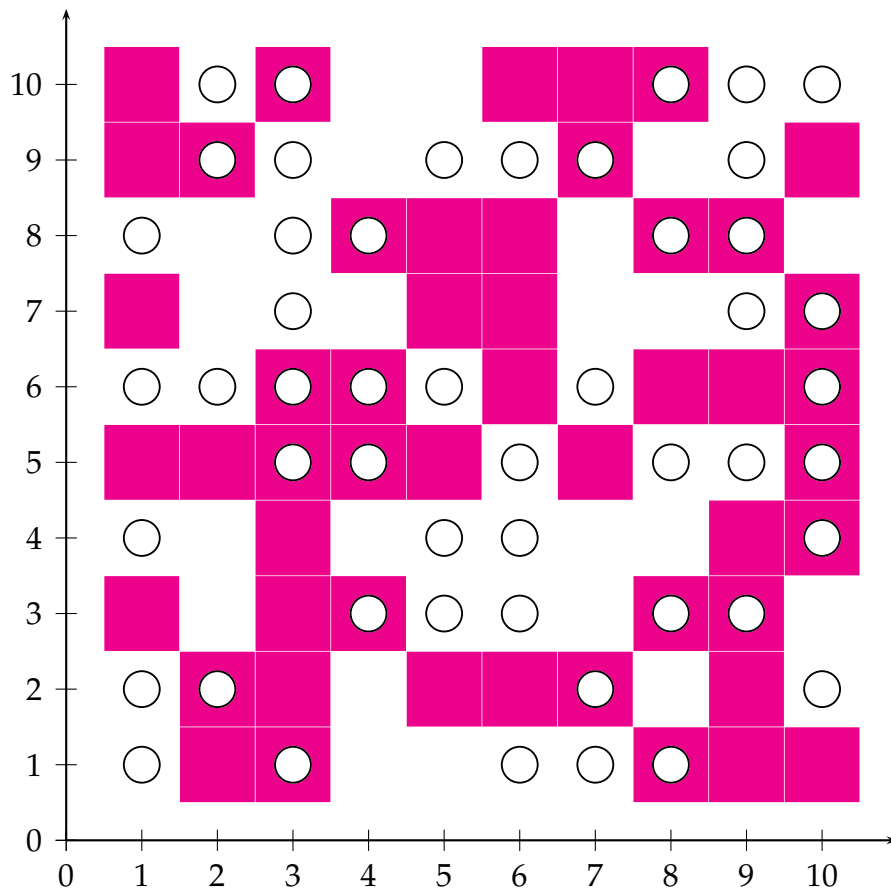

```
1 \begin{pspicture}(-0.5,-0.75)(11,11)
2   \psaxes{->}(11,11)
3   \psMatrixPlot[dotsize=1.1cm,dotstyle=square*,linecolor=magenta]%
4     {10}{10}{matrix.dat}
5   \psMatrixPlot[dotsize=.5cm,dotstyle=o,ChangeOrder]{10}{10}{matrix.dat}
6 \end{pspicture}
```

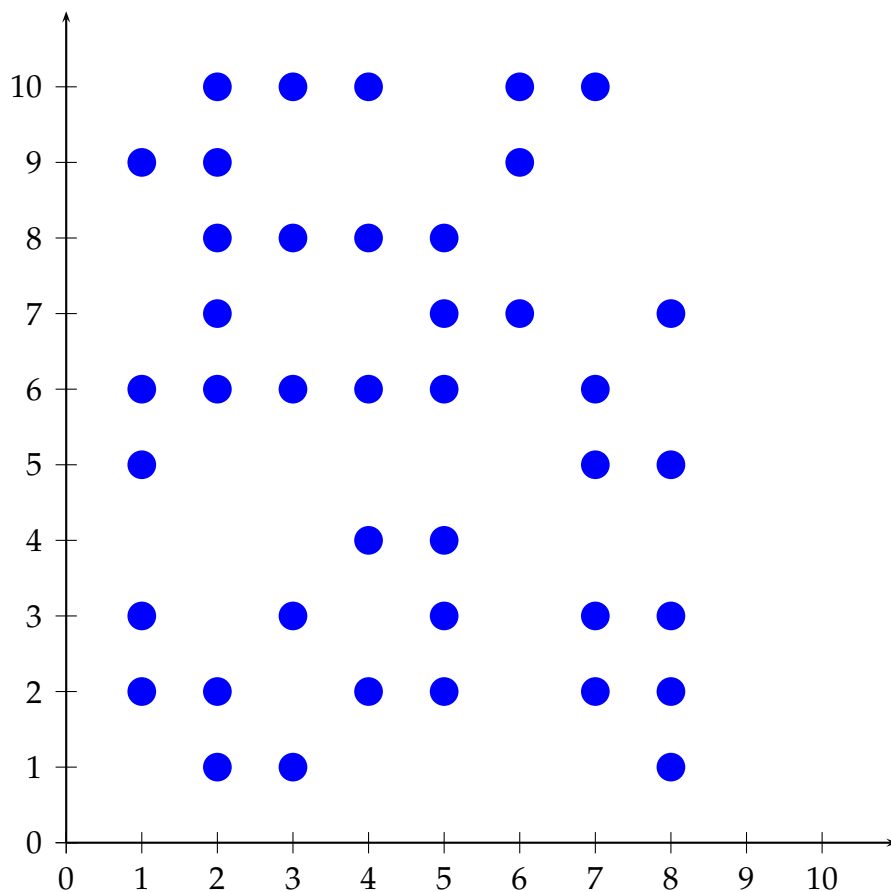

```


1 \begin{pspicture}(-0.5,-0.75)(11,11)
2   \psaxes{->}(11,11)
3   \psMatrixPlot[dotstyle=*,linecolor=blue]{10}{8}{matrix.dat}
4 \end{pspicture}

```

32 \psforeach

The macro `\psforeach` allows a loop with an individual increment.

```
\psforeach{variable}{value list}{action}
```

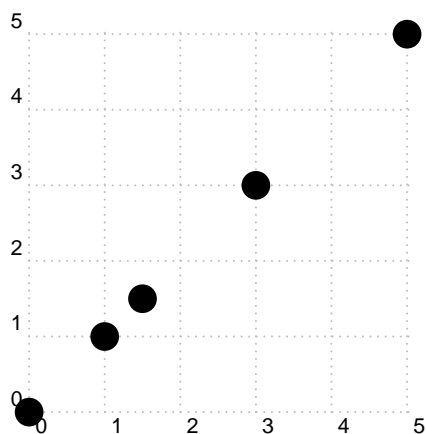

```

1 \begin{pspicture}[showgrid=true](5,5)
2   \psforeach{\nA}{0, 1, 1.5, 3, 5}{%
3     \psdot[dotstyle=*,linecolor=black]{\nA,\nA}
4   }

```

33 \resetOptions

Sometimes it is difficult to know what options, which are changed inside a long document, are different to the default one. With this macro all options depending to pst-plot can be reset. This depends to all options of the packages pstricks, pst-plot and pst-node.

A PostScript

PostScript uses the stack system and the LIFO system, "Last In, First Out".

Function	Meaning on stack before \rightarrow after
add	$x \ y \rightarrow x + y$
sub	$x \ y \rightarrow x - y$
mul	$x \ y \rightarrow x \times y$
div	$x \ y \rightarrow x \div y$
sqrt	$x \rightarrow \sqrt{x}$
abs	$x \rightarrow x $
neg	$x \rightarrow -x$
cos	$x \rightarrow \cos(x)$ (x in degrees)
sin	$x \rightarrow \sin(x)$ (x in degrees)
tan	$x \rightarrow \tan(x)$ (x in degrees)
atan	$y \ x \rightarrow \angle(\vec{Ox}; \vec{OM})$ (in degrees of $M(x, y)$)
ln	$x \rightarrow \ln(x)$
log	$x \rightarrow \log(x)$
array	$n \rightarrow v$ (of dimension n)
aload	$v \rightarrow x_1 \ x_2 \ \dots \ x_n \ v$
astore	$x_1 \ x_2 \ \dots \ x_n \ v \rightarrow v$
pop	$x \rightarrow$
dup	$x \ x \rightarrow$
roll	$x_1 \ x_2 \ \dots \ x_n \ np \rightarrow$

Table 5: Some primitive PostScript macros

B List of all optional arguments for pstricks-add

Key	Type	Default
CMYK	boolean	true
fsAngle	ordinary	[none]
fsOrigin	ordinary	[none]
maxdashes	ordinary	[none]
intSeparator	ordinary	[none]
braceWidth	ordinary	[none]
bracePos	ordinary	[none]
braceWidthInner	ordinary	[none]
braceWidthOuter	ordinary	[none]
veearrowlength	ordinary	[none]
veearrowangle	ordinary	[none]
veearrowlinewidth	ordinary	[none]
filledveearrowlength	ordinary	[none]
filledveearrowangle	ordinary	[none]
filledveearrowlinewidth	ordinary	[none]
arrowLW	ordinary	[none]
tickarrowlength	ordinary	[none]
tickarrowlinewidth	ordinary	[none]
hooklength	ordinary	[none]
hookwidth	ordinary	[none]
ArrowFill	boolean	true
nArrowsA	ordinary	[none]
nArrowsB	ordinary	[none]
nArrows	ordinary	[none]
ArrowInside	ordinary	[none]
ArrowInsidePos	ordinary	[none]
ArrowInsideNo	ordinary	[none]
ArrowInsideOffset	ordinary	[none]
dashNo	ordinary	[none]
linecap	ordinary	[none]
randomPoints	ordinary	[none]
color	boolean	true
lineAngle	ordinary	[none]
trueAngle	boolean	true
blName	command	
bcName	command	
brName	command	
clName	command	
ccName	command	
crName	command	

Continued on next page

Continued from previous page

Key	Type	Default
tlName	command	
tcName	command	
trName	command	
labelFontSize	ordinary	[none]
comma	boolean	true
xAxis	boolean	true
yAxis	boolean	true
xyAxes	boolean	true
xyDecimals	ordinary	[none]
xDecimals	ordinary	[none]
yDecimals	ordinary	[none]
xlogBase	ordinary	[none]
ylogBase	ordinary	[none]
xylogBase	ordinary	[none]
trigLabelBase	ordinary	[none]
trigLabels	boolean	true
logLines	ordinary	[none]
ylabelFactor	ordinary	[none]
xlabelFactor	ordinary	[none]
xticksize	ordinary	[none]
yticksize	ordinary	[none]
subticks	ordinary	[none]
xsubticks	ordinary	[none]
ysubticks	ordinary	[none]
subticksize	ordinary	[none]
xsubticksize	ordinary	[none]
ysubticksize	ordinary	[none]
tickwidth	ordinary	[none]
xtickwidth	ordinary	[none]
ytickwidth	ordinary	[none]
subtickwidth	ordinary	[none]
xsubtickwidth	ordinary	[none]
ysubtickwidth	ordinary	[none]
tickcolor	ordinary	[none]
xtickcolor	ordinary	[none]
ytickcolor	ordinary	[none]
subtickcolor	ordinary	[none]
xsubtickcolor	ordinary	[none]
ysubtickcolor	ordinary	[none]
xticklinestyle	ordinary	[none]
xsubticklinestyle	ordinary	[none]
yticklinestyle	ordinary	[none]

Continued on next page

Continued from previous page

Key	Type	Default
ysubticklinestyle	ordinary	[none]
ticklinestyle	ordinary	[none]
subticklinestyle	ordinary	[none]
nStep	ordinary	[none]
nStart	ordinary	[none]
nEnd	ordinary	[none]
xStep	ordinary	[none]
yStep	ordinary	[none]
xStart	ordinary	[none]
xEnd	ordinary	[none]
yStart	ordinary	[none]
yEnd	ordinary	[none]
plotNo	ordinary	[none]
plotNoMax	ordinary	[none]
ChangeOrder	boolean	true
xAxisLabel	ordinary	[none]
yAxisLabel	ordinary	[none]
xAxisLabelPos	ordinary	[none]
yAxisLabelPos	ordinary	[none]
llx	ordinary	[none]
lly	ordinary	[none]
urx	ordinary	[none]
ury	ordinary	[none]
box	ordinary	true
ignoreLines	ordinary	[none]
polarplot	boolean	true
algebraic	boolean	true
method	ordinary	[none]
whichabs	ordinary	[none]
whichord	ordinary	[none]
plotfuncx	ordinary	[none]
plotfuncy	ordinary	[none]
expression	ordinary	[none]
buildvector	boolean	true
VarStep	boolean	true
PlotDerivative	ordinary	[none]
VarStepEpsilon	ordinary	[none]
varsteptol	ordinary	[none]
adamsorder	ordinary	[none]
barwidth	ordinary	[none]
StepType	ordinary	[none]
Derive	ordinary	[none]

Continued on next page

Continued from previous page

Key	Type	Default
Tnormal	boolean	true
filename	ordinary	[none]
saveData	boolean	true
dicescale	ordinary	[none]

C Credits

Hendri Adriaens | Martin Chicoine | Ulrich Dirr | Christophe Fourey | Hubert Gäßlein | Denis Girou | Peter Hutnick | Christophe Jorssen | Uwe Kern | Manuel Luque | Jens-Uwe Morawski | Tobias Nähring | Rolf Niepraschk | Alan Ristow | Arnaud Schmittbuhl | Timothy Van Zandt

References

- [1] Hendri Adriaens. xkeyval package. CTAN:/macros/latex/contrib/xkeyval, 2004.
- [2] Denis Girou. Présentation de PSTricks. *Cahier GUTenberg*, 16:21–70, April 1994.
- [3] Michel Goosens, Frank Mittelbach, Sebastian Rahtz, Denis Roegel, and Herbert Voß. *The L^AT_EX Graphics Companion*. Addison-Wesley Publishing Company, Reading, Mass., 2007.
- [4] Alan Hoenig. *T_EX Unbound: L^AT_EX & T_EX Strategies, Fonts, Graphics, and More*. Oxford University Press, London, 1998.
- [5] Laura E. Jackson and Herbert Voß. Die plot-funktionen von pst-plot. *Die T_EXnische Komödie*, 2/02:27–34, June 2002.
- [6] Nikolai G. Kollock. *PostScript richtig eingesetzt: vom Konzept zum praktischen Einsatz*. IWT, Vaterstetten, 1989.
- [7] Frank Mittelbach and Michel Goosens et al. *The L^AT_EX Companion*. Addison-Wesley Publishing Company, Boston, second edition, 2004.
- [8] Frank Mittelbach and Michel Goosens et al. *Der L^AT_EX Begleiter*. Pearson Education, München, zweite edition, 2005.
- [9] Herbert Voß. *Chaos und Fraktale selbst programmieren: von Mandelbrotmengen über Farbmanipulationen zur perfekten Darstellung*. Franzis Verlag, Poing, 1994.
- [10] Herbert Voß. Die mathematischen Funktionen von PostScript. *Die T_EXnische Komödie*, 1/02, March 2002.

- [11] Herbert Voß. *LT_EX in Naturwissenschaften & Mathematik*. Franzis Verlag, München, first edition, 2006.
- [12] Herbert Voß. *PSTricks Grafik für T_EX und LT_EX*. DANTE – Lehmanns, Heidelberg/Hamburg, forth edition, 2007.
- [13] Timothy Van Zandt. *PSTricks - PostScript macros for generic T_EX*.
<http://www.tug.org/application/PSTricks>, 1993.
- [14] Timothy Van Zandt. *multido.tex - a loop macro, that supports fixed-point addition*.
CTAN:/graphics/pstricks/generic/multido.tex, 1997.
- [15] Timothy Van Zandt. *pst-plot: Plotting two dimensional functions and data*.
CTAN:/graphics/pstricks/generic/pst-plot.tex, 1999.
- [16] Timothy Van Zandt and Denis Girou. Inside PSTricks. *TUGboat*, 15:239–246, September 1994.

D Change log

See file Changes