

the chemmacros bundle

v4.1 2013/08/24


packages **chemmacros** (v4.1), **chemformula** (v4.1), **ghsystem** (v4.0) and
chemgreek (v0.2)

documentation for the **chemformula** package

Clemens NIEDERBERGER

<https://bitbucket.org/cgnieder/chemmacros/>
contact@mychemistry.eu

English documentation

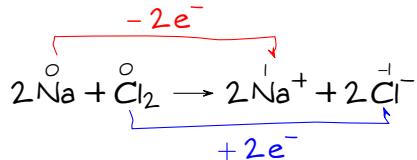

Contents

1	Introduction	2	7	Special Input Types	13
			7.1	Single Token Groups	13
			7.2	Option Input	14
2	Licence and Requirements	2	8	Escaped Input	14
			8.1	Text	14
			8.2	Math	15
3	Setup	2	9	Arrows	15
4	The Basic Principle	3	9.1	Arrow types	15
5	Stoichiometric Factors	4	9.2	Labels	16
6	Compounds	6	9.3	Customization	17
6.1	Adducts	6	9.4	Modify Arrow Types	18
6.2	Subscripts	7	9.5	Standalone Arrows	19
6.3	Commands	7	10	Names	20
6.4	Charges and Other Superscripts	7	10.1	Syntax	20
6.5	Bonds	9	10.2	Customization	20
6.5.1	Native Bonds	9	10.3	Standalone Names	21
6.5.2	Flexible Bonds	9	11	Format and Font	21
6.6	Customization	10	12	Usage In Math Equations	23
6.7	Standalone Formulae	13			

13 Usage with TikZ or pgfplots and externalization	23	References	26
14 Further Examples	24	Index	27

1 Introduction

Probably every chemist using L^AT_EX 2_E is aware of the great mhchem¹ package by Martin Hensel. There have always been some difficulties intertwining it with CHEMMACROS, though. Also, some other minor points in mhchem always bothered me, but they hardly seemed enough for a new package. They weren't even enough for a feature request to the mhchem author. The challenge and the fun of creating a new package and the wish for a highly customizable alternative led to CHEMFORMULA after all.

CHEMFORMULA works very similar to mhchem but is more strict as to how compounds, stoichiometric factors and arrows are input. In the same time CHEMFORMULA offers *many* possibilities to customize the output.

Since version 4.0, the CHEMFORMULA package can be used independently from CHEMMACROS. This means that if you say

```
1 \usepackage{chemformula}
```

then CHEMMACROS will not be loaded. The CHEMMACROS package, however, *will* load CHEMFORMULA.

2 Licence and Requirements

Permission is granted to copy, distribute and/or modify this software under the terms of the L^AT_EX project public license (lppl) version 1.3 or later (<http://www.latex-project.org/lppl.txt>). The package has the status “maintained.”

The CHEMFORMULA package needs and thus loads the packages expl3 (from the l3kernel²), xparse, l3keys2e and xfrac (from the l3packages³), tikz,⁴ amsmath,⁵ nicefrac and scrlfile (from the KOMA-Script⁶ bundle).

3 Setup

All of CHEMFORMULA's options belong to CHEMMACROS' module chemformula. This means they can be setup with

```
1 \chemsetup[chemformula]{<options>} or
2 \chemsetup{chemformula/<option1>,chemformula/<option2>}
```

¹ on CTAN: mhchem ² on CTAN: l3kernel ³ on CTAN: l3packages ⁴ on CTAN: pgf ⁵ on CTAN: amsmath ⁶ on CTAN: koma-script

However, if you're using **CHEMFORMULA** as a standalone package the command `\chemsetup` is not available. This is why **CHEMFORMULA** also has its own setup command:

```
1 \setchemformula{<options>}
```

4 The Basic Principle

CHEMFORMULA offers one main command.

```
\ch[<options>]{<input>}
```

The usage will seem very familiar to you if you're familiar with mhchem:

1	<code>\ch{H2O} \\</code>	H ₂ O
2	<code>\ch{Sb2O3} \\</code>	Sb ₂ O ₃
3	<code>\ch{H+} \\</code>	H ⁺
4	<code>\ch{CrO4^2-} \\</code>	CrO ₄ ²⁻
5	<code>\ch{AgCl2-} \\</code>	AgCl ₂ ⁻
6	<code>\ch{[AgCl2]-} \\</code>	[AgCl ₂] ⁻
7	<code>\ch{Y^{99+}} \\</code>	Y ⁹⁹⁺
8	<code>\ch{Y^{99+}} \\</code>	Y ⁹⁹⁺
9	<code>\ch{H2_{(aq)}} \\</code>	H _{2(aq)}
10	<code>\ch{NO3-} \\</code>	NO ₃ ⁻
11	<code>\ch{({NH4)2S} \\</code>	(NH ₄) ₂ S
12	<code>\ch{{^227}_{(90)}Th+} \\</code>	²²⁷ ₉₀ Th ⁺
13	<code>\$V_{\{\ch{H2O}\}}\$ \\</code>	V _{H₂O}
14	<code>\ch{Ce^{IV}} \\</code>	Ce ^{IV}
15	<code>\ch{KCr(SO4)2 * 12 H2O}</code>	KCr(SO ₄) ₂ · 12 H ₂ O

However, there are differences. The most notable one: **CHEMFORMULA** distinguishes between different types of input. These different parts *have* to be separated with blanks:

```
\ch{part1 part2 part3 part4}
```

A blank in the input *never* is a blank in the output. This role of the blank strictly holds and disregarding it can have unexpected results and even lead to errors.

Another notable difference: **CHEMFORMULA** tries to avoid math mode whenever possible:

1	<code>\ch{A + B ->[a] C} \\</code>	A + B \xrightarrow{a} C
2	<code>\ce{A + B ->[a] C}</code>	A + B \xrightarrow{a} C

This means that `\ch{2H2O}` is recognized as a *single* part, which in this case is recognized as a compound.

1	<code>\ch{2H2O} \\</code>	$_2\text{H}_2\text{O}$
2	<code>\ch{2 H2O}</code>	2 H ₂ O

This also means, that a part cannot contain a blank since this will automatically divide it into two parts. If you need an extra blank in the output you need to use ~. However, since commands in most cases gobble a space after them a input like `\ch{\command ABC}` will be treated as a single part. If you want or need to divide them you need to add an empty group: `\ch{\command{} ABC}`. The different input types are described in the following sections.

There are some options to customize the output of the `\ch` command. They can either be applied locally using the optional argument or can be set globally using the setup command. All options of `CHEMFORMLA` belong to the module `chemformula` and can be set in different ways:

`\chemsetup[chemformula]{<options>}` (when loaded via `CHEMMACROS`)

`\chemsetup{chemformula/<options>}` (when loaded via `CHEMMACROS`)

`\setchemformula{<options>}` (independent from `CHEMMACROS`)

5 Stoichiometric Factors

A stoichiometric factor may only contain of numbers and the signs . , _ / ()

```

1  \ch{2} \\
2  \ch{12}

3
4  % decimals:           2
5  \ch{.5} \\             12
6  \ch{5,75}              0.5
7
8  % fractions:          5.75
9  \ch{3/2} \\            3
10 \ch{1_1/2}              2
11
12 % ``iupac'':
13 \ch{(1/2)}

```

As you can see if you input decimal numbers a missing leading zero is added.

You have to be a little bit careful with the right syntax but I believe it is rather intuitive.

```

1  this won't work but will result in an error: \ch{1/1_1}

```

If stoichiometric factors are enclosed with parentheses the fractions are not recognized and missing leading zeros are not added. What's inside the parentheses is typeset as is.

```

1  \ch{(1/2) H2O} \ch{1/2 H2O} \ch{0.5 H2O}      (1/2)H2O ½ H2O 0.5 H2O

```

You can find many examples like the following for stoichiometric factors in parentheses in the IUPAC Green Book [Coh+08]:



There are a few possibilities to customize the output.

decimal-marker = <marker> Default: .
 The symbol to indicate the decimal.

frac-style = math|xfrac|nicefrac Default: math
 Determines how fractions are displayed.

frac-math-cmd = <command sequence> Default: \frac
 Introduced in version 4.1 Allows you to choose which command is used with **frac-style** = math. This needs to be a command sequence that takes two arguments that are set in math mode.

stoich-space = <skip> Default: .1667em plus .0333em minus .0117em
 The space that is placed after the stoichiometric factor. A rubber length.

stoich-paren-parse = true|false Default: false
 If set to true stoichiometric factors enclosed by parentheses also are parsed.

```
1 \ch[decimal-marker={,}]{3.5} \ch[decimal-marker={$\cdot$}]{3,5}
2 3,5 3·5
```

The option **frac-style** = xfrac uses the \sfrac command of the xfrac package. The output strongly depends on the font you use.

```
1 \ch[frac-style=xfrac]{3/2} \ch[frac-style=xfrac]{1_1/2}
2 3½ 1½
```

CHEMFORMULA defines the instance formula-text-frac which you can redefine to your needs. See the xfrac documentation for further information. The default definition is this:

```
1 \DeclareInstance{xfrac}{chemformula-text-frac}{text}
2 {
3   slash-left-kern = -.15em ,
4   slash-right-kern = -.15em
5 }
```

This document uses the font Linux Libertine O and the following definition:

```
1 \DeclareInstance{xfrac}{chemformula-text-frac}{text}
2 {
3   scale-factor      = 1 ,
4   denominator-bot-sep = -.2ex ,
5   denominator-format = \scriptsize #1 ,
6   numerator-top-sep = -.2ex ,
7   numerator-format = \scriptsize #1 ,
8   slash-right-kern = .05em ,
9   slash-left-kern = .05em
```

6 Compounds

```
10 }
```

The option `frac-style = nicefrac` uses the `\nicefrac` command of the `nicefrac` package.

```
1 \ch[frac-style=nicefrac]{3/2} \ch[frac-style=nicefrac]{1_1/2}  
2 3/2 1 1/2
```

The option `stoich-space` allows you to customize the space between stoichiometric factor and the group following after it.

```
1 \ch{2 H2O} \\ 2 H2O  
2 \ch[stoich-space=.3em]{2 H2O} 2 H2O
```

6 Compounds

`CHEMFORMULA` determines compounds as the type that “doesn’t fit in anywhere else.” This point will become more clear when you know what the other types are.

```
1 \ch{H2SO4} \\ H2SO4  
2 \ch{[Cu(NH3)4]^2+} [Cu(NH3)4]2+
```

6.1 Adducts

`CHEMFORMULA` has two identifiers which will create adducts.

```
\ch{A.B}  
A·B
```

```
\ch{A*B}  
A·B
```

```
1 \ch{CaSO4.H2O} \\ CaSO4·H2O  
2 \ch{CaSO4*H2O} CaSO4·H2O
```

Since numbers in a compound always are treated as subscripts (see section 6.2) you sometimes need to introduce stoichiometric factors for the right output:

```
1 \ch{Na3P04*12H2O} \\ Na3PO4·12H2O  
2 \ch{Na3P04* 12 H2O} \\ Na3PO4·12 H2O  
3 \ch{Na3P04 * 12 H2O} Na3PO4·12 H2O
```

6.2 Subscripts

All numbers in a compound are treated as subscripts.

<code>1 \ch{H25O4}</code>	H_2SO_4
---------------------------	-----------

If you want a letter to be a subscript you can use the math syntax:

<code>1 \ch{A_nB_m}</code>	A_nB_m
----------------------------	----------

The subscript recognizes groups. You can also use math inside it.

<code>1 \ch{A_{n\$}B_{m\$}} \\ 2 \ch{NaCl_{(aq)}}</code>	A_nB_m $NaCl_{(aq)}$
--	---------------------------

6.3 Commands

Commands are allowed in a compound:

<code>1 \ch{\textbf{A2}B3} \ch{A2\color{red}B3}</code>	$A_2B_3 A_2\color{red}{B}_3$
--	------------------------------

However, if the commands demand numbers as argument, e.g., space commands or `CHEMMACROS'` `\ox` command the direct use will fail. This is because the numbers are treated as subscripts *before* the command expands.

<code>1 \ch{A\hspace{2mm}B} will raise an error because \hspace sees something like 2 this: \hspace{\$_2\$mm}. Actually not at all like it but equally bad\ldots</code>

See section 8.1 for a way around this.

6.4 Charges and Other Superscripts

Basics If a compound *ends* with a plus or minus sign it will be treated as charge sign and typeset as superscript. In other places a plus is treated as a triple bond and a dash will be used as a single bond, see section 6.5.

<code>1 \ch{A+B} \ch{AB+} \\ 2 \ch{A-B} \ch{AB-}</code>	$A \equiv B AB^+$ $A - B AB^-$
---	-----------------------------------

For longer charge groups or other superscripts you can use the math syntax. It recognizes groups and you can use math inside them. Inside these groups neither + nor - are treated as bonds. If a dot . is inside a superscript it is treated as indicator for a radical. A * gives the excited state.

6 Compounds

1 \ch{A^{x-}} \\	A ^{x-}
2 \ch{A^x-} \\	A ^{x-}
3 \ch{A^{x-}} \\	A ^{x-}
4 \ch{A^{x-\$}} \\	A ^{x-}
5 \ch{RNO2^-} \\	RNO ₂ ⁻
6 \ch{^31H} \\	³ H
7 \ch{^{14}6C} \\	¹⁴ C
8 \ch{^{58}_{26}Fe} \\	⁵⁸ ₂₆ Fe
9 \ch{NO^*}	NO [*]

Ions and ion composites with more than one charge can be typeset quite as easy:

1 \ch{SO4^2-} \ch{Ca^2+ SO4^2-}	SO ₄ ²⁻ Ca ²⁺ SO ₄ ²⁻
---------------------------------	--

Charge Commands You don't need to use `\mch` and related commands inside `\ch`. Indeed, you *shouldn't* use them as they might mess with the subscript and superscript alignment. The `CHEMMACROS` option `circled` is obeyed by `\ch`.

1 \chemsetup[option]{circled=all}	H ⁺ + OH ⁻ ⇌ H ₂ O
2 \ch{H+ + OH- <=> H2O}	

Behaviour The superscripts behave differently depending on their position in a compound, if there are super- and subscripts following each other directly.

1 \ch{^3B} \ch{{}^3B} \ch{^3B} \ch{B^3} \ch{B3^3} \\	
2 \ch{^23_{123}B} \ch{{}^23_{123}B} \ch{_23{}^{123}B} \ch{_23{}^{123}B}	
3 \ch{^23_{123}B} \ch{{}^23_{123}B} \ch{_23{}^{123}B} \ch{_23{}^{123}B}	
	³ B ³ B ³ B B ³ B ₃ ²³ B ₂₃ B ²³ B B ²³ B ₁₂₃ ¹²³ B ₁₂₃ B ¹²³ B B ¹²³ B ₂₃

- If a compound *starts* with a sub- or superscript both sub- and superscript are aligned to the *right* else to the *left*.
- If a compound *does not start* with a sub- or superscript and there is both a sub- and a superscript, the superscript is shifted additionally by a length determined from the option `charge-hshift = <dim>`, also see page 10f.

The second point follows IUPAC's recommendations:

In writing the formula for a complex ion, spacing for charge number can be added (staggered arrangement), as well as parentheses: SO₄²⁻, (SO₄)²⁻ The staggered arrangement is now recommended.
IUPAC Green Book [Coh+08, p.51]

Table 1: Bonds available with \bond.

name	appearance	aliases
single	-	normal, sb
double	=	db
triple	≡	tp
dotted	semisingle
deloc	...=	semidouble
tdeloc	≡=	semitriple
co>	→	coordright
<co	←	coordleft

6.5 Bonds

6.5.1 Native Bonds

There are three kinds of what I will call “native bonds”:

<pre> 1 single: \ch{CH3-CH3} \\ 2 double: \ch{CH2=CH2} \\ 3 triple: \ch{CH+CH} </pre>	<p>single: CH₃—CH₃ double: CH₂=CH₂ triple: CH≡CH</p>
---	--

6.5.2 Flexible Bonds

Predefined Bonds In addition to the three native bonds there are a few more which can be called by

\bond{<bond name>}

The predefined bond types are shown in table 1.

<pre> 1 \ch{C\bond{sb}\bond{db}\bond{tp}\bond{deloc}\bond{tdeloc}\bond{co>}\bond{<co}} </pre>	<p>C—C=C≡C—C≡C→C←C</p>
---	------------------------

Own Bonds CHEMFORMULA offers commands to define own bond types:

\DeclareChemBond{<name>}{<code>}

\RenewChemBond{<name>}{<code>}

\DeclareChemBondAlias{<new name>}{<old name>}

\ShowChemBond{<name>}

The usage is best described with an example. So let's see how the `single` bond and the `co>` bond are defined:

```

1 \DeclareChemBond{single}
2   { \draw[chembond] (chemformula-bond-start) -- (chemformula-bond-end) ; }
3 \DeclareChemBond{coordright}
4   { \draw[chembond,butt cap->] (chemformula-bond-start) -- (chemformula-
5     bond-end) ; }
5 \DeclareChemBondAlias{co>}{coordright}

```

Two points are important: the names of the starting and the ending coordinates, `chemformula-bond-start` and `chemformula-bond-end`, and the *TikZ* style of the bonds `chembond`.

So, let's say you want to define a special kind of dashed bond. You could do this:

```

1 \usetikzlibrary{decorations.pathreplacing}
2 \makeatletter
3 \DeclareChemBond{dashed}
4 {
5   \draw[
6     chembond,
7     decorate,
8     decoration={ticks,segment length=\chemformula@bondlength/10,amplitude=1.5
9     pt}]
10    (chemformula-bond-start) -- (chemformula-bond-end) ;
11 }
12 \makeatother
13 \chemsetup[chemformula]{bond-length=2ex}
14 \ch{C\bond[dashed]C}

```

C—C

The last example showed you another macro: `\chemformula@bondlength`. It only exists so you can use it to access the bond length as set with `bond-length` directly.

6.6 Customization

These options allow you to customize the output of the compounds:

<code>subscript-vshift</code> = <dim>	Default: 0pt
Extra vertical shift of the subscripts.	
<code>subscript-style</code> = text math	Default: text
Style that is used to typeset the subscripts.	
<code>charge-hshift</code> = <dim>	Default: .25em
Shift of superscripts when following a subscript.	
<code>charge-vshift</code> = <dim>	Default: 0pt
Extra vertical shift of the superscripts.	
<code>charge-style</code> = text math	Default: text
Style that is used to typeset the superscripts.	

adduct-space = <dim>	Default: .1333em
Space to the left and the right of the adduct point.	
bond-length = <dim>	Default: .5833em
The length of the bonds.	
bond-offset = <dim>	Default: .07em
Space between bond and atoms.	
bond-style = <tikz>	(initially empty)
TikZ options for the bonds.	
bond-penalty = <num>	Default: 10000
Introduced in version 4.0a	The penalty that is inserted after a bond for (dis-)allowing line breaks.
radical-style = <tikz>	(initially empty)
TikZ options for the radical point.	
radical-radius = <dim>	Default: .2ex
The radius of the radical point.	
radical-hshift = <dim>	Default: .15em
Horizontal shift before the radical point is drawn.	
radical-vshift = <dim>	Default: .5ex
Vertical shift relative to the current baseline.	
radical-space = <dim>	Default: .15em
Horizontal shift after the radical point is drawn.	

Maybe you have noticed that charges of certain ions are shifted to the right.

```
1 \ch{SO4^2-} \ch{NH4+} \ch{Na+} SO42- NH4+ Na+
```

They are shifted if they *follow* a subscript which follows IUPAC recommendations [Coh+08, p.51]. The amount of the shift can be set with the option **charge-hshift**.

```
1 \ch{SO4^2-} \ch{NH4+} \ch{Na+} \
2 \chemsetup[chemformula]{charge-hshift=.5ex} SO42- NH4+ Na+
3 \ch{SO4^2-} \ch{NH4+} \ch{Na+} \
4 \chemsetup[chemformula]{charge-hshift=.5pt} SO42- NH4+ Na+
5 \ch{SO4^2-} \ch{NH4+} \ch{Na+}
```

Despite IUPAC's recommendation **CHEMFORMULA** does not make fully staggered arrangements in the default setting as I find it hard to read in some cases and ugly in others. Since this is a subjective decision **CHEMFORMULA** not only let's you define the absolute amount of the shift but also provides a possibility for full staggered arrangements. For this you have to use **charge-hshift = full**.

6 Compounds

```
1 \ch[charge-hshift=0pt]{C5H11+} \ch[charge-hshift=0pt]{S04^2-} \\
2 \ch{C5H11+} \ch{S04^2-} \\
3 \ch[charge-hshift=1ex]{C5H11+} \ch[charge-hshift=1ex]{S04^2-} \\
4 \ch[charge-hshift=full]{C5H11+} \ch[charge-hshift=full]{S04^2-}

C5H11+ SO42-
C5H11+ SO42-
C5H11+ SO42-
C5H11+ SO42-
```

If you don't want the charges to be typeset in text mode you can switch to math mode:

```
1 \ch{M^x+} \ch{S04^2-} \\
2 \chemsetup[chemformula]{charge-style = math}
3 \ch{M^x+} \ch{S04^2-}

Mx+ SO42-
Mx+ SO42-
```

The option `subscript-vshift` can be used to adjust the vertical shift of the subscripts:

```
1 \ch{H2S04} \ch{Na3P04} \\
2 \chemsetup[chemformula]{subscript-vshift=.5ex}
3 \ch{H2S04} \ch{Na3P04} \\
4 \chemsetup[chemformula]{subscript-vshift=-.2ex}
5 \ch{H2S04} \ch{Na3P04}

H2SO4 Na3PO4
H2SO4 Na3PO4
H2SO4 Na3PO4
```

You can choose the mode subscripts are typeset in the same way as it is possible for the charges:

```
1 \ch{A_nB_m} \ch{H2S04} \\
2 \chemsetup[chemformula]{subscript-style = math}
3 \ch{A_nB_m} \ch{H2S04}

AnBm H2SO4
AnBm H2SO4
```

The option `adduct-space` sets the space left and right to the adduct symbol ·.

```
1 \ch{Na3P03*H2O} \\
2 \chemsetup[chemformula]{adduct-space=.2em}           Na3PO3 · H2O
3 \ch{Na3P03*H2O}                                     Na3PO3 · H2O
```

Changing the length of the bonds:

```

1 \chemsetup[chemformula]{bond-length=4mm}%
2 single: \ch{CH3-CH3} \\
3 double: \ch{CH2=CH2} \\
4 triple: \ch{CH=CH}

```

single: CH₃—CH₃
double: CH₂=CH₂
triple: CH≡CH

You can change the distance between bond and atom, too:

```

1 \ch{H-H + N+N + O=O} \\
2 \ch[bond-offset=1pt]{H-H + N+N + O=O}

```

H—H + N≡N + O=O
H—H + N≡N + O=O

6.7 Standalone Formulae

Introduced in version 4.0 **CHEMFORMULA** offers a command that *only accepts* the “compound” input type:

\chcpd[<options>]{<compound>}

7 Special Input Types

There are some “special type” input groups.

7.1 Single Token Groups

The first kind are groups which consist of only one token, namely of the following ones:

\ch{ + } +

Creates the plus sign between compounds with space around it:

\ch{2 Na + Cl2} 2Na + Cl₂

\ch{ v } ↓

Sign for precipitate: \ch{BaSO4 v} BaSO₄↓

\ch{ ^ } ↑

Sign for escaping gas⁷: \ch{H2 ^} H₂↑

The space left and right of the plus sign can be set with this option:

plus-space = <skip>

Default: .3em plus .1em minus .1em

A rubber length.

plus-penalty = <num>

Default: 700

The penalty that is inserted after the plus sign for (dis-)allowing line breaks.

```

1 \ch{A + B} \\
2 \ch[plus-space=4pt]{A + B}

```

A + B
A + B

⁷ Is this the correct English term? Please correct me if it isn't.

7.2 Option Input

Sometimes you might want to apply an option only to a part of a, say, reaction. Of course you have the possibility to use \ch several times.

```

1 \ch{H2O +}\textcolor{red}{\ch{H2SO4}}\ch{-> H3O+ + HS04-} \\
2 \ch{H2O +}\ch[subscript-vshift=2pt]{H2SO4}\ch{-> H3O+ + HS04-}

H2O + H2SO4 → H3O+ + SO42-
H2O + H2SO4 → H3O+ + SO42-
```

This, however, interrupts the input in your source and *may* mess with the spacing. That's why there is an alternative:

\ch{ @{<options>} }

The options specified this way will be valid *only* until the next compound is set.

```

1 \ch{H2O +}\textcolor{red}{\ch{H2SO4}}\ch{-> H3O+ + HS04-} \\
2 \ch{H2O + @{format=\color{red}} H2SO4 -> H3O+ + HS04-} \\
or of course:\\
4 \ch{H2O + \textcolor{red}{\ch{H2SO4}} -> H3O+ + HS04-} \\[1em]
5 \ch{H2O +}\ch[subscript-vshift=2pt]{H2SO4}\ch{-> H3O+ + HS04-} \\
6 \ch{H2O + @{subscript-vshift=2pt} H2SO4 -> H3O+ + HS04-}

H2O + H2SO4 → H3O+ + SO42-
H2O + H2SO4 → H3O+ + SO42-
or of course:
H2O + H2SO4 → H3O+ + SO42-

H2O + H2SO4 → H3O+ + SO42-
H2O + H2SO4 → H3O+ + SO42-
```

8 Escaped Input

In some cases it may be desirable to prevent CHEMFORMULA from parsing the input. This can be done in two ways.

8.1 Text


If you put something between " " or ' ' then the input will be treated as normal text, except that spaces are not allowed and have to be input with ~.

```
\ch{ "<escaped text>" }
\ch{ '<escaped text>' }
```

```

1 \ch{"\ox{2,Ca}" 0} \\
2 \ch{"\ldots," Na + "\ldots," Cl2 -> "\ldots," NaCl} \\
3 \ch{'A~->B'}

```

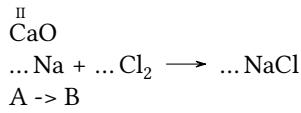

In many cases you won't need to escape the input. But when you get into trouble when using a command inside `\ch` try hiding it.

8.2 Math

If you especially want to input math you just enclose it with `$ $`. This output is different from the escaped text as it is followed by a space. The reasoning behind this is that I assume math will mostly be used to replace stoichiometric factors.

```
\ch{ $<escaped math>$ }
```

```
\ch{ \(<escaped math>\) }
```

```

1 escaped text: \ch{"$x$" H2O} \\
2 escaped math: \ch{$x$ H2O} \\
3 also escaped math: \ch{\(x\)} H2O} \\
4 \ch{$2n$ Na + $n$ Cl2 -> $2n$ NaCl}

```

```

escaped text:  $x\text{H}_2\text{O}$ 
escaped math:  $x\text{H}_2\text{O}$ 
also escaped math:  $x\text{H}_2\text{O}$ 
 $2n\text{Na} + n\text{Cl}_2 \longrightarrow 2n\text{NaCl}$ 

```

The space that is inserted after a math group can be edited:

`math-space = <skip>`
A rubber length.

Default: `.1667em plus .0333em minus .0117em`

```

1 \ch{$2n$ Na + $n$ Cl2 -> $2n$ NaCl} \\
2 \chemsetup[chemformula]{math-space=.25em} \\
3 \ch{$2n$ Na + $n$ Cl2 -> $2n$ NaCl} \\
4 \ch{$A->B$}

```

```

 $2n\text{Na} + n\text{Cl}_2 \longrightarrow 2n\text{NaCl}$ 
 $2n\text{Na} + n\text{Cl}_2 \longrightarrow 2n\text{NaCl}$ 
 $A- \rightarrow B$ 

```

9 Arrows

9.1 Arrow types

Arrows are input in the same intuitive way they are with mhchem. There are various different types:

```
\ch{ -> } \longrightarrow
standard right arrow
```

9 Arrows

\ch{ <- } ←
standard left arrow

\ch{ -/> } →
does not react (right)

\ch{ </- } ↙
does not react (left)

\ch{ <-> } ↔
resonance arrow

\ch{ <> } ⇌
reaction in both directions

\ch{ == } =
stoichiometric equation

\ch{ <=> } ⇌
equilibrium arrow

\ch{ <>> } ⇌
unbalanced equilibrium arrow to the right

\ch{ <><> } ⇌
unbalanced equilibrium arrow to the left


\ch{ <o> } ↪
isolobal arrow

All these arrows are drawn with *TikZ*.

```

1 \ch{H2 + Cl2 -> 2 HCl} \\
2 \ch{H2O + CO3^2- <=> OH- + HCO3-} \\
3 \ch{A <- B} \\
4 \ch{[[CH2=CH-CH2]- <-> [CH2-CH=CH2]- }} \\
5 \ch{A <> B} \\
6 \ch{H+ + OH- <>> H2O} \\
7 \ch{2 NO2 <>> N2O4}

```

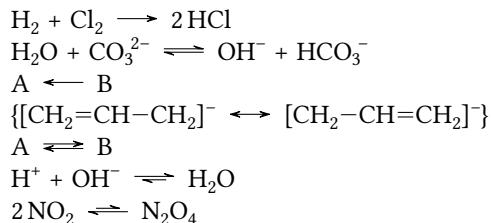

9.2 Labels


The arrows take two optional arguments to label them.

\ch{ ->[<above>] [<below>] }

```

1 \ch{A ->[a] B} \\
2 \ch{A ->[a][b] B} \\
3 \ch{A ->[\SI{100}{\celsius}] B}

```




The label text can be parsed separately from the arrow. The recipe is easy: leave blanks.

```

1 \ch{A ->[H2O] B} \\
2 \ch{A ->[ H2O ] B} \\
3 \ch{A ->[ "\ox{2,Ca}" F2 ] B} \\
4 \ch{A ->[$\Delta$,$\sim[H^+]$] B}

```




If you leave the blanks **CHEMFORMULA** treats the groups inside the square brackets as separated input types. The arrow reads its arguments *afterwards*. As you can see the arrows “grow” with the length of the labels. What stays constant is the part that protrudes the labels. As you also can see in the last example square brackets inside the arrow arguments should be produced using **\[** and **\]**. They keep their usual meaning outside **\ch**. These commands are necessary since the usual grouping (i.e. hiding the brackets inside curly brackets) doesn’t work due to the way **\ch** reads its argument.

```

1 \ch{A ->[a] B} \\
2 \ch{A ->[ab] B} \\
3 \ch{A ->[abc] B} \\
4 \ch{A ->[abc~abc] B} \\
5 % needs the `chemfig` package:
6 \setatomsep{15pt}
7 \ch{A ->[ "\chemfig{-[:30]-[:-30]OH} ] B} \\
8 \ch{A ->[[]] B} vs. \ch{A ->[\[\]] B}

```

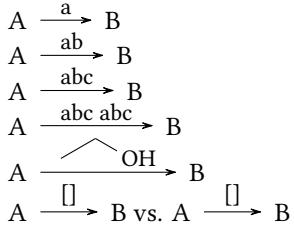

9.3 Customization

These are the options which enable you to customize the arrows:

arrow-offset = <dim>

Default: .75em

This is the length that an arrow protrudes a label on both sides. This means an empty arrow’s length is two times **arrow-offset**.

arrow-min-length = <dim>

Default: 0pt

Introduced in
version 3.6b

The minimal length an error must have unless two times **arrow-offset** plus the width of the label is larger.

`arrow-yshift` = <dim> Default: 0pt
 Shifts an arrow up (positive value) or down (negative value).

`arrow-ratio` = <factor> Default: .6
 The ratio of the arrow lengths of the unbalanced equilibrium. .4 would mean that the length of the shorter arrow is 0.4× the length of the longer arrow.

`compound-sep` = <dim> Default: .5em
 The space between compounds and the arrows.

`label-offset` = <dim> Default: 2pt
 The space between the labels and the arrows.

`label-style` = Default: \footnotesize
 The relative font size of the labels.

`arrow-penalty` = <num> Default: 0
 The penalty that is inserted after an arrow for (dis-)allowing line breaks.

Introduced in
version 4.0a

The following code shows the effect of the different options on the <=>> arrow:

```

1 standard: \ch{A <=>>[x][y] B} \\
2 longer: \ch[arrow-offset=12pt]{A <=>>[x][y] B} \\
3 higher: \ch[arrow-yshift=2pt]{A <=>>[x][y] B} \\
4 more balanced: \ch[arrow-ratio=.8]{A <=>>[x][y] B} \\
5 labels further away: \ch[label-offset=4pt]{A <=>>[x][y] B} \\
6 larger distance to compounds: \ch[compound-sep=2ex]{A <=>>[x][y] B} \\
7 smaller labels: \ch[label-style=\tiny]{A <=>>[x][y] B}

standard: A  $\xrightarrow{y} B$ 
longer: A  $\xrightarrow[y]{x} B$ 
higher: A  $\xrightarrow[x]{y} B$ 
more balanced: A  $\xrightarrow{y} B$ 
labels further away: A  $\xrightarrow[y]{x} B$ 
larger distance to compounds: A  $\xrightarrow[2ex]{x} B$ 
smaller labels: A  $\xrightarrow[x]{y} B$ 
```

9.4 Modify Arrow Types

The arrows are defined with the command

`\DeclareChemArrow{<tokens>}{{<tikz>}}`

{<tokens>} is the sequence of tokens that is replaced with the actual arrow code. For example the basic arrow is defined via

```
1 \DeclareChemArrow{->}{\draw[-cf] (cf_arrow_start) -- (cf_arrow_end) ;}
```


In order to define arrows yourself you need to know the basics of *TikZ*.⁸ There are some predefined coordinates you can and should use:

- (**cf_arrow_start**) The beginning of the arrow.
- (**cf_arrow_end**) The end of the arrow.
- (**cf_arrow_mid**) The mid of the arrow.
- (**cf_arrow_mid_start**) The beginning of the shorter arrow in types like <=>.
- (**cf_arrow_mid_end**) The end of the shorter arrow in types like <=>.
- cf, left cf, right cf** **CHEMFORMULA**'s own arrow heads.

```

1 \DeclareChemArrow{.}{\draw[-cf,dotted,red] (cf_arrow_start) -- (cf_arrow_end);}
2 \DeclareChemArrow{n}{\draw[-cf] (cf_arrow_start) .. controls ([yshift=3ex]cf_
arrow_mid) .. (cf_arrow_end);}
3 \ch{A .> B} \ch{A .>[a][b] B} \ch{A n> B}

```



If you want to redefine an existing arrow there are two commands you can use:

```
\RenewChemArrow{<tokens>}{<tikz>}
>ShowChemArrow{<tokens>}
```

The second one gives the current definition, the first one redefines an existing arrow.

```

1 \texttt{\ShowChemArrow{->}} \\
2 \RenewChemArrow{->}{\draw[->,red] (cf_arrow_start) -- (cf_arrow_end) ;}
3 \texttt{\ShowChemArrow{->}} \\
4 \ch{A -> B}

\draw [-cf](cf_arrow_start)--(cf_arrow_end);
\draw [->,red] (cf_arrow_start) -- (cf_arrow_end) ;
A → B

```

9.5 Standalone Arrows

Introduced in
version 4.0

CHEMFORMULA offers a command that *only accepts* the “arrow” input type:

```
\charrow{<arrow>}[<above>][<below>]
```

⁸ Please see the pgfmanual for details.

10 Names


10.1 Syntax

CHEMFORMULA has a built-in syntax to write text under a compound. In a way it works very similar to the arrows.

```
\ch{ !(<name>) ( <formula> ) }
```


If an exclamation mark is followed by a pair of parentheses **CHEMFORMULA** will parse it this way:

```
1 \ch{!(ethanol)( CH2CH2OH )}
```



The same what's true for the arrows arguments holds for these arguments: if you leave blanks the different parts will be treated according to their input type before the text is set below the formula.

```
1 \ch{!(water)(H2O)} \quad
2 \ch{! ( "textcolor{blue}{water}" )( H2O )} \quad
3 \ch{! ( $2n-1$ )( H2O )} \quad
4 \ch{! ( H2O )( H2O )} \quad
5 \ch{! (oxonium)( H3O+ )}
```



If for some reason you want to insert an exclamation mark *without* it creating a name you only have to make sure it isn't followed by parentheses.

```
1 \ch{H2O~(!)} \\
2 \ch{A!{}()}
```



10.2 Customization

CHEMFORMULA provides two options to customize the output of the names:

name-format = <commands>

Default: `\scriptsize\centering`

The format of the name. This can be arbitrary input.

name-width = <dim>|auto

Default: auto

The width of the box where the label is put into. auto will detect the width of the name and set the box to this width.

```
1 \ch{!(acid)( H2SO4 ) -> B} \\
2 \ch[name-format=\sffamily\small]{!(acid)( H2SO4 ) -> B} \\
3 \ch[name-format=\scriptsize N:~]{!(acid)( H2SO4 ) -> B} \\
4 \ch[name-width=3em,name-format=\scriptsize\raggedright]{!(acid)( H2SO4 ) -> B}
```

```
H2SO4 → B
acid
H2SO4 → B
acid
H2SO4 → B
N: acid
H2SO4 → B
acid
```

10.3 Standalone Names

Introduced in version 4.0

CHEMFORMULA offers a command that allows the usage of the “name” syntax in normal text. This is the command that a bang is replaced with in **CHEMFORMULA**’s formulas, actually. Both arguments are mandatory.

\chname(<under>)(<text>)

11 Format and Font

In the standard setting **CHEMFORMULA** doesn’t make any default changes to the font of the formula output. Let’s take a look at a nonsense input which shows all features:

```
1 \newcommand*\sample{%
2   \ch{H2C-C=C-CH=CH+ + CrO4^2-
3     <=>[x][y]
4     2.5 Cl^- + 3_1/2 Na*OH_{(aq)} + !(name)( A^n ) "\LaTeXe"
5   }
6 \sample

H2C-C≡C-CH=CH+ + CrO42-  $\xrightleftharpoons[x]{y}$  2.5 Cl- + 3½ Na·OH(aq) + An  $\text{\LaTeXe}$ 
```

Now we’re going to change different aspects of the font a look what happens:

```
1 \sffamily Hallo \sample \\
2 \ttfamily Hallo \sample \normalfont \\
3 \bfseries Hallo \sample \normalfont \\
4 \itshape Hallo \sample

Hallo H2C-C≡C-CH=CH+ + CrO42-  $\xrightleftharpoons[x]{y}$  2.5 Cl- + 3½ Na·OH(aq) + An  $\text{\LaTeXe}$ 
name
Hallo H2C-C≡C-CH=CH+ + CrO42-  $\xrightleftharpoons[x]{y}$  2.5 Cl- + 3½ Na·OH(aq) + An  $\text{\LaTeXe}$ 
name
Hallo H2C-C≡C-CH=CH+ + CrO42-  $\xrightleftharpoons[x]{y}$  2.5 Cl- + 3½ Na·OH(aq) + An  $\text{\LaTeXe}$ 
name
Hallo H2C-C≡C-CH=CH+ + CrO42-  $\xrightleftharpoons[x]{y}$  2.5 Cl- + 3½ Na·OH(aq) + An  $\text{\LaTeXe}$ 
```

As you can see most features adapt to the surrounding font.

If you want to change the default format you need to use this option:

format = <anything> (initially empty)
 Adds arbitrary code before the output of \ch.

```

1  \definecolor{newblue}{rgb}{.1,.1,.5}
2  \chemsetup[chemformula]{format=\color{newblue}\sffamily}
3  \sffamily Hallo \sample \\
4  \ttfamily Hallo \sample \normalfont \\
5  \bfseries Hallo \sample \normalfont \\
6  \itshape Hallo \sample

Hallo H2C—C≡C—CH=CH+ + CrO42- ⇌yx 2.5 Cl-• + 3½ Na·OH(aq) + An LATEX 2ε
name
Hallo H2C—C≡C—CH=CH+ + CrO42- ⇌yx 2.5 Cl-• + 3½ Na·OH(aq) + An LATEX 2ε
name
Hallo H2C—C≡C—CH=CH+ + CrO42- ⇌yx 2.5 Cl-• + 3½ Na·OH(aq) + An LATEX 2ε
name
Hallo H2C—C≡C—CH=CH+ + CrO42- ⇌yx 2.5 Cl-• + 3½ Na·OH(aq) + An LATEX 2ε
name

```

You can also specifically change the fontfamily, fontseries and fontshape of the output.

font-family = <family> (initially empty)
 Changes the fontfamily of the output with \fontfamily{<family>}\selectfont.

font-series = <series> (initially empty)
 Changes the fontseries of the output with \fontseries{<series>}\selectfont.

font-shape = <shape> (initially empty)
 Changes the fontshape of the output with \fontshape{<shape>}\selectfont.

```

1  \chemsetup[chemformula]{font-series=bx}
2  Hallo \sample \\
3  \sffamily Hallo \sample \normalfont \\
4  \chemsetup[chemformula]{font-family=lmr,font-series=m} Hallo \sample \normalfont
   \\
5  \itshape Hallo \sample

Hallo H2C—C≡C—CH=CH+ + CrO42- ⇌yx 2.5 Cl-• + 3½ Na·OH(aq) + An LATEX 2ε
name
Hallo H2C—C≡C—CH=CH+ + CrO42- ⇌yx 2.5 Cl-• + 3½ Na·OH(aq) + An LATEX 2ε
name
Hallo H2C—C≡C—CH=CH+ + CrO42- ⇌yx 2.5 Cl-• + 3½ Na·OH(aq) + An LATEX 2ε
name
Hallo H2C—C≡C—CH=CH+ + CrO42- ⇌yx 2.5 Cl-• + 3½ Na·OH(aq) + An LATEX 2ε
name

```

If you're using XeLATEX or LuaLATEX and have loaded fontspec⁹ you have the possiblty to set the font with it:

font-spec = {} (initially empty)
 or with options

⁹ on CTAN: fontsdesc

`font-spec = {[<options>]}`

```

1  \chemsetup[chemformula]{font-spec={Linux Biolinum O}} \sample \\
2  \chemsetup[chemformula]{font-spec={Augie}} \sample \\
3  \chemsetup[chemformula]{font-spec={Latin Modern Sans}} \sample \\
4  \bfseries \sample \normalfont

H2C—C≡C—CH=CH+ + CrO42-  $\xrightleftharpoons[\text{y}]{\text{x}}$  2.5 Cl- + 3½ Na·OH(aq) + An TEX 2ε  

name
H2C—C≡C—CH=CH+ + CrO42-  $\xrightleftharpoons[\text{y}]{\text{x}}$  2.5 Cl- + 3½ Na·OH(aq) + An TEX 2ε  

name
H2C—C≡C—CH=CH+ + CrO42-  $\xrightleftharpoons[\text{y}]{\text{x}}$  2.5 Cl- + 3½ Na·OH(aq) + An TEX 2ε  

name
H2C—C≡C—CH=CH+ + CrO42-  $\xrightleftharpoons[\text{y}]{\text{x}}$  2.5 Cl- + 3½ Na·OH(aq) + An TEX 2ε  

name

```

12 Usage In Math Equations

The `\ch` command can be used inside math equations. It recognizes `\&` and `&` and passes them on. However, you can't use the optional arguments of `\&` inside `\ch`.

```

1  \begin{align}
2  \ch{
3    H2O &->[a] H2SO4 \\
4    Cl2 &->[x][y] CH4
5  }
6  \end{align}
7  \begin{align*}
8  \ch{
9    RN02 && \leftrightarrow[+e^-] RN02^{\cdot -} \\
10   RN02^{\cdot -} && \leftrightarrow[+e^-] RN02^{2-}
11  }
12 \end{align*}

```

$$\text{H}_2\text{O} \xrightarrow{\text{a}} \text{H}_2\text{SO}_4 \quad (1)$$

$$\text{Cl}_2 \xrightarrow[\text{y}]{\text{x}} \text{CH}_4 \quad (2)$$

$$\text{RN02} \xleftrightarrow{+e^-} \text{RN02}^{\cdot -}$$

$$\text{RN02}^{\cdot -} \xleftrightarrow{+e^-} \text{RN02}^{2-}$$

13 Usage with TikZ or pgfplots and externalization

Introduced in
version 4.1

Since **CHEMFORMULA** uses **TikZ** to draw reaction arrows and bonds they would be externalized, too, if you use that facility with **TikZ** or **pgfplots**.¹⁰ This may not be desirable since they are very small pictures maybe containing of a single line. This is why **CHEMFORMULA**'s default behaviour is to disable externalization for it's bonds and arrows. This can be turned on and off through the following option:

`tikz-external-disable = true|false` Default: `true`
dis- or enable **TikZ**' externalization mechanism for **CHEMFORMULA**'s arrows and bonds.

If you should be using a formula that contains bonds or arrows inside of a **tikzpicture** that is externalized you should locally enable it for **CHEMFORMULA**, too:

¹⁰ on CTAN: **pgfplots**

```

1 \begin{tikzpicture}
2   \setchemformula{tikz-external-disable=false}
3   \begin{axis}[ xlabel={\ch{2 H+ + 2 e- -> H2}}]
4     \addplot ... ;
5   \end{axis}
6 \end{tikzpicture}

```

14 Further Examples

This section presents some examples of a possible usage.

```

1 \begin{reaction}[Synthese von Alkanen]
2 ! (Synthesegas)( $n$ CO + $(2n+1)$ H2 )
3 ->[\SI{200}{\celsius}][[CoNi]]
4 C_{\$n\$}H_{\$2n+2\$} + $n$ H2O
5 \end{reaction}

```

$n \text{CO} + (2n + 1) \text{H}_2 \xrightarrow[\text{[CoNi]}]{\text{Synthesegas}, 200^\circ\text{C}} \text{C}_n\text{H}_{2n+2} + n \text{H}_2\text{O}$ {1}

```

1 \begin{reactions*}
2   "a)" && CH4      + Cl2 &-> CH3Cl   + HCl && "{$\text{\small Chlormethan/Methylchlorid}}$"
3   \\
4   "b)" && CH3Cl   + Cl2 &-> CH2Cl2  + HCl && "{$\text{\small Dichlormethan/Methylenchlorid}}$"
5   }" \\
6   "c)" && CH2Cl2  + Cl2 &-> CHCl3   + HCl && "{$\text{\small Trichlormethan/Chloroform}}$"
7   \\
8   "d)" && CHCl3   + Cl2 &-> CCl4    + HCl && "{$\text{\small Tetrachlormethan/}}$"
9     Tetrachlorkohlenstoff}"
10 \end{reactions*}

a) CH4 + Cl2 → CH3Cl + HCl Chlormethan/Methylchlorid
b) CH3Cl + Cl2 → CH2Cl2 + HCl Dichlormethan/Methylenchlorid
c) CH2Cl2 + Cl2 → CHCl3 + HCl Trichlormethan/Chloroform
d) CHCl3 + Cl2 → CCl4 + HCl Tetrachlormethan/Tetrachlorkohlenstoff


```

```

1 \chemsetup[ox]{parse=false}
2 \ch{"\ox{\delm,C}" -{} " \ox{\delp,M}" \qqquad ( <-> "\ox{\delp,C}" -{} " \ox{\delm
,Br}" )} \\
3 \ch[adduct-space=0pt]{X. + .Y <=> X-Y + Bindungsenergie} \\
4 \ch[name-format=\normalsize]{%
5   !(\State{H}{f}\qqquad)() !(\textcolor{red}{red}{??}) ( CH4\gas{} ) +
6   !(\num{0})( 2 O2\gas{} ) \\
7   -> \\
8   !(\num{-94.3})( CO2\gas{} ) + \\
9   !(\num{-57.9})( H2O\lqd{} ) + \\
10  !(\num{-192.1})( "\State{H}" ) \\
11 }

```


14 Further Examples

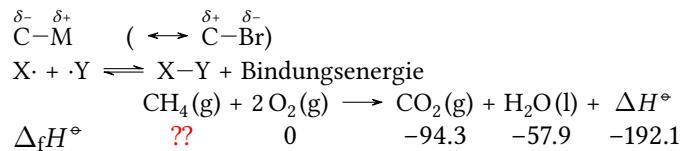

```

1  \newcommand{\cstack}[1]{%
2    \clap{%
3      \begin{tabular}{c}
4        #1
5      \end{tabular}
6    }%
7  }
8  \begin{reactions*}
9    \text{CH}_3\text{MgBr} + "\text{ox}*[1,\text{Cu}]" \text{X} &-> "\text{glqq}" \text{CH}_3 "\text{ox}*[1,\text{Cu}]\text{grqq}" + \text{MgBrX} "\text{qqquad} \text{X} \\
10   ~\$-\$-\text{Br},\text{I},\text{CN}" \\
11   2 \text{MeLi} + \text{CuI} &-> !(\cstack{\text{Dimethylcuprat}\text{\textbackslash}\text{(Gilmann-Cuprat)}}(\text{Me2} \\
12     \text{CuLi}) + \text{Li} \\
13   \end{reactions*}


```

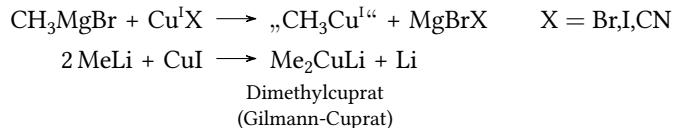

```

1  % needs `chemfig'
2  \begin{reactions*}
3    \text{H}_3\text{C}-\text{CH}_3 + \text{Cl}_2 &-> [\$\Delta][\$h\nu] \text{H}_3\text{CCH}_2\text{Cl} + \text{HCl} \\
4    &\&"\text{Enthalpy}\{-27.1\}" \\
5    \text{H}_3\text{C}-\text{CH}_3 + "\text{Lewis}\{0.,\text{Cl}\}" &-> \text{H}_3\text{CCH}_2 "\text{Lewis}\{0.,\text{vphantom}\{\text{H}\}\}" + \\
6    \text{HCl} &\&"\text{Enthalpy}\{-5.0\}" \\
7    \text{H}_3\text{C}-\text{CH}_2 "\text{Lewis}\{0.,\text{vphantom}\{\text{H}\}\}" + \text{Cl}_2 &-> \text{H}_3\text{CCH}_2\text{Cl} + "\text{Lewis}\{0.,\text{Cl}\}" \\
8    &\&"\text{Enthalpy}\{-23.0\}" \\
9  \end{reactions*}

```


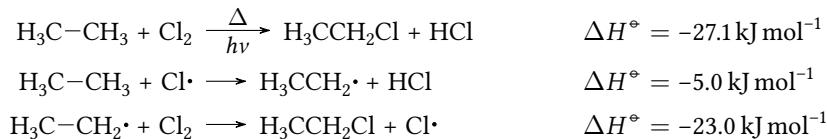


The following example shows how the cancelling of compounds could be done.¹¹

¹¹ Inspired by a question on TeX.SE: <http://tex.stackexchange.com/q/30118/5049>

References

```
1 % needs `cancel'
2 \begin{align*}
3 \cancel{\text{HCOOH}} + \text{H}_2\text{O} &\rightleftharpoons \text{H}_3\text{O}^+ + \cancel{\text{HCOO}^-} \\
4 \cancel{\text{HCOO}^-} + \text{H}_2\text{O} &\rightleftharpoons \cancel{\text{HCOOH}} + \text{OH}^- \\
5 \cline{1-2}
6 \text{H}_2\text{O} + \text{H}_2\text{O} &\rightleftharpoons \text{H}_3\text{O}^+ + \text{OH}^- \\
7 \end{align*}
```



References

- [Coh+08] E. Richard Cohan, Tomislav Cvitaš, Jeremy G. Frey, Bertil Holmström, Kozo Kuchitsu, Roberto Marquardt, Ian Mills, Franco Pavese, Martin Quack, Jürgen Stohner, Herbert L. Strauss, Michio Takami, and Anders J Thor. “*Quantities, Symbols and Units in Physical Chemistry*”, *IUPAC Green Book*. 3rd Edition. 2nd Printing. IUPAC & RSC Publishing, Cambridge, 2008.

Index

Section titles are indicated **bold**, packages sans serif, commands `\brown`, options `yellow` and modules (only `CHEMMACROS`) `blue`.

Symbols

<code>\[</code>	17
<code>\]</code>	17

A

<code>adduct-space</code>	11f
<code>amsmath</code>	2
<code>arrow-min-length</code>	17
<code>arrow-offset</code>	17
<code>arrow-penalty</code>	18
<code>arrow-ratio</code>	18
<code>arrow-yshift</code>	18
Arrows	15–19
customization	17
labels	16
standalone	19
types	15
modify	18

B

<code>\bond</code>	9
<code>bond-length</code>	10f
<code>bond-offset</code>	11
<code>bond-penalty</code>	11
<code>bond-style</code>	11

C

<code>\ch</code>	3f, 6–17, 20f
<code>charge-hshift</code>	8, 10f
<code>charge-style</code>	10
<code>charge-vshift</code>	10
<code>\charrow</code>	19
<code>\chcpd</code>	13
<code>\chemsetup</code>	3f
<code>\chname</code>	21
<code>compound-sep</code>	18
Compounds	6–13
adducts	6
bonds	9
length	12
charges	7

shift	11
commands	7
customization	10
standalone	13
subscripts	7
shift	12
superscripts	7
behaviour	8
charge commands	8

D

<code>decimal-marker</code>	5
<code>\DeclareChemArrow</code>	18
<code>\DeclareChemBond</code>	9
<code>\DeclareChemBondAlias</code>	9

E

Escaped Input	14f
math	15
text	14
<code>expl3</code>	2

F

<code>font-family</code>	22
<code>font-series</code>	22
<code>font-shape</code>	22
<code>font-spec</code>	22f
<code>fontspec</code>	22
<code>format</code>	22
Format and Font	21ff
<code>frac-math-cmd</code>	5
<code>frac-style</code>	5f

L

<code>\l_3kernel</code>	2
<code>\l_3keysze</code>	2
<code>\l_3packages</code>	2
<code>label-offset</code>	18
<code>label-style</code>	18

M

<code>math-space</code>	15
Math Environments	23
<code>\mch</code>	8
<code>mhchem</code>	2f, 15

N

<code>name-format</code>	20
--------------------------	----

<code>name-width</code>	20
Names	20f
customization	20
standalone	21
syntax	20
<code>nicefrac</code>	2, 6

P

<code>pgfplots</code>	2, 23
<code>plus-penalty</code>	13
<code>plus-space</code>	13

R

<code>radical-hshift</code>	11
<code>radical-radius</code>	11
<code>radical-space</code>	11
<code>radical-style</code>	11
<code>radical-vshift</code>	11
<code>\RenewChemArrow</code>	19
<code>\RenewChemBond</code>	9

S

<code>scrlfile</code>	2
<code>\setchemformula</code>	4
<code>\ShowChemArrow</code>	19
<code>\ShowChemBond</code>	9
Special Types	13f
option input	14
single token groups	13
<code>stoich-paren-parse</code>	5
<code>stoich-space</code>	5f
Stoichiometric Factors	4ff
<code>nicefrac</code>	6
<code>space</code>	6
<code>xfrac</code>	5
<code>subscript-style</code>	10
<code>subscript-vshift</code>	10, 12

T

<code>TikZ</code>	10f, 16
<code>tikz</code>	2
<code>tikz-external-disable</code>	23

X

<code>xfrac</code>	2, 5
<code>xparse</code>	2