

The `ctable` package*

Wybo Dekker
`wybo@servalys.nl`

March 4, 2007

1 Purpose

The `ctable` package lets you easily typeset captioned table and figure floats with optional footnotes. Both caption and footnotes will be forced within the width of the table.

If the width of the table is specified, then `tabularx` will be used to typeset it, and the `X` column specifier can be used. Otherwise `tabular` will be used.

This package defines the commands `\ctable`, `\tnote` and `\tmark`, as well as four `\tabularnewline` generating commands. The latter generate reasonable amounts of whitespace around horizontal rules and are also useful for tabulars outside this package.

Since the `ctable` package imports the `array` and `booktabs` packages, all commands from those packages are available as well.

Note that, in line with the comments that Simon Fear made describing his `booktabs` package, vertical rules for column separation can be produced with `\ctable`, but no provisions are made to have them make contact with horizontal rules.

2 Usage

`\ctable` `\ctable` is called with 4 parameters, of which the first is optional:

```
\ctable[options]{coldefs}{footable}{table lines} % key=value,...  
% for \begin{tabular}  
% zero or more \tnote commands (see below)  
% lines for the table
```

Options are given as `key=value` pairs, separated by comma's, including one behind the last pair, don't hurt. Arguments to option should be put between braces if they contain comma's or equals signs. Currently the following option keys have been defined:

<code>caption={...}</code>	table caption; the braces are needed only if your caption contains a comma or an equals sign.
<code>cap={...}</code>	for a short caption to go to the <code>\tableofcontents</code> .
<code>captionskip=...</code>	set the whitespace between the caption and the table; default is <code>2ex</code> .
<code>mincapwidth=...</code>	sets the minimum width of the caption. Useful for very narrow tables. If the given width is larger than the caption's actual width, only that width will be used, so that any footnotes stay within the caption's width.
<code>pos=...</code>	float position, default: <code>tbp</code> .
<code>label=...</code>	for <code>\label</code>
<code>width=...</code>	<code>tabularx</code> will be used to typeset the table at the specified width—one or more <code>X</code> column specifiers must be provided.

*This document corresponds to `ctable` v1.9, dated 2007/03/04.

<code>maxwidth=...</code>	like the <code>width</code> option, but any X column specifiers will be replaced with 1 if the resulting table width would thus stay within the specified maximum width. This is especially useful where the L ^A T _E X source is generated by a script.
<code>center</code>	center the table in the available text width; this is the default.
<code>left</code>	left align the table in the available text width.
<code>right</code>	right align the table in the available text width.
<code>figure</code>	produce a figure float instead of a table float.
<code>botcap</code>	put the caption at the bottom of the float instead of on top of it.
<code>sideways</code>	rotate table or figure by 90 degrees anticlockwise and put it on a separate page. With the <code>twoside</code> option for the standard L ^A T _E X document classes, rotation will be -90 on even pages. If you use this option, the <code>pos</code> option is not allowed.
<code>star</code>	use the starred versions of the <code>table</code> and <code>figure</code> environments, which place the float over two columns when the <code>twocolumn</code> option or the <code>\twocolumn</code> command is active.
<code>nosuper</code>	in the footnote table, typeset footnote markers on the line, instead of superscripted.
<code>framerule=...</code>	draw a frame around the table with the given rule thickness. The default is <code>0pt</code> , so that no frame will be seen.
<code>framesep=...</code>	set the distance between the frame and the table to the given dimension. The default is <code>0pt</code> .
<code>framefg=r g b</code>	set the foreground color of the frame (the rule color) to the given triplet of <code>rgb</code> -values. The values should be numbers between 0 and 1. The default is <code>0 0 0</code> (black).
<code>framebg=r g b</code>	set the background color of the frame (the color inside the frame) to the given triplet of <code>rgb</code> -values. The values should be numbers between 0 and 1. The default is <code>1 1 1</code> (white).

The footnotes are placed under the table, without a rule. You therefore probably will want to use the `\LL` (last line) command if you use footnotes. `\tnote[label]{footnote text}` places ^{label} footnote text under the table. Can only be used in the foottable parameter described above. The label is optional, the default label is a single *a*. For more detailed control, you can also replace this command with something like `label text&footnotetext\NN`.

`\tmark` `\tmark[label]` this command places the superscripted label in the table. It is equivalent with `$^{\{label\}}$`. The label is optional, the default label is a single *a*.

The newline generating commands are a combination of `\tabularnewline` and zero or one of booktabs' `\toprule`, `\midrule` or `\bottomrule`. These combinations have been made, and short names have been defined, because source texts for complex tables often become very crowded:

`\NN` Normal Newline, generates just a normal new line. An optional dimen parameter inserts extra vertical space under the line

`\FL` First Line, generates a new line and a thick rule with some extra space under it. An optional dimen parameter sets the line width; the default is `0.08em`

`\ML` Middle Line: generates a new line and a thin rule with some extra space over and under it. An optional dimen parameter sets the line width; the default is `0.05em`

`\LL` Last Line: generates a new line and a thick rule with some extra space over it. An optional dimen parameter sets the line width; the default is `0.08em`

These macros can be used outside `\ctable` constructs.

Finally, for completeness, here are some of booktabs' commands that may be useful:

`\toprule[<wd>]` where `<wd>` is the optional thickness of the rule

`\midrule[<wd>]`

`\bottomrule[<wd>]`

`\cmidrule[<wd>](<trim>){a-b}` where `<trim>` can be `r`, `l`, or `rl` and the rule is drawn over columns *a* through *b*

`\morecmidrules` `\morecmidrules` must be used to separate two successive cmidrules

`\addlinespace[<wd>]` inserts extra space between rows

`\specialrule{<wd>}{<abovespace>}{<belowspace>}`

See the booktabs documentation for details.

Table 1: The Skewing Angles (β) for $\text{Mu}(\text{H}) + \text{X}_2$ and $\text{Mu}(\text{H}) + \text{HX}$ ^a

	H(Mu) + F ₂	H(Mu) + Cl ₂
$\beta(\text{H})$	80.9° ^b	83.2°
$\beta(\text{Mu})$	86.7°	87.7°

^a for the abstraction reaction,
 $\text{Mu} + \text{HX} \rightarrow \text{MuH} + \text{X}$.

^b 1 degree = $\pi/180$ radians.

^c this is a particularly long note, showing that footnotes are set in raggedright mode as we don't like hyphenation in table footnotes.

2.1 The width and maxlen options

When L^AT_EX-sources containing tables are generated automatically by a script, it is often not known in advance what the maximum size of an l column will be. A good solution for this is to use an X specifier, typesetting the table at the text width with the tabularx package. However, this will result in too much white space in cases where the column contains small texts only. This problem can be solved by using the maxlen option instead of the width option. The X specifiers will then be replaced with l as long as the width of the resulting table stays with the specified maximum width.

3 Examples

3.1 Tables

Table 1 is an example taken from the related package threeparttable.sty by Donald Arseneau, with an extra footnote. It was typeset with:

```
\ctable[
  cap      = The Skewing Angles,
  caption = The Skewing Angles ($\beta) for
             $\fam0 \text{Mu}(\text{H})+\text{X}_2$ and $\fam0 \text{Mu}(\text{H})+\text{HX}^{\tmark},
  label    = tab:nowidth,
]{rlcc} {
  \tnote{for the abstraction reaction,
         $\fam0 \text{Mu}+\text{HX} \rightarrow \text{MuH}+\text{X}$.}
  \tnote[b]{1 degree{} = $\pi/180$ radians.}
  \tnote[c]{this is a particularly long note, showing that
            footnotes are set in raggedright mode as we don't like
            hyphenation in table footnotes.}
  \\
  & & & \FL
  & & & \ML
  & $\beta(\text{H})$ & $80.9^\circ\tmark[b]$ & $83.2^\circ\tmark[NN]$
  & $\beta(\text{Mu})$ & $86.7^\circ\tmark$ & $87.7^\circ\tmark[LL]
}
```

Table 2 is an example with a width specification, taken from the tabularx documentation, with the vertical rules removed. By using the trimming parameters of the \LR, \MR, and \RR commands of the booktabs package, some of the horizontal splitting was regained. By using the left option, the table has been left aligned. It was typeset with:

```
\ctable[
  caption = Example with a specified width of 100mm,
  width   = 100mm,
  pos     = b,
```

```

label    = tab:width,
left
]{c>{\raggedright}Xc>{\raggedright}X}{
  \tnote{footnotes are placed under the table}
}{\FL
\multicolumn{4}{c}{Example using tabularx} {\ML
\multicolumn{2}{c}{Multicolumn entry!} & THREE & FOUR {\NN
  \cmidrule(r){1-2}\cmidrule(rl){3-3}\cmidrule(l){4-4}
one&
The width of this column depends on the width of the
table.\tmark &
three&
Column four will act in the same way as
column two, with the same width. {\LL
}
}

```

3.2 Figures

Figures, even single ones, are always put in tabular cells. This is not particularly handy for single pictures, but it eases the construction of arrays of pictures, including sub-captions, delineation, and spacing. Figure 1 shows a figure that has been produced with the `\ctable` command, in combination with `\usepackage{carom}`; it has been typeset with:

```

\ctable[
  caption = The di- and tri-bromobenzenes,
  label   = fig,
  botcap,
  framebg = .53 .81 .92,
  framerule = 1pt,
  framesep = 4ex,
  figure,
]{ccc}{}{\NN
\bdrv{1==Br;2==Br}&
\bdrv{1==Br;3==Br}&
\bdrv{1==Br;4==Br} {\NN
1,2 & 1,3 & 1,4 {\NN[3ex]
\bdrv{1==Br;2==Br;3==Br}&
\bdrv{1==Br;2==Br;4==Br}&
\bdrv{1==Br;3==Br;5==Br} {\NN
1,2,3 & 1,2,4 & 1,3,5
}
}

```

(The excessive whitespace at the left of the figure is caused by the bounding boxes generated by the `carom` package.)

Table 2: Example with a specified width of 100mm

Example using tabularx			
	Multicolumn entry!	THREE	FOUR
one	The width of this column depends on the width of the table. ^a	three	Column four will act in the same way as column two, with the same width.

^a footnotes are placed under the table

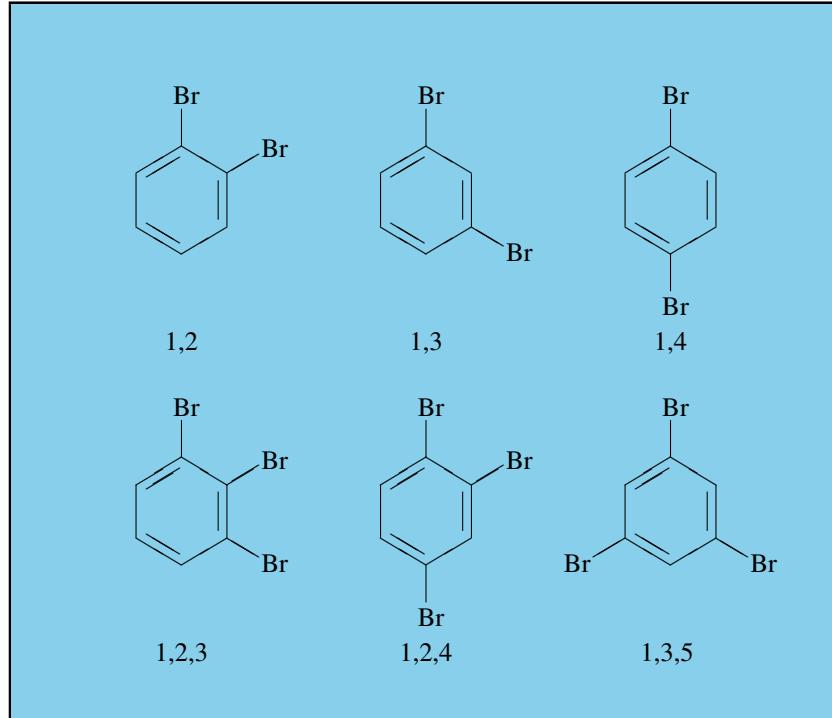


Figure 1: The di- and tri-bromobenzenes

4 Implementation

```

1 \RequirePackage{xspace,color,xkeyval,array,tabularx,booktabs,rotating}
2 \def\NN{\tabularnewline}
3 \def\FL{\toprule}
4 \def\ML{\NN\midrule}
5 \def\LL{\NN\bottomrule}
6 \def\@ctblfgcolor#1 #2 #3={\definecolor{@ctblframefg}{rgb}{#1,#2,#3}}
7 \def\@ctblbgcolor#1 #2 #3={\definecolor{@ctblframebg}{rgb}{#1,#2,#3}}
8 \let\@cttextsuperscript\@textsuperscript
9 \def\@ctcopy#1{\footnotesize #1}
10 \newdimen\@ctblframesep
11 \newdimen\@ctblframerule
12 \newdimen\@ctblwidth
13 \newdimen\@ctblcaptionskip
14 \newdimen\@ctblmaxwidth
15 \newdimen\@ctblmincapwidth
16 \newdimen\@ctblw % the final width
17 \newdimen\@ctblww
18 \newdimen\@ctboldsep
19 \newdimen\@ctboldrule

```

Allocate box registers so that we can determine the widths of the tables

```

20 \newbox\ctbl@tblx      % the width with X columns
21 \newbox\ctbl@tbl1       % the width where X is replaced with 1
22 \newbox\ctbl@t          % the final box will become one of the two above

```

Option setting commands from keyval. The table position (here, top, bottom, page) gets a special treatment, since L^AT_EX does not expand commands there. So instead of putting things like tbp in a command like \ctblbegin we put \begin{table}[tbp] in it.

```

23 \define@key{ctbl}{caption}{\def\@ctblcaption{\#1}}%
24 \define@key{ctbl}{cap}{\def\@ctblcap{\#1}}%
25 \define@key{ctbl}{label}{\def\@ctbllabel{\#1}}%
26 \define@key{ctbl}{pos}{\def\@ctblpos{\#1}\def\@ctblbegin{\@ctblbeg[\#1]}}%
27 \define@key{ctbl}{width}{\@ctblwidth=\#1}%
28 \define@key{ctbl}{maxwidth}{\@ctblmaxwidth=\#1}%
29 \define@key{ctbl}{mincapwidth}{\@ctblmincapwidth=\#1}%
30 \define@key{ctbl}{botcap}{}{\def\@ctblbotcap{1}}%
31 \define@key{ctbl}{sideways}{}{\def\@tblsideways{sideways}}%
32 \define@key{ctbl}{rotate}{}{\def\@tblsideways{sideways}}%
33                                     \PackageWarning{ctable}{%
34                                         using obsolete option 'rotate', use 'sideways' instead}%
35 }%
36 \define@key{ctbl}{figure}{}{\def\@tbltaborfig{figure}}%
37 \define@key{ctbl}{center}{}{\def\@tblalign{center}}%
38 \define@key{ctbl}{right}{}{\def\@tblalign{flushright}}%
39 \define@key{ctbl}{left}{}{\def\@tblalign{flushleft}}%
40 \define@key{ctbl}{star}{}{\def\@tblstarred{*}}%
41 \define@key{ctbl}{framerule}{\@tblframerule=\#1}%
42 \define@key{ctbl}{framesep}{\@tblframesep=\#1}%
43 \define@key{ctbl}{framefg}{\@tblfgcolor=\#1}%
44 \define@key{ctbl}{framebg}{\@tblbgcolor=\#1}%
45 \define@key{ctbl}{captionskip}{\@tblcaptionskip=\#1}%
46 \define@key{ctbl}{nosuper}{}{\let\@cttextsuperscript\@ctcopy}%

```

a caption will only be generated if the *caption* option was used:

```

47 \def\@tblCaption{%
48   \ifx\@tblcap\empty\let\@tblcap\@tblcaption\fi
49   \ifx\@tblcaption\empty\else
50     \caption[\@tblcap]{\label{\@tbllabel}\@tblcaption}
51   \fi
52 }
53 \def\@tblframe#1#2#3{%
54   \@tbloldsep\fboxsep\fboxsep\@tblframesep%
55   \@tbloldrule\fboxrule\fboxrule\@tblframerule%
56   \fcolorbox{#1}{#2}{\fboxsep\@tbloldsep\fboxrule\@tbloldrule #3}%
57 }
58 \newcommand{\tnote}[2][a]{%
59   \hbox{\@cttextsuperscript{\normalfont\textrit{\#1}}}\&#2\NN}
60 \newcommand{\tmark}[1][a]{%
61   \hbox{\@cttextsuperscript{\normalfont\textrit{\#1\xspace}}}}
62 \newcommand{\ctable}[4][]{%
63   \def\@tbltaborfig{table}%
64   \def\@tblalign {center}%
65   \def\@tblsideways {}%
66   \def\@tblpos {}%
67   \def\@tblcaption {}%
68   \def\@tblcap {}%
69   \def\@tbllabel {}%
70   \def\@tblbeg {\begin{\@tblsideways\@tbltaborfig\@tblstarred}}%
71   \def\@tblbegin {\@tblbeg}%
72   \def\@tblend {\end{\@tblsideways\@tbltaborfig\@tblstarred}}%
73   \def\@tblbotcap {}%
74   \def\@tblstarred {}%
75   \definecolor{@tblframefg}{rgb}{0,0,0}%
76   \definecolor{@tblframebg}{rgb}{1,1,1}%
77   \@tblframerule0pt
78   \@tblcaptionskip2ex
79   \@tblframesep0pt
80   \@tblwidth=0pt

```

```

81  \@ctblmaxwidth=0pt
82  \@ctblmincapwidth=0pt
83  \setkeys{ctbl}{#1}%

```

It makes no sense to use *width* together with *maxwidth* or *pos* together with *sideways*

```

84  \ifdim\@ctblwidth=0pt\else
85      \ifdim\@ctblmaxwidth=0pt\else
86          \PackageError{ctable}{
87              You may not use the width and maxwidth options together}%
88              Use either width or maxwidth}
89      \fi
90  \fi
91  \ifx\@ctblpos\empty\else
92      \ifx\@ctblsideways\empty\else
93          \PackageError{ctable}{
94              You may not use the pos and sideways options together}%
95              Rotated tables and figures are always typeset on a separate page}
96      \fi
97  \fi
98  \newcolumntype{Y}{X}% save the X type

```

save the table contents in a box, so we can determine its width, one box will contain the table typeset with the tabular environment:

```

99  \sbox\ctbl@tabel{%
100     \newcolumntype{X}{l}% temporarily make type X = l
101     \@ctblframe{@ctblframefg}{@ctblframebg}{%
102         \begin{tabular}{#2}
103             #4
104         \end{tabular}%
105     }%
106 }%

```

the other will get the table typeset with the tabularx environment:

```

107  \sbox\ctbl@tabelx{%
108      \newcolumntype{X}{Y}% restore X
109      \@ctblframe{@ctblframefg}{@ctblframebg}{%
110          \begin{tabularx}{\ifdim\@ctblwidth>0pt\@ctblwidth\else\@ctblmaxwidth\fi}{#2}
111              #4
112          \end{tabularx}%
113      }%
114 }%

```

if no *maxwidth* was given:

```
115  \ifdim\@ctblmaxwidth=0pt
```

and also no *width*:

```
116  \ifdim\@ctblwidth=0pt
```

then use the tabular environment:

```

117      \sbox{\ctbl@t}{\usebox\ctbl@tabel}%
118  \else

```

if width was given: use the tabularx environment

```

119      \sbox{\ctbl@t}{\usebox\ctbl@tabelx}%
120  \fi

```

```
121 \else
```

with the *maxwidth* option, we check if the table, typeset with the tabular environment would get too wide:

```
122 \ifdim\wd\ctbl@tabel>\@ctblmaxwidth
```

if so, we use the tabularx environment:

```
123 \sbox{\ctbl@t}{\usebox\ctbl@tabelx}%
124 \else
```

but if within limits, we use the tabular environment:

```
125 \sbox{\ctbl@t}{\usebox\ctbl@tabel}%
126 \fi
127 \fi
```

the *ctbl@t* box now contains the table as we want to typeset it; determine its width:

```
128 \@ctblw=\wd\ctbl@t
```

If *mincapwidth* was set wider than the table, make only as wide as needed for the caption so that any footnotes stay within the caption width

```
129 \ifdim\@ctblmincapwidth<\@ctblw\@ctblw=\@ctblw\else%
130 \setwideth{@ctblw}{\tablename\ \thetable:\ @ctblcaption}
131 \ifdim\@ctblw>\@ctblmincapwidth\@ctblw=\@ctblmincapwidth\fi%
132 \fi
```

\@ctblbegin is now defined as something like \begin{table}[tbp].

```
133 \@ctblbegin
134   \begin{@ctblalign}
135     \begin{minipage}{\@ctblww}
136       \ifx\@tblbotcap\empty\@tblCaption\vspace{\@tblcaptionskip}\fi
137       \centering\usebox\ctbl@t % insert the tabular
138       \def\@tblfootnotes{\#3}
139       \ifx\#3\empty\else % append footnotes, if any
140         \\
141         \begin{tabularx}{\hsize}{r@{\,}c{\footnotesize\raggedright}X}
142           \#3
143         \end{tabularx}
144       \fi
145       \ifx\@tblbotcap\empty\else\@tblCaption\fi
146     \end{minipage}
147   \end{@ctblalign}
148   \@ctblend
149 }
```

Index

Numbers written in italic refer to the page where the corresponding entry is described; numbers underlined refer to the code line of the definition; numbers in roman refer to the code lines where the entry is used.

```
addlinespace= \subitem *+\addlinespace+, \subitem[2]+ \captiontbl= \subitem *+\ctable+, \usage{1}, 62
               centering= \subitem *+\centering+, \subitem t+, 22, 117, 119, 123, 125, 128,
bottomrule= \subitem *+\bottomrule, \usage{2}, \subitem *+\cmidrule+, \usage{2}, \subitem tabel+, 21, 99, 117, 122, 125
```

```
tablex= \subitem tabelx+, 20 midrule=119, \subitem *+\midrule\midrule&usage{2}, \subitem *+\tablename+, 130
          ML= \subitem *+\ML+, \usage{2}table= \subitem *+\thetable+, 130
FL= \subitem *+\FL+, \usage{2}recmidrules= \subitem *+\mqrrecmidrules\subitem usage{2}mark+, \usage{2}, 60
hsize= \subitem *+\hspace+, 141 NN= \subitem *+\NN+, \usage{2}tnote= \subitem *+\tnote+, \usage{2}, 58
          settowidth= \subitem *+\settowidth+, 130
LL= \subitem *+\LL+, \usage{2}ialrule= \subitem *+\specialrule+, \usage{2}\subitem *+\xspace+, 61
```