

# Writing, running and including the output of external documents from within a main **LATEX** document –v. 0.28

Herbert Voß [herbert@dante.de](mailto:herbert@dante.de)

1. Juni 2022

## Inhaltsverzeichnis

<b>1 Syntax</b>	<b>2</b>
<b>2 First examples</b>	<b>2</b>
2.1 Without showing the code . . . . .	2
2.2 Showing code and output of a Python example . . . . .	3
<b>3 Setting marker in the source</b>	<b>6</b>
<b>4 Optional arguments</b>	<b>7</b>
4.1 Programs and runs . . . . .	7
4.2 Grafik options . . . . .	9
4.3 Listings options . . . . .	10
4.4 Background color . . . . .	10
4.5 Type of the source code . . . . .	11
4.6 Output more than one page . . . . .	11
4.7 Output as floating object with caption and label . . . . .	12
4.8 Cropping the PDF . . . . .	13
4.9 Code and output side by side . . . . .	13
4.10 Horizontal alignment of the output . . . . .	14
4.11 Inline images . . . . .	15
4.12 Input text instead of an image . . . . .	15
4.13 Running additional external programs . . . . .	17
4.14 Using listings . . . . .	18
4.15 Vertical space . . . . .	21
4.16 No output . . . . .	21
<b>5 Defining new marker</b>	<b>22</b>
<b>6 Supported engines</b>	<b>22</b>
6.1 METAPOST example . . . . .	22
6.2 plain <small>T<small>E</small>X</small> example . . . . .	23
6.3 Lua <small>L<small>A</small>T<small>E</small>X</small> example . . . . .	24
6.4 Con <small>T<small>E</small>Xt</small> example . . . . .	25
<b>7 Running external commands</b>	<b>26</b>

## 1 Syntax

```
\usepackage{hvextern}
```

This package allows to write external METAPOST, TeX, ConTeXt, L<sup>A</sup>T<sub>E</sub>X, LuaTeX, LuaLaTeX, XeTeX, XeLaTeX, Lua, Perl, Java and/or Python source code, which will then be run via shell escape to create a PDF oder text output to include it into the main L<sup>A</sup>T<sub>E</sub>X document.

There is only one environment and one command:

```
\begin{externalDocument}[<options>]{<external filename without extension>}
...
source code
...
\end{externalDocument}

\runExtCmd[<options>]
  {<command with arguments>}
  {<external filename without extension>}
```

The main document *must* be run with the `--shell-escape` option, otherwise it won't work, e.g.:

```
lualatex --shell-escape <file>
```

The purpose for this package is to show the output of documents which have to be compiled with a different preamble or a different engine or a complete different system, but integrating the output automatically in the main document..

*All examples in this document are created on-the-fly while running this L<sup>A</sup>T<sub>E</sub>X document with lualatex with the --shell-escape option.*


## 2 First examples

### 2.1 Without showing the code

This document was run with LuaLaTeX. Suppose you want to insert the output of a document which needs for several reasons a XeLaTeX run. Instead of creating and running a document outside of the main document and then to insert the output we can do this from within this LuaLaTeX document itself. The external document is compiled with XeLaTeX and the output is inserted as pdf image: 美好的一天.

Another example which needs a pdfL<sup>A</sup>T<sub>E</sub>X run. The source code itself is also not shown by the environment `externalDocument`.

```
\begin{externalDocument}[
  compiler=pdflatex, force,cleanup]{voss}
\documentclass{standalone}
%StartVisiblePreamble
\usepackage{fontenc}
\usepackage{libertinus}
\usepackage[linguistics]{forest}
\forestapplylibrarydefaults{linguistics,
  edges}
%StopVisiblePreamble
\begin{document}
\begin{forest}
[VP
  [DP]
  [V
    [V]
    [DP]
  ]
]
\end{forest}
\end{document}
\end{externalDocument}
```



## 2.2 Showing code and output of a Python example

The png image is created on the fly with the following arguments of `externalDocument`:

```
\begin{externalDocument}[
  compiler=python3,
  code,
  ext=py,
  docType=py,
  usefancyvrb,
  grfOptions={width=\ linewidth}]{python}
... Python code ...
\end{externalDocument}
```

The code which is declared as header and main can be marked by:

```
\hv@extern@exampleType{py}
{\NumChar StartVisibleMain}
{\NumChar StopVisibleMain}
{\NumChar StartVisiblePreamble}
{\NumChar StopVisiblePreamble}
```

`\NumChar` is the default Python comment character `#` and needs to be saved with a different category, which is done internally by the package. The complete definition of the code is:

```
\begin{externalDocument}[
  compiler=python3,
  code,
  ext=py,
```

```

force=false,
docType=py,
usefancyvrb,
grfOptions={width=\linewidth]}{python}
import os
#StartVisiblePreamble
from PIL import Image
import subprocess
# drawing area (xa < xb and ya < yb)
xa = -0.1716
xb = -0.1433
ya = 1.022
yb = 1.044
maxIt = 1024 # iterations
imgx = 1000 # image size
imgy = 750
image = Image.new("RGB", (imgx, imgy))
#StopVisiblePreamble

#StartVisibleMain
for y in range(imgy):
    cy = y * (yb - ya) / (imgy - 1) + ya
    for x in range(imgx):
        cx = x * (xb - xa) / (imgx - 1) + xa
        c = complex(cx, cy)
        z = 0
        for i in range(maxIt):
            if abs(z) > 2.0: break
            z = z * z + c
        r = i % 4 * 6
        g = i % 8 * 32
        b = i % 16 * 16
        image.putpixel((x, y), b * 65536 + g * 256 + r)
#StopVisibleMain
# now get the filename created by the latex document
imageName = os.path.basename(os.path.splitext(__file__)[0])+".png" # get filename
image.save(imageName, "PNG")
\end{externalDocument}

```

And with using this code we get the image as png inserted. The given filename of the external document is internally extended by a consecutive number which isn't known to the Python code. However, it is no problem in any programming language to get the name of a running file. The forlast line in the above code shows how it can be done with Python.

```

from PIL import Image
import subprocess
# drawing area (xa < xb and ya < yb)
xa = -0.1716
xb = -0.1433

```


```

ya = 1.022
yb = 1.044
maxIt = 1024 # iterations
imgx = 1000 # image size
imgy = 750
image = Image.new("RGB", (imgx, imgy))

for y in range(imgy):
    cy = y * (yb - ya) / (imgy - 1) + ya
    for x in range(imgx):
        cx = x * (xb - xa) / (imgx - 1) + xa
        c = complex(cx, cy)
        z = 0
        for i in range(maxIt):
            if abs(z) > 2.0: break
            z = z * z + c
        r = i % 4 * 6
        g = i % 8 * 32
        b = i % 16 * 16
        image.putpixel((x, y), b * 65536 + g * 256 + r)

```

python-3.py

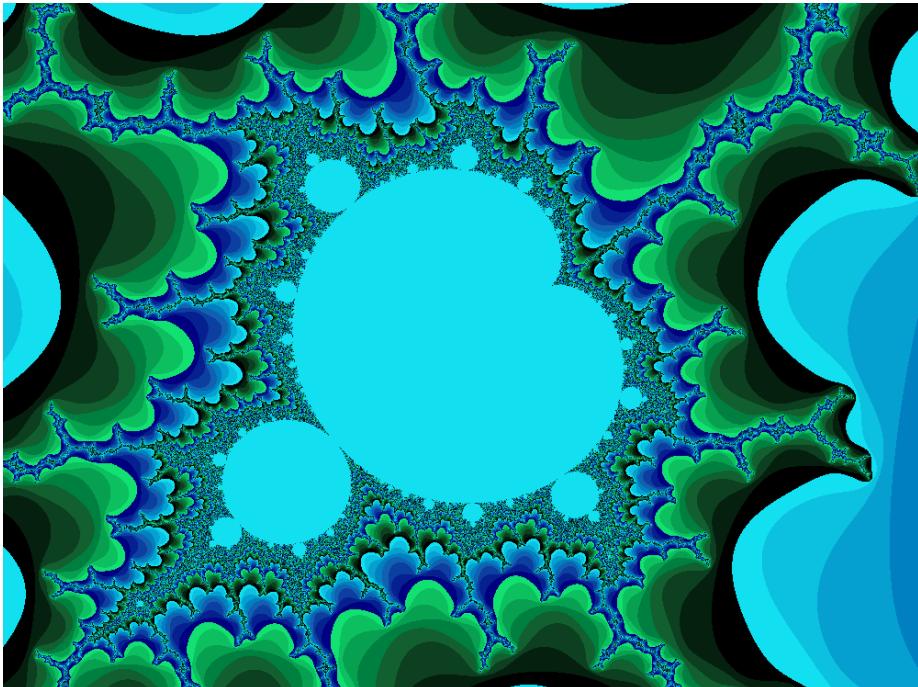


The external filename, extended by a consecutive number, can be printed in the margin by setting the keyword `showFilename`. In general it is printed in the outer margin or in `twocolumn` mode in the outer column. If the example is set in `twocolumn` mode but inside a starred floating environment over both column, then use the keyword `outerFN`. Then `hvextern` doesn't test for `twocolumn` mode.

A vertical shift of the filename is possible by setting a length to the keyword `shiftFN`, e.g. `shiftFN=5ex`.

```
\usepackage{tikz}
\usepackage[hks,pantone,xcolor]{xespotcolor}

\SetPageColorSpace{HKS}
\definecolor{HYellow}{spotcolor}{HKS05N,0.5}
\definecolor{HRed}{spotcolor}{HKS14N,0.5}
\definecolor{HBlue}{spotcolor}{HKS38N,0.5}
\begin{tikzpicture}[scale=0.7, fill opacity =0.7]
\fill[HYellow]( 90:1.2) circle (2);
\fill[HRed] ( 210:1.2) circle (2);
\fill[HBlue] ( 330:1.2) circle (2);
\node at ( 90:2) {Typography};
\node at ( 210:2) {Design};
\node at ( 330:2) {Coding};
\node {\LaTeX};
\end{tikzpicture}
```

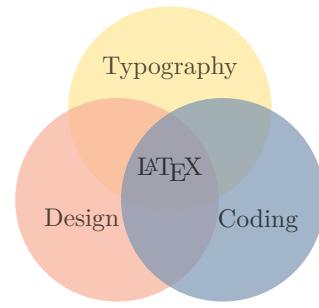

### 3 Setting marker in the source

The marker for the code ranges which should be listed depend to the used programming language:

```
[...]
%StartVisiblePreamble
[... listed preamble code ]
%StopVisiblePreamble
[...]
\begin{document}
[...]
\end{document}
```

everything between `%StartVisiblePreamble` and `%StopVisiblePreamble` will be listed as preamble and in case of a L<sup>A</sup>T<sub>E</sub>X source everything between `\begin{document}` and `\end{document}` as body. The marker must be defined with an own macro, e.g.:

```
\hv@extern@exampleType{py}
{\NumChar StartVisibleMain}
{\NumChar StopVisibleMain}
{\NumChar StartVisiblePreamble}
{\NumChar StopVisiblePreamble}
```

`\NumChar` is the comment character #, which needs a special handling. This version of `hvextern` supports the following programming languages (option `compiler`): `mpost`, `tex`, `latex`, `luatex`, `python3`, `perl`, `lua`, `xetex`, `pdflatex`, `lualatex`, `xelatex`, and `context`. The default is `pdflatex`. The option `docType` selects the config file, which must be one of `context`, `lua`, `p1`, `tex`, `latext`, `mp`, and `py`. For Lua it is

```
\hv@extern@exampleType{lua}
{--StartVisibleMain}
```

```
{--StopVisibleMain}  
{--StartVisiblePreamble}  
{--StopVisiblePreamble}
```

It defines the marker strings for the listed code sequences. In some cases you have to use multiple times the same value for different optional arguments, e.g.

```
ext=lua, compiler(lua, docType=lua, ...
```

## 4 Optional arguments

The default setting is always shown in brackets.

### 4.1 Programs and runs

The proxpath should only in some rare cases needed. In general all used compilers will be found by the system. A given proxpath must be end with a slash, e.g. ./bin/

```
\define@key{hv}{proxpath}[]{\def\hv@extern@proxpath{\#1}}  
\define@key{hv}{compiler}[pdflatex]{\def\hv@extern@compiler{\#1}}  
\define@key{hv}{runsequence}[]{\def\hv@extern@runsequence{\#1}}  
\define@key{hv}{runs}[1]{\setcounter{hv@extern@runs}{#1}}
```


Instead of the optional arguments `compiler`, `biber`, and `xindex` one can define an individual command sequence by using the optional argument `runsequence`. It must be comma separated list:

```
runsequence={lualatex,biber,xindex -l de -c AU,lualatex,lualatex}
```

```
\usepackage[ngerman]{babel}  
\usepackage{libertinus,hvindex}  
\usepackage{makeidx}\makeindex  
\usepackage{biblatex}\addbibresource{biblatex-examples.bib}
```

```
Sort with xindex \verb|-l DE --config AU|  
\blindtext  
\Index{Österreich} \Index{Öresund}  
\Index{Ostern} \Index{Ober} \Index{Oberin}  
\Index{Österreich} \Index{Öresund}  
\Index{Ödem} \Index{Oligarch} \Index{Oder}  
\Index{Goldmann}  
\printindex  
\nocite{*}\printbibliography  
\blindtext  
\blinddocument
```

VOSS-5.tex

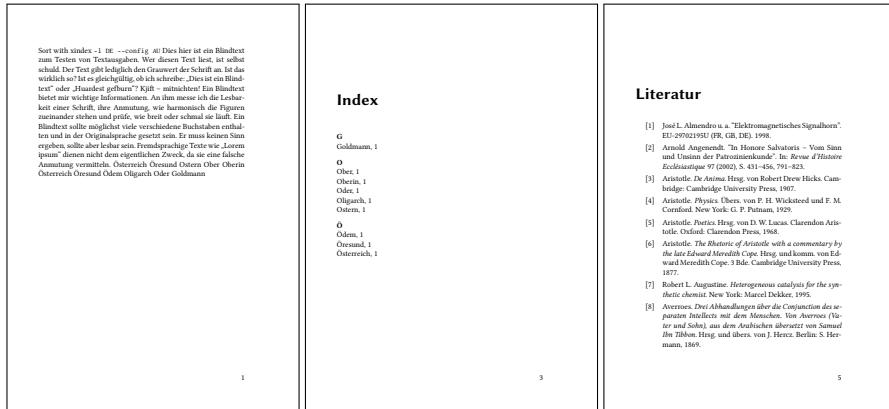

The following Java-program creates the Mandelbrot set as png image. The valid setting for the environment `externalDocument` is:

```
compiler=java,ext=java,docType=java,
```


java-6.java

```
public static int iterZahl(final double cx, final double cy, int maxIt,  
    final double radius) {  
    // bestimmt Anzahl der Iterationen  
    int zaehler = 0;  
    double zx = 0.0, zy = 0.0, tmp;  
    do {  
        tmp = zx*zx - zy*zy + cx;  
        zy = 2*zx*zy + cy; zx = tmp;  
        zaehler++;  
    } while (zx*zx + zy*zy <= radius && zaehler < maxIt);  
    return zaehler;  
}  
  
double xa = -2.5, xe = 0.7, ya = -1.2, ye = 1.2; // Ratio 20:15  
double dx = (xe-xa)/(imageBreite-1), dy = (ye-ya)/(imageHoehe-1);  
double cx, cy; int R, G, B;  
double radius = 10.0; int maxIt = 1024;  
cx = xa;  
for (int sp = 0; sp < imageBreite; sp++) {  
    cy = ye; // von oben nach unten  
    for (int ze = 0; ze < imageHoehe; ze++) {  
        int zIter = iterZahl(cx, cy, maxIt, radius);  
        if (zIter == maxIt) {  
            g.setColor(Color.WHITE);  
            g.drawLine(sp, ze, sp, ze);  
        } else {  
            R = zIter % 4 * 6 ; G = zIter % 8 * 32; B = zIter % 16 * 16;  
            g.setColor(new Color(R,G,B));  
            g.drawLine(sp, ze, sp, ze);  
        }  
        cy = cy - dy;  
    } // for ze  
} // for sp
```

```

    cx = cx + dx;
} // for sp

```

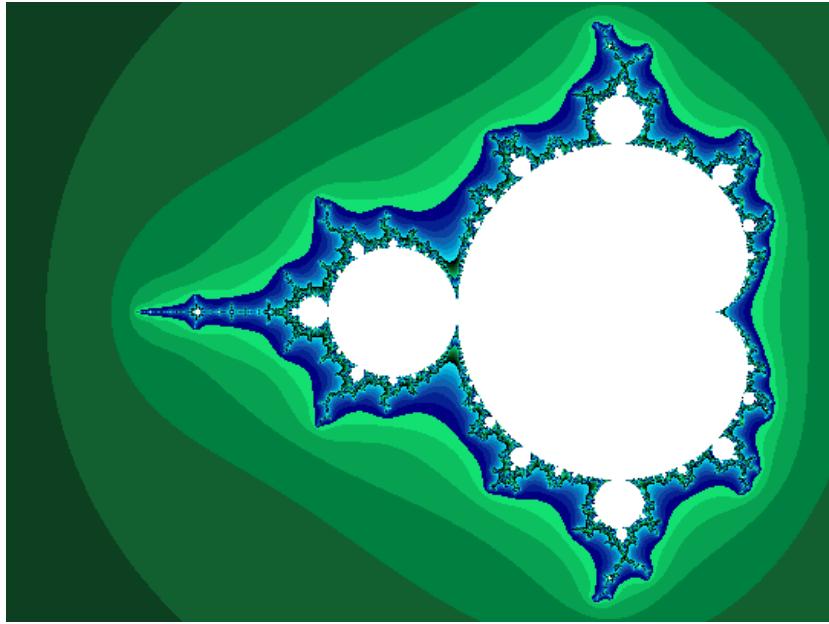

## 4.2 Grafik options

```
\define@key{hv}{grfOptions}[]{\def\hv@extern@grfOptions{#1}}
```


The option is passed to `\includegraphics`, e.g. `angle=90, width=\linewidth` for the following example.

```

\usepackage{tikz}
\usepackage[hks,pantone,xcolor]{xespotcolor}

\SetPageColorSpace{HKS}
\definecolor{HYellow}{spotcolor}{HKS05N,0.5}
\definecolor{HRed}{spotcolor}{HKS14N,0.5}
\definecolor{HBlue}{spotcolor}{HKS38N,0.5}
\begin{tikzpicture}[scale=0.7, fill opacity
=0.7]
\fill[HYellow] ( 90:1.2) circle (2);
\fill[HRed] (210:1.2) circle (2);
\fill[HBlue] (330:1.2) circle (2);
\node at ( 90:2) {Typography};
\node at ( 210:2) {Design};
\node at ( 330:2) {Coding};
\node {\LaTeX};
\end{tikzpicture}

```

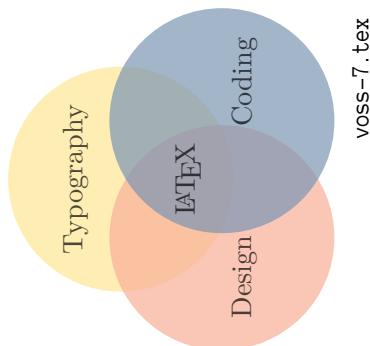

### 4.3 Listings options

```
\define@key{hv}{1stOptions}[]{\def\hv@extern@1stOptions{\#1}}
```


The option is passed either to `\lstinputlisting`, or, if `usefancyvrb` is active, to `\VerbatimInput`. The following example uses

```
1stOptions={basicstyle=\sffamily\itshape\scriptsize},
```

`voss-8.tex`

```
\usepackage{pst-calendar}

\psscalebox{0.3}{%
\psCalDodecaeder[Year=2022, style=april]%
}
```

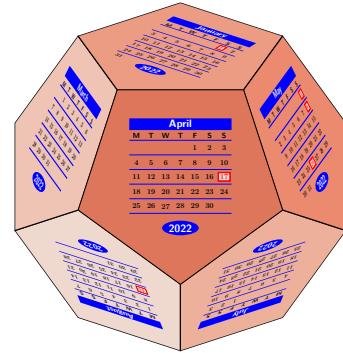

### 4.4 Background color

There are different colors for the preamble and body listing: the background and frame color.

```
\define@key{hv}{BGpreamble}[black12]{\def\hv@extern@BGpreamble{\#1}}
\define@key{hv}{BGbody}[black8]{\def\hv@extern@BGbody{\#1}}
\define@key{hv}{B0preamble}[black12]{\def\hv@extern@B0preamble{\#1}}
\define@key{hv}{B0body}[black8]{\def\hv@extern@B0body{\#1}}
```


The options are passed to `tcolorbox` and preset to `black!12` and `black!8`. The color of the frame is set to the same values, hence not seen. The following example uses

```
BGpreamble=red!10, B0preamble=red,
BGbody=blue!8, B0body=blue,
```

`voss-9.tex`

```
\usepackage{pst-calendar}

\pscalebox{0.3}{%
\psCalDodecaeder[Year=2022, style=may]%
}
```

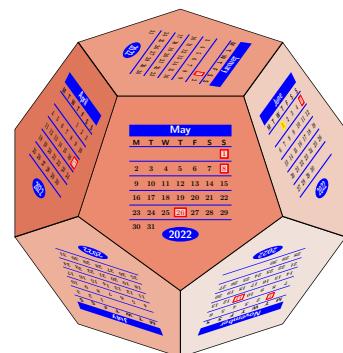

## 4.5 Type of the source code

The current version of hvxtern supports code written as METAPOST, plain TeX, L<sup>A</sup>T<sub>E</sub>X, ConTeXt, and Python. Every type has its own keywords for the linerange which should be printed for the preamble and the body. For example the latex config is:

```
\hv@extern@exampleType{latex}%
for _all_LaTeX engines
{\string\begin\string{document\string}}%
{\string\end\string{document\string}}%
{\perCent StartVisiblePreamble}%
{\perCent StopVisiblePreamble}%

% only for the sequence latex->dvips->ps2pdf
\def\hv@extern@runLATEX#1#2#3#4{%
  path compiler file extension
  \ifhv@extern@verbose \typeout{>>> running #1#2 #3#4}\fi
  \ShellEscape{#1#2\space #3#4}%
  \ifhv@extern@verbose \typeout{>>> running #1dvips #3}\fi
  \ShellEscape{#1dvips\space #3.dvi}%
  \ifhv@extern@verbose \typeout{>>> running ps2pdf #3.ps}\fi
  \ShellEscape{#1ps2pdf\space -dAutoRotatePages=/None\space -dALLOWPSTRANSIENCY\space #3.ps}%
}
```

If a source needs more than running the defined compiler, it must be defined by a macro

```
\def\hv@extern@run<NAME>#1#2#3#4{%
  path compiler file extension
  ...}
```

The type of the source code can be different to the compiler, e.g. source latex, but compiler lualatex.

## 4.6 Output more than one page

The pages which should be printed can be defined by

```
\define@key{hv}{pages}[1]{\def\hv@extern@pages{#1}}
\define@key{hv}{pagesep}[1em]{\hv@extern@pagesep=#1}
\define@boolkey{hv}[hv@extern@]{frame}[true]{}
```


With frame the pages can be framed (internally by \fbox). It is leaved to the user to choose the correct image width for the pages. The separation between the pages is defined by the length pagesep. The following example uses:

```
pages={1,2,3},
pagesep=2pt,
grfOptions={width=0.3\linewidth},
compiler=lualatex, runs=2, % for the TOC
frame,
```

```
\usepackage[american]{babel}
\usepackage{libertinus}
\usepackage{blindtext}
```

voss-10.tex

```
\title{A multipage example}
\author{Erasmus von Rotterdam}
\maketitle
\tableofcontents
\blinddocument
```

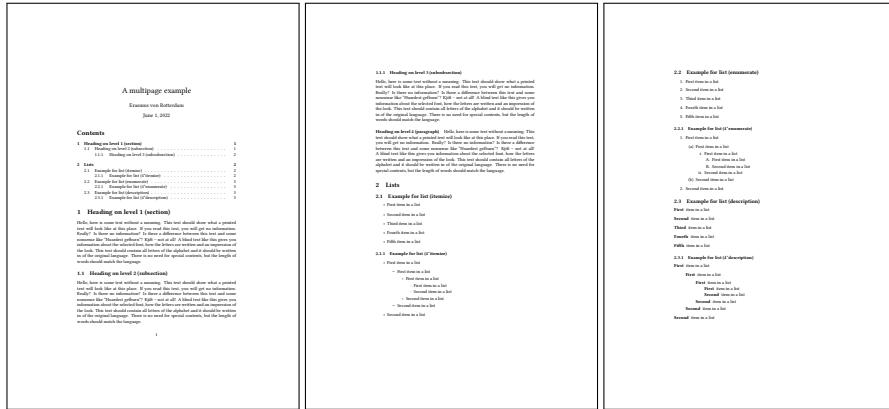

## 4.7 Output as floating object with caption and label

By default the images are not inserted as a float. This can be changed by the keyword `float`, a caption and a label are optional. The float type is always `figure`.

```
\define@boolkey{hv}[hv@extern@]{float}[true]{}
\define@key{hv}{floatsetting}[]{\def\hv@extern@floatsetting{\#1}}
\define@key{hv}{caption}[]{\def\hv@extern@caption{\#1}}
\define@key{hv}{label}[]{\def\hv@extern@label{\#1}}
```

The image Figure 1 shows an example for a floating object, which uses the floatsetting `!htb`, which is the default. Using a caption and a label are optional.

```
voss-11.tex
\usepackage{pst-coxeterp}

\begin{pspicture}(-1,-1)(1,1)\Simplex[dimension=2]\end{pspicture}
\begin{pspicture}(-1,-1)(1,1)\Simplex[dimension=3]\end{pspicture}
\begin{pspicture}(-1,-1)(1,1)\Simplex[dimension=5]\end{pspicture}
\begin{pspicture}(-1,-1)(1,1)\Simplex[dimension=7]\end{pspicture}
```

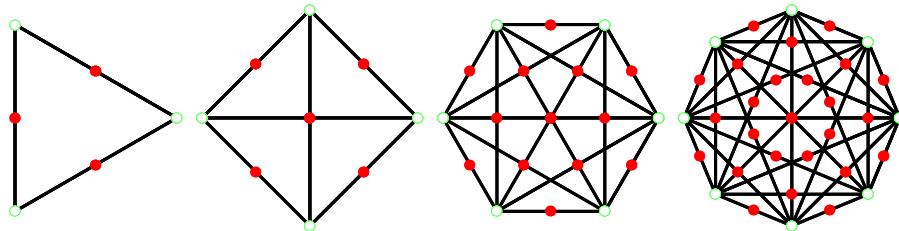


Abbildung 1: An example for Coxeter images

## 4.8 Cropping the PDF

Instead of using the documentclass standalone, which already crops the created PDF, one can use the optional argument `crop`.

```
\define@boolkey{hv}[hv@extern@]{crop}[\true]{}
\define@key{hv}{cropmargin}[2]{\def\hv@extern@cropmargin{\#1 }}% length in pt
```


It is also possible to crop a document with more than one page. In this case the beginning and end of the pages should be on the same height. Otherwise the pages will have different heights after cropping (see next image). The following example was created with

```
pages={1,2,3},
pagesep=2pt,
grfOptions={width=0.3\linewidth},
compiler=lualatex, runs=2, % for the TOC
frame,
crop, cropmargin=5,%      5pt margin
```

```
\usepackage[american]{babel}
\usepackage{libertinus}
\usepackage{blindtext}
\pagestyle{headings}
```

```
\title{A multipage example}
\author{Erasmus von Rotterdam}
\maketitle
\tableofcontents
\Blinddocument
```

VOSS-12.tex

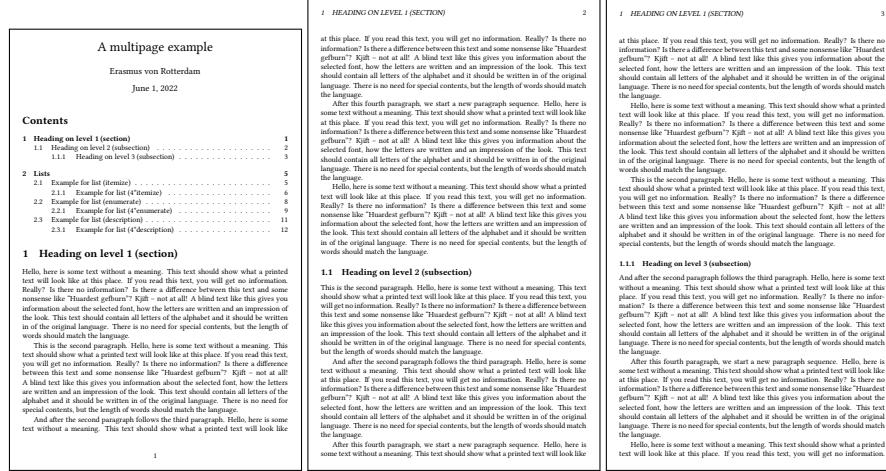

## 4.9 Code and output side by side

By default the code and the output is on top of each other. With setting the width of a minipage with `mpwidth` greater than 0 pt the output will be side by side.

```
\define@key{hv}{mpwidth}[0pt]{\setlength\hv@extern@mpwidth{\#1}}
\define@key{hv}{mpvalign}[0pt]{\def\hv@extern@mpvalign{\#1}}
```

`mpwidth` is the width of the code. The rest of the line, minus 1em for the space between the minipages, will be the possible width for the output and will be calculated automatically. The two minipages are aligned by defaults to its top. This can be changed by setting `mpvalign` to `c` or `b`.

## 4.10 Horizontal alignment of the output


```
align=\centering, % default
```

```
\rule{0.5\linewidth}{5mm}
```




```
align=\raggedright,
```

```
\rule{0.5\linewidth}{5mm}
```



```
align=\raggedleft,
```

```
\rule{0.5\linewidth}{5mm}
```



```
align=\centering, mpwidth=0.5\linewidth, % default for side by side
```

```
\rule{0.25\linewidth}{5mm}
```



```
align=\raggedright, mpwidth=0.5\linewidth,
```

```
\rule{0.25\linewidth}{5mm}
```



```
align=\raggedleft, mpwidth=0.5\linewidth,
```

```
\rule{0.25\linewidth}{5mm}
```



## 4.11 Inline images

By default code and image are own paragraphs. With the optional argument `inline` the created image can be part of the current line. This may make sense, if you need characters which are not part of your current font.

```
\define@boolkey{hv}[hv@extern@]{inline}[true]{%
  \hv@extern@codefalse
  \hv@extern@showfilenamefalse}
```

With the setting `inline=true` the optional keyword `code` and `showFilename` is automatically set to false. The next Chinese characters %美好的一天 are inserted as inline image without showing the code. The complete code looks like:

```
With \Lkeyset{inline} the optional argument \Lkeyword{code} is
automatically set to false. The next Chinese characters
\begin{externalDocument}[
  compiler=xelatex, inline, runs=2, grfOptions={height=8pt},
  crop, cropmargin=0, cleanup, force=false, docType=latex]{voss}
\documentclass{ctexart}
\pagestyle{empty}
\begin{document}
\end{document}
\end{externalDocument}
are inserted as inline image without showing the code. The complete
code looks like:
```

## 4.12 Input text instead of an image

By default the created pdf which can be, of course, only text, will be inserted by `\includegraphics`. If you have only text as output and don't want to create a pdf you can insert this kind of output as verbatim text by setting `includegraphic=false`.

```
\define@boolkey{hv}[hv@extern@]{includegraphic}[true]{}
```

The textfile must have the same main filename with the extension `.txt`. As already mentioned, in every programming language you can get the current used filename from within the code itself. The following Perl example which calculates the Kaprekar constants uses

```
my $filename = $0;          # the current filename
$filename =~ s/\.\pl//;      # without extension .pl
$filename = "${filename}.txt"; # for the output
```

Only for some completeness: a Kaprekar constant is a number  $A$  with  $\max(A) - \min(A) = A$ .  $\max$  and  $\min$  are the sorted digits of the number  $A$ :  $495 = 954 - 459$ .

```

voss-20.pl                                         Finding Kaprekarconstants
my $zahl = 1;
my $anfang = 1;
my $ende = 9;

print $fh "Finding Kaprekarconstants ... \n";
while ($zahl < 8) {
    print $fh "${zahl}-stellig: ";
    foreach ($anfang...$ende) { # for every
        my $_
        @Zeichen = split(//,$_);
        $Min = join("",sort(@Zeichen));
        $Max = reverse($Min);
        $Dif=$Max-$Min;
        if($_ eq $Dif) {
            $found = 1;
            print $fh $_, " ";
        }
    }
    if (!$found) { print $fh "---\n"; }
    else { print $fh "\n"; }
    $found = false;
    $zahl = $zahl+1;
    $anfang = $anfang*10;
    $ende = $ende*10;
}

```

Another example with running Lua to calculate and print the Pascal's triangle.  
The internal filename is available with

```


local filename = arg[0]
local shortFN = str:match("(.+)%..+")
outFile = io.open(shortFN..".txt","w+")
-- open external file

function nextrow(t)
    local ret = {}
    t[0], t[#t+1] = 0, 0
    for i = 1, #t do ret[i] = t[i-1] + t[i] end
    return ret
end

function triangle(n)
    t = {1}
    for i = 1, n do
        m = (n - i)
        for j = 1,m do outFile:write(" ") end
        for k = 1,i do outFile:write(string.format("%8s",t[k])) end
        outFile:write("\n")
        t = nextrow(t)
    end
end

triangle(10)

```

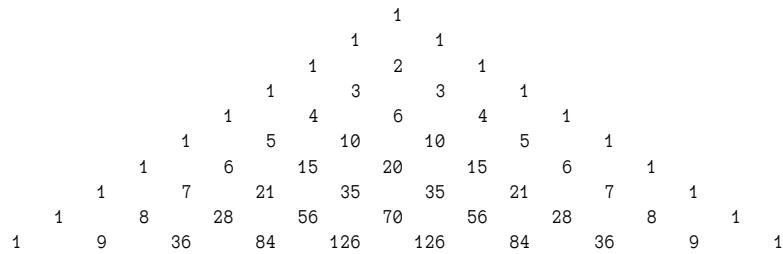

## 4.13 Running additional external programs

For a L<sup>A</sup>T<sub>E</sub>X additional programs for bibliography, index, a.s.o. maybe needed.

```
\define@boolkey{hv}[hv@extern@]{biber}[true]{}
\define@boolkey{hv}[hv@extern@]{xindex}[true]{}
\define@key{hv}{xindexOptions}[]{\def\hv@extern@xindexOptions{#1}}
\define@key{hv}{runsequence}[]{\def\hv@extern@runsequence{#1}}
```

The biber run needs no additional options, but for xindex it maybe useful. The following examples uses

```
\begin{externalDocument}[  
    compiler=lualatex, runs=2, pages=2,crop,  
    xindex, xindexOptions={-l DE --config AU},  
    mpwidth=0.6\linewidth, usefancyvrb=false,  
    docType=latex,  
    ...  
]{voss}
```

```
\usepackage{makeidx}\makeindex
\usepackage{hvindex}

Sort with xindex \verb|-1 DE --config AU|
\Index{Österreich} \Index{Öresund}
\Index{Ostern} \Index{Ober} \Index{Oberin}
\Index{Österreich} \Index{Öresund}
\Index{Ödem} \Index{Oligarch} \Index{Oder}
\Index{Ostern} \Index{Ober} \Index{Oberin}
\Index{Obstler} \Index{Öl} \Index{ölen}
\Index{Oder|seealso{Fluss}} \Index{Göbel}
\Index{oder} \index{Fluss!Oder}
\Index{Goethe} \Index{Göthe} \Index{Götz}
\Index{Goldmann}
\printindex
```

Index

<b>F</b>	Obstler, 1
Fluss	oder, 1
- Oder, 1	Oder, 1, <i>siehe auch Fluss</i>
<b>G</b>	Oligarch, 1
Goethe, 1	Ostern, 1
Goldmann, 1	<b>Ö</b>
Göbel, 1	Ödem, 1
Göthe, 1	Öl, 1
Götz, 1	Öresund, 1
<b>O</b>	Österreich, 1
Ober, 1	<b>ö</b>
Oberin, 1	ölen, 1

Instead of using the options `compiler`, `biber`, and `xindex` one can also use only the optional argument `runsequence` to define an individual sequence of commands, e.g.:

```
runsequence={lualatex,biber,{xindex -l de -c AU},lualatex,lualatex}
```

<pre>\usepackage[ngerman]{babel} \usepackage{libertinus,hvindex} \usepackage{makeidx}\makeindex \usepackage[biblatax]{addbibr}{biblatax-examples.bib}</pre>	<pre>\blindtext \Index{Österreich} \Index{Öresund} \Index{Ostern} \Index{Ober} \Index{Oberin} \Index{Österreich} \Index{Öresund} \Index{Ödem} \Index{Oligarch} \Index{Oder} \Index{Goldmann} \printindex \nocite{*}\printbibliography \blindtext \blinddocument</pre>	<p>Setzt mit <code>-1</code> ist <code>--cont</code> (p. 4). Dies hier ist ein Blindtext aus Teilen von Textausgaben. Wer diesen Text liest, ist selbst schuld. Der Text gibt lediglich den Grauwert der Schrift an, ist das wirklich so? Ist es gleichgültig, ob ich schreibe „Dies ist ein Blindtext“ oder „Dies ist ein Blindtext“? Ein Blindtext ist kein Text, er liefert mir wichtige Informationen. An ihm messe ich die Lesbarkeit einer Schrift, ihrer Struktur, wie sie sich auf die Figuren und die Farben des Textes auswirkt. Ein Blindtext sollte möglichst viele verschiedene Buchstaben enthalten und in der Originalsprache gestellt sein. Er muss keinen Sinn haben, aber er darf nicht leer sein. Eine „Liste mit dem Wort ‘ipsum’“ dient nicht dem eigentlichen Zweck, da sie eine falsche Annahme vermittelt. Österreich Öresund Ostern Ober Oberin Österreich Öresund Ödem Oligarch Oder Goldmann</p>	<p><b>Index</b></p> <table border="0"> <tr> <td><b>G</b></td><td>Goldmann, 1</td></tr> <tr> <td><b>O</b></td><td>Ober, 1 Oberin, 1 Ödem, 1 Oligarch, 1 Öster, 1</td></tr> <tr> <td><b>Ö</b></td><td>Ödem, 1 Öresund, 1 Österreich, 1</td></tr> </table>	<b>G</b>	Goldmann, 1	<b>O</b>	Ober, 1 Oberin, 1 Ödem, 1 Oligarch, 1 Öster, 1	<b>Ö</b>	Ödem, 1 Öresund, 1 Österreich, 1
<b>G</b>	Goldmann, 1								
<b>O</b>	Ober, 1 Oberin, 1 Ödem, 1 Oligarch, 1 Öster, 1								
<b>Ö</b>	Ödem, 1 Öresund, 1 Österreich, 1								
			<p><b>Literatur</b></p> <ul style="list-style-type: none"> <li>[1] José L. Almendro u. a. "Elektromagnetisches Signalraum". EU-29702195U (FR, GR, DE), 1996.</li> <li>[2] André Angermeier, "In Honore Salvatoris – Vom Sinn und Wert des Patriarchen". In: <i>Revue d'histoire Ecclésiastique</i> 97 (2002), S. 441–466, 791–810.</li> <li>[3] Aristotle, <i>De Anima</i> Hrg. von Robert Dale Hicks. Cambridge: Cambridge University Press, 1907.</li> <li>[4] Aristotle, <i>Physics</i> Hrg. von P. D. L. A. Olstad und F. M. Cornford. New York: G. E. Pergamon, 1928.</li> <li>[5] Aristotle, <i>Poetics</i> Hrg. von W. Lucas. Clarendon Aristotle. Oxford: Clarendon Press, 1968.</li> <li>[6] Aristotle, <i>The Rhetoric of Aristotle</i> with a commentary by Richard J. Gould. Translated and annotated by Edward Ward Merleau Cope. 3 Bde. Cambridge: Cambridge University Press, 1891.</li> <li>[7] Robert L. Augustine, "Heterogeneous catalysts for the synthesis of organic compounds in aqueous media". U.S. Patent 3,895,200, 1975.</li> <li>[8] Avempace, <i>Drei Abhandlungen über die Conjunction des separaten Intellekts mit dem Menschen</i>. Von Avempace (Viz. Abu'l-Barakat Sabur), aus dem Arabischen übersetzt von Samuel Boethius. Hrg. und übers. von J. Herz. Berlin: S. Hirmer, 1860.</li> <li>[9] Avempace, <i>The Point of the Possibility / Conjunction with the Active Intellect / On the Rule of the Conjunction of the Two Intellects</i> Hrg. und übers. von Klaus P. Bialostocki. Morelet Studies in Jewish History, Literature and Thought 7. New York: Jewish Theological Seminary of America, 1997.</li> <li>[10] Avempace, <i>Des Avempace Abhandlung: Über die Möglichkeit der Conjunction oder Über den materiellen Intellekt</i>. Hrg. und übers. von Ludwig Henrichs. Halle an der Saale: A. K. Kaestner, 1892.</li> <li>[11] John C. Baez und Aaron D. Lauda, "Higher-Dimensional Algebra V: 2-Groups", Version 1.27. Okt. 2004 arXiv:math/0403060.</li> <li>[12] John C. Baez und Aaron D. Lauda, "Higher-Dimensional Algebra V: 2-Groups", Version 3. In: <i>Theory and Applications of Categories</i> 12 (2004), S. 423–491. arXiv: math/0307200.</li> <li>[13] Aaron Bertram und Richard Wentworth, "Gromov invariants for holomorphic maps on Riemann surfaces". In: <i>J. Amer. Math. Soc.</i> 9.2 (1996), S. 529–571.</li> <li>[14] Jakob von Hayne, "Die Reichensteiner Vertragsschulden zwischen Liechtenstein im Mitte des 11. Jahrhunderts bis 1448". In: <i>Europa im Hoch- und Spätmittelalter</i>. Hrg. von Ferdinand Seibt. Handbuch der europäischen Geschichte 2. Stuttgart: Frommann, 1983, S. 103–120.</li> <li>[15] The Chicago Manual of Style. The Essential Guide for Writers, Editors, and Publishers. 15. Aufl. Chicago, Ill.: University of Chicago Press, 2003. ISBN: 0-226-16003-6.</li> </ul>						
1	2	3	4						

## 4.14 Using listings

The default is using `\lstinputlisting` for the printed code sequences.

```
\documentclass[chapterprefix=on,parskip=half-,DIV=12,fontsize=12pt]{scrbook}
}
\DeclareNewSectionCommand[
  style=section,
  level=4,
```

```

beforeskip=-3.25ex plus -1ex minus -.2ex,
afterskip=1.5ex plus .2ex,
font=\normalsize,
indent=0pt,
counterwithin=subsubsection
]{subsubsubsection}
\RedeclareSectionCommand[
  level=5,
  toplevel=5,
  tocindent=13em,
  tocnumwidth=5.9em,
  counterwithin=subsubsubsection
]{paragraph}
\RedeclareSectionCommand[
  level=6,
  toplevel=6,
  tocindent=15em,
  tocnumwidth=6.8em
]{subparagraph}
\setcounter{secnumdepth}{\subsubsubsectionnumdepth}
\setcounter{tocdepth}{\subsubsubsectiontocdepth}

\tableofcontents
\chapter{Einführung}
\section{Ein Abschnitt}
\subsection{Ein Unterabschnitt}
\subsubsection{Ein Unter-Unterabschnitt}
\subsubsubsection{Ein Unter-Unter-Unterabschnitt}
\paragraph{Der normale Paragraph}
\blindtext
\subparagraph{Der normale Unterparagraph}
\blindtext
\blinddocument

```

vooss-24.tex

**Inhaltsverzeichnis**

1 Einleitung	3
1.1 Ein Abschnitt	3
1.1.1 Ein Unterabschnitt	3
1.1.1.1 Ein Unter-Unterabschnitt	3
2 Überschrift auf Ebene 0 (section)	5
2.1 Überschrift auf Ebene 1 (subsection)	5
2.1.1 Überschrift auf Ebene 2 (subsubsection)	5
2.1.1.1 Überschrift auf Ebene 3 (subsubsubsection)	6
2.2 Listen	6
2.2.1 Beispiel einer Liste (itemize)	6
2.2.1.1 Beispiel einer Liste (item)	7
2.2.2 Beispiel einer Liste (enumerate)	7
2.2.2.1 Beispiel einer Liste (enum)	7
2.2.3 Beispiel einer Liste (description)	8
2.2.3.1 Beispiel einer Liste (description)	8

**Kapitel 1****Einführung****1.1 Ein Abschnitt****1.1.1 Ein Unterabschnitt****1.1.1.1 Ein Unter-Unterabschnitt**

**Der normale Paragraph.** Dies hier ist ein Blindtext zum Testen von Textausgaben. Wer diesen Text liest, ist selbst schuld. Der Text gibt lediglich den Grauwert der Schrift an. Ist es wirklich so? Ist es gleichgültig, ob ich schreibe „Dies ist ein Blindtext“ oder „Häardet gefbum“? Kijit – mindestens Ein Blindtext bietet die benötigte Information. An ihm messe ich die Lesbarkeit einer Schrift, ihre Annäumung, wie harmonisch die Figuren zusammenstehen und prüfe, wie breit oder schmal sie läuft. Ein Blindtext sollte möglichst viele verschiedene Buchstaben enthalten und in der Originalsprache gesetzt sein. Er muss keinen Sinn ergeben, sollte aber lesbar sein. Fremdsprachige Texte wie „Lorem ipsum“ dienen nicht dem eigentlichen Zweck, da sie eine falsche Annäumung vermitteln.


**Der normale Unterparagraph.** Dies hier ist ein Blindtext zum Testen von Textausgaben. Wer diesen Text liest, ist selbst schuld. Der Text gibt lediglich den Grauwert der Schrift an. Ist es wirklich so? Ist es gleichgültig, ob ich schreibe „Dies ist ein Blindtext“ oder „Häardet gefbum“? Kijit – mindestens Ein Blindtext bietet die benötigte Information. An ihm messe ich die Lesbarkeit einer Schrift, ihre Annäumung, wie harmonisch die Figuren zusammenstehen und prüfe, wie breit oder schmal sie läuft. Ein Blindtext sollte möglichst viele verschiedene Buchstaben enthalten und in der Originalsprache gesetzt sein. Er muss keinen Sinn ergeben, sollte aber lesbar sein. Fremdsprachige Texte wie „Lorem ipsum“ dienen nicht dem eigentlichen Zweck, da sie eine falsche Annäumung vermitteln.

It also possible to use `\VerbatimInput` from package `fancyvrb`. In general it makes no difference using the optional argument `usefancyvrb` or not.

```
\documentclass[chapterprefix=on,parskip=half-,DIV=12,fontsize=12pt]{scrbook}
\DeclareNewSectionCommand[
  style=section,
  level=4,
  beforeskip=-3.25ex plus -1ex minus -.2ex,
  afterskip=1.5ex plus .2ex,
  font=\normalsize,
  indent=0pt,
  counterwithin=subsubsection
]{subsubsubsection}
\RedeclareSectionCommand[
  level=5,
  toplevel=5,
  tocindent=13em,
  tocnumwidth=5.9em,
  counterwithin=subsubsubsection
]{paragraph}
\RedeclareSectionCommand[
  level=6,
  toplevel=6,
  tocindent=15em,
  tocnumwidth=6.8em
]{ subparagraph}
\setcounter{secnumdepth}{\subsubsectionnumdepth}
\setcounter{tocdepth}{\subsubsectiontocdepth}

\tableofcontents
\chapter{Einführung}
\section{Ein Abschnitt}
\subsection{Ein Unterabschnitt}
\subsubsection{Ein Unter-Unterabschnitt}
\subsubsubsection{Ein Unter-Unter-Unterabschnitt}
\paragraph{Der normale Paragraph}
\blindtext
\subparagraph{Der normale Unterparagraph}
\blindtext
\blinddocument
```

voSS-25.tex

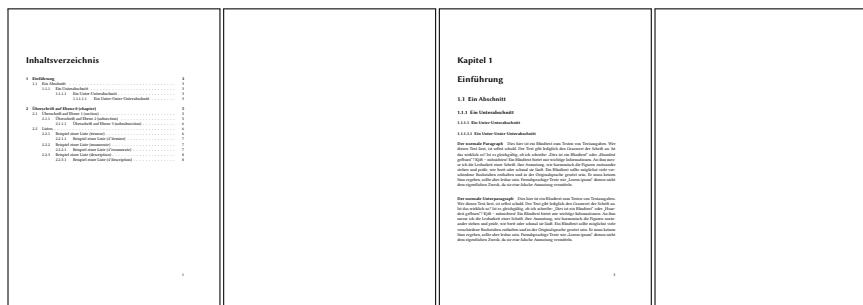

## 4.15 Vertical space

```
\define@key{hv}{aboveskip}[\medskipamount]{%
    \setlength\h@extern@aboveskip{#1}}
\define@key{hv}{belowpreambleskip}[\smallskipamount]{%
    \setlength\h@extern@belowpreambleskip{#1}}
\define@key{hv}{belowbodyskip}[\smallskipamount]{%
    \setlength\h@extern@belowbodyskip{#1}}
\define@key{hv}{belowskip}[\medskipamount]{%
    \setlength\h@extern@belowskip{#1}}
```

**aboveskip** Vertical space *before* the environment `externalDocument` or the command  
`\runExtCmd` (default `\medskipamount`)

**belowpreambleskip** Vertical space between preamble and body (default `\smallskipamount`)

**belowbodyskip** Vertical space between body and output (default `\smallskipamount`)

**belowskip** Vertical space *after* the environment `externalDocument` or the command  
`\runExtCmd` (default `\medskipamount`)

## 4.16 No output

By default there is an image or text as output of the external run. In a case, where you are only interested in the code, which should be formatted in the same style as other examples, you can set `output` to false.

```
\documentclass[chapterprefix=on,parskip=half-,DIV=12,fontsize=12pt]{scrbook}
\DeclareNewSectionCommand[
    style=section,
    level=4,
    beforeskip=-3.25ex plus -1ex minus -.2ex,
    afterskip=1.5ex plus .2ex,
    font=\normalsize,
    indent=0pt,
    counterwithin=subsubsection
]{subsubsubsection}

\tableofcontents
\chapter{Einführung}
\section{Ein Abschnitt}
\subsection{Ein Unterabschnitt}
\subsubsection{Ein Unter-Unterabschnitt}
\subsubsubsection{Ein Unter-Unter-Unterabschnitt}
\blindtext
```

VOSS-26.tex

## 5 Defining new marker

Suppose you do not want for a L<sup>A</sup>T<sub>E</sub>X document the complete body part between \begin{ and \end printed. In this case you can define own markers, e.g.:

```
\defMarkerType{ltx}
  {\perCent StartVisibleBody}
  {\perCent StopVisibleBody}
  {\perCent StartVisiblePreamble}
  {\perCent StopVisiblePreamble}
```

With this definition and the setting docType=ltx the last example looks like:

```
\DeclareNewSectionCommand[
  style=section,
  level=4,
  beforeskip=-3.25ex plus -1ex minus -.2ex,
  afterskip=1.5ex plus .2ex,
  font=\normalsize,
  indent=0pt,
  counterwithin=subsubsection
]{subsubsubsection}
\subsubsubsection{Ein Unter-Unter-Unterabschnitt}
```

## Inhaltsverzeichnis

<b>1 Einführung</b>	<b>2</b>
1.1 Ein Abschnitt . . . . .	2
1.1.1 Ein Unterabschnitt . . . . .	2
1.1.1.1 Ein Unter-Unterabschnitt . . . . .	2
1.1.1.1.1 Ein Unter-Unter-Unterabschnitt . . . . .	2


## 6 Supported engines

### 6.1 METAPOST example

Needs the run sequence setting to get a pdf from the created dvi output. It is already internally defined.

```
defaultfont:="ptmr8r";
warningcheck:=0;

draw fullcircle shifted (0.5,0.6) xscaled 8cm yscaled 3.5cm
  withpen pencircle scaled 5bp withcolor red;
special( "/Times-Roman findfont 150 scalefont setfont " &
  " 0 10 moveto (MPost) false charpath clip stroke gsave 150 70 translate "
  &
  " 2 4 600 {dup 0 moveto 0 exch 0 exch 0 360 arc stroke} for grestore ");
```

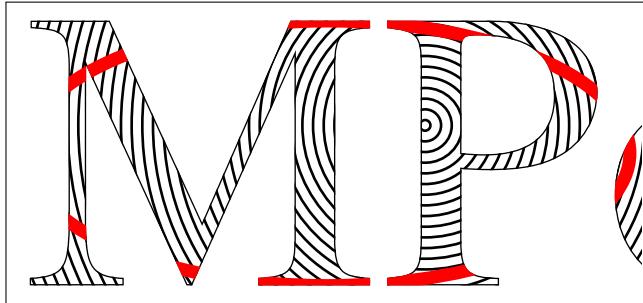

## 6.2 plainTeX example

Needs the run sequence setting to get a pdf from the created dvi output. It is already internally defined.

```
\footline={\footsc the electronic journal of combinatorics
           {\footbf 16} (2009), \#R00\hfil\footrm\folio}

\font\bigrm=cmr12 at 14pt
\centerline{\bigrm An elementary proof of the reconstruction conjecture}

\bigskip\bigskip
\centerline{D. Remifa\footnote*{Thanks to the editors of this journal!}}
\smallskip
\centerline{Department of Inconsequential Studies}
\centerline{Solatido College, North Kentucky, USA}
\centerline{\tt remifa@dis.solatido.edu}
\bigskip
\centerline{\footrm
Submitted: Jan 1, 2009; Accepted: Jan 2, 2009; Published: Jan 3, 2009}
\centerline{\footrm Mathematics Subject Classifications: 05C88, 05C89}
\bigskip\bigskip
\centerline{\bf Abstract}
\smallskip
{\narrower\noindent
The reconstruction conjecture states that the multiset of unlabeled
vertex-deleted subgraphs of a graph determines the graph, provided it
has at least 3 vertices. A version of the problem was first stated
by Stanis\l aw Ulam. In this paper, we show that the conjecture can
be proved by elementary methods. It is only necessary to integrate
the Lenkle potential of the Broglington manifold over the quantum
supervacillatory measure in order to reduce the set of possible
counterexamples to a small number (less than a trillion). A simple
computer program that implements Pipletti's classification theorem
for torsion-free Aramaic groups with symplectic socles can then
finish the remaining cases.}

\bigskip
\begin{section} 1. Introduction.

This is the start of the introduction.
```

voss-29.tex




### 6.3 *Lua<sup>LT</sup><sub>E</sub>X example*

With *Lua<sup>LT</sup><sub>E</sub>X* and and using PostScript code the intermediate GhostScript run is not needed. The pdf is directly created.

```
\usepackage{fontenc}\usepackage{libertinus}
\usepackage{pst-all}

\psset{unit=0.8cm}
\begin{pspicture}(-9,-15)(9,2)
\psaxes(0,0)(-9,-15)(9,2)
\psplot[algebraic,plotstyle=curve,curvature=1 1 0,
    linewidth=2pt, linecolor=red]{-8}{8}[
1 - 3876218985722260225*x^2/10892114744073986176
+ 14975974793271450625*x^4/174273835905183778816
- 317095420958296875*x^6/26811359370028273664
+ 194412970920703125*x^8/214490874960226189312
- 2090988251953125*x^10/53622718740056547328
+ 99480224609375*x^12/107245437480113094656
- 7879638671875*x^14/697095343620735115264
+ 152587890625*x^16/2788381374482940461056]
\end{pspicture}
```

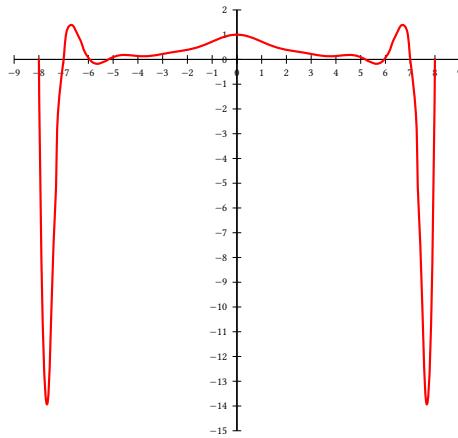

## 6.4 ConTeXt example

```
\definehead
[myhead]
[section]
\setuphead
[myhead]
[numberstyle=bold,
 textstyle=bold,
 before=\hairline\blank,
 after=\nowhitespace\hairline]

\startstandardmakeup
\midaligned{From Hasselt to America}
\midaligned{by}
\midaligned{J. Jonker and C. van Marle}
\stopstandardmakeup
\placecombinedlist[content]
\chapter{Introduction}
\input knuth \input knuth
\chapter[rensselaer]{The Rensselaer family}
\input knuth
\section{The first born}
\input knuth
\section{The early years}
... in those days Hasselt was ...
\input knuth
\section{Living and workin in America}
\input knuth
\chapter[lansing]{The Lansing family}
... the Lansing family was also ...
\input knuth
\chapter[cuyler]{The Cuyler family}
... much later Tydeman Cuyler ...
\input knuth
\myhead[headlines]{And the end}
foo
```

voss-31.tex

<p style="text-align: center;">From Hawaii to America by J. Jucker and C. van Maanen</p>	<p style="text-align: center;">1 Introduction 2 The Rensselaer family 3 The first years 4 The Lausanne family 5 The Leipzig family 6 The Oxford family</p>	<p style="text-align: center;">1 Introduction 2 The Rensselaer family 3 The first years 4 The Lausanne family 5 The Leipzig family 6 The Oxford family</p>
<p style="text-align: center;">2 The Rensselaer family <small>Then I came to the conclusion that the designer of a new system must not only be the implementor and first large-scale user, the designer should also write the first user manual.</small></p> <p style="text-align: center;">3 The first years <small>The separation of any of these four components would have had T2K significantly influence the design. If I had not participated fully in all these activities, hardly hundreds of improvements would never have been made, because I would never have thought of them or perceived why they were important.</small></p> <p style="text-align: center;">4 The Lausanne family <small>The separation of any of these four components would have had T2K significantly influence the design. If I had not participated fully in all these activities, hardly hundreds of improvements would never have been made, because I would never have thought of them or perceived why they were important.</small></p> <p style="text-align: center;">5 The Leipzig family <small>The separation of any of these four components would have had T2K significantly influence the design. If I had not participated fully in all these activities, hardly hundreds of improvements would never have been made, because I would never have thought of them or perceived why they were important.</small></p> <p style="text-align: center;">6 The Oxford family <small>The separation of any of these four components would have had T2K significantly influence the design. If I had not participated fully in all these activities, hardly hundreds of improvements would never have been made, because I would never have thought of them or perceived why they were important.</small></p>	<p style="text-align: center;">2 The Rensselaer family <small>Then I came to the conclusion that the designer of a new system must not only be the implementor and first large-scale user, the designer should also write the first user manual.</small></p> <p style="text-align: center;">3 The first years <small>The separation of any of these four components would have had T2K significantly influence the design. If I had not participated fully in all these activities, hardly hundreds of improvements would never have been made, because I would never have thought of them or perceived why they were important.</small></p> <p style="text-align: center;">4 The Lausanne family <small>The separation of any of these four components would have had T2K significantly influence the design. If I had not participated fully in all these activities, hardly hundreds of improvements would never have been made, because I would never have thought of them or perceived why they were important.</small></p> <p style="text-align: center;">5 The Leipzig family <small>The separation of any of these four components would have had T2K significantly influence the design. If I had not participated fully in all these activities, hardly hundreds of improvements would never have been made, because I would never have thought of them or perceived why they were important.</small></p>	<p style="text-align: center;">2 The Rensselaer family <small>Then I came to the conclusion that the designer of a new system must not only be the implementor and first large-scale user, the designer should also write the first user manual.</small></p> <p style="text-align: center;">3 The first years <small>The separation of any of these four components would have had T2K significantly influence the design. If I had not participated fully in all these activities, hardly hundreds of improvements would never have been made, because I would never have thought of them or perceived why they were important.</small></p> <p style="text-align: center;">4 The Lausanne family <small>The separation of any of these four components would have had T2K significantly influence the design. If I had not participated fully in all these activities, hardly hundreds of improvements would never have been made, because I would never have thought of them or perceived why they were important.</small></p> <p style="text-align: center;">5 The Leipzig family <small>The separation of any of these four components would have had T2K significantly influence the design. If I had not participated fully in all these activities, hardly hundreds of improvements would never have been made, because I would never have thought of them or perceived why they were important.</small></p>

## 7 Running external commands

Integrating the current directory of this document we can use the macro `\runExtCmd` with the optional argument `redirect`

`\runExtCmd[redirect]{ls -la}{voss}`

to get the directory listed:

```
total 4776
drwxr-xr-x  19 voss  staff      608  1 Jun 17:35 .
drwxr-xr-x  200 voss  staff    6400 30 Mai 20:57 ..
drwxr-xr-x   3 voss  staff      96 24 Apr 19:50 .ctan
drwxr-xr-x   4 voss  staff     128 27 Apr 11:29 .test
-rw-r--r--   1 voss  staff    1359  1 Jun 14:58 Changes
drwxr-xr-x  134 voss  staff   4288  1 Jun 17:35 Exa
-rwxrwxrwx   1 voss  staff   1170 27 Mai 08:16 Makefile
-rw-rw-rw-   1 voss  staff    713 27 Mai 08:56 README
-rwxrwxrwx   1 voss  staff   3998 27 Mai 08:59 hvdoctools.sty
-rw-r--r--   1 voss  staff  16384  1 Jun 17:35 hvextern.aux
-rw-r--r--   1 voss  staff   8192  1 Jun 17:35 hvextern.idx
-rw-r--r--   1 voss  staff    600  1 Jun 17:35 hvextern.ilg
-rw-r--r--   1 voss  staff   8558  1 Jun 17:35 hvextern.ind
-rw-r--r--   1 voss  staff  168463  1 Jun 17:35 hvextern.log
```

```
-rw-r--r--@ 1 voss staff 1292711 1 Jun 17:35 hvextern.pdf
-rw-r--r-- 1 voss staff    27359 1 Jun 17:30 hvextern.sty
-rw-r--r-- 1 voss staff     50790 1 Jun 17:33 hvextern.tex
-rw-r--r-- 1 voss staff       0 1 Jun 17:35 hvextern.toc
-rw-r--r-- 1 voss staff      693 1 Jun 17:30 texput.log
```

## 8 Other options

**force=false** can speed up the comiling time for the document. If a created image/-output already exists, there is no need to create it with the next run again and again.

**cleanup** the auxiliary files of a L<sup>A</sup>T<sub>E</sub>X-run are deleted, preset to aux, log. It must be a comma seperated list of the extensions of the main file, s.g. cleanup={aux,log}.

**copyToExampleDir** name of a directory for the examples, must first be created by the user himself

**ExamplesDir** move all examples into a directory

**tclbox=false** Can be used if there are some negative interactions between package listings and package tcolorbox.

**framesep** Value for \fbox if keyword frame is used.

**mpsep** Distance between code and output (default 1 em).

**pagesep** Distance between pages for multipage output (default 1 em).

**verbose** Print control messages into the terminal and logfile.

**eps** create an eps from the pdf (historical).

# Index

## Symbols

-shell-escape (package option), 2  
.bin/ (value), 7  
#, 3  
%StartVisiblePreamble, 6  
%StopVisiblePreamble, 6

## A

aboveskip (keyword), 21

## B

b (value), 14  
\begin, 22  
\begin{document}, 6  
belowbodyskip (keyword), 21  
belowpreambleskip (keyword), 21  
belowskip (keyword), 21  
biber (keyword), 7, 17  
bibliography, 17  
black!12 (color), 10  
black!8 (color), 10

## C

c (value), 14  
cleanup (keyword), 27  
code (keyword), 15  
compiler (keyword), 6f, 17  
context (value), 6  
copyToExampleDir (keyword), 27  
crop (keyword), 13  
cropping, 13  
current line, 15

## D

docType (keyword), 6, 22  
documentclass, 13

## E

\end, 22  
\end{document}, 6  
eps (keyword), 27  
ExamplesDir (keyword), 27  
externalDocument (environment), 2f, 8, 21

## F

false (value), 15, 27  
fancyvrb (package), 20  
\fbox, 11, 27

figure (environment), 12  
float (keyword), 12  
force (keyword), 27  
frame (keyword), 11  
framesep (keyword), 27

## H

hvextern (package), 5f, 11

## I

includegraphic (keyword), 15  
\includegraphics, 9, 15  
index, 17  
inline (keyword), 15  
inline image, 15

## J

Java, 2

## K

Kaprekar, 15

## Keyword

- ExamplesDir, 27
- aboveskip, 21
- belowbodyskip, 21
- belowpreambleskip, 21
- belowskip, 21
- biber, 7, 17
- cleanup, 27
- code, 15
- compiler, 6f, 17
- copyToExampleDir, 27
- crop, 13
- docType, 6, 22
- eps, 27
- float, 12
- force, 27
- frame, 11
- framesep, 27
- includegraphic, 15
- inline, 15
- mpsep, 27
- mpvalign, 14
- mpwidth, 13f
- outerFN, 5
- output, 21
- pagesep, 11, 27
- progpath, 7

- redirect, 26
- runsequence, 7, 17
- shiftFN, 5
- showFilename, 5, 15
- tclbox, 27
- usefancyvrb, 10, 20
- verbose, 27
- xindex, 7, 17
  
- L**
- latex (value), 6, 11
- listings (package), 27
- \lstinputlisting, 10, 18
- ltx (value), 22
- lua (value), 6
- Lua, 2
- lualatex (value), 6, 11
- luatex (value), 6
  
- M**
- \medskipamount, 21
- minipages, 14
- mp (value), 6
- mpost (value), 6
- mpsep (keyword), 27
- mpvalign (keyword), 14
- mpwidth (keyword), 13f
  
- N**
- \NumChar, 3, 6
  
- O**
- outerFN (keyword), 5
- output (keyword), 21
  
- P**
- pagesep (keyword), 11, 27
- Pascal's triangle, 16
- pdflatex (value), 6
- perl (value), 6
- Perl, 2
- p1 (value), 6
- png, 3
- progpath (keyword), 7
- py (value), 6
- Python, 2, 4
- python3 (value), 6
  
- R**
- redirect (keyword), 26
- \runExtCmd, 21, 26