

The microtype package

Subliminal refinements towards typographical perfection

R Schlicht

w.m.l@gmx.net

v2.7d

2019/11/18

The `microtype` package provides a `LATEX` interface to the micro-typographic extensions that were introduced by `pdfTeX` and have since also propagated to `LuaTeX` and `X\text{\tiny E}TeX`: most prominently, character protrusion and font expansion, furthermore the adjustment of interword spacing and additional kerning, as well as hyphenatable letterspacing (tracking) and the possibility to disable all or selected ligatures. These features may be applied to customisable sets of fonts, and all micro-typographic aspects of the fonts can be configured in a straight-forward and flexible way. Settings for various fonts are provided.

Note that character protrusion requires `pdfTeX` (version 0.14f or later), `LuaTeX`, or `X\text{\tiny E}TeX` (at least version 0.9997). Font expansion works with `pdfTeX` (version 1.20 for automatic expansion) or `LuaTeX`. The package will by default enable protrusion and expansion if they can safely be assumed to work. Disabling ligatures requires `pdfTeX` (≥ 1.30) or `LuaTeX`, while the adjustment of interword spacing and of kerning only works with `pdfTeX` (≥ 1.40). Letterspacing is available with `pdfTeX` (≥ 1.40) or `LuaTeX` (≥ 0.62).

The alternative package `letterspace`, which also works with plain `\TeX`, provides the user commands for letterspacing only, omitting support for all other extensions (see section 7).

This package is copyright © 2004–2019 R Schlicht. It may be distributed and/or modified under the conditions of the [L^AT_EX Project Public License](#), either version 1.3c of this license or (at your option) any later version. This work has the LPPL maintenance status ‘author-maintained’.

Contents

| | |
|--|-----------|
| 1 Micro-typography with T_EX | 4 |
| 2 Getting started | 5 |
| 3 Options | 6 |
| 3.1 Enabling the micro-typographic features | 6 |
| 3.2 Character protrusion | 7 |
| 3.3 Font expansion | 7 |
| 3.4 Tracking | 8 |
| 3.5 Miscellaneous options | 8 |
| 3.6 Changing options later | 9 |
| 4 Selecting fonts for micro-typography | 10 |
| 5 Micro fine tuning | 12 |
| 5.1 Character protrusion | 13 |
| 5.2 Font expansion | 14 |
| 5.3 Tracking | 15 |
| 5.4 Additional kerning | 18 |
| 5.5 Interword spacing | 19 |
| 5.6 Character inheritance | 20 |
| 5.7 Configuration files | 20 |
| 6 Context-sensitive setup | 22 |
| 7 Letterspacing revisited | 23 |
| 8 Disabling ligatures | 24 |
| 9 Hints and caveats | 25 |
| 10 Contributions | 28 |
| 11 Acknowledgments | 28 |
| 12 References | 29 |
| 13 Short history | 30 |
| 14 Implementation | 34 |
| 14.1 Preliminaries | 35 |
| Debugging [36] Requirements [38] Declarations [42] Auxiliary macros [43] | |
| Compatibility [51] | |
| 14.2 Font setup | 56 |
| Protrusion [62] Expansion [69] Interword spacing (glue) [71] Additional kerning [73] | |
| Tracking [74] Disabling ligatures [85] Loading the configuration [86] | |
| Translating characters into slots [90] Hook into L ^A T _E X's font selection [98] | |
| Context-sensitive setup [101] | |
| 14.3 Configuration | 104 |
| Font sets [104] Variants and aliases [110] Disabling ligatures [111] Interaction | |
| with babel [111] Fine tuning [111] Character inheritance [118] Permutation [120] | |

| | | |
|-------|--|-----|
| 14.4 | Package options | 123 |
| | Declaring the options [123] Loading the definition file [127] Reading the configuration file [128] Hook for other packages [129] Changing options later [129] Processing the options [132] | |
| 15 | Configuration files | 142 |
| 15.1 | Font sets | 142 |
| 15.2 | Font variants and aliases | 143 |
| 15.3 | Interaction with <code>babel</code> | 145 |
| 15.4 | Note on admissible characters | 145 |
| 15.5 | Character inheritance | 145 |
| | OT1 [146] T1 [146] LY1 [147] OT4 [147] QX [148] T5 [148] EU1, EU2, TU [149] Euro symbols [150] | |
| 15.6 | Tracking | 150 |
| 15.7 | Font expansion | 150 |
| 15.8 | Character protrusion | 152 |
| | Normal [153] Italics [161] Small caps [172] Italic small caps [175] Text companion [177] Computer Modern math [181] AMS symbols [185] Euler [189] Euro symbols [193] | |
| 15.9 | Interword spacing | 193 |
| | Nonfrenchspacing [196] | |
| 15.10 | Additional kerning | 197 |
| | French [197] Turkish [198] | |
| 16 | OpenType configuration files | 199 |
| 16.1 | Character inheritance | 199 |
| 16.2 | Character protrusion | 203 |
| 17 | Auxiliary file for micro fine tuning | 216 |
| A | The title logo | 218 |
| A.1 | Macros | 218 |
| A.2 | Document | 223 |
| B | The letterspacing illustration | 223 |
| B.1 | Macros | 223 |
| B.2 | Document | 226 |
| C | Change history | 228 |
| D | Index | 237 |
| E | The L^AT_EX Project Public License | 246 |

List of Tables

| | | |
|---|--|----|
| 1 | Availability of micro-typographic features | 7 |
| 2 | Predefined font sets | 11 |
| 3 | Fonts with tailored protrusion settings | 21 |
| 4 | Order for matching font attributes | 89 |

1 Micro-typography with \TeX

Micro-typography is the art of enhancing the appearance and readability of a document while exhibiting a minimum degree of visual obtrusion. It is concerned with what happens between or at the margins of characters, words or lines. Whereas the macro-typographical aspects of a document (i.e., its layout) are clearly visible even to the untrained eye, micro-typographical refinements should ideally not even be recognisable. That is, you may think that a document looks beautiful, but you might not be able to tell exactly why: good micro-typographic practice tries to reduce all potential irritations that might disturb a reader.

Some essential micro-typographical aspects are already taken care of by \TeX out of the box – and in an outstanding manner – namely, hyphenation and justification, as well as kerning and ligatures. Other aspects are in the user’s scope of responsibilities, e.g., to specify the right amounts of spacing around punctuation characters, numbers, or quotation marks. On top of this, a number of long-standing micro-typographic techniques have been introduced to the \TeX world relatively recently with pdf \TeX , and have since also propagated to Lua \TeX and Xe \TeX . These features make them the tool of choice not only for the creation of electronic documents but also of works of outstanding time-honoured typography: most prominently, *character protrusion* (also known as margin kerning) and *font expansion*. Quoting H $\ddot{\text{a}}$ n Th $\acute{\text{e}}$ Thành, the author of pdf \TeX , who writes in his thesis:

After you have read the text on the right, you can view the effect of the features it describes by clicking on the links:

Protrusion off
Expansion off

Both features are enabled throughout this document.

‘Margin kerning is the adjustments of the characters at the margins of a typeset text. A simplified employment of margin kerning is hanging punctuation. Margin kerning is needed for optical alignment of the margins of a typeset text, because mechanical justification of the margins makes them look rather ragged. Some characters can make a line appear shorter to the human eye than others. Shifting such characters by an appropriate amount into the margins would greatly improve the appearance of a typeset text.’

Composing with font expansion is the method to use a wider or narrower variant of a font to make interword spacing more even. A font in a loose line can be substituted by a wider variant so the interword spaces are stretched by a smaller amount. Similarly, a font in a tight line can be replaced by a narrower variant to reduce the amount that the interword spaces are shrunk by. There is certainly a potential danger of font distortion when using such manipulations, thus they must be used with extreme care. The potentiality to adjust a line width by font expansion can be taken into consideration while a paragraph is being broken into lines, in order to choose better breakpoints.’ [Th $\acute{\text{e}}$ Thành 2000, p. 323]

Another micro-typographic technique, which has always been extremely difficult to achieve in \TeX , is robust and hyphenatable *letterspacing (tracking)*.¹ Whereas letterspacing can easily be, and often is, abused when applying it to lowercase letters, readability may be increased by slightly letterspacing (small) capitals or by decreasing the tracking of very large uppercase type.

Setting *additional kerning* for individual characters is especially (but not only) useful for languages whose typographical tradition requires certain characters to be separated by a space. For example, it is customary in French typography to add a small space before question mark, exclamation mark and semi-colon, and a bigger space before the colon and the guillemets. Until now, this could only be achieved

¹ The `soul` package undertakes great efforts, but may still fail in certain circumstances; even to systematically adjust the tracking of a font throughout the document remains impossible.

by making these characters active (as is done, for example, by the `babel` package), which may not always be a robust solution. In contrast to the standard kerning built into the fonts (which will of course apply as usual), this additional kerning relates to single characters, not to character pairs.

Adjustment of interword spacing is based upon the idea that in order to achieve a uniform greyness of the text, the space between words should also depend on the surrounding characters. For example, if a word ends with an ‘r’, the following space should be a tiny bit smaller than that following, say, an ‘m’. You can think of this concept as an extension to TeX’s ‘space factors’. This feature may enhance the appearance of paragraphs even more. Emphasis in the last sentence is on the word ‘may’: this extension is still highly experimental – in particular, only ending characters will currently influence the interword space. Also, the settings shipped with `microtype` are but a first approximation, and I would highly welcome corrections and improvements. I suggest reading the reasoning behind the settings in section 15.9.

The possibility, finally, to *disable all or selected ligatures* is particularly useful for typewriter fonts.

The `microtype` package provides an interface to all these micro-typographic extensions. All micro-typographic aspects may be customised to your taste and needs in a straight-forward and systematic manner. The next chapters present a survey of all options and customisation possibilities. Should the micro-typographic extension discussed in a section work only with certain TeX engines, this requirement is marked inside a grey text box on the right.

2 Getting started

There is nothing surprising in loading this package:

```
\usepackage{microtype}
```

This will be sufficient in most cases, and if you are not interested in fine-tuning the micro-typographic appearance of your document (however unlikely this would seem, since using this package is proof of your interest in typographic issues), you may actually skip the rest of this document. If this, on the other hand, does not satisfy you – be it for theoretical or practical reasons – this manual will guide you on the path to the desired results along the following milestones:

- Enable the desired micro-typographic features, either via the respective package option or with the `\microtypesetup` command (section 3).
- Select the fonts to which this feature should be applied by declaring and activating ‘sets of fonts’. A number of sets are predefined, which may be activated directly in the package options (section 4).
- Fine-tune the micro-typographic settings of the fonts or sets of fonts (section 5).
- If you’re of the kind who always wants to march on, you will certainly be interested in the possibility of context-sensitive setup (section 6).
- You are even countenanced to leave the path of typographic virtue and steal some sheep (section 7) or trespass in other ways (section 8).
- Should you encounter any obstacles, follow the hints and caveats (section 9).

3 Options

Like many other L^AT_EX packages, the `microtype` package accepts options in the well-known `key=value` syntax. In the following, you will find a description of all **keys** and their possible **values** ('true' may be omitted; multiple values, where allowed, must be enclosed in braces; the default value is shown on the right, preceded by an asterisk if it is contingent on the T_EX engine, version and/or the output mode).

3.1 Enabling the micro-typographic features

protrusion true, false, compatibility, nocompatibility, *{font set name}* * true

expansion These are the main options to control the level of micro-typographic refinement which the fonts in your document should gain. By default, the package is moderately greedy: character protrusion will always be enabled, font expansion will only be disabled when the fonts cannot be expanded automatically, that is, with pdfT_EX versions older than 1.20 or in DVI output mode (see section 3.5), or with X_ET_EX. In other words, `microtype` will try to apply as much micro-typography as can safely be expected to work under the respective conditions (hence, it is usually not necessary to load the package with different options for PDF resp. DVI mode).

Protrusion and expansion may be enabled or disabled independently from each other by setting the respective key to true resp. false. The activate option is a shortcut for setting both options at the same time. Therefore, the following lines all have the same effect (when creating PDF files with a recent version of pdfT_EX):

```
\usepackage[protrusion=true,expansion]{microtype}
```

```
\usepackage[activate={true,nocompatibility}]{microtype}
```

```
\usepackage{microtype}
```

With activated font expansion and/or character protrusion, line breaks (and consequently, page breaks) may turn out differently. If this is not desired – because you are re-typesetting a book whose pagination must not change – you may pass the value compatibility to the protrusion and/or expansion options. Typographically, however, the results will be suboptimal, hence the default value is nocompatibility.

Finally, you may also specify the name of a font set to which character protrusion and/or font expansion should be restricted. See section 4 for a detailed discussion. Specifying a font set for a feature implicitly activates this feature.

tracking true, false, *{font set name}* false

This option will systematically change the tracking of the fonts specified in the active font set (by default, all small capitals). It is not available with X_ET_EX (you may use the ‘LetterSpace’ option of the `fontspec` package instead). With pdfT_EX, it is only available in PDF mode.

kerning true, false, *{font set name}* false

spacing These features do not unconditionally improve the quality of the typeset text: the spacing feature is still considered experimental, while the kerning feature only makes sense in special cases. Therefore, neither feature is enabled by default. They are not available with X_ET_EX or LuaT_EX.

Table 1:

| Availability of micro-typographic features | TeX engine | | | Micro-typographic features | | | | | |
|--|------------|---------|--------|----------------------------|----------------|----------|---------|---------|----------------|
| | Engine | Version | Output | Protrusion | Expansion | (= auto) | Kerning | Spacing | Tracking |
| pdfTeX | < 0.14f | DVI/PDF | ∅ | ∅ | ∅ | ∅ | ∅ | ∅ | ∅ |
| | | DVI/PDF | ★ | ☒ | ∅ | ∅ | ∅ | ∅ | ∅ |
| | | DVI | ★ | ☒ | ∅ | ∅ | ∅ | ∅ | ∅ |
| | ≥ 1.40 | PDF | ★ | ★ | ★ | ∅ | ∅ | ∅ | ∅ |
| | | DVI | ★ | ☒ | ∅ | ☒ | ☒ | ☒ | ∅ |
| | | PDF | ★ | ★ | ★ | ☒ | ☒ | ☒ | ☒ |
| LuaTeX | ≥ 0.30 | DVI | ★ | ☒ | ∅ | ∅ | ∅ | ∅ | ∅ |
| | | PDF | ★ | ★ | ★ | ∅ | ∅ | ∅ | ∅ |
| | ≥ 0.62 | DVI | ★ | ☒ | ☒ ^a | ∅ | ∅ | ∅ | ☒ ^a |
| | | PDF | ★ | ★ | ★ | ∅ | ∅ | ∅ | ☒ |
| XeTeX | ≥ 0.9997 | PDF | ★ | ∅ | ∅ | ∅ | ∅ | ∅ | ∅ |

★ = enabled ☒ = not enabled ∅ = not available ^a for legacy (TFM) fonts only

Table 1 presents an overview of which micro-typographic features are available and enabled by default for the relevant TeX versions and output modes.

Whether ligatures should be disabled cannot be controlled via a package option but by using the `\DisableLigatures` command, which is explained in section 8.

3.2 Character protrusion

pdfTeX 0.14f | LuaTeX 0.30 | XeTeX 0.9997

factor *(integer)* 1000

Using this option, you can globally increase or decrease the amount by which the characters will be protruded. While a value of 1000 means that the full protrusion as specified in the configuration (see section 5.1) will be used, a value of 500 would result in halving all protrusion factors of the configuration. This might be useful if you are generally satisfied with the settings but prefer the margin kerning to be less or more visible (e.g., if you are so proud of being able to use this feature that you want everybody to see it, or – to mention a motivation more in compliance with typographical correctness – if you are using a large font that calls for more modest protrusion).

unit character, *(dimension)* character

This option is described in section 5.1, apropos the command `\SetProtrusion`. Use with care.

3.3 Font expansion

pdfTeX 0.14f | LuaTeX 0.30

auto true, false * true

Beginning with pdfTeX version 1.20 (inherited by LuaTeX), the expanded instances of the fonts may be calculated automatically and at run-time instead of the user having to prepare them in advance. This option is true by default provided that you are using a TeX engine with this capability and the output mode is PDF. If auto

is set to false, the font instances for all expansion steps must exist (with files called $\langle\text{font name}\rangle\pm\langle\text{expansion value}\rangle$, e.g., cmr12+10, as described in the [pdfTeX manual](#)).

With pdfTeX, automatic font expansion does not work with bitmap fonts. Therefore, if you are using the Computer Modern Roman fonts in T1 encoding, you should either install the cm-super fonts or use the Latin Modern fonts (package `lmodern`). With LuaTeX, expansion is always automatic, and also works in DVI mode (`dviulatex`), however, because postprocessing programs like `dvips` or `dvipdfmx` are not (yet) capable of dealing with OpenType fonts, only for legacy fonts.

stretch `<integer>` 20

shrink You may specify the stretchability and shrinkability of a font, i.e., the maximum amount that a font may be stretched or shrunk. The numbers will be divided by 1000, so that a stretch limit of 10 means that the font may be expanded by up to 1%. The default stretch limit is 20. The shrink limit will by default be the same as the stretch limit.

step `<integer>` * 1

Fonts are not expanded by arbitrary amounts but only by certain discrete steps within the expansion limits. With recent versions of pdfTeX (1.40 or newer) or LuaTeX, this option is by default set to 1, in order to allow trying the maximum number of font instances, and hence to guarantee the best possible output.² Older pdfTeX versions, however, had to include every font instance in the PDF file, which may increase the file size quite dramatically. Therefore, in case you are using a pre-1.40 pdfTeX version, `step` is by default set to one fifth of the smaller value of `stretch` and `shrink`.

selected `true, false` false

When applying font expansion, it is possible to restrict the expansion of some characters that are more sensitive to deformation than others (e.g., the ‘O’, in contrast to the ‘T’). This is called *selected expansion*, and its usage allows increasing the stretch and shrink limits (to, say, 30 instead of 20); however, the gain is limited since at the same time the average stretch variance will be decreased. Therefore, this option is by default set to `false`, so that all characters will be expanded by the same amount. See section 5.2 for a more detailed discussion.

3.4 Tracking

pdfTeX 1.40 | LuaTeX 0.62

letterspace `<integer>` 100

This option changes the default amount for tracking (see section 5.3) resp. letter-spacing (see section 7). The amount is specified in thousandths of 1em; admissible values are in the range of -1000 to +1000.

3.5 Miscellaneous options

DVIoutput `true, false` * `false`

pdfTeX and LuaTeX are not only able to generate PDF output but can also spit out DVI files.³ The latter can be ordered with the option `DVIoutput`, which will set `\pdfoutput` to zero. For XeTeX, this option is not applicable.

² The downside with this default is that pdfTeX may run out of memory with huge documents; in this case, read about the error messages in the ‘Hints and caveats’ section (9), or try with a larger `step`.

³ All recent TeX systems are using pdfTeX as the default engine also for DVI output.

Note that this will confuse packages that depend on the value of `\pdfoutput` if they were loaded earlier, as they had been made believe that they were called to generate PDF output where they actually weren't. These packages are, among others: `graphics`, `color`, `hyperref`, `pstricks` and, obviously, `ifpdf`. Either load these packages after `microtype` or else issue the command `\pdfoutput=0` earlier – in the latter case, the DVI output option is redundant.

When generating DVI files, font expansion has to be enabled explicitly. With pdfTeX, neither letterspacing nor *automatic* font expansion will work because the postprocessing drivers (`dviips`, `dvipdfm`, etc.) resp. the DVI viewer are not able to generate the fonts on the fly.

| | | |
|----------------------|--|------------------------|
| <code>draft</code> | <code>true, false</code> | <code>false</code> |
| <code>final</code> | If the <code>draft</code> option is passed to the package, <i>all micro-typographic extensions will be disabled</i> , which may lead to different line, and hence page, breaks. The <code>draft</code> and <code>final</code> options may also be inherited from the class options; of course, you can override them in the package options. E.g., if you are using the class option <code>draft</code> to show any overfull boxes, you should load <code>microtype</code> with the <code>final</code> option. | |
| <code>verbose</code> | <code>true, false, errors, silent</code> | <code>false</code> |
| | Information on the settings used for each font will be written into the log file if you enable the <code>verbose</code> option. When <code>microtype</code> encounters a problem that is not fatal (e.g., an unknown character in the settings, or non-existent settings), it will by default only issue a warning and try to continue. Loading the package with <code>verbose=errors</code> will turn all warnings into errors, so that you can be sure that no problem will go unnoticed. If on the other hand you have investigated all warnings and decide to ignore them, you may silence <code>microtype</code> with <code>verbose=silent</code> . | |
| <code>babel</code> | <code>true, false</code> | <code>false</code> |
| | Loading the package with the <code>babel</code> option will adjust the typesetting according to the respective selected language. Read section 6 for further information. | |
| <code>config</code> | <code>{file name}</code> | <code>microtype</code> |
| | Various settings for this package will be loaded from a main configuration file, by default <code>microtype.cfg</code> (see section 5.7). You can have a different configuration file loaded instead by specifying its name <i>without the extension</i> , e.g., <code>config=microtype</code> . | |

3.6 Changing options later

`\microtypesetup{<key>=<value> list}`

Inside the preamble, this command accepts all package options described above (except for `config`). In the document body, this command may be used to change the general settings of the micro-typographic extensions. It then accepts all options from section 3.1: `expansion`, `protrusion` and `activate`, which in turn may receive the values `true`, `false`, `compatibility` or `incompatibility`, and `tracking`, `kerning` and `spacing` with the admissible values `true` or `false`. Passing the name of a font set is not allowed. Using this command, you could for instance temporarily disable font expansion by saying:

```
\microtypesetup{expansion=false}
```

4 Selecting fonts for micro-typography

By default, character protrusion will be applied to all text fonts used in the document, and a basic set of fonts will be subject to font expansion. You may want to customise which fonts should get the benefit of micro-typographic treatment. This can be achieved by declaring and activating ‘font sets’; these font sets are specified via font attributes that have to match.

```
\DeclareMicrotypeSet
```

`\DeclareMicrotypeSet*` This command declares a new set of fonts to which the micro-typographic extensions should be applied. The optional argument may contain a comma-separated list of features to which this set should be restricted. The starred version of the command declares *and* activates the font set at the same time.

The *set of fonts* is specified by assigning values to the NFSS font attributes: encoding, family, series, shape and size (cf. [L^AT_EX 2_E font selection](#)). Let’s start with an example. In the main configuration file `microtype.cfg`, a font set called ‘basictext’ is defined as follows:

```
\DeclareMicrotypeSet{basictext}
  { encoding = {OT1,T1,T2A,LY1,OT4,QX,T5,EU1,EU2,TU},
    family   = {rm*,sf*},
    series   = {md*},
    size     = {normalsize,footnotesize,small,large}
  }
```

If you now call

```
\UseMicrotypeSet[protrusion]{basictext}
```

in the document’s preamble, only fonts in the text encodings, roman or sans serif families, normal (or ‘medium’) series, and in sizes called by `\normalsize`, `\footnotesize`, `\small` or `\large`, will be protruded. Math fonts, on the other hand, will not, since they are in another encoding. Neither will fonts in bold face, or huge fonts. Etc.

If an attribute list is empty or missing – like the ‘shape’ attribute in the above example – it does not constitute a restriction. In other words, this is equivalent to specifying *all* possible values for that attribute. Therefore, the predefined set ‘`alltext`’, which is declared as:

```
\DeclareMicrotypeSet{alltext}
  { encoding = {OT1,T1,T2A,LY1,OT4,QX,T5,TS1,EU1,EU2,TU} }
```

is far less restrictive. The only condition here is that the encoding must match.

If a value is followed by an asterisk (like ‘`rm*`’ and ‘`sf*`’ in the first example), it does not designate an NFSS code, but will be translated into the document’s `\(value)default`, e.g., `\rmdefault`.⁴ A single asterisk means `\(attribute)default`, e.g., `\encodingdefault`, respectively `\normalsize` for the size axis. Sizes may either be specified as a dimension (‘`10`’ or ‘`10pt`’), or as a size selection command *without* the backslash. You may also specify ranges (e.g., ‘`small-Large`’); while the lower

⁴ These translations will take place `\AtBeginDocument`, which means that changes to the defaults inside the preamble will also be taken into account. Only in cases where you change font defaults `\AtBeginDocument` yourself, you need to load `microtype` after these changes.

Table 2:

| Predefined font sets | Set name | Font attributes | | | | |
|----------------------|--------------------------------|--------------------------------------|-----------|----------|----------------|---|
| | | Encoding | Family | Series | Shape | Size |
| | all | ∅ | ∅ | ∅ | ∅ | ∅ |
| | alltext (allmath) | Text encodings, TS1 (OML, OMS, U) | ∅ | ∅ | ∅ | ∅ |
| | alltext-nott (allmath-nott) | Text encodings, TS1 (OML, OMS, U) | \rm*,\sf* | ∅ | ∅ | ∅ |
| | basictext (basicmath) | Text encodings (OML, OMS) | \rm*,\sf* | \md* | ∅ | \normalsize, \footnotesize, \small,\large |
| | smallcaps | Text encodings | ∅ | ∅ | \sc*,\si,\scit | ∅ |
| | footnotesize | Text encodings, TS1 | ∅ | ∅ | ∅ | -\small |
| | scriptsize | Text encodings, TS1 | ∅ | ∅ | ∅ | -\footnotesize |
| | normalfont | \encoding* | \family* | \series* | \shape* | \normalsize |

'Text encodings' = OT1, T1, T2A, LY1, OT4, QX, T5, EU1, EU2, TU '\...*' = '\...default'

boundary is included in the range, the upper boundary is not. Thus, '12-16' would match 12 pt, 13.5 pt and 15.999 pt, for example, but not 16 pt. You are allowed to omit the lower or upper bound ('-10', 'large-').

Additionally to this declaration scheme, you can add single fonts to a set using the 'font' key, which expects the concatenation of all font attributes, separated by forward slashes, i.e., 'font = <encoding>/<family>/<series>/<shape>/<size>'. This allows you to add fonts to the set that are otherwise disjunct from it. For instance, if you wanted to have the roman family in all sizes protruded, but only the normal sized, possibly italic, typewriter font (in contrast to, say, the small one), this is how you could declare the set:

```
\DeclareMicrotypeSet[protrusion]
{ myset }
{ encoding = T1,
  family   = rm*,
  font     = {T1/tt*/m/n/*,
             T1/tt*/m/it/*} }
```

As you can tell from the example, the asterisk notation is also permitted for the font key. A single asterisk is equivalent to '*//*/*/*', i.e., the normal font. Size selection commands are possible, too, however, ranges are not allowed.

Table 2 lists the eleven predefined font sets. They may also be activated by passing their name to the feature options protrusion, expansion, tracking, kerning and spacing when loading the package, for example:

```
\usepackage[protrusion=allmath,tracking=smallcaps]{microtype}
```

`\UseMicrotypeSet [⟨features⟩] {⟨set name⟩}`

This command activates a font set previously declared by `\DeclareMicrotypeSet`. Using the optional argument, you can limit the application of the set to one or more features. This command only has an effect if the feature was activated in the package options.

`\DeclareMicrotypeSetDefault [⟨features⟩] {⟨set name⟩}`

If a feature is enabled but no font set has been chosen explicitly, the sets declared by this command will be activated. By default, the ‘alltext’ font set will be used for character protrusion and additional kerning, the ‘basictext’ set for font expansion and interword spacing, and the ‘smallcaps’ set for tracking.

These commands may only be used in the preamble or in the main configuration file. Their scope is global to the document. Only one set per feature may be activated.

5 Micro fine tuning

Every character asks for a particular protrusion, kerning or spacing amount. It may also be desirable to restrict the maximum expansion of certain characters. Furthermore, since every font looks different, settings have to be specific to a font or set of fonts. This package offers flexible and straight-forward methods of customising these finer aspects of micro-typography.

All fine-tuning commands follow basically the same syntax: they all take three arguments; the first one is optional and may contain additional options; in the second argument, you specify the set of fonts to which the settings should apply; the third argument contains the actual settings. Here, as in all configuration commands, all spaces are ignored.

The set of fonts to which the settings should apply is declared using the same syntax of $\langle font axis \rangle = \langle value list \rangle$ pairs as for the command `\DeclareMicrotypeSet` (see section 4), with the only difference that values including asterisks (which, as you may recall, stand for the respective default) will be translated immediately instead of at the end of the preamble. To find the matching settings for a given font the package will try all combinations of font encoding, family, series, shape and size, with decreasing significance in this order. For instance, if settings exist for both the current family (say, T1/cmr///) and for italic fonts in the normal weight (T1//m/it/), the settings for the cmr family would apply. The encoding must always match.

The characters may be specified either as a single letter (A), as a text symbol command (`\textquoteright`), or as a slot number (resp. Unicode number for LuaTeX or XeTeX): three or more digits for decimal notation, prefixed with “`\`” for hexadecimal, with ‘`\`’ for octal numerals (e.g., the ‘fl’ ligature in T1 encoding: 029, “1D, ‘35). 8-bit (and even UTF-8) characters may be entered directly or in L^AT_EX’s traditional 7-bit notation: both `\"A` and `\AA` are valid, provided the character is actually declared in both the input and the font encoding. With LuaTeX or XeTeX, you may additionally specify a (font-specific) glyph name, prefixed with ‘/’ (e.g., the ‘fl’ ligature as `/f_1`). Note that you also have the possibility to declare lists of characters that should inherit settings (see section 5.6).

5.1 Character protrusion

pdfTeX 0.14f | LuaTeX 0.30 | XeTeX 0.9997

```
\SetProtrusion [⟨options⟩] {⟨set of fonts⟩} {⟨protrusion settings⟩}
```

Using this command, you can set the protrusion factors for each character of a font or a set of fonts. A very incomplete example would be the following:

```
\SetProtrusion
  { encoding = T1,
    family   = cmr }
  { A        = {50,50},
    \textquotel = {700, } }
```

which would result in the character ‘A’ being protruded by 5% of its width on both sides, and the left quote character by 70% of its width into the left margin. This would apply to all font shapes, series and sizes of the T1 encoded Computer Modern Roman family.

The *protrusion settings* consist of ⟨character⟩ = ⟨protrusion factors⟩ pairs. The protrusion factors designate the amount that a character should be protruded into the left margin (first value) respectively into the right margin (second value). By default, the values are relative to the character widths, so that a value of 1000 means that the character should be shifted fully into the margin, while, for example, with a value of 50 it would be protruded by 5% of its width. Negative values are admitted, as well as numbers larger than 1000 (but effectively not more than 1em of the font). You may omit either number if the character should not be protruded on that side, but must not drop the separating comma.

Options:

name You may assign a name to the protrusion settings, so that you are able to load it by another list.

load You can load another list (provided, you assigned a name to it) before the current list will be loaded, so that the fonts will inherit the values from the loaded list.

In this way, the configuration may be simplified considerably. You can for instance create a default list for a font; settings for other shapes or series can then load these settings, and extend or overwrite them (since the value that comes last will take precedence). Font settings will be loaded recursively. The following options will affect all loaded lists, in other words, any options from the loaded lists will be ignored:

factor This option can be used to influence all protrusion factors of the list, overriding any global factor setting (see section 3.2). For instance, if you want fonts in larger sizes to be protruded less, you could load the normal lists, just with a different factor applied to them:

```
\SetProtrusion
  [ factor   = 700,
    load     = cmr-T1 ]
  { encoding = T1,
    family   = cmr,
    size     = large- }
  { }
```

unit By default, the protrusion factors are relative to the respective character's width. The `unit` option may be used to override this and make `microtype` regard all values in the list as thousandths of the specified width. Issuing, for instance, '`unit=1em`' would have the effect that a value of, say, 50 now results in the character being protruded by 5% of an em of the font (thus simulating the internal measuring of pdfTeX's `\lpcode` and `\rpcode` primitives). The default behaviour can be restored with `unit=character`.⁵

preset Presets the protrusion codes of all characters to the specified values ($=\{\langle left \rangle, \langle right \rangle\}$), possibly scaled by a factor. A `unit` setting will only be taken into account if it is not `=character`.

inputenc Selects an input encoding that should apply to this list, regardless of what the document's input encoding is. You may specify any encoding that can be loaded via the `inputenc` package, e.g., `ansinew`, `koi8-r`, `utf8`.

context The scope of the list may be limited to a certain context. For further details, see section 6.

5.2 Font expansion

pdfTeX 0.14f | LuaTeX 0.30

`\SetExpansion` [$\langle options \rangle$] $\{\langle set of fonts \rangle\} \{\langle expansion settings \rangle\}$

By default, all characters of a font are allowed to be stretched or shrunk by the same amount. However, it is also possible to limit the expansion of certain characters if they are more sensitive to deformation. This is the purpose of the `\SetExpansion` command. Note that it will only have an effect if the package has been loaded with the `selected` option (cf. section 3.3). Otherwise, the expansion settings will be ignored – unlike the options in the optional first argument, which will still be evaluated. If the `selected` option has been set to true, and settings for a font don't exist, font expansion will not be applied to this font at all. Should the extraordinary situation arise that you want to employ selected expansion in general but for a particular font (set) all characters should be expanded or shrunk by the same amount, you would have to declare an empty list for these fonts.

The *expansion settings* consist of $\langle character \rangle = \langle expansion factor \rangle$ pairs. You may specify one number for each character, which determines the amount that a character may be expanded. The numbers denote thousandths of the full expansion. For example, if you set the expansion factor for the character 'O' to 500, it will only be expanded or shrunk by one half of the amount that the rest of the characters will be expanded or shrunk. While the default value for character protrusion is 0 – that is, if you didn't specify any characters, none would be protruded – the default value for expansion is 1000, which means that all characters would be expanded by the same amount.

Options:

name, load, preset, inputenc, context Analogous to `\SetProtrusion`, the optional argument may be used to assign a name to the list, to load another list, to preset

⁵ The `unit` option can even be passed globally to the package (cf. section 3.2). However, all provided settings are created under the assumption that the values are relative to the character width. Therefore, you should only change it if you are certain that the default settings will not be used in your document.

all expansion factors, to set the input encoding, or to determine the context of the list (expansion contexts are only possible with pdfTeX version 1.40.4 or newer).

auto, stretch, shrink, step These keys can be used to override the global settings from the package options (see section 3.3). If you don't specify either one of stretch, shrink and step, their respective global value will be used (that is, no calculation will take place).

As a practical example, suppose you have a paragraph containing a widow that could be avoided by shrinking the font a bit more. In conjunction with the context option (see section 6 for further details), you could thus allow for more expansion in this particular paragraph:

```
\SetExpansion
[ context = sloppy,
  stretch = 30,
  shrink = 60,
  step   = 5 ]
{ encoding = {OT1,T1,TS1} }
{
% ... END PREAMBLE
{\microtypecontext{expansion=sloppy}}
This paragraph contains a `fussy' widow.}
```

This method of employing contexts to temporarily apply different expansion parameters only works with pdfTeX version 1.40.4 or later.⁶ Also note that pdfTeX prohibits the use of fonts with different expansion limits or steps (even of different fonts) within one paragraph, hence the `sloppy` context has to be applied to complete paragraphs.

factor This option provides a different method to alter expansion settings for certain fonts, working around the restriction just mentioned. The factor option influences the expansion factors of all characters (in contrast to the overall stretchability) of the font. For instance, if you want the italic shape to be expanded less, you could declare:

```
\SetExpansion
[ factor = 500 ]
{ encoding = *,
  shape    = it }
{ }
```

The factor option can only be used to *decrease* the stretchability of the characters, that is, it may only receive values smaller than 1000. Also, it can only be used for single fonts or font sets; setting it globally in the package options wouldn't make much sense – to this end, you use the package's `stretch` and `shrink` options.

5.3 Tracking

pdfTeX 1.40 | LuaTeX 0.62

\SetTracking [*<options>*] {*<set of fonts>*} {*<tracking amount>*}

An important typographic technique – which was missing in TeX for a long time – is the adjustment of tracking, i.e., the uniform addition or subtraction of letter space

⁶ For older versions, a dirty trick is laid out in section 14.2 on page 58.

to/from all the characters in a font. For example, it is good typographic practice to slightly space out text set in all capitals or small capitals (as in this document). Legibility may also be improved by minimally increasing the tracking of smaller and decreasing that of larger type.⁷ The `\SetTracking` command allows specifying the tracking amount for different fonts or font sets. It will also be evaluated by the `\textls` command, which may be used for letterspacing shorter pieces of text (see section 7).

The tracking amount is specified in thousandths of 1em (or the given unit); negative values are allowed, too.

Options:

name, unit, context These options serve the same functions as in the previous configuration commands. The unit may be any dimension, default is 1em.

spacing When the inter-letter spacing is altered, the inter-word spacing probably also needs to be adjusted. This option expects three numbers for interword space, stretch and shrink respectively, which are given in thousandths of 1em (or of the current unit). If a value is followed by an asterisk, it denotes thousandths of the respective font dimension which will be added to it. For instance, with

```
\SetTracking[ spacing = {25*,166, } ]{ encoding = *, shape = sc }{ 25 }
```

the interword space will be increased by 2.5%, the stretch amount will be set to 0.166em, while the shrink amount will be left untouched. If you don't specify the spacing option, the interword space will be scaled by the current letterspace amount (as in the above example), while stretch and shrink will not be changed.

outer spacing If an interword space immediately precedes or follows letter-spaced text, it will by default be equal to that within the text. With this option, which accepts the same values as spacing, it may be adjusted independently.

outer kerning If, on the other hand, no interword space precedes or follows, you may still want to slightly set off the first and last letter from adjoining letters. This option expects the kerning amounts for left and right hand side, separated by a comma, in thousandths of 1em (or the current unit). If a value is followed by an asterisk, it denotes thousandths of the current letterspacing amount. A single asterisk means ‘500*’; this is also the default, i.e., the sum of the outer kerns is by default equal to the current letterspace amount. To remove kerning on both sides, you would write ‘outer kerning={0,0}’.

no ligatures By default, ligatures in letterspaced fonts will be constructed as usual, which may be advisable when changing the tracking by only a small amount. For larger letterspacing amounts, on the other hand, the normal letter space within ligatures would have displeasing effects. This key expects a comma-separated list of characters for which ligatures should be disabled; only the character that begins a ligature must be specified. If the key is given without a value, *all* ligatures of the font will be disabled. With pdfTeX, this is not recommended, however, since it entails that kerning will be switched off, too. With LuaTeX, there is no such limitation. The default settings disable ligatures for the character ‘f’ only, i.e., ‘ff’,

⁷ With full-featured fonts like Computer Modern, this is usually not necessary, though, since they come in optical sizes, and the tracking of the small-capitals font is already adjusted.

'fi', ' ffi', etc.⁸ In exceptional situations, you can manually break up a ligature by inserting '\kern0pt' resp. babel's " | shortcut, or protect it by enclosing it in \slig (see section 7).

Since a picture is worth a thousand words, probably even more if, in our case, it depicts a couple of letterspaced words, let's bring one to sum up these somewhat confusing options. Suppose you had the following settings (which are in no way recommended; they only serve illustrative purposes):

```
\SetTracking
[ no ligatures = {f},
  spacing      = {600*, -100*, },
  outer spacing = {450, 250, 150},
  outer kerning = {*, *} ]
{ encoding = * }
{ 160 }
```

and then write:

```
Stop \textls{stealing sheep}!
```

this would be the (typographically dubious) outcome:

Click on the image to show the kerns and spacings involved. Click on emphasised words in the text below to reveal the relation of image and code.

While the word 'Stop' is not letterspaced, the space between the letters in the other two words is expanded by the *tracking amount* of 160/1000em = 0.16em. The *inner space* within the letterspaced text is increased by 60%, while its *stretch* amount is decreased by 10% and the *shrink* amount is left untouched. The *outer space* (of 0.45em) immediately before the piece of text may *stretch* by 0.25em and *shrink* by 0.15em. Note that there is no outer space after the text, since the exclamation mark immediately follows; instead, the default *outer kern* of half the letterspace amount (0.08em) is added. Furthermore, one *ligature* wasn't broken up, because we neglected to specify the 's' in the no ligatures key.

As another, more realistic example, suppose you want to space out all small capitals by 50/1000em, fonts smaller than \small by 0.02em, and to decrease the tracking of large type by 0.02em. This could be achieved with the following settings:

```
\usepackage[tracking=true]{microtype}
\DeclareMicrotypeSet*[tracking]{my}
{ encoding = *,
  size      = {-small,Large-},
  font     = /*/*/*sc/* }
\SetTracking[ no ligatures = f ]{ encoding = *, shape = sc}{ 50 }
\SetTracking{ encoding = *, size = -small }{ 20 }
\SetTracking{ encoding = *, size = Large- }{ -20 }
```

Letterspaced fonts for which settings don't exist will be spaced out by the default of 0.1em (adjustable with the package option `letterspace`, see section 3.5). Suppose

⁸ With pdfTeX versions older than 1.40.4, *all* ligatures, and hence all kerning, will be disabled. It is therefore recommended to use at least version 1.40.4.

your editor wants you to shorten your 1000-pages chef-d'œuvre by a handful of pages, you could load `microtype` with (fingers crossed):

```
\usepackage[tracking=alltext,letterspace=-40]{microtype}
```

5.4 Additional kerning

pdfTeX 1.40

`\SetExtraKerning` [*<options>*] {*<set of fonts>*} {*<kerning settings>*}

With this command, you can fine tune the extra kerning. In contrast to standard kerning, which is always associated with a *pair* of characters, and to tracking, which specifies the space between *all* characters of a font, the extra kerning relates to single characters, that is, whenever a particular character appears in the text, the specified kerning will be inserted, regardless of which character precedes resp. follows it. (Put in another way, this feature allows to modify the left or right *sidebearings* of specific glyphs.)

It should not be neglected to mention a limitation of this feature: words *immediately following* such a kern (not separated by a space) will not be hyphenated, unless you insert the breakpoints manually, e.g., for kerning after the apostrophe, '`'apos\-\trophe`'. Furthermore, additional kerning will not be applied in math mode. These restrictions of pdfTeX will hopefully be lifted some time.

The *kerning settings* are specified as pairs of *<character>* = *<kerning values>*, where the latter consist of two values: the kerning added before the character, and the kerning appended after the respective character. Once again, either value may be omitted, but not the separating comma.

Options:

`name`, `load`, `factor`, `preset`, `inputenc` These options serve the same function as in the previous configuration commands.

`unit` Admissible values are: space, character and a *(dimension)*. By default, the values denote thousandths of 1em.

`context` When it comes to kerning settings, this option is especially useful, since it allows applying settings depending on the current language.

For example, you can find the following settings, intended to be used for documents written in French, in the main configuration file:

```
\SetExtraKerning
[ name      = french-default,
  context   = french,
  unit      = space  ]
{ encoding = {OT1,T1,LY1} }
{
  : = {1000,}, % = \fontdimen2
  ; = {500, }, % ~ \thinspace
  ! = {500, },
  ? = {500, }
}
```

What is the result of these settings? If they are active, like in the current paragraph, a thin space will be inserted in front of each question mark, exclamation mark and

semicolon ; a normal space in front of the colon. Read section 6 to learn how to activate these settings ! This paragraph was input like this :

```
\begin{microtypecontext}{kerning=french}
What is the result of these settings? If they are active, like in the
current paragraph, a thin space will be inserted in front of each
question mark, exclamation mark and semicolon; a normal space in front
of the colon. Read section-\ref{sec:context} to learn how to activate
these settings! This paragraph was input like this:
\end{microtypecontext}
```

5.5 Interword spacing

pdfTeX 1.40

`\SetExtraSpacing [⟨options⟩] {⟨set of fonts⟩} {⟨spacing settings⟩}`

This command allows you to fine tune the interword spacing (also known as glue). A preliminary remark on what a ‘space’ is may be in order: between two words, TeX will insert a so called glue, which is characterised by three parameters – the normal distance between two words, the maximum amount of space that may be added to it, and the maximum amount that may be subtracted. The latter two parameters come into effect whenever TeX tries to break a paragraph into lines and does not succeed; it can then stretch or shrink the spaces between words. These three parameters are specific to each font.

On top of these glue dimensions, TeX has the concept of ‘space factors’. They may be used to increase the space after certain characters, most prominently the punctuation characters. pdfTeX’s additional spacing adjustment may be considered as an extension to space factors with much finer control: while space factors will influence all three parameters of interword space (or glue) by the same amount – the kerning, the maximum amount that the space may be stretched and the maximum amount that it may be shrunk – you may modify these parameters independently from one another. Furthermore, the values may be set differently for each font. And, probably most importantly, the parameters may not only be increased but also decreased. Note that when interword spacing adjustment is in effect, space factors are ignored.

The *spacing settings* are declared as pairs of *⟨character⟩ = ⟨spacing factors⟩*, where the latter consist of three numbers: first, the additional kern inserted after this character if it appears before an interword space, second, the additional stretch amount, and third, the additional shrink amount. All values may also be negative, in which case the dimensions will be decreased. Not all values have to be specified, but the settings must always contain the two separating commas.

Options:

name, load, factor, preset, inputenc, context These options serve the same function as in the previous configuration commands.

unit You can specify the unit by which the specified numbers are measured. Possible values are: character, a *⟨dimension⟩* and, additionally, space. The latter will measure the values in thousandths of the respective space dimension set by the font. By default, the unit is measured by the space dimensions. For example, with the following (nonsensical) settings:

```
\SetExtraSpacing
[ unit = space ] % default
{ font = /*/*/*/* }
{
  . = {1000,1000,1000},
}
```

the space inserted after a full stop would be doubled (technically speaking: $2 \times \text{\fontdimen} 2$), as would the maximum stretch and shrink amounts of the interword space ($\text{\fontdimen} 3$ and 4). Conversely, setting all three values to -1000 would completely cancel a space after the respective character.

5.6 Character inheritance

`\DeclareCharacterInheritance [⟨features⟩] {⟨set of fonts⟩} {⟨inheritance lists⟩}`

In most cases, accented characters should inherit the settings from the respective base character. For example, all of the characters Å, Á, Â, Ã, Ä, Å and Ä should probably be protruded by the same (absolute) amount as the character A. Using the command `\DeclareCharacterInheritance`, you may declare such classes of characters, so that you then only have to set up the respective base character. With the optional argument, which may contain a comma-separated list of features, you can confine the scope of the list. Additionally, it accepts the `inputenc` key to set the input encoding for this list. The font set can be declared in the usual way. The inheritance lists are declared as pairs of $\langle\text{base character}\rangle = \langle\text{list of inheriting characters}\rangle$. Unless you are using a different encoding or a very peculiarly shaped font, there should be no need to change the default character inheritance settings.

The situation is different with LuaTeX and XeTeX, however: the default inheritance settings only contain those glyphs that can safely be assumed to exist in any font; but since OpenType fonts may contain many more glyphs for different scripts (languages), it is quite probable that font-specific settings are necessary, which should be specified in the font's configuration file (see next section).

5.7 Configuration files

The default configuration, consisting of inheritance settings, declarations of font sets and alias fonts, and generic protrusion, expansion, spacing and kerning settings, will be loaded from the file `microtype.cfg`. You may extend this file with custom settings (or load a different configuration file with the ‘config’ option, see section 3.5).

If you embark on creating new settings for a font family, you should put them into a separate file, whose name must be: ‘`mt-⟨font family⟩.cfg`’ (e.g., ‘`mt-cmr.cfg`’; any spaces in the font name should be removed, e.g., ‘`mt-MinionPro.cfg`’), and may contain all commands described in the current section 5. These files will be loaded automatically if you are actually using the respective fonts. This package ships with configuration files for a number of font families. Table 3 lists them all.

`\DeclareMicrotypeVariants {⟨list of suffixes⟩}`

`\DeclareMicrotypeVariants*` On its search for a configuration file, the package will also try to remove from the font name a suffix of one or more letters that denotes a ‘variant’ of the base font (cf. Karl Berry’s [Fontname](#)). It is thus possible to put settings for, e.g., the

Table 3:

Fonts with tailored protrusion settings

| Font family (NFSS code) | Features | |
|---|---|-----------------------------------|
| | Encodings [Scripts] | Shapes |
| Generic | OT1, T1, T2A, LY1, QX, (TS1) ^a | n, (it, sl, sc) ^a |
| Computer Modern Roman (cmr) ^b | OT1, OT4, T1, T2A, T5, LY1, TS1 | n, it, sl, sc |
| Bitstream Charter (bch) ^c | OT1, T1, T5, LY1, TS1 | n, it, (sl) ^d , sc |
| Adobe Garamond (pad, padx, padj) | OT1, T1, LY1, TS1 | n, it, (sl) ^d , sc |
| URW Garamond (ugm) ^e | OT1, T1, TS1 | n, it |
| Bitstream Letter Gothic (blg) ^f | OT1, T1, TS1 | n, it |
| Adobe Minion (pmnx, pmnj) | OT1, T1, T2A, LY1, TS1 | n, it, (sl) ^d , sc, si |
| Palatino (pp1, pplx, pp1j) ^g | OT1, OT4, T1, LY1, (TS1) ^a | n, it, (sl) ^d , sc |
| Times (ptm, ptmx, ptmj) ^h | OT1, OT4, T1, LY1, QX, (TS1) ^a | n, it, (sl) ^d , sc |
| Latin Modern Roman | EU1/2, TU [Latin, Greek] | n, it, (sl) ^d |
| Charis SIL | EU1/2, TU [Latin, Cyrillic, Greek] | n, it, sc |
| Palatino Linotype ⁱ | EU1/2, TU [Latin] | n, it, sc |
| Computer Modern math (cmsy, cmm) ^j | OML/OMS | n/it |
| AMS symbols (msa, msb) | U | n |
| Euler (eur, eus, euf) ^k | U | n |
| Euro symbols (Adobe, ITC, marvosym) | U/OT1 | n, it |

^a Incomplete
^b Aliases: Latin Modern (lmr), ae (aer), zefonts (zer), eco (cmor), hfoldsty (hfor)
^c Aliases: mathdesign/Charter (mdbch), MicroPress's chmath (chr), XCharter
^d Settings inherited from italic shape
^e Aliases: mathdesign/URW Garamond (mdugm), garamondx (zgmx, zgmj)
^f Alias: ulgothic (ulg)
^g Aliases: pxfonts (pxr), qfonts/QuasiPalatino, TeX Gyre Pagella (qpl), newpx, FPL Neu (fp9x, fp9j)
^h Aliases: txfonts (txr), qfonts/QuasiTimes, TeX Gyre Termes (qtm), newtx, tempora
ⁱ Aliases: TeX Gyre Pagella, Palatino LT Std, Palatino
^j Aliases: Latin Modern (lmsy, lmm)
^k Alias: eulervm (zeur, zeus)

fonts padx (expert set), padj (oldstyle numerals) and pad (plain) into one and the same file `mt-pad.cfg`. This command expects a comma-separated list of variant suffixes. The starred version appends the suffix(es) to the existing list. The default declaration in `microtype.cfg` is:

```
\DeclareMicrotypeVariants{x,j,w,a,d,0,1}
```

```
\DeclareMicrotypeAlias {\langle font name \rangle} {\langle alias font \rangle}
```

This command may be used for fonts that are very similar, or actually the same (for instance if you did not stick to the Berry naming scheme when installing a font). An example would be the Latin Modern fonts, which are derived from Computer Modern, so that it is not necessary to create new settings for them – you could say:

```
\DeclareMicrotypeAlias{lmr}{cmr}
```

which would make the package, whenever it encounters the font `lmr` and does not find settings for it, also try the font `cmr`. In fact, you will find this very line, along with some others, in the default configuration file.

\LoadMicrotypeFile {*font name*}

In rare cases, it might be necessary to load a font configuration file manually, for instance, from within another configuration file, or to be able to extend settings defined in a file that would otherwise not be loaded automatically, or would be loaded too late.⁹ This command will load the file ‘mt-*font name*.cfg’.

6 Context-sensitive setup

The microtype package also allows applying different micro-typographic settings to the fonts depending on the context in which they occur. This opens up the space for infinite possibilities of tweaking the document’s appearance.

\microtypecontext {*context assignments*}

This command may be used anywhere in the document (also in the preamble) to change the micro-typographic context in the current group. To each feature (`protrusion`, `expansion`, (or `activate` as a shortcut for both), `tracking`, `spacing` and `kerning`), one context may be assigned. Consequently, only settings with the corresponding ‘context’ keyword will be applied.

\begin{microtypecontext} {*context assignments*}

\end{microtypecontext} Like many L^AT_EX commands, it is also available in the form of an environment.

\textmicrotypecontext {*context assignments*} {*general text*}

As another possibility, the command \textmicrotypecontext sets the context(s) for the text given in the second argument.

Suppose you want the footnote markers in the text to be protruded by a larger amount. You could define settings for the numbers:

```
\SetProtrusion
[ context = footnote ]
{ font   = */*/*/*/scriptsize } % adapt if necessary
{ 1 = { ,650}, 2 = { ,400}, 3 = { ,400}, 4 = { ,400}, 5 = { ,400},
  6 = { ,400}, 7 = { ,500}, 8 = { ,400}, 9 = { ,400}, 0 = { ,400} }
```

and have the context changed in the footnote marker command. This command differs among the various classes; for the base classes, e.g., `article`, it would be:

```
\newcommand*\new@makefnmark{\hbox{\@textsuperscript{\normalfont
\microtypecontext{protrusion=footnote}\@thefnmark}}}
\renewcommand*\@footnotemark{%
\leavevmode \ifhmode\edef\x@sf{\the\spacefactor}\nobreak\fi
\new@makefnmark \ifhmode\spacefactor\x@sf\fi \relax}
```

For the `memoir` class, you would additionally have to disable auto-detection of multiple footnotes, which prevents protrusion:

```
\renewcommand*\@makefnmark{\hbox{\@textsuperscript{\normalfont
\microtypecontext{protrusion=footnote}\@thefnmark}}}
\let\m@mmf@prepare\relax
\let\m@mmf@check\relax
```

⁹ Font package authors might also want to have a look at the hook `\Microtype@Hook`, described in the implementation part, section 14.4.4.

Another possibility would be to employ contexts for a language-dependent setup. For instance, if you are writing a text in French, you could add:

```
\microtypecontext{kerning=french}
```

to the preamble. This would have the effect that kerning settings for the French context would be applied to the document. Should parts of the document be in English, you could write:

```
\textmicrotypecontext{kerning=}{English text!}
```

to reset the context, so that the punctuation characters in these parts will not receive any extra kerning.

Instead of adding these commands manually to your document, you may also load `microtype` with the `babel` option (see section 3.5). The current language will then be automatically detected and the contexts set accordingly.

`\DeclareMicrotypeBabelHook` {*list of babel languages*} {*context list*}

Naturally, `microtype` does not know about the typographic specialties of every language. This command is a means of teaching it how to adjust the context when a particular language is selected. The main configuration file contains among others the following declaration:

```
\DeclareMicrotypeBabelHook
{french,francais,acadian,canadien}
{kerning=french, spacing=}
```

Consequently, whenever you switch to the French language, the kerning context will be changed to ‘french’ and the spacing context will be reset. This hook only has an effect if the package was loaded with the `babel` option. Currently, `microtype` supports French and Turkish kerning and English spacing (aka. `\nonfrenchspacing`). For unknown languages, all contexts will be reset.

7 Letterspacing revisited

pdfTeX 1.40 | LuaTeX 0.62

`\textls` [*amount*] {*general text*}

While the tracking feature, described in section 5.3, will apply to sets of fonts, you may also want to letterspace shorter pieces of text, regardless of the font in which they are typeset.¹⁰ For such ad-hoc letterspacing, `microtype` introduces two commands that can be used (independently of whether the tracking option is enabled) in the same way as L^AT_EX’s text commands: `\textls` – which also works

`\lsstyle` in math mode – expects the text in the mandatory argument, while `\lsstyle` will switch on letterspacing for all subsequent fonts until the end of the current group.

`\textls*` The starred version of `\textls` does not add any extra kerning before or after the text, which may be useful, e.g., for section titles. By default, each character will be spaced out by $100/1000\text{em} = 0.1\text{em}$; this amount may be altered in the optional argument to `\textls`, using the `\SetTracking` command, or globally with the `letterspace` package option, with decreasing significance in this order.

¹⁰ Letterspacing should be used cautiously; in particular, letterspacing lowercase text is held in abhorrence by honourable typographers. Unless you know what you are doing, you should probably only letterspace capitals or small capitals. Another just cause may be emphasis in texts typeset in Fraktur fonts.

`\lslig {⟨ligature⟩}`

Since the commands `\textls` and `\lsstyle` will also evaluate the ‘no ligatures’ key for the respective font, you need not worry about protecting or breaking ligatures with most fonts. However, in certain situations, there may be a conflict of ligatures beginning with the same letter, where some of them should be inhibited, while others should not. When letterspacing text typeset in Fraktur fonts, for example, the ligatures ‘ch’, ‘ck’, ‘tz’ and ‘sz’ (‘ß’) should never be broken up; you also usually see the ‘st’ (‘ſt’) ligature in letterspaced text. Furthermore, at least the `yfonts` package realises the short s (‘s’) as the ligature ‘s:’. On the other hand, the ‘ct’ ligature and the other ‘long s’ ligatures often found in Fraktur fonts should be suppressed. There are two ways of solving this problem: either don’t disable the ‘s’ and/or ‘c’ ligatures and break those that need to be broken up by inserting ‘`\kern0pt`’ or `babel`’s “|” shortcut; or disable them and protect those ligatures that need to be protected by enclosing them in the `\lslig` command. So, the following two solutions have the same result (namely, ‘`Ausſichtslosigkeit`’, with ligatures shown in green, inhibited ligatures in red).

```
\SetTracking[no ligatures={f}]{encoding = LY, family = yfrak}{120}
\textfrak{\lsstyle Aus:s{\kern0pt}ichts:los{\kern0pt}igkeit}
```

```
\SetTracking[no ligatures={f,s,c}]{encoding = LY, family = yfrak}{120}
\textfrak{\lsstyle Au\lslig{s:}si\lslig{ch}t\lslig{s:}losigkeit}
```

`letterspace.sty` These three commands (plus the `letterspace` option, described in section 3.4) are also available with the alternative `letterspace` package, which is in fact a much stripped-down version of `microtype`, omitting support for all the other extensions (and also omitting the possibilities of the `\SetTracking` command – all ‘f’ ligatures will be disabled, inner and outer spacing and outer kerning will be set to the default values described in section 5.3). If you prefer to forgo `microtype`’s specialties, you may load the `letterspace` package instead. Both packages should not be used at the same time.

In contrast to `microtype`, which requires `LATEX`, the `letterspace` package also works with `eplain` or even only `miniltx`: for use with `eplain`, load the package with `\usepackage` inside the `\begin{packages} ... \end{packages}` environment; with `miniltx` (which does not support package options) simply `\input letterspace.sty`.

8 Disabling ligatures

pdfT_EX 1.30 | Lu_aT_EX 0.30

`\DisableLigatures [⟨characters⟩] {⟨set of fonts⟩}`

While completely disabling all ligatures of a font (which will also switch off kerning for this font), purposely *lowers* the micro-typographic quality instead of raising it, it is especially useful for typewriter fonts, so that, e.g., in a T1 encoded font, ‘`\texttt{--}`’ will indeed be printed as ‘--’, not as ‘-’. `\DisableLigatures` may be used to specify, in the usual way, a set of fonts for which ligatures should be disabled, for example, of the typewriter font in T1 encoding:

```
\DisableLigatures{encoding = T1, family = tt* }
```

It is also possible to disable selected ligatures only. The optional argument may contain a comma-separated list of characters for which the ligature mechanism should be inhibited:

```
\DisableLigatures[?,!]{encoding = T1} % inhibit ?` and !`, but not fi, –, », etc.
```

Only the character that begins the ligature(s) should be specified. This command may only be used in the preamble, and only once.¹¹

9 Hints and caveats

Use settings that match your font. Although the default settings should give reasonable results for most fonts, the particular font you happen to be using may have different character shapes that necessitate more or less protrusion. In particular, italic letter shapes may differ wildly in different fonts, hence I have decided against providing default protrusion settings for them. The file `test-microtype.tex` might be of some help when adjusting the protrusion settings for a font.

Don't use too large a value for expansion. Font expansion is a feature that is supposed to enhance the typographic quality of your document by producing a more uniform greyness of the text block (and potentially reducing the number of necessary hyphenations). When expanding or shrinking a font too much, the effect will be turned into the opposite. Expanding the fonts by more than 2%, i.e., setting a stretch limit of more than 20, should be justified by a typographically trained eye. If you are so lucky as to be in the possession of multiple instances of a Multiple Master font, you may set expansion limits to up to 4%.

Don't use font expansion for web documents (with older pdfTEX versions). With pdfTEX versions older than 1.40, each expanded instance of the font will be embedded in the PDF file, hence the file size may increase by quite a large factor (depending on expansion limits and step). Therefore, courtesy and thriftiness of bandwidth command it not to enable font expansion when creating files to be distributed electronically. With pdfTEX 1.40 and LuaTEX, which use a different technique of expansion, the increase of file size can be neglected.

You might want to disable protrusion in the Table of Contents. In unfortunate situations, enabled protrusion might internally alter the line length in the TOC and similar lists in such a way that an excess leader dot will fit in. The solution is to temporarily disable protrusion for the TOC:

```
\microtypesetup{protrusion=false}
\tableofcontents
\microtypesetup{protrusion=true}
```

You might want to disable protrusion in verbatim environments. As you know by now, microtype will by default activate character protrusion for all fonts contained in the font set ‘alltext’. This also includes the typewriter font. Although it does make sense to protrude the typewriter font if it appears in running text (like, for example, in this manual), this is probably not desirable inside the `verbatim`

¹¹ With LuaTEX, you have to load the fonts with the `fontspec` option ‘`Renderer=Basic`’.

environment. However, `microtype` has no knowledge about the context that a font appears in but will solely decide by examining its attributes. Therefore, you have to take care of disabling protrusion in `verbatim` environments for yourself (that is, if you don't want to disable protrusion for the typewriter font altogether, by activating, say, the font set 'alltext-nott'). While the `\microtypesetup` command has of course been designed for cases like this, you may find it tiresome to repeat it every time if you are using the `verbatim` environment frequently. The following line (which requires the `etoolbox` package), added to the document's preamble, would serve the same purpose:

```
\AtBeginEnvironment{verbatim}{\microtypesetup{activate=false}}
```

If you are using the `fancyvrb` or the `listings` package, this is not necessary, since their implementation of the corresponding environments will inhibit protrusion anyway.

Settings for Greek/Thai/Armenian etc. encodings are not yet included. The default sets of fonts for which the micro-typographic features will be enabled (see table 2) only contain those encodings for which configurations exist. Therefore, if you are using any other encoding (e.g., LGR, T2B, etc.), `microtype` will not apply to these fonts. You have to define and activate a new font set including the encoding(s) you are using (for details, see section 4). For protrusion at least, you would also have to create settings for the fonts in question (see section 5.1). It goes without saying that contributions for these encodings are more than welcome.

Only employ kerning adjustment if it is customary in the language's typographic tradition. In contrast to protrusion and expansion, additional kerning does not unconditionally improve the micro-typographical quality of your document. You should only switch it on if you are writing a document in a language whose typographic tradition warrants such kerning. If you are, for example, writing an English text, your readers would probably be rather confused by additional spaces before the punctuation characters.

Adjustment of interword spacing is still experimental. The implementation of this feature in pdfTeX is not complete, and may not yield the positive effects on the typographical quality you might expect – in certain situations, there may even be undesired side effects, in particular, when used together with the `ragged2e` package. Therefore, the `spacing` option should not be chosen blindly; it is also recommended to experiment with the settings in order to understand the workings of this feature.

Compatibility and interaction with other packages: The `microtype` package is supposed to work happily together with all other L^AT_EX packages (except for `pdfcprot`). However, life isn't perfect, so problems are to be expected. Currently, I am aware of the following issues:

- Even though all configuration files are still provided in legacy (7-bit) format, using multi-byte (Unicode) characters in the settings should run smoothly with an up-to-date L^AT_EX system. For older systems or documents in legacy encodings, in contrast, this requires loading the `inputenc` package first. Furthermore, when using multiple input encodings in a document, 8-bit characters in the settings will only work reliably if you specify the `inputenc` key.

- When loading the package with the `babel` option, you must load the `babel` package before `microtype`.
- Before this package was fully compatible with LuaTeX, the following method of enabling expansion and protrusion with the `fontspec` package was most often found to be recommended:

```
\newfontfeature{Microtype}{protrusion=default;expansion=default}
\defaultfontfeatures{Microtype}
```

This code should *not* be used with this package, as it will basically override all of the settings made by `microtype` – despite the naming, the above lines have nothing to do with this package.¹²

- With pdfTeX, it is currently not possible to create character-specific settings for Chinese/Japanese/Korean fonts. Therefore, the only micro-typographic extension that can be made to work with CJK fonts is (non-selected) font expansion.
- When used with the `xeCJK` package or the `luatexja` package, text commands (e.g., `\'A`, `\textless`) in the configuration will not be understood. You therefore have to ensure that `microtype` will encounter none of them. This requires, firstly, that the glyphs be specified only as single (possibly Unicode) characters, as numbers, or as glyph names (cf. section 5); and secondly, if you are using a font for which pre-defined settings do not exist, that you create these settings yourself (because otherwise, the default settings will be loaded, which do contain text commands). Furthermore, you should load `microtype` late.

Possible error messages and how to get rid of them (`specs` may differ):

- ! Font csnameendcsname=`cmr10+20 at 10.0pt` not loadable: Metric (TFM) file not found.
This error message will occur if you are trying to employ font expansion while creating DVI output. Remember that *automatic* font expansion only works when running pdfTeX in PDF mode. Although expansion is also possible in DVI mode, it requires that all instances of the expanded fonts exist on your TeX system.
- ! pdfTeX error (font expansion): auto expansion is only possible with scalable fonts.
Automatic font expansion has been improved in pdfTeX 1.40, in that it now not only works with Type 1 fonts but also with TrueType, OpenType and even non-embedded fonts. The above error message indicates either that you are trying to apply expansion to a bitmap (pk) font, which is still not possible, or that the font isn't found at all, e.g., because of missing map entries.
- Warning: pdflatex: font `ptmr8r` cannot be expanded (not an included Type1 font)
and the PDF viewer complains about a missing font, e.g., Adobe Reader thusly:
Could not find a font in the Resources dictionary - using Helvetica instead.
With pdfTeX versions older than 1.40, font expansion can only be applied if the font is actually embedded in the PDF file. If you get the above error message, your TeX system is not set up to embed (or 'download') the base PostScript fonts (e.g., Times, Helvetica, Courier). In most TeX distributions, this can be changed in the file `updmap.cfg` by setting `pdftexDownloadBase14` to true.

¹² They make use of features provided by `luatofload` (via `fontspec`).

- Warning: pdflatex (file `ecrm1000+20`): Font `ecrm1000+20 at 1200` not found

Furthermore, pdf \TeX versions older than 1.40 require Type 1 fonts for automatic font expansion. When you receive a message like the above, you are probably trying to apply font expansion to a bitmap or TrueType font. With older pdf \TeX versions, this is only possible if you manually create expanded instances of the fonts.

- ! Font `T1/cmr/m/n/10=ecrm1000 at 10.0pt` not loaded: Not enough room left.

Memory parameter ‘font_mem_size’ too small.

- ! TeX capacity exceeded, sorry [maximum internal font number (font_max)=2000].

Memory parameter ‘font_max’ too small.

- ! TeX capacity exceeded, sorry [PDF memory size (pdf_mem_size)=65536].

Memory parameter ‘pdf_mem_size’ too small (pdf \TeX versions older than 1.30).

When applying micro-typographic enhancement to a large document with a lot of fonts, pdf \TeX may be running out of some kind of memory. It can be increased by setting the respective parameter to a larger value. For web2c-based systems, e.g., \TeX Live, change the settings in `texmf.cnf`, for MiK \TeX , in the file `miktex.ini` (2.4 or older) resp. `pdflatex.ini` (2.5 or newer).

- pdf \TeX warning (font expansion): font should be expanded before its first use

This warning will occur with pdf \TeX versions older than 1.40.4, if tracking and expansion is applied to a font. It is harmless and can be ignored.

The source code of this document is freely available. If you wonder how this document was created, just have a look at the source code in `microtype.dtx`, which is either already included in your \TeX distribution, or else can be downloaded from [CTAN](#). For the source code of the logo on the title page and of the letterspacing sample from section 5.3, see the appendices A and B. If you want to re-typeset the documentation, read the comments at the end of `microtype.dtx`.

10 Contributions

I would be glad to include configuration files for more fonts. Preparing such configurations is quite a time-consuming task and requires a lot of patience. To alleviate this process, this package also includes a test file that can be used to check at least the protrusion settings (`test-microtype.tex`). If you have created a configuration file for another font, or if you have any suggestions for enhancements in the default configuration files, I would gratefully accept them: w.m.l@gmx.net.

11 Acknowledgments

This package would be pointless if *Hàn Thê Thành* hadn’t created the pdf \TeX programme in the first place, which introduced the micro-typographic extensions and made them available to the \TeX world. Furthermore, I thank him for helping me to improve this package, and not least for promoting it in [Thành 2004](#), [Thành 2008](#) and elsewhere. I also thank him and the rest of the pdf \TeX team, and more recently also the Lua \TeX and X \TeX teams, for refuting the idea that \TeX is dead, and for fixing the bugs I find.

Harald Harders has contributed protrusion settings for Adobe Minion. I would also like to thank him for a number of bug reports and suggestions he had to make. *Andreas Bühmann* has suggested the possibility to specify ranges of font sizes, and resourcefully assisted in implementing this. He also came up with some good ideas for the management of complex configurations. *Ulrich Dirr* has made numerous suggestion, especially concerning the new extensions of interword spacing adjustment and additional character kerning. *Georg Duffner* has patiently tested `microtype` under X_ET_EX and LuaT_EX with his beautiful OpenType font EB Garamond¹³. My thanks also go to *Maciej Eder* for contributing settings for the QX encoding, as well as to *Karl Karlsson* for providing settings for the Cyrillic T2A encoding, and to *Hendrik Vogt*, who made substantial improvements to the Computer Modern Roman italic settings. I thank *Loren B. Davis* for providing protrusion settings for OpenType versions of Palatino Linotype. I am also very much indebted to *Élie Roux*, who not only contributed the `lua` module in the first place, but also, together with *Philipp Gesang*, took care of updating it for the developments in LuaT_EX land.

I thank *Philipp Lehman* for adding to his `csquotes` package the possibility to restore the original meanings of all activated characters, thus allowing for these characters to be used in the configuration files. *Peter Wilson* kindly provided a hook in his `ledmac`/`ledpar` packages, so that critical editions can finally also benefit from character protrusion. Likewise, *Donald Arseneau* patched his `shapepar` package to accommodate protrusion.

Additionally, the following people have reported bugs, made suggestions or helped otherwise (in chronological order, quotes indicate TeX.SX user names): *Tom Kink*, *Herb Schulz*, *Michael Hoppe*, *Gary L. Gray*, *Georg Verwegen*, *Christoph Bier*, *Peter Muthesius*, *Bernard Gaulle*, *Adam Kucharczyk*, *Mark Rossi*, *Stephan Hennig*, *Michael Zedler*, *Herbert Voß*, *Ralf Stubner*, *Holger Uhr*, *Peter Dyballa*, *Morten Høgholm*, *Steven Bath*, *Daniel Flipo*, *Michalis Miatidis*, *Sven Naumann*, *Ross Hetherington*, *Wiebke Petersen*, *Geoff Vallis*, *Steven E. Harris*, *Karl Berry*, *Peter Meier*, *Nathan Rosenblum*, *Wolfram Schaal*, *Vasile Gaburici*, *Sveinung Heggen*, *Axel Berger*, *Colin Rourke*, *Maverick Woo*, *Silas S. Brown*, *Lars Rönnbäck*, *Christian Stark*, *Leo*, *Marcin Borkowski*, *hscm*, *George Gratzer*, *Josep Maria Font*, *Juan Acevedo*, *Heiko Oberdiek*, *Till A. Heilmann*, *Rolf Dieterich*, *Seamus Bradley*, *Meho R*, *Steffen Hoffmann*, *Scott Pakin*, *Maïeul Rouquette*, *Jonas Hogstrom*, *Gabriel Kerneis*, ‘RazorXsr’, *Sebastian Schubert*, ‘Dave’, *Giuseppe Palma*, *Stephan Stiller*, *Christopher Schramm*, ‘uli’, *Sam Mason*, ‘kleenstar’, ‘Henning’, *Ronnie Marks*, *David Carlisle*, ‘Max’, ‘HcN’, *Will Robertson*, ‘user11126’, *Ulrike Fischer*, ‘Daniel’, ‘ltcomdata’, *Reinhard Kotucha*, ‘jcr’, *Nils Anders Danielsson*, *Paolo Ney*, *Frank Mittelbach*, *Franz Wexler*, *Moritz Wemheuer*, ‘Andy N’, *Phelype Oleinik*, *Falk Hanisch*, *Markus Kohm*, *Paolo Polesana*, *Oliver Kopp* and *Hironori Kitagawa*.

12 References

Hàn Thé Thành, ‘Micro-typographic extensions to the T_EX typesetting system’, Diss. Masaryk University Brno 2000, in: *TUGBoat*, vol. 21 (2000), no. 4, pp. 317–434. (Online at <http://www.tug.org/TUGboat/Articles/tb21-4/tb69thanh.pdf>)

13 Available from CTAN at <http://ctan/pkg/ebgaramond>, including configuration files for `microtype`.

Hàn Thé Thành, ‘Micro-typographic extensions of pdfTeX in practice’, in: *TUGBoat*, vol. 25 (2004), no. 1: ‘Proceedings of the Practical TeX 2004 Conference’, pp. 35–38. (Online at <http://www.tug.org/TUGboat/Articles/tb25-1/thanh.pdf>)

Hàn Thé Thành, ‘Font-specific issues in pdfTeX’, in: *TUGBoat*, vol. 29 (2008), no. 1: ‘EuroBachoTeX 2007 Proceedings’, pp. 36–41. (Online at <http://www.tug.org/TUGboat/Articles/tb29-1/tb91thanh-fonts.pdf>)

Hàn Thé Thành, Sebastian Rahtz, Hans Hagen, Hartmut Henkel, Paweł Jackowski, Martin Schröder, *The pdfTeX user manual*, 2 January 2018. (Available from CTAN at [/systems/doc/pdftex/manual/pdftex-a.pdf](https://ctan.org/systems/doc/pdftex/manual/pdftex-a.pdf))

Karl Berry, *Fontname: Filenames for TeX fonts*, July 2009. (Available from CTAN at [/info/fontname/fontname.pdf](https://ctan.org/info/fontname/fontname.pdf))

LATEX3 Project Team, *LATEX2 ϵ font selection*, July 2019. (Available from CTAN at [/macros/latex/base/fntguide.pdf](https://ctan.org/macros/latex/base/fntguide.pdf))

Will Robertson, *The fontspec package: Font selection for X_ETEX and Lua_ETEX*, 19 October 2019. (Available from CTAN at [pkg/fontspec](https://ctan.org/pkg/fontspec))

Élie Roux, Khaled Hosny, Philipp Gesang, Ulrike Fischer, Marcel Krüger, *The luaotfload package*, 10 November 2019. (Available from CTAN at [pkg/luatex](https://ctan.org/pkg/luatex))

Carsten Schurig, Tobias Schlemmer, *The pdfcprot.sty package*, 10 June 2005. (Available from CTAN at [pkg/pdfcprot](https://ctan.org/pkg/pdfcprot))

Melchior Franz, *The soul package*, 17 November 2003. (Available from CTAN at [pkg/soul](https://ctan.org/pkg/soul)). See also Heiko Oberdiek’s extension of this package, *soulutf8*, which adds Unicode support. (Available from CTAN at [pkg/soulutf8](https://ctan.org/pkg/soulutf8))

13 Short history

The comprehensive list of changes can be found in appendix C. The following is a list of all changes relevant in the user land; bug and compatibility fixes are swept under the rug. Numbers in brackets indicate the relevant section in this manual.

2.7 (2017/07/07)

- Allow automatic expansion and letterspacing with LuaTeX in DVI mode (aka. dvilualatex) [3.1, 3.3, table 1]
- Compatibility with LATEX 2017/01/01 (fix warnings)

2.6 (2016/05/01)

- Support for LuaTeX ≥ 0.85
- Improvements for tracking/letterspacing with LuaTeX (Renderer=Basic no longer required)
- New font sets: ‘alltext-nott’, ‘allmath-nott’ [4, table 2]

2.5 (2013/03/13)

- Support for the *fontspec* package, viz. for OpenType fonts with LuaTeX and X_ETEX
- Support for protrusion with X_ETEX ≥ 0.9997
- Support for tracking/letterspacing with LuaTeX ≥ 0.62
- Allow context-sensitive setup with LuaTeX
- Info if protrusion settings are generic

- Protrusion settings for Latin Modern Roman (OpenType)
- Protrusion settings for Charis SIL (OpenType)
- Protrusion settings for Palatino Linotype (OpenType)

2.4 (2010/01/10)

- Protrusion settings for T2A encoded Minion

2.3e (2009/11/09)

- Support for the Cyrillic T2A encoding (protrusion, expansion, spacing)

2.3d (2009/03/27)

- New default for expansion option ‘step’: 1, if $\text{pdfTEX} \geq 1.40$ [3.3]

2.3c (2008/11/11)

- Support for LuaTeX enabled by default

2.3 (2007/12/23)

- New key ‘outer kerning’ for `\SetTracking` to customise outer kerning [5.3]
- Adjust protrusion settings for tracking even if protrusion is not enabled
- New option ‘verbose=silent’ to turn all warnings into mere messages [3.5]
- The `letterspace` package also works with `eplain` or `miniltx` [7]

2.2 (2007/07/14)

- Improvements to tracking/letterspacing: retain kerning ($\text{pdfTEX} \geq 1.40.4$); automatically adjust protrusion settings
- New key ‘no ligatures’ for `\SetTracking` to disable selected or all ligatures ($\text{pdfTEX} \geq 1.40.4$) [5.3]
- New keys ‘spacing’ and ‘outer spacing’ for `\SetTracking` to customise interword spacing [5.3]
- Possibility to expand a font with different parameters ($\text{pdfTEX} \geq 1.40.4$) [5.2]
- New optional argument for `\DisableLigatures` to disable selected ligatures [8]
- New command `\DeclareMicrotypeVariants` to specify variant suffixes [5.7]
- New command `\textmicrotypecontext` as a wrapper for `\microtypecontext` [6]
- Protrusion settings for Bitstream Letter Gothic

2.1 (2007/01/21)

- New command `\lslig` to protect ligatures in letterspaced text [7]

2.0 (2007/01/14)

- Support for the new extensions of $\text{pdfTEX} \geq 1.40$: tracking/letterspacing, additional kerning, and adjustment of interword spacing (glue) (new commands `\SetTracking`, `\SetExtraKerning`, `\SetExtraSpacing`; new options ‘tracking’, ‘kerning’, ‘spacing’) [5.3, 5.4, 5.5]
- New commands `\textls` and `\lssstyle` for letterspacing, new option ‘letterspace’ [3.4, 7]
- New option ‘babel’ for automatic micro-typographic adjustment to the selected language [3.5, 6]
- New font sets: ‘smallcaps’, ‘footnotesize’, ‘scriptsize’ [4, table 2]
- New package ‘letterspace’ providing the commands for robust and hyphenatable letterspacing [7]

1.9e (2006/07/28)

- New key ‘`inputenc`’ to specify the lists’ input encodings [5]
- Protrusion settings for Euler math fonts

1.9d (2006/05/05)

- Support for the Central European QX encoding (protrusion, inheritance)
- Protrusion settings for various Euro symbol fonts (Adobe, ITC, marvosym)
- Support for Unicode input in the configuration (`inputenc/utf8`)

1.9c (2006/02/02)

- Protrusion settings for URW Garamond

1.9a (2005/12/05)

- Defer setup until the end of the preamble
- Inside the preamble, `\microtypesetup` accepts all package options [3.6]
- Protrusion settings for T5 encoded Charter

1.9 (2005/10/28)

- New command `\DisableLigatures` to disable ligatures ($\pdfTeX \geq 1.30$) [8]
- New command `\microtypecontext` to change the configuration context; new key ‘`context`’ for the configuration commands [6]
- New key ‘`font`’ to add single fonts to the font sets [4]
- New key ‘`preset`’ to set all characters to the specified value before loading the lists
- Value ‘`relative`’ renamed to ‘`character`’ for ‘`unit`’ keys
- Support for the Polish OT4 encoding (protrusion, expansion, inheritance)
- Support for the Vietnamese T5 encoding (protrusion, expansion, inheritance)

1.8 (2005/06/23)

- New command `\DeclareMicrotypeSetDefault` to declare the default font sets [4]
- New option ‘`config`’ to load a different configuration file [3.5]
- New option ‘`unit`’ to measure protrusion factors relative to a dimension instead of the character width [5.1]
- Renamed commands from `\..MicroType..` to `\..Microtype..`
- Protrusion settings for AMS math fonts
- Protrusion settings for Times in LY1 encoding completed
- The ‘`allmath`’ font set also includes U encoding
- Support for protrusion with the `ledmac` package ($\pdfTeX \geq 1.30$)

1.7 (2005/03/23)

- Possibility to specify ranges of font sizes in the set declarations [4, 5]
- New command `\LoadMicrotypeFile` to load a configuration file manually [5.7]
- New command `\Microtype@Hook` for font package authors [14.4.4]
- New option ‘`verbose=errors`’ to turn all warnings into errors
- Warning when running in draft mode

1.6 (2005/01/24)

- New option ‘`factor`’ to influence protrusion resp. expansion of all characters of a font or font set [3.2, 5]
- When \pdfTeX is too old to expand fonts automatically, expansion has to be enabled explicitly, automatic expansion will be disabled [3.1]
- Use e- \TeX extensions, if available

1.5 (2004/12/15)

- When output mode is DVI, font expansion has to be enabled explicitly, automatic expansion will be disabled [3.1]
- New option ‘selected’ to enable selected expansion, default: false [3.3, 5.2]
- New default for expansion option ‘step’: 4 ($\min(\text{stretch}, \text{shrink})/5$) [3.3]
- Protrusion settings for Bitstream Charter

1.4 (2004/11/12)

- Set up fonts independently from L^AT_EX font loading
- New option: ‘final’ [3.5]

1.2 (2004/10/03)

- New font sets: ‘allmath’ and ‘basicmath’ [4, table 2]
- Protrusion settings for Computer Modern Roman math symbols
- Protrusion settings for TS1 encoding completed for Computer Modern Roman and Adobe Garamond

1.1 (2004/09/21)

- Protrusion settings for Adobe Minion
- New command: \DeclareCharacterInheritance [5.6]
- Characters may also be specified as octal or hexadecimal numbers [5]

1.0 (2004/09/11)

- First CTAN release

14 Implementation

The docstrip modules in this file are:

- driver: The documentation driver, only visible in the `dtx` file.
- package: The code for the `microtype` package (`microtype.sty`).
- `pdftex-def`: Definitions specific to pdf_{TEX} (`microtype-pdftex.def`).
- `xetex-def`: Definitions specific to X_ET_EX (`microtype-xetex.def`).
- `luatex-def`: Definitions specific to Lu_AT_EX (`microtype-luatex.def`).
- letterspace: The code for the `letterspace` package (`letterspace.sty`).
- plain: Code for `eplain`, `miniltx` (`letterspace` only).
- debug: Code for additional output in the log file.
Used for – surprise! – debugging purposes.
- luafile: Lua functions (`microtype.lua`).
- config: Surrounds all configuration modules.
 - cfg-t: Surrounds (Latin) text configurations.
 - mt: The main configuration file (`microtype.cfg`).
 - bch: Settings for Bitstream Charter (`mt-bch.cfg`).
 - blg: Settings for Bitstream Letter Gothic (`mt-blg.cfg`).
 - cmr: Settings for Computer Modern Roman (`mt-cmr.cfg`).
 - pad: Settings for Adobe Garamond (`mt-pad.cfg`).
 - ppl: Settings for Palatino (`mt-ppl.cfg`).
 - ptm: Settings for Times (`mt-ptm.cfg`).
 - pmn: Settings for Adobe Minion (`mt-pmn.cfg`).
 - Contributed by *Harald Harders*.
 - ugm: Settings for URW Garamond (`mt-ugm.cfg`).
 - cfg-u: Surrounds non-text configurations (U encoding).
 - msa: Settings for AMS ‘a’ symbol font (`mt-msa.cfg`).
 - msb: Settings for AMS ‘b’ symbol font (`mt-msb.cfg`).
 - euf: Settings for Euler Fraktur font (`mt-euf.cfg`).
 - eur: Settings for Euler Roman font (`mt-eur.cfg`).
 - eus: Settings for Euler Script font (`mt-eus.cfg`).
 - cfg-e: Surrounds Euro symbol configurations.
 - zpeu: Settings for Adobe Euro symbol fonts (`mt-zpeu.cfg`).
 - euroitc: Settings for ITC Euro symbol fonts (`mt-euroitc.cfg`).
 - mvs: Settings for marvosym Euro symbol (`mt-mvs.cfg`).
- test: A helper file that may be used to create and test protrusion settings (`test-microtype.tex`).

And now for something completely different.

¹ `(*package|letterspace)`

14.1 Preliminaries

\MT@MT This is us.

```
2 \def\MT@MT
3 (package) {microtype}
4 (letterspace) {letterspace}
```

\MT@fix@catcode We have to make sure that the category codes of some characters are correct (the german package, for instance, makes " active). Probably overly cautious. Ceterum censeo: it should be forbidden for packages to change catcodes within the preamble. Polite as we are, we'll restore them afterwards.

```
5 \let\MT@restore@catcodes\empty
6 \def\MT@fix@catcode#1#2{%
7   \edef\MT@restore@catcodes{%
8     \MT@restore@catcodes
9     \catcode#1 \the\catcode#1\relax
10  }%
11  \catcode#1 #2\relax
12 }
13 (package)\MT@fix@catcode{17}{14}\% ^^Q (comment)
14 \MT@fix@catcode{24} {9}\% ^^X (ignore)
15 (package)\MT@fix@catcode{33}{12}\% !
16 (package)\MT@fix@catcode{34}{12}\% "
17 \MT@fix@catcode{36} {3}\% $ (math shift)
18 \MT@fix@catcode{39}{12}\%
19 \MT@fix@catcode{42}{12}\% *
20 \MT@fix@catcode{43}{12}\% +
21 \MT@fix@catcode{44}{12}\% ,
22 \MT@fix@catcode{45}{12}\% -
23 \MT@fix@catcode{58}{12}\% :
24 \MT@fix@catcode{60}{12}\% <
25 \MT@fix@catcode{61}{12}\% =
26 \MT@fix@catcode{62}{12}\% >
27 (package)\MT@fix@catcode{63}{12}\% ?
28 \MT@fix@catcode{94} {7}\% ^ (superscript)
29 \MT@fix@catcode{96}{12}\%
30 (package)\MT@fix@catcode{124}{12}\%
```

These are all commands for the outside world. We define them here as blank commands, so that they won't generate an error if we are not running pdfTeX.

```
31 (*package)
32 \newcommand*\DeclareMicrotypeSet[3] []
33 \newcommand*\UseMicrotypeSet[2] []
34 \newcommand*\DeclareMicrotypeSetDefault[2] []
35 \newcommand*\SetProtrusion[3] []
36 \newcommand*\SetExpansion[3] []
37 \newcommand*\SetTracking[3] []
38 \newcommand*\SetExtraKerning[3] []
39 \newcommand*\SetExtraSpacing[3] []
40 \newcommand*\DisableLigatures[2] []
41 \newcommand*\DeclareCharacterInheritance[3] []
42 \newcommand*\DeclareMicrotypeVariants[1] {}
43 \newcommand*\DeclareMicrotypeAlias[2] {}
44 \newcommand*\LoadMicrotypeFile[1] {}
45 \newcommand*\DeclareMicrotypeBabelHook[2] {}
46 \newcommand*\microtypsetup[1] {}
47 \newcommand*\microtypecontext[1] {}
48 \newcommand*\textmicrotypecontext[2]{#2}
49 @ifpackageloaded{letterspace}{\let\MT@textls\relax}{%
50 (/package)
51 \newcommand*\lsstyle{}}
52 \newcommand*\textls[2] []
53 \def\textls#1{}
```

```

54 \newcommand*\lslig[1]{#1}
55 (*package)
56 }

```

These commands also have a starred version.

```

57 \def\DeclareMicrotypeSet#1{\@gobbletwo}
58 \def\DeclareMicrotypeVariants#1{\@gobble}

```

Set declarations are only allowed in the preamble (resp. the main configuration file). The configuration commands, on the other hand, must be allowed in the document, too, since they may be called inside font configuration files, which, in principle, may be loaded at any time.

```

59 \@onlypreamble\DeclareMicrotypeSet
60 \@onlypreamble\UseMicrotypeSet
61 \@onlypreamble\DeclareMicrotypeSetDefault
62 \@onlypreamble\DisableLigatures
63 \@onlypreamble\DeclareMicrotypeVariants
64 \@onlypreamble\DeclareMicrotypeBabelHook

```

Don't load `letterspace`.

```

65 \expandafter\let\csname ver@letterspace.sty\endcsname\empty

```

\MT@old@cmd The old command names had one more hunch.

```

66 \def\MT@old@cmd#1#2{%
67   \newcommand*#1{\MT@warning{%
68     string#1 is deprecated. Please use\MessageBreak
69     string#2 instead}%
70   \let #1#2#2}}
71 \MT@old@cmd\DeclareMicroTypeAlias\DeclareMicrotypeAlias
72 \MT@old@cmd\DeclareMicroTypeSet \DeclareMicrotypeSet
73 \MT@old@cmd\UseMicroTypeSet \UseMicrotypeSet
74 \MT@old@cmd\LoadMicroTypeFile \LoadMicrotypeFile
75 (/package)

```

\MT@warning Communicate.

```

\MT@warning@n1 76 \def\MT@warning{\PackageWarning\MT@MT}
77 \def\MT@warning@n1#1{\MT@warning{#1\@gobble}}
78 (*package)
\MT@info@n1 79 \def\MT@info{\PackageInfo\MT@MT}
80 \def\MT@info@n1#1{\MT@info{#1\@gobble}}
81 \let\MT@vinfo\@gobble
82 \def\MT@error{\PackageError\MT@MT}
83 \def\MT@warn@err#1{\MT@error{#1}%
84   This error message appears because you loaded the `\'\MT@MT'\MessageBreak
85   package with the option `verbose=errors'. Consult the documentation\MessageBreak
86   in \'MT@MT.pdf to find out what went wrong.}

```

14.1.1 Debugging

```

\tracingmicrotype
  \MT@dinfo
\MT@info@n1
Cases for \tracingmicrotype:
0: almost none
1: + sets & lists
2: + heirs
3: + slots
4: + factors
87 (*debug)
88 \MT@warning@n1{This is the debug version}
89 \newcount\tracingmicrotype

```

```

90 \tracingmicrotype=2
91 \def\MT@info#1{\PackageInfo{\MT@MT{#1}}{\MT@addto@annot{#1}}}
92 \def\MT@info@n1#1{\PackageInfo{\MT@MT{#1}@gobble}{\MT@addto@annot{#1}}}
93 \let\MT@vinfo\MT@info@n1
94 \def\MT@warning#1{\PackageWarning{\MT@MT{#1}}{\MT@addto@annot{Warning: #1}}}
95 \def\MT@warning@n1#1{\PackageWarning{\MT@MT{#1}@gobble}{\MT@addto@annot{Warning: #1}}}
96 \def\MT@dinfo#1#2{\ifnum\tracingmicrotype<#1 \else\MT@info{#2}\fi}
97 \def\MT@dinfo@n1#1#2{\ifnum\tracingmicrotype<#1 \else\MT@info@n1{#2}\fi}

```

\tracingmicrotypeinpdf

Another debug method: font switches can be marked in the PDF file with a small caret, an accompanying popup text box displaying all debug messages.

Cases for \tracingmicrotypeinpdf:

1: show new fonts

2: + show known fonts

```
98 \newcount\tracingmicrotypeinpdf
```

Let's see how it works ... (if you don't see anything special on this page, your PDF viewer doesn't support annotations).

```
\tracingmicrotypeinpdf=2
```

```
\MT@pdf@annot
\MT@addto@annot
\ifMT@inannot
```

During font setup, we save the text for the popup in \MT@pdf@annot. (This requires pdfTeX ≥ 1.30 .) The pdftexcmds package provides pdfTeX's utility commands in LuaTeX, too.

```

99 \RequirePackage{pdftexcmds}
100 \newif\ifMT@inannot \MT@inannottrue
101 \let\MT@pdf@annot@\empty
102 \def\MT@addto@annot#1{\ifnum\tracingmicrotypeinpdf>\z@ \ifMT@inannot
103   {\def\MessageBreak{^J}@spaces}%
104   \MT@xadd\MT@pdf@annot{\pdf@escapestring{#1^J}}\fi\fi}
```

\iftracingmicrotypeinpdfall

With \tracingmicrotypeinpdfall=false, the PDF output is (hopefully) identical, but some font switches will not be displayed; otherwise the output is affected, but *all* font switches are visible. In the latter case, we also insert a small kern so that multiple font switches are discernable.

```
105 \newif\iftracingmicrotypeinpdfall
```

\MT@show@pdfannot

A red caret is shown for fonts which are actually set up by *Microtype*, a green one marks fonts that we have already seen. The /Caret annotation requires a viewer for PDF version 1.5 (you could use /Text if you're using an older PDF viewer).

```

106 \def\MT@show@pdfannot#1{%
107   \ifnum\tracingmicrotypeinpdf<#1 \else
108     \iftracingmicrotypeinpdfall\leavevmode\fi
109     \pdfannot height 4pt width 4pt depth 2pt {%
110       /Subtype/Caret
111       /T(\expandafter\string\font@name)
112       \ifcase#1\or
113         /Subj(New font)/C[1 0 0]
114       \else
115         /Subj(Known font)/C[0 1 0]
116       \fi
117       /Contents(\MT@pdf@annot)
118     }%
119     \iftracingmicrotypeinpdfall\kern1pt \fi
120     \global\MT@inannotfalse
121   \fi
122 }
123 
```

```

124 
```

14.1.2 Requirements

\MT@plain The letterspace package works with:

- 0: miniltx
- 1: eplain
- 2: L^AT_EX

For plain usage, we have to copy some commands from `latex.ltx`.

```

125 (*plain)
126 \def\MT@plain{2}
127 \ifx\documentclass\undefined
128   \def\MT@plain{1}
129   \def\hmode@bgroup{\leavevmode\bgroup}
130   \def\nfss@text#1{{\mbox{#1}}}
131   \let\@typeset@protect\relax
132   \ifx\eplain\undefined
133     \def\MT@plain{0}
134     \def\PackageWarning#1#2{%
135       \begingroup
136         \newlinechar=10 %
137         \def\MessageBreak{^J(#1)\@spaces\@spaces\@spaces\@spaces}%
138         \immediate\write16{^JPackage #1 Warning: #2\on@line.^J}%
139       \endgroup
140     }
141     \def\on@line{ on input line \the\inputlineno}
142     \def\@spaces{\space\space\space\space}
143   \fi
144 \fi

```

\MT@requires@latex Better use groups than plain ifs.

```

145 \def\MT@requires@latex#1{%
146   \ifnum\MT@plain<#1 \expandafter\@secondoftwo\else\expandafter\@firstoftwo\fi
147 }
148 (/plain)

```

For definitions that depend on e-T_EX features.

```

149 \ifcase 0%
150   \ifx\TeXversion\undefined 1\else
151     \ifx\TeXversion\relax    1\else
152       \ifcase\TeXversion    1\fi
153     \fi
154   \fi
155 \else
156   \catcode`\^\Q=9 \catcode`\^X=14
157 \fi
158 (debug)\MT@dinfo@n{0}{this is
159 (debug)^\Q not
160 (debug) etex}

```

We check whether we are running pdfT_EX, X_ET_EX, or LuaT_EX, and load the appropriate definition file.

\MT@clear@options If we are using neither of these engines, we disable everything and exit.

```

161 \def\MT@clear@options{%
162 (plain) \MT@requires@latex{%
163   \AtEndOfPackage{\let\unprocessedoptions\relax\MT@restore@catcodes}%
164   \let\CurrentOption@\empty
165 (package) \let\MT@endinput\endinput
166 (plain) }\relax
167 }

```

A hack circumventing the T_EX Live 2004 hack which undefines the pdfT_EX primitives in the format in order to hide the fact that pdfT_EX is being run from the user. This

has been *fixed* in TeX Live 2005.

```

168 \ifx\normalpdftexversion@undefined \else
169   \let\pdftexversion \normalpdftexversion
170   \let\pdftexrevision\normalpdftexrevision
171   \let\pdfoutput \normalpdfoutput
172 \fi

\MT@engine Old packages might have let \pdftexversion to \relax.

\MT@engine@tooold 173 \let\MT@engine\relax
174 (letterspace)\def\MT@engine@tooold{0}
175 \ifx\pdftexversion@undefined \else
176   \ifx\pdftexversion\relax \else
177     \def\MT@engine{pdf}
178 (letterspace) \let\MT@pdf@or@lua@\firstoftwo
179 (letterspace) \ifnum\pdftexversion > 139 \def\MT@engine@tooold{1}\fi
180 \fi
181 \fi
182 \ifx\directlua@undefined \else
183   \ifx\directlua\relax \else
184     \def\MT@engine{lua}

```

Since approx. LuaTeX 0.80, \pdftexversion is let to \luatexversion, so that we would be fooled to think that pdfTeX is too old.

```

185 (*letterspace)
186   \let\MT@pdf@or@lua@\secondoftwo
187   \ifnum\luatexversion < 62 \def\MT@engine@tooold{0}
188   \else
189     \def\MT@engine@tooold{1}
190     \ifnum\luatexversion > 84
191       \let\pdfoutput\outputmode
192       \let\pdfprotrudechars\protrudechars
193     \fi
194   \fi
195 (/letterspace)
196   \fi
197 \fi
198 (*package)
199 \ifx\MT@engine\relax
200   \ifx\XeTeXversion@undefined \else
201     \ifx\XeTeXversion\relax \else
202       \def\MT@engine{xe}
203     \fi
204   \fi
205 \fi
206 (/package)
207 (/package|letterspace)

```

\MT@pdftex@no pdfTeX's features for which we provide an interface here haven't always been available, and some specifics have changed over time. Therefore, we have to test which pdfTeX we're using, if any. \MT@pdftex@no will be used throughout the package to respectively do the right thing.

Currently, we have to distinguish seven cases for pdfTeX:

- 0: not running pdfTeX
- 1: pdfTeX (< 0.14f)
- 2: + micro-typographic extensions (0.14f,g)
- 3: + protrusion relative to 1em ($\geq 0.14h$)
- 4: + automatic font expansion; protrusion no longer has to be set up first; scale factor fixed to 1000; default \efcode = 1000 (≥ 1.20)

- 5: + \left, \right) marginkern; \pdfnoligatures; \pdfstrcmp; \pdfescapestring
 ≥ 1.30
- 6: + adjustment of interword spacing; extra kerning; \letterspacefont; \pdfmatch¹⁴;
\pdftracingfonts; always e-TeX (≥ 1.40)
- 7: + \letterspacefont doesn't disable ligatures and kerns; \pdfcopyfont ($\geq 1.40.4$)

```

208 (*pdftex-def)
209 (debug) \MT@dinfo@n{0}{this is pdftex \the\pdftexversion(\pdftexrevision)}
210 \def\MT@pdftex@no{7}
211 \ifnum\pdftexversion = 140
212   \ifnum\pdftexrevision < 4
213     \def\MT@pdftex@no{6}
214   \fi
215 \else
216   \ifnum\pdftexversion < 140
217     \def\MT@pdftex@no{5}
218   \ifnum\pdftexversion < 130
219     \def\MT@pdftex@no{4}
220   \ifnum\pdftexversion < 120
221     \def\MT@pdftex@no{3}
222   \ifnum\pdftexversion = 14
223     \ifnum \expandafter`\pdftexrevision < `h
224       \def\MT@pdftex@no{2}
225     \ifnum \expandafter`\pdftexrevision < `f
226       \def\MT@pdftex@no{1}
227     \fi
228   \fi
229 \else
230   \ifnum\pdftexversion < 14
231     \def\MT@pdftex@no{1}
232   \fi
233 \fi
234 \fi
235 \fi
236 \fi
237 \fi
238 (debug) \MT@dinfo@n{0}{pdftex no.: \MT@pdftex@no}
239 (/pdftex-def)

```

\MT@xetex@no XeTeX supports character protrusion since version 0.9997.

```

240 (*xetex-def)
241 (debug) \MT@dinfo@n{0}{this is xetex (\the\XeTeXversion\XeTeXrevision)}
242 \ifdim 0\XeTeXrevision pt < 0.9997pt
243   \def\MT@xetex@no{1}
244 \else
245   \def\MT@xetex@no{2}
246 \fi
247 (debug) \MT@dinfo@n{0}{xetex no.: \MT@xetex@no}
248 (/xetex-def)

```

\MT@luatex@no Cases for LuaTeX (\luatexversion ought to have been enabled by the format):

- 0: N/A
- 1: LuaTeX (< 0.36)
- 2: + \directlua without state number (≥ 0.36)
- 3: + \letterspacefont (≥ 0.62)
- 4: + almost all of the pdfTeX primitives have been renamed (≥ 0.85)

14 This command was actually introduced in 1.30, but failed on strings longer than 1023 bytes.

5: + default \efcode = 1000; \protrusionboundary [not yet supported] (≥ 0.90)

Also, sometime between 1.0.4 and 1.0.7, the function font.setexpansion has been introduced, but we'll test this directly later.

```
249 (*luatex-def)
250 (debug)\MT@dinfo@n10{this is luatex (\the\luatexversion)}
```

\MT@lua Communicate with lua. Beginning with LuaTeX 0.36, \directlua no longer requires a state number.

```
251 \def\MT@lua{\directlua}
252 \def\MT@luatex@no{5}
253 \ifnum\luatexversion<90
254   \def\MT@luatex@no{4}
255   \ifnum\luatexversion<85
256     \def\MT@luatex@no{3}
257     \ifnum\luatexversion<62
258       \def\MT@luatex@no{2}
259       \ifnum\luatexversion<36
260         \def\MT@lua{\directlua0}
261         \def\MT@luatex@no{1}
262       \fi
263     \fi
264   \fi
265 \fi
266 (debug)\MT@dinfo@n10{luatex no.: \MT@luatex@no}
267 (/luatex-def)
268 (*pdftex-def|xetex-def|letterspace)
269 \ifnum
270 (pdftex-def|xetex-def) \csname MT@\MT@engine tex@no\endcsname < 2
271 (letterspace) \MT@engine@tooold=\z@
272 \MT@warning@n1{You
273 (*letterspace)
274   \ifx\MT@engine\relax
275     don't seem to be using pdftex or luatex.\MessageBreak
276     Try running `pdftex' or `luatex' instead of\MessageBreak
277     `\\ifx\\XeTeXversion\\undefined\\else xe\\fi tex'%
278   \else
279   (/letterspace)
280     are using a \MT@engine tex version older than
281 (pdftex-def) 0.14f%
282 (xetex-def) 0.9997%
283 (letterspace) \MT@pdf@or@lua{1.40}{0.62}%
284   .\MessageBreak
285   `\\MT@MT' does not work with this version.\MessageBreak
286   Please install a newer version of \MT@engine tex%
287 (letterspace) \fi
288   .\MessageBreak I will quit now}
289 \MT@clear@options
290 \endinput\fi
291 (/pdftex-def|xetex-def|letterspace)
```

Still there? Then we can begin: We need the keyval package, including the ‘new’ \KV@@sp@def implementation.

```
292 (*package|letterspace)
293 \RequirePackage{keyval}[1997/11/10]
294 (*package)
```

\MT@toks We need a token register.

```
295 \newtoks\MT@toks
```

\ifMT@if@ A scratch if.

```
296 \newif\ifMT@if@
```

14.1.3 Declarations

```

\ifMT@protrusion These are the global switches ...
\ifMT@expansion 297 \newif\ifMT@protrusion
\ifMT@auto 298 \newif\ifMT@expansion
\ifMT@selected 299 \newif\ifMT@auto
\ifMT@noligatures 300 \newif\ifMT@selected
\ifMT@noligatures 301 \newif\ifMT@noligatures
\ifMT@draft 302 \newif\ifMT@draft
\ifMT@spacing 303 \newif\ifMT@spacing
\ifMT@kerning 304 \newif\ifMT@kerning
\ifMT@tracking 305 \newif\ifMT@tracking
\ifMT@tracking 306 \newif\ifMT@babel
\MT@babel ... and numbers.
\MT@ex@level 307 \let\MT@pr@level\tw@
\MT@pr@factor 308 \let\MT@ex@level\tw@
\MT@ex@factor 309 \let\MT@pr@factor\@m
\MT@ex@factor 310 \let\MT@ex@factor\@m
\MT@sp@factor 311 \let\MT@sp@factor\@m
\MT@kn@factor 312 \let\MT@kn@factor\@m

\MT@pr@unit Default unit for protrusion settings is character width, for spacing space, for kerning
\MT@sp@unit (and tracking) 1em.
\MT@kn@unit 313 \let\MT@pr@unit\@empty
\MT@sp@unit 314 \let\MT@sp@unit\m@ne
\MT@kn@unit 315 \def\MT@kn@unit{1em}

\MT@stretch Expansion settings.
\MT@shrink 316 \let\MT@stretch\m@ne
\MT@step 317 \let\MT@shrink \m@ne
\MT@step 318 \let\MT@step \m@ne

\MT@pr@min Minimum and maximum values allowed by pdfTEX.
\MT@pr@max 319 \def\MT@pr@min{-\@m}
\MT@ex@min 320 \let\MT@pr@max\@m
\MT@ex@min 321 \let\MT@ex@min\z@
\MT@ex@max 322 \let\MT@ex@max\@m
\MT@sp@min 323 \def\MT@sp@min{-\@m}
\MT@sp@max 324 \let\MT@sp@max\@m
\MT@sp@max 325 \def\MT@kn@min{-\@m}
\MT@kn@min 326 \let\MT@kn@max\@m
\MT@kn@max 327 (/package)
\MT@tr@min 328 \def\MT@tr@min{-\@m}
\MT@tr@max 329 \let\MT@tr@max\@m
\MT@tr@max 330 (*package)

\MT@factor@default Default factor.
331 \def\MT@factor@default{1000 }

\MT@stretch@default Default values for expansion.
\MT@shrink@default 332 \def\MT@stretch@default{20 }
333 \def\MT@shrink@default{20 }

\MT@letterspace Default value for letterspacing (in thousandths of 1em).
\MT@letterspace@default 334 (/package)
335 \let\MT@letterspace\m@ne
336 \def\MT@letterspace@default{100}
337 (*package)

\ifMT@document Our private test whether we're still in the preamble.
338 \newif\ifMT@document
339 (/package)
340 (/package|letterspace)

```

14.1.4 Auxiliary macros

\MT@requires@pdftex For definitions that depend on a particular pdfTeX resp. LuaTeX version.

```
341 (*pdftex-def|luatex-def)
342 \def
343 (pdftex-def) \MT@requires@pdftex%
344 (luatex-def) \MT@requires@luatex%
345 #1{\ifnum
346 (pdftex-def) \MT@pdftex@no
347 (luatex-def) \MT@luatex@no
348     <#1 \expandafter@\secondoftwo\else\expandafter@\firstoftwo\fi}
349 (luatex-def&debug)\MT@requires@luatex4{\directlua{tex.enableprimitives('pdf',{'tracingfonts'})}}\relax
350 (pdftex-def&debug)\MT@requires@pdftex6{
351 (debug)\pdftracingfonts=1
352 (pdftex-def&debug)}\relax
353 (/pdftex-def|luatex-def)
```

Some functions are loaded from a dedicated `lua` file. This avoids character escaping problems and incompatibilities between versions of LuaTeX. Unless running a recent L^AT_EX, we load the `luatexbase` package.

```
354 (*luatex-def)
355 \ifl@t@r{fmtversion{2016/01/01}}\relax{\RequirePackage{luatexbase}}
```

We load `luatofload`, because some of its functions are required in `microtype.lua`. This eliminates the need for the user to load `fontspec` before `microtype`. There will hardly be any LuaTeX documents that don't load this package, anyway.

```
356 \RequirePackage{luatofload}
357 \MT@lua{require("microtype")}
358 (/luatex-def)
```

Here it begins. The module was contributed by Élie Roux.

```
359 (*luafile)
360
361 function microtype.info(...)
362   luatexbase.module_info("microtype",...)
363 end
364
365 local find      = string.find
366 local match     = string.match
367 local tex_write = tex.write
368
369 local catpackage
370 if luatexbase.registernumber then
371   catpackage = luatexbase.registernumber("catcodetable@atletter") -- LaTeX
372 else
373   catpackage = luatexbase.catcodetables.CatcodeTableAtletter -- luatexbase
374 end
375 function microtype.sprint (...)
376   tex.sprint(catpackage, ...)
377 end
378
379 (/luafile)
```

To be continued, but first back to primitives.

\MT@glet Here's the forgotten one.

```
380 (*package|letterspace)
381 \def\MT@glet{\global\let}
```

\MT@exp@cs \MT@exp@gcs Commands to create command sequences. Those that are going to be defined globally should be created inside a group so that the save stack won't explode.

```
382 \def\MT@exp@cs#1#2{\expandafter#1\csname#2\endcsname}
383 (*package)
384 \def\MT@exp@gcs#1#2{\begingroup\expandafter\endgroup\expandafter#1\csname#2\endcsname}
```

```

\MT@def@n This is \@namedef and global.
\MT@gdef@n 385 \def\MT@def@n{\MT@exp@cs\def}
            386 \def\MT@gdef@n{\MT@exp@gcs\gdef}

\MT@edef@n Its expanding versions.
\MT@xdef@n 387 (/package)
            388 \def\MT@edef@n{\MT@exp@cs\edef}
            389 (*package)
            390 \def\MT@xdef@n{\MT@exp@gcs\xdef}

\MT@let@nc \let a \csname sequence to a command.
\MT@glet@nc 391 \def\MT@let@nc{\MT@exp@cs\let}
            392 \def\MT@glet@nc{\MT@exp@gcs\MT@glet}

\MT@let@cn \let a command to a \csname sequence.
            393 (/package)
            394 \def\MT@let@cn#1#2{\expandafter\let\expandafter#1\csname #2\endcsname}
            395 (*package)

\MT@let@nn \let a \csname sequence to a \csname sequence.
\MT@glet@nn 396 \def\MT@let@nn{\MT@exp@cs\MT@let@cn}
            397 \def\MT@glet@nn{\MT@exp@gcs{\global\expandafter\MT@let@cn} }

\MT@@font Remove trailing space from the font name.
            398 \def\MT@@font{\expandafter\string\MT@font}

\MT@exp@one@n Expand the second token once and enclose it in braces.
            399 (/package)
            400 \def\MT@exp@one@n#1{\expandafter{\expandafter#1\expandafter{#2}}}

\MT@exp@two@c Expand the next two tokens after (#1) once.
            401 \def\MT@exp@two@c#1{\expandafter\expandafter\expandafter#1\expandafter}
            402 (*package)

\MT@exp@two@n Expand the next two tokens after (#1) once and enclose them in braces.
            403 \def\MT@exp@two@n#1#2#3{%
            404   \expandafter\expandafter\expandafter
            405   #1\expandafter\expandafter\expandafter
            406   {\expandafter#2\expandafter}\expandafter{#3}}

```

You do not wonder why \MT@exp@one@c doesn't exist, do you?

Wrapper for testing whether command resp. \csname sequence is defined. If we are running e-TEX, we will use its primitives \ifdefined and \ifcsname, which decreases memory use substantially.

```

\MT@ifdefined@c@T 407 \def\MT@ifdefined@c@T#1{%
            408 ^^X \ifdefined#1\expandafter\@firstofone\else\expandafter\@obble\fi
            409 ^^Q \ifx#1@undefined\expandafter\@obble\else\expandafter\@firstofone\fi
            410 }
            411 (/package)
            412 \def\MT@ifdefined@c@TF#1{%
            413 ^^X \ifdefined#1\expandafter\@firstoftwo\else\expandafter\@secondoftwo\fi
            414 (package)^^Q \ifx#1@undefined
            415 (package)^^Q \expandafter\@secondoftwo\else\expandafter\@firstoftwo\fi
            416 }
            417 \def\MT@ifdefined@n@T#1{%
            418 ^^X \ifcsname#1\endcsname\expandafter\@firstofone\else\expandafter\@obble\fi
            419 (package)^^Q \begingroup\MT@exp@two@c\endgroup\ifx\csname #1\endcsname\relax
            420 (package)^^Q \expandafter\@obble\else\expandafter\@firstofone\fi
            421 }
            422 \def\MT@ifdefined@n@TF#1{%
            423 ^^X \ifcsname#1\endcsname\expandafter\@firstoftwo\else\expandafter\@secondoftwo\fi
            424 (package)^^Q \begingroup\MT@exp@two@c\endgroup\ifx\csname #1\endcsname\relax
            425 (package)^^Q \expandafter\@secondoftwo\else\expandafter\@firstoftwo\fi

```

```

426 }
427 (*package)

\MT@detokenize@n      Translate a macro into a token list. With e-TeX, we can use \detokenize. We also
\MT@detokenize@c      need to remove the last trailing space; and only the last one – therefore the fiddling
\MT@rem@last@space    (and the \string isn't perfect, of course).
428 \def\MT@detokenize@n#1{%
429   ^X \expandafter\MT@rem@last@space\detokenize{#1} \@nil
430   ^Q \string#1%
431 }
432 \def\MT@detokenize@c#1{%
433   ^X \MT@exp@one@n\MT@detokenize@n#1%
434   ^Q \MT@exp@two@c\MT@rem@last@space\strip@prefix\meaning#1 \@nil
435 }
436 \def\MT@rem@last@space#1 #2{#1%
437   \ifx\@nil#2\else \space
438   \expandafter\MT@rem@last@space\expandafter#2\fi
439 }

\MT@ifempty      Test whether argument is empty.
440 (/package)
441 \begingroup
442 \catcode`\%=12
443 \catcode`\&=14
444 \gdef\MT@ifempty#1{%
445   \if %#1%
446     \expandafter\@firstoftwo
447   \else
448     \expandafter\@secondoftwo
449   \fi
450 }
451 \endgroup
452 (*package)

\MT@ifint      Test whether argument is an integer, using an old trick by Mr. Arseneau, or the
                latest and greatest from pdfTeX or LuaTeX (which also allows negative numbers, as
                required by the letterspace option).
453 (/package)
454 (/package|letterspace)
455 (pdftex-def)\MT@requires@pdftex6{
456 (letterspace)\MT@pdf@or@lua{
457 (*pdftex-def|letterspace)
458 \def\MT@ifint#1{%
459   \ifcase\pdfmatch{^-*[0-9]+ *$}{#1}\relax
460     \expandafter\@secondoftwo
461   \else
462     \expandafter\@firstoftwo
463   \fi
464 }
465 }{
466 (pdftex-def|letterspace)
467 (*pdftex-def|xetex-def|letterspace)
468 \def\MT@ifint#1{%
469   \if!\ifnum9<1#1!\else?\fi
470     \expandafter\@firstoftwo
471   \else
472     \expandafter\@secondoftwo
473   \fi
474 }
475 (pdftex-def|xetex-def|letterspace)
476 (pdftex-def|letterspace)
477 (luatex-def)\def\MT@ifint#1{\csname\MT@lua{microtype.if_int([[#1]])}\endcsname}
478 (*luafile)
479 local function if_int(s)

```

```

480   if find(s,"^-*[0-9]+ *$") then
481     tex_write("@firstoftwo")
482   else
483     tex_write("@secondoftwo")
484   end
485 end
486 microtype.if_int = if_int
487
488 (/luafile)

```

\MT@ifdimen Test whether argument is dimension (or number). (nd and nc are new Didot resp. Cicero, added in pdfTeX 1.30; px is a pixel.)

```

489 (*pdftex-def)
490 \MT@requires@pdftex6{
491 \def\MT@ifdimen#1{%
492   \ifcase\pdfmatch{^([0-9]+([.,][0-9]+)?|[.,][0-9]+)%}
493     (em|ex|cm|mm|in|pc|pt|dd|cc|bp|sp|nd|nc|px)? *$}{#1}\relax
494   \expandafter\@secondoftwo
495   \else
496     \expandafter\@firstoftwo
497   \fi
498 }
499 }{
500 (/pdftex-def)
501 (*pdftex-def|xetex-def)
502 \def\MT@ifdimen#1{%
503   \setbox\z@=\hbox{%
504     \MT@count=1#1\relax
505     \ifnum\MT@count=\@ne
506       \aftergroup\@secondoftwo
507     \else
508       \aftergroup\@firstoftwo
509     \fi
510   }%
511 }
512 (/pdftex-def|xetex-def)
513 (pdftex-def)
514 (luatex-def)\def\MT@ifdimen#1{\csname\MT@lua{microtype.if_dimen}[[#1]]\endcsname}
515 (*luafile)
516 local function if_dimen(s)
517   if (find(s, "^-*[0-9]+(%a*) *$") or
518     find(s, "^-*[0-9]*[.,][0-9]+(%a*) *$")) then
519     tex_write("0firstoftwo")
520   else
521     tex_write("@secondoftwo")
522   end
523 end
524 microtype.if_dimen = if_dimen
525
526 (/luafile)

```

\MT@ifdim Compare floating point numbers.

```

527 (*package)
528 \def\MT@ifdim#1#2#3{%
529   \ifdim #1\p@ #2 #3\p@
530     \expandafter\@firstoftwo
531   \else
532     \expandafter\@secondoftwo
533   \fi
534 }
535 (/package)

```

\MT@ifstreq Test whether two strings (fully expanded) are equal.

```

536 (*pdftex-def)
537 \MT@requires@pdftex5{

```

```

538 \def\MT@ifstreq#1#2{%
539   \ifcase\pdfstrcmp{#1}{#2}\relax
540     \expandafter\@firstoftwo
541   \else
542     \expandafter\@secondoftwo
543   \fi
544 }
545 }{
546 (pdftex-def)
547 (*pdftex-def|xetex-def)
548 \def\MT@ifstreq#1#2{%
549   \edef\MT@res@a{\#1}%
550   \edef\MT@res@b{\#2}%
551   \ifx\MT@res@a\MT@res@b
552     \expandafter\@firstoftwo
553   \else
554     \expandafter\@secondoftwo
555   \fi
556 }
557 (pdftex-def|xetex-def)
558 (pdftex-def)
559 (luatex-def)\def\MT@ifstreq#1#2{\csname\MT@lua{microtype.if_str_eq([[#1]],[[#2]])}\endcsname}
560 (*luafile)
561 local function if_str_eq(s1, s2)
562   if s1 == s2 then
563     tex_write("@firstoftwo")
564   else
565     tex_write("@secondoftwo")
566   end
567 end
568 microtype.if_str_eq = if_str_eq
569
570 (/luafile)

```

\MT@xadd Add item to a list.

```

571 (*package)
572 \def\MT@xadd#1#2{%
573   \ifx#1\relax
574     \xdef#1{#2}%
575   \else
576     \xdef#1{\#1#2}%
577   \fi
578 }

```

\MT@xaddb Add item to the beginning.

```

579 \def\MT@xaddb#1#2{%
580   \ifx#1\relax
581     \xdef#1{#2}%
582   \else
583     \xdef#1{\#2#1}%
584   \fi
585 }
586 (/package)

```

\MT@map@clist@n Run (#2) on all elements of the comma list (#1). This and the following is modelled after L^ET_EX3 commands.

```

587 (*package|letterspace)
588 \def\MT@map@clist@n#1#2{%
589   \ifx@\empty#1\else
590     \def\MT@clist@function##1{#2}%
591     \MT@map@clist@#1,\@nil,\@nil
592   \fi
593 }
594 \def\MT@map@clist@c#1{\MT@exp@one@n\MT@map@clist@n#1}

```

```

595 \def\MT@map@clist@#1,{%
596   \ifx\@nil#1%
597     \expandafter\MT@clist@break
598   \fi
599   \MT@clist@function{#1}%
600   \MT@map@clist@
601 }
602 \let\MT@clist@function\gobble
603 \def\MT@clist@break#1\@nnil{%
604   (*package)

```

\MT@map@tlist@ Execute ⟨#2⟩ on all elements of the token list ⟨#1⟩. \MT@tlist@break can be used to jump out of the loop.

```

605 \def\MT@map@tlist@#1#2{\MT@map@tlist@#2#1\@nnil}
606 \def\MT@map@tlist@#1#2{\expandafter\MT@map@tlist@\expandafter#2#1\@nnil}

```

\MT@tlist@break \def\MT@map@tlist@#1#2{%
608 \ifx\@nnil#2\else
609 #1{#2}%
610 \expandafter\MT@map@tlist@
611 \expandafter#1%
612 \fi
613 }
614 \def\MT@tlist@break#1\@nnil{\fi}

\ifMT@in@list@ Test whether item ⟨#1⟩ is in comma list ⟨#2⟩. Using \pdfmatch would be slower.

```

615 \newif\ifMT@in@list@
616 \def\MT@in@list@#2{%
617   \def\MT@res@a##1,#1##2##3\@nnil{%
618     \ifx##2\@empty
619       \MT@in@list@false
620     \else
621       \MT@in@list@true
622     \fi
623   }%
624   \expandafter\MT@res@a\expandafter,#2,#1,\@empty\@nnil
625 }

```

\MT@rem@from@clist Remove item ⟨#1⟩ from comma list ⟨#2⟩. This is basically \removeelement from ltcntrl.dtx. Using \pdfmatch and \pdflastmatch here would be really slow!

```

626 \def\MT@rem@from@clist@#1#2{%
627   \def\MT@res@a##1,#1##2\MT@res@a{##1,##2\MT@res@b}%
628   \def\MT@res@b##1,\MT@res@b##2\MT@res@b{\ifx##1\@empty\else##1\fi}%
629   \xdef#2{\MT@exp@two@c\MT@res@b\MT@res@a\expandafter,#2,\MT@res@b,#1,\MT@res@a}%
630 }

```

\MT@in@tlist@ \MT@in@tlist@ Test whether item is in token list. Since this isn't too elegant, I thought that at least here, \pdfmatch would be more efficient – however, it turned out to be even slower than this solution.

```

631 \def\MT@in@tlist@#1{%
632   \MT@in@list@false
633   \def\MT@res@a##1{%
634     \MT@map@tlist@c##2\MT@in@tlist@
635   }%
636   \def\MT@in@tlist@#1{%
637     \edef\MT@res@b##1{%
638       \ifx\MT@res@a\MT@res@b
639         \MT@in@list@true
640       \expandafter\MT@tlist@break
641     \fi
642   }

```

\MT@in@rlist@ \MT@in@rlist@ \MT@size@name Test whether size \MT@size is in a list of ranges. Store the name of the list in \MT@size@name

```

643 \def\MT@in@rlist#1{%
644   \MT@inlist@false
645   \MT@map@tlist@c#1\MT@in@rlist@
646 }
647 \def\MT@in@rlist@#1{\expandafter\MT@in@rlist@@#1}
648 \def\MT@in@rlist@@#1#2#3{%
649   \MT@ifdim{#2}=\m@ne{%
650     \MT@ifdim{#1}=\MT@size
651     \MT@inlist@true
652     \relax
653   }{%
654     \MT@ifdim{\MT@size<{#1}}\relax{%
655       \MT@ifdim{\MT@size<{#2}}{%
656         \MT@inlist@true
657         \relax
658       }%
659     }%
660   \ifMT@inlist@
661     \def\MT@size@name{#3}%
662     \expandafter\MT@tlist@break
663   \fi
664 }

```

\MT@loop This is the same as L^AT_EX's `\loop`, which we mustn't use, since this could confuse an outer `\loop` in the document.

```

\MT@iterate 665 (/package)
666 \def\MT@loop#1\MT@repeat{%
667   \def\MT@iterate#1\relax\expandafter\MT@iterate\fi}%
668   \MT@iterate \let\MT@iterate\relax
669 }
670 \let\MT@repeat\fi

```

\MT@while@num Execute `\#3` from `\#1` up to (excluding) `\#2` (much faster than L^AT_EX's `\@whilenum`).

```

671 \def\MT@while@num#1#2#3{%
672   \tempcnta#1\relax
673   \MT@loop #3%
674   \advance\tempcnta \one
675   \ifnum\tempcnta < #2\MT@repeat
676 }
677 (/package|letterspace)

```

\MT@do@font Execute `\#1` 256 times,

```

678 (pdftex-def|letterspace)\def\MT@do@font{\MT@while@num\z@\@ccvi}
      resp. for the whole font for LuaTEX, if loaded by fontspec/luaotfload.

```

```

679 (*luatex-def)
680 \def\MT@do@font#1{%
681   \MT@if@fontspec@font{%
682     \def\MT@do@font@function{#1}%
683     \MT@lua{microtype.do_font()}%
684   }{\MT@while@num\z@\@ccvi{#1}}%
685 }
686 (/luatex-def)

```

This is the `lua` function, which is much faster than looping through all glyphs in T_EX. Legacy fonts (which this function might be fed with, because `fontspec` isn't always getting it right) don't contain a `v.index` field.

```

687 (*luafile)
688 local function do_font()
689   if fonts then
690     local thefont
691     if fonts.ids then --- legacy luaotfload
692       thefont = fonts.ids[font.current()]
693     else --- new location

```

```

694     thefont = fonts.hashes.identifiers[font.current()]
695   end
696   if thefont then
697     for i,v in next,thefont.characters do
698       if v.index == nil or v.index > 0 then
699         microtype.sprint([[[@tempcnda=]]...i...[[\relax\MT@dofont@function]]])
700       end
701     end
702   end
703 end
704 end
705 microtype.do_font = do_font
706
707 (/luafile)

```

The X_ET_EX variant.

```

708 (*xetex-def)
709 \def\MT@do@font#1{%
710   \tempcnda=\z@
711   \loop #1%
712   \advance\tempcnda \one
713   \ifnum\tempcnda < \XeTeXcountglyphs\MT@font \MT@repeat
714 }
715 (*xetex-def)
716 (*package)

```

\MT@count Increment macro *#1* by one. Saves using up too many counters. The e-T_EX way is slightly faster.

```

717 \newcount\MT@count
718 \def\MT@increment#1{%
719   \edef#1{\number\numexpr #1 + 1\relax}%
720   \MT@count=#1\relax
721   \advance\MT@count \one
722   \edef#1{\number\MT@count}%
723 }

```

\MT@scale Multiply and divide a counter. If we are using e-T_EX, we will use its \numexpr primitive. This has the advantage that it is less likely to run into arithmetic overflow. The result of the division will be rounded instead of truncated. Therefore, we'll get a different (more accurate) result in about half of the cases.

```

724 \def\MT@scale#1#2#3{%
725   \multiply #1 #2\relax
726   \ifnum #3 = \z@
727     \numexpr #1 * #2\relax
728   \else
729     \numexpr #1 * #2 / #3\relax
730   \divide #1 #3\relax
731   \fi
732 }

```

\MT@abbr@pr Some abbreviations. Thus, we can have short command names but full-length log output.

```

733 \def\MT@abbr@pr{protrusion}
734 \def\MT@abbr@ex{expansion}
735 \def\MT@abbr@pr@c{protrusion codes}
736 \def\MT@abbr@ex@c{expansion codes}
737 \def\MT@abbr@pr@inh{protrusion inheritance}
738 \def\MT@abbr@ex@inh{expansion inheritance}
739 \def\MT@abbr@n1{nligatures}
740 \def\MT@abbr@sp{spacing}
741 \def\MT@abbr@sp@c{interword spacing codes}
742 \def\MT@abbr@sp@inh{interword spacing inheritance}
743 \def\MT@abbr@kn{kerning}
\MT@abbr@kn
\MT@abbr@kn@c
\MT@abbr@kn@inh
\MT@abbr@tr
\MT@abbr@tr@c

```

```

744 \def\MT@abbr@kn@c{kerning codes}
745 \def\MT@abbr@kn@inh{kerning inheritance}
746 \def\MT@abbr@tr{tracking}
747 \def\MT@abbr@tr@c{tracking amount}

\MT@rbba@protrusion These we also need the other way round.
\MT@rbba@expansion 748 \def\MT@rbba@protrusion{pr}
\MT@rbba@spacing   749 \def\MT@rbba@expansion{ex}
\MT@rbba@kerning   750 \def\MT@rbba@spacing{sp}
\MT@rbba@tracking 751 \def\MT@rbba@kerning{kn}
                    752 \def\MT@rbba@tracking{tr}

\MT@features We can work on these lists to save some guards in the dtx file.
\MT@features@long 753 \def\MT@features{pr,ex,sp,kn,tr}
                  754 \def\MT@features@long{protrusion,expansion,spacing,kerning,tracking}

\MT@is@feature Whenever an optional argument accepts a list of features, we can use this command to check whether a feature exists in order to prevent a rather confusing 'Missing \endcsname inserted' error message. The feature (long form) must be in (#1), the type of list to ignore in (#2), then comes the action.
755 \def\MT@is@feature#1#2{%
756   \MT@in@clist{#1}\MT@features@long
757   \ifMT@inlist@%
758     \expandafter\@firstofone
759   \else
760     \MT@error{'#1' is not an available micro-typographic\MessageBreak
761       feature. Ignoring #2}{Available features are: `'\MT@features@long'.}%
762     \expandafter\@gobble
763   \fi
764 }

```

14.1.5 Compatibility

For the record, the following L^AT_EX kernel commands will be modified by `microtype`:

- `\pickup@font`
- `\do@subst@correction`
- `\add@accent` (all in section 14.2.9)
- `\showhyphens` (in section 14.4.6)

The `wordcount` package redefines the font-switching commands, which will break `microtype`. Since `microtype` doesn't have an effect on the number of words in the document anyway, we will simply disable ourselves.

```

765 \@ifl@aded{tex}{wordcount}{%
766   \MT@warning@nl{Detected the `wordcount' utility.\MessageBreak
767   Disabling `'\MT@MT', since it wouldn't work}%
768   \MT@clear@options\endinput}\relax

```

The `minimal` class doesn't define any size commands other than `\normalsize`, which will result in lots of warnings. Therefore we issue a warning about the warnings.

```

769 \@ifclassloaded{minimal}{%
770   \MT@warning@nl{Detected the `minimal' class.\MessageBreak
771   Expect lots of warnings and some malfunctions.\MessageBreak
772   You might want to use a proper class instead}%
773 }\relax

```

`\MT@setup@` The setup is deferred until the end of the preamble. This has a couple of advantages: `\microtypesetup` can be used to change options later on in the preamble, and fonts don't have to be set up before `microtype`.

```

774 (/package)
775 (*package|letterspace)
776 (plain)\MT@requires@lateX1{
777 \let\MT@setup@\empty

\MT@addto@setup We use our private hook to have better control over the timing. This will also work
with eplain, but not with miniltx alone.
778 \def\MT@addto@setup{\g@addto@macro\MT@setup@}

    Don't hesitate with miniltx.
779 (plain){\let\MT@addto@setup\@firstofone}

\MT@with@package@T We almost never do anything if a package is not loaded.
780 \def\MT@with@package@T#1{\@ifpackageloaded{#1}\@firstofone\@gobble}
781 (*package|letterspace)
782 (*package)

\MT@with@babel@and@T LATEX's \@ifpackagewith ignores the class options.
783 \def\MT@with@babel@and@T#1{
784     \MT@ifdefined@n@T{opt@babel.\@pkgextension}{%
785         \@expandtwoargs\MT@in@list{#1}%
786         {\csname opt@babel.\@pkgextension\endcsname,\@classoptionslist}%
787         \ifMT@inlist@\expandafter\@gobble\fi
788     }\@gobble
789 }

\MT@ledmac@setup The ledmac package first saves each paragraph in a box, from which it then splits
off the lines one by one. This will destroy character protrusion. (There aren't any
problems with the lineno package, since it takes a different approach.) — ... —
After much to and fro, the situation has finally settled and there is a fix. Beginning
with pdfTEX version 1.21b together with ledpatch.sty as of 2005/06/02 (v0.4),
character protrusion will work at last.

Peter Wilson was so kind to provide the \l@dunhbox@line hook in ledmac to
allow for protrusion. \leftmarginkern and \rightmarginkern are new primitives
of pdfTEX 1.21b (aka. 1.30.0). They are also part of recent XETEX. The successor
packages eledmac and reledmac are also supported.

790 (/package)
791 (pdftex-def)\MT@requires@pdftex5{
792 (*pdftex-def|luatex-def|xetex-def)
793 \def\MT@ledmac@setup{%
794     \ifMT@protrusion
795         \MT@ifdefined@c@TF\l@dunhbox@line{%

\MT@led@unhbox@line Hook.
796     \MT@info@n{Patching ((r)e)ledmac to enable character protrusion}%
797     \let\MT@led@unhbox@line\l@dunhbox@line
798     \renewcommand*\l@dunhbox@line[1]{%
799         \ifhbox##1%
800             \kern\leftmarginkern##1%
801             \expandafter\MT@led@unhbox@line\expandafter##1\expandafter
802                 \kern\rightmarginkern##1%
803         \fi
804     }%
805     }{%
806         \MT@warning@n{%
807             Character protrusion in paragraphs with line\MessageBreak
808             numbering will only work if you update ledmac,\MessageBreak
809             or use one of its successors, eledmac or reledmac}%
810     }%
811     \fi
812 }

```

```

813 (/pdftex-def|luatex-def|xetex-def)
814 (*pdftex-def)
815 }{
816   \def\MT@ledmac@setup{%
817     \ifMT@protrusion
818       \MT@warning@nl{%
819         The pdftex version you are using does not allow\MessageBreak
820         character protrusion in paragraphs with \line\MessageBreak
821         numbering by the `((r)e)ledmac' package.\MessageBreak
822         Upgrade pdftex to version 1.30 or later}%
823     \fi
824   }
825 }
826 (/pdftex-def)

```

The `shapepar` package (v2.2) fixes this in a similar manner by itself, so we don't have to bother.

`\MT@restore@p@h` Restore meaning of `\%` and `\#`.

```

827 (*package|letterspace)
828 (*package)
829 \def\MT@restore@p@h{\chardef\%`%\% \chardef\#`#\# }

```

`\ifMT@xunicode` Two new conditionals for use with X_ET_EX or LuaT_EX.

```

830 \newif\ifMT@xunicode
831 \MT@with@package@T{xunicode}\MT@xunicodetrue
832 (/package)
833 \newif\ifMT@fontspec
834 (letterspace)\MT@requires@latextwo{
835 \MT@with@package@T{fontspec}\MT@fontspectrue
836 (letterspace){\MT@fontspecfalse}

```

`\MT@if@fontspec@font` For fonts loaded by `fontspec` (or, rather, `luatotfload`) we can use some of the features the latter package provides.

```

837 \let\MT@if@fontspec@font\@secondoftwo
838 \def\MT@fontspec@setup{%
839   \ifpackagelater{fontspec}{2013/05/23}%
840     \MT@let@cn\MT@if@fontspec@font{fontspec_if_fontspec_font:TF}%
841   }\relax
842 }
843 \ifMT@fontspec\MT@fontspec@setup\fi

```

`\MT@maybe@gobble@with@tikz` If `\tikz@expandcount` is greater than zero, we're inside or at the end of a `tikz` node, where we don't want to adjust spacing after letterspacing, lest we disturb `tikz`. This is used in `\MT@afteraftergroup`, and we don't need it for `letterspace`.

```

844 (*package)
845 \let\MT@maybe@gobble@with@tikz\@firstofone
846 \def\MT@tikz@setup{%
847   \def\MT@maybe@gobble@with@tikz{%
848     \ifnum\tikz@expandcount>\z@%
849       \expandafter\@gobble
850     \else
851       \expandafter\@firstofone
852     \fi}}

```

`\MT@setupfont@hook` This hook will be executed every time a font is set up (inside a group).

In the preamble, we check for the packages each time a font is set up. Thus, it will work regardless when the packages are loaded.

Even for packages that don't activate any characters in the preamble (like `babel` and `csquotes`), we have to check here, too, in case they were loaded before `microtype`, and a font is loaded `\AtBeginDocument`, before `microtype`. (This is no longer needed, since the complete setup is now deferred until the end of the

preamble. However, it is still necessary for `defersetup=false`.

853 `\def\MT@setupfont@hook{%`
 Spanish (as well as Galician and Mexican) babel modify `\%`, storing the original meaning in `\percentsign`.

```
854   \MT@if@false
855   \MT@with@babel@and@T{spanish} \MT@if@true
856   \MT@with@babel@and@T{galician}\MT@if@true
857   \MT@with@babel@and@T{mexican} \MT@if@true
858   \ifMT@if@\MT@ifdefined@c@T\percentsign{\let\%\percentsign}\fi
```

Using `\@disablequotes`, we can restore the original meaning of all characters made active by `csquotes`. (It would be doable for older versions, too, but we won't bother.)

```
859   \MT@with@package@T{csquotes}{%
860     \@ifpackagelater{csquotes}{2005/05/11}{\@disablequotes\relax}}%
```

`hyperref` redefines `\%` and `\#` inside a `\url`. We restore the original meanings (which we can only hope are correct). Same for `tex4ht` and `mathastext`.

```
861   \MT@if@false
862   \MT@with@package@T{hyperref} \MT@if@true
863   \MT@with@package@T{tex4ht} \MT@if@true
864   \MT@with@package@T{mathastext}\MT@if@true
865   \ifMT@if@\MT@restore@p@h\fi
866   \MT@with@package@T{tikz}\MT@tikz@setup
867 }
```

Check again at the end of the preamble.

```
868 (/package)
869 \MT@addto@setup{%
870 (*package)}
```

Our competitor, the `pdfcprot` package, must not be tolerated!

```
871   \MT@with@package@T{pdfcprot}{%
872     \MT@error{Detected the `pdfcprot' package!}\MessageBreak
873     `\\MT@MT' and `pdfcprot' may not be used together}{%
874 The `pdfcprot' package provides an interface to character protrusion.\MessageBreak
875 So does the `\\MT@MT' package. Using both packages at the same\MessageBreak
876 time will almost certainly lead to undesired results. Have your choice!}{%
877 }%
878   \MT@with@package@T {ledmac}\MT@ledmac@setup
879   \MT@with@package@T {eledmac}\MT@ledmac@setup
880   \MT@with@package@T{reledmac}\MT@ledmac@setup
881   \MT@with@package@T{xunicode}\MT@unicodetrue
882 (/package)
883 (plain) \MT@requires@latext2{
884   \MT@with@package@T{fontspec}{\MT@fontspectrue\MT@fontspec@setup}{%
885 (plain) }\relax
886 (*package)}
```

We can clean up `\MT@setupfont@hook` now.

```
887 \MT@glet\MT@setupfont@hook@\empty
888 \MT@if@false
889 \MT@with@babel@and@T{spanish} \MT@if@true
890 \MT@with@babel@and@T{galician}\MT@if@true
891 \MT@with@babel@and@T{mexican} \MT@if@true
892 \ifMT@if@
893   \g@addto@macro\MT@setupfont@hook{%
894     \MT@ifdefined@c@T\percentsign{\let\%\percentsign}}%
895 \fi
896 \MT@with@package@T{csquotes}{%
897   \@ifpackagelater{csquotes}{2005/05/11}{%
898     \g@addto@macro\MT@setupfont@hook@\@disablequotes
899   }}%
```

```

900      \MT@warning@n{%
901          Should you receive warnings about unknown slot\MessageBreak
902          numbers, try upgrading the `csquotes' package}%
903      }%
904  }%

```

We disable `microtype`'s additions inside `hyperref`'s `\pdfstringdef`, which redefines lots of commands. `hyperref` doesn't work with plain `TeX`, so in that case we don't bother.

```

905      \MT@if@false
906  (/package)
907  (plain)  \MT@requires@latex2{
908      \MT@with@package@T{hyperref}{%
909          \pdfstringdefDisableCommands{%
910  (*package)
911          \MT@ltx@pickupfont
912          \let\textmicrotypecontext\@secondoftwo
913          \let\microtypecontext\@gobble
914  (/package)
915          \def\lsstyle{\pdfstringdefWarn\lsstyle}%
916          \def\textls#1{\pdfstringdefWarn\textls}%
917      }%
918  (package)    \MT@if@true
919      }%
920  (plain)  }\relax
921  (*package)
922  \MT@with@package@T{tex4ht}\MT@if@true
923  \MT@with@package@T{mathastext}\MT@if@true
924  \ifMT@if@\g@addto@macro\MT@setupfont@hook\MT@restore@p@h\fi

```

The `listings` package makes numbers and letters active,

```

925  \MT@with@package@T{listings}{%
926      \g@addto@macro\MT@cfg@catcodes{%
927          \MT@while@num{"30}{"3A}{\catcode@\tempcnta 12\relax}%
928          \MT@while@num{"41}{"5B}{\catcode@\tempcnta 11\relax}%
929          \MT@while@num{"61} {"7B}{\catcode@\tempcnta 11\relax}%
930      }%

```

... and the backslash (which would lead to problems in `\MT@get@slot`).

```

931  \g@addto@macro\MT@setupfont@hook{%
932      \catcode`\\\z@

```

Inside a listing, `\space` is redefined.

```

933  \def\space{ }%

```

When loaded with the `extendedchar` option, `listings` will also redefine 8-bit active characters (`inputenc`). Luckily, this simple redefinition will make them expand to their original definition, so that they could be used in the configuration.

```

934      \let\lst@ProcessLetter@\empty
935      }%
936  }%

```

Of course, using both `soul`'s and `microtype`'s letterspacing mechanisms at the same time doesn't make much sense. But `soul` can do more, e.g., underlining. The optional argument to `\textls` may not be used.

```

937  (/package)
938  (plain)  \MT@requires@latex2{
939      \MT@with@package@T{soul}{%
940          \soulregister\lsstyle 0%
941          \soulregister\textls 1%
942      }%

```

Under plain `TeX`, `soul` doesn't register itself the `LATEX` way, hence we have to use a

different test in this case.

```

943 (*plain)
944   }{\ifx\SOUL@{\undefined\else
945     \soulregister\lsstyle 0%
946     \soulregister{textls 1%
947     \fi}%
948 (/plain)
949 (*package)
950   \MT@with@package@T{tikz}\MT@tikz@setup

```

Compatibility with the `pinyin` package (from CJK): disable `microtype` in `\py@macron`, which loads a different font for the accent. In older versions of `pinyin` (pre-4.6.0), `\py@macron` had only one argument.

```

951   \MT@with@package@T{pinyin}{%
952     \let\MT@orig@py@macron\py@macron
953     \@ifpackagelater{pinyin}{2005/08/11}{%
954       \def\py@macron#1#2{%
955         \MT@ltx@pickupfont
956         \MT@orig@py@macron{#1}{#2}%
957         \MT@MT@pickupfont}%
958     }{%
959       \def\py@macron#1{%
960         \MT@ltx@pickupfont
961         \MT@orig@py@macron{#1}%
962         \MT@MT@pickupfont}%
963     }%
964   }%
965 (/package)
966 }
967 (/package|letterspace)

```

We need a font (the `minimal` class doesn't load one).

```
968 (package)\expandafter\ifx\the\font\nullfont\normalfont\fi
```

14.2 Font setup

`\MT@setupfont` Setting up a font entails checking for each feature whether it should be applied to the current font (`\MT@font`).

```

969 (*pdftex-def|xetex-def|luatex-def)
970 \def\MT@setupfont{%

```

With `XETEX` and `LuaTEX` the font may not be actually loaded, hence we might see a wrong font (in `\MT@get@slot`). Therefore, we first load the current font.

```
971 (xetex-def|luatex-def) \MT@font
```

We might have to disable stuff when used together with adventurous packages.

```
972 \MT@setupfont@hook}
```

This will use a copy of the font (allowing for expansion parameter variation and the use of more than one set of protrusion factors for a font within one paragraph).

```

973 (pdftex-def)\MT@requires@pdftex7{%
974 (pdftex-def|luatex-def)\g@addto@macro\MT@setupfont\MT@copy@font
975 (pdftex-def)\relax

```

The font properties must be extracted from `\MT@font`, since the current value of `\f@encoding` and friends may be wrong!

```

976 \g@addto@macro\MT@setupfont{%
977   \MT@exp@two@c\MT@split@name\string\MT@font\@nil

```

Try to find a configuration file for the current font family.

```

978 \MT@exp@one@n\MT@find@file\MT@family
979 \ifx\MT@familyalias\@empty \else

```

```
980 \MT@exp@one@\MT@find@file\MT@familyalias\fi
```

We have to make sure that `\cf@encoding` expands to the correct value (for later, in `\MT@get@slot`), which isn't the case when `\selectfont` chooses a new encoding (this would be done a second later in `\selectfont`, anyway – three lines, to be exact). (I think, I do not need this anymore – however, I'm too afraid to remove it. ... Oops, I did it. Let's see whether anybody complains.)

```
981 % \ifx\f@encoding\cf@encoding\else\@@enc@update\fi
982 }
```

Tracking has to come first, since it means actually loading a different font.

```
983 (pdftex-def)\MT@requires@pdftex6
984 (luatex-def)\MT@requires@luatex3
985 (pdftex-def|luatex-def) {\g@addto@macro\MT@setupfont\MT@tracking}\relax
986 \g@addto@macro\MT@setupfont{%
987   \MT@check@font
988   \ifMT@inlist@
989   (debug)\MT@show@pdfannot2%
990   \else
991     \MT@vinfo{Setting up font `"\MT@font'\on@line}%
992     \MT@info@notracking}
```

Now we can begin setting up the font for all features that the current pdfTeX provides. The following commands are `\let` to `\relax` if the respective feature is disabled via package options.

For versions older than 1.20, protrusion has to be set up first, beginning with 1.20, the order doesn't matter.

```
993 \MT@protrusion
994 (pdftex-def|luatex-def) \MT@expansion
995 }
```

Interword spacing and kerning (pdfTeX 1.40).

```
996 (*pdftex-def)
997 \MT@requires@pdftex6{
998 \g@addto@macro\MT@setupfont{\MT@spacing\MT@kerning}
999 }\relax
1000 (/pdftex-def)
```

Disable ligatures (pdfTeX 1.30).

```
1001 (pdftex-def)\MT@requires@pdftex5{
1002 (pdftex-def|luatex-def)\g@addto@macro\MT@setupfont\MT@noligatures
1003 (pdftex-def)\relax
1004 \g@addto@macro\MT@setupfont{%
```

Debugging.

```
1005 (debug)\MT@show@pdfannot1%
```

Finally, register the font so that we don't set it up anew each time.

```
1006 \MT@register@font
1007 \fi
1008 }
1009 (/pdftex-def|xetex-def|luatex-def)
```

`\MT@copy@font` The new (1.40.4) `\pdfcopyfont` command allows expanding a font with different parameters, or to use more than one set of protrusion factors for a given font within one paragraph. It will be used when we find a context for `\SetProtrusion` or `\SetExpansion` in the preamble, or when the package has been loaded with the `copyfonts` option.

```
1010 (*pdftex-def|luatex-def)
1011 \let\MT@copy@font\relax
1012 (pdftex-def)\MT@requires@pdftex7{
```

```

1013 \def\MT@copy@font@{%
\MT@font@copy    For every new protrusion and expansion context, we create a new copy.
1014   \xdef\MT@font@copy{\csname\MT@@font@\MT@pr@context/\MT@ex@context\endcsname}%
1015   \expandafter\ifx\MT@font@copy\relax
\MT@font@orig    pdfTeX doesn't allow copying a font that has already been copied and expanded/
letterspaced. Hence, we have to get the original.
1016   \edef\MT@font@orig{\csname\expandafter\string\font@name @orig\endcsname}%
1017   \expandafter\ifx\MT@font@orig\relax
1018     \MT@exp@two@c\MT@glet\MT@font@orig\font@name
1019   \else
1020     \MT@exp@two@c\let\font@name\MT@font@orig
1021   \fi
1022 (pdftex-def)   \global\MT@exp@two@c\pdfcopyfont\MT@font@copy\font@name

```

Even though LuaTeX also provides the primitive from pdfTeX (even renamed to `\copyfont`, that is, ‘promoted’ as per the LuaTeX manual), it is crippled in that OpenType features will be lost. Therefore, we do not copy the font but load it anew.

```

1023 (luatex-def)   \MT@exp@two@c\MT@lua@copyfont\meaning\font@name@nil
1024 (debug)\MT@dinfo{lcreating new copy: \MT@font@copy}%

```

Since it's a new font, we have to remove it from the context lists.

```

1025   \MT@map@clist@c\MT@active@features{%
1026     \MT@exp@cs\ifx{\MT@\@nameuse{\MT@abbr##1}}\relax\else
1027       \def\@tempa{##1}%
1028       \MT@exp@cs\MT@map@tlist@c{\MT@##1@doc@contexts}\MT@rem@from@list
1029     \fi
1030   }%
1031   \fi
1032 \MT@exp@two@c\let\MT@font\MT@font@copy

```

We only need the font identifier for letterspacing.

```

1033 \let\font@name\MT@font@copy

```

But we have to properly substitute the font after we're done. In LuaTeX, for some reason, one expansion step more.

```

1034 (luatex-def)   \aftergroup\MT@exp@two@c
1035   \aftergroup\let\aftergroup\font@name\aftergroup\MT@font@copy
1036 }

```

`\MT@rem@from@list`

```

1037 \def\MT@rem@from@list#1{%
1038   \MT@exp@cs\ifx{\MT@\@tempa##1}\relax\else
1039     \expandafter\MT@exp@one@n\expandafter\MT@rem@from@clist\expandafter
1040       \MT@font \csname\MT@\@tempa##1\font@list\endcsname
1041     \fi
1042   }%
1043 (pdftex-def)\relax

```

`\MT@lua@copy@font` (#1) and (#2) are ‘select’ and ‘font’, respectively, (#3) is the font spec.

```

1044 (luatex-def)\def\MT@lua@copyfont #1 #2 #3@nil{%
1045 (luatex-def)   \global\expandafter\font\MT@font@copy=#3\relax}
1046 (pdftex-def|luatex-def)

```

Here's the promised dirty trick for users of older pdfTeX versions, which works around the problem that the use of the same font with different expansion parameters is prohibited. If you do not want to create a clone of the font setup (this would require duplicating the `tfm/vf` files under a new name, and writing new `fd` files and `map` entries), you can load a minimally larger font for the paragraph in question. E.g., for a document typeset in 10 pt:

```
\SetExpansion
  [ stretch = 30,
    shrink  = 60,
    step    = 5 ]
{ encoding = *,
  size = 10.001 }
{
\newcommand{\expandpar}[1]{%
  \fontsize{10.001}{\baselineskip}\selectfont #1\par}
% ...
\expandpar{This paragraph contains an `unnecessary' widow.}
```

Note that the `\expandpar` command can only be applied to complete paragraphs. If you are using Computer Modern Roman, you have to load the `fix-cm` package to be able to select fonts in arbitrary sizes. Finally, the reason I suggest to use a larger font, and not a smaller one, is to prevent a different design size being selected.

```
\MT@split@name      Split up the font name (#6) may be a protrusion/expansion context and/or a
\MT@encoding        letterspacing amount). With fontspec we also need to remove its internal instance
\MT@family          counter.
\MT@series 1047 (*package)
\MT@shape   1048 \def\MT@split@name#1/#2/#3/#4/#5/#6@nil{%
\MT@size    1049   \def\MT@encoding{#1}%
\ifMT@fontspec
  1051     \edef\MT@family{\MT@scrubfeature#2()}\relax%
\else
  1053     \def\MT@family{#2}%
\fi
  1055 \def\MT@series {#3}%
  1056 \def\MT@shape {#4}%
  1057 \def\MT@size {#5}%

\MT@familyalias    Alias family?
  1058   \MT@ifdefined@n@TF{\MT@family @alias}{%
  1059     {\MT@let@cn\MT@familyalias{\MT@family @alias}}%
  1060     {\let\MT@familyalias\@empty}%
  1061 }

\MT@scrubfeature   Remove one resp. all feature counters (fontspec).
\MT@scrubfeatures 1062 \def\MT@scrubfeature#1(#2)#3\relax{#1}
  1063 \def\MT@scrubfeatures#1(#2)#3\relax{%
  1064   #1%
  1065   \ifx\relax#3\relax\else
  1066     \MT@scrubfeatures#3\relax
  1067   \fi
  1068 }

\ifMT@do            We check all features of the current font against the lists of the currently active
\MT@feat             font set, and set \ifMT@do accordingly.
\MT@maybe@do 1069 \newif\ifMT@do
  1070 \def\MT@maybe@do#1{%
  (but only if the feature isn't globally set to false)
  1071   \csname ifMT@\csname MT@abbr@#1\endcsname\endcsname
```

Begin with setting micro-typography to true for this font. The `\MT@checklist@...` tests will set it to false if the property is not in the list. The first non-empty list that does not contain a match will stop us (except for font).

```
  1072   \MT@dottrue
  1073   \edef\@tempa{\csname MT@#10setname\endcsname}%
  1074   \MT@map@clist@n{font,encoding,family,series,shape,size}{%
```

```

1075      \MT@ifdefined@n@TF{\MT@checklist@##1}%
1076          {\csname MT@checklist@##1\endcsname}%
1077          {\MT@checklist@{##1}}%
1078          {##1}%
1079      }%
1080  \else
1081      \MT@ofalse
1082  \fi
1083 \ifMT@do
    \MT@feat stores the current feature.

1084 \def\MT@feat{##1}%
1085 \csname MT@set@#1@codes\endcsname
1086 \else
1087     \MT@ifstreq{##1}{tr}%
1088     {\let\MT@info@notracking\MT@info@notracking@}%
1089     {\MT@vinfo{... No @nameuse{MT@abbr@##1}}}%
1090 \fi
1091 }

\MT@info@notracking To defer the message to after the font has actually been logged.

\MT@info@notracking@ 1092 \let\MT@info@notracking\relax
1093 \def\MT@info@notracking@{\MT@vinfo{... No tracking}}


\MT@dinfo@list
1094 <debug>\def\MT@dinfo@list#1#2#3{\MT@dinfo@nl{1}{@\nameuse{MT@abbr@##1}: #2
1095 <debug> \ifx\\#3\\list empty\else `@\nameuse{MT@##2}' #3 list\fi}

\MT@checklist@ The generic test (#1) is the axis, (#2) the feature, @tempa contains the set name.

1096 \def\MT@checklist@#1#2{%
1097 <!debug> \MT@ifdefined@n@T
1098 <debug> \MT@ifdefined@n@TF
1099     {MT@##2list@##1@tempa}%
}

Begin a (neatly masqueraded) \expandafter orgy to test whether the font attribute
is in the list.

1100 \expandafter\MT@exp@one@n\expandafter\MT@in@clist
1101     \csname MT@##1\expandafter\endcsname
1102     \csname MT@##2list@##1@tempa\endcsname
1103 \ifMT@inlist@
1104 <debug>\MT@dinfo@list{##2}{##1}{in}%
1105     \MT@dotrue
1106 \else
1107 <debug>\MT@dinfo@list{##2}{##1}{not in}%
1108     \MT@ofalse
1109     \expandafter\MT@clist@break
1110 \fi
1111 }%

If no limitations have been specified, i.e., the list for a font attribute has not been
defined at all, the font should be set up.

1112 <debug> {\MT@dinfo@list{##2}{##1}{}}%
1113 }

\MT@checklist@family Also test for the alias font, if the original font is not in the list.

1114 \def\MT@checklist@family#1{%
1115 <!debug> \MT@ifdefined@n@T
1116 <debug> \MT@ifdefined@n@TF
1117     {MT@##1list@family@tempa}%
1118     \MT@exp@two@n\MT@in@clist
1119     \MT@family{\csname MT@##1list@family@tempa\endcsname}%
1120 \ifMT@inlist@
1121 <debug>\MT@dinfo@list{##1}{family}{in}%
1122     \MT@dotrue

```

```

1123 \else
1124 <debug> \MT@dinfo@list{#1}{family}{not in}%
1125   \MT@ofalse
1126   \ifx\MT@familyalias\@empty \else
1127     \MT@exp@two@n\MT@in@clist
1128       \MT@familyalias{\csname MT@#1list@family@\@tempa\endcsname}%
1129     \ifMT@inlist@
1130 <debug> \MT@dinfo@list{#1}{family alias}{in}%
1131   \MT@dotrue
1132 <debug> \else\MT@dinfo@list{#1}{family alias}{not in}%
1133   \fi
1134   \fi
1135 \fi
1136 \ifMT@do \else
1137   \expandafter\MT@clist@break
1138 \fi
1139 }%
1140 <debug> {\MT@dinfo@list{#1}{family}{}}
1141 }

```

\MT@checklist@size Test whether font size is in list of size ranges.

```

1142 \def\MT@checklist@size#1{%
1143 <!debug> \MT@ifdefined@n@T
1144 <debug> \MT@ifdefined@n@TF
1145   {MT@#1list@size@\@tempa}%
1146   \MT@exp@cs\MT@in@rlist{MT@#1list@size@\@tempa}%
1147   \ifMT@inlist@
1148 <debug> \MT@dinfo@list{#1}{size}{in}%
1149   \MT@dotrue
1150 \else
1151 <debug> \MT@dinfo@list{#1}{size}{not in}%
1152   \MT@ofalse
1153   \expandafter\MT@clist@break
1154 \fi
1155 }%
1156 <debug> {\MT@dinfo@list{#1}{size}{}}
1157 }

```

\MT@checklist@font If the font matches, we skip the rest of the test.

```

1158 \def\MT@checklist@font#1{%
1159 <!debug> \MT@ifdefined@n@T
1160 <debug> \MT@ifdefined@n@TF
1161   {MT@#1list@font@\@tempa}%

```

Since \MT@font may be appended with context and/or letterspacing specs, we construct the name from the font characteristics.

```

1162 \edef@tempb{\MT@encoding/\MT@family/\MT@series/\MT@shape/\MT@size}%
1163 \expandafter\MT@exp@one@n\expandafter\MT@in@clist\expandafter
1164   @tempb \csname MT@#1list@font@\@tempa\endcsname
1165 \ifMT@inlist@
1166 <debug> \MT@dinfo@list{#1}{font}{in}%
1167   \expandafter\MT@clist@break
1168 \else
1169 <debug> \MT@dinfo@list{#1}{font}{not in}%
1170   \MT@ofalse
1171 \fi
1172 }%
1173 <debug> {\MT@dinfo@list{#1}{font}{}}
1174 }

```

14.2.1 Protrusion

\ifMT@nofamily Info for settings that are not family-specific. (Warnings seem to be too irritating.)
The switch is set in \MT@next@listname.

```
1175 \newif\ifMT@nofamily
1176 (/package)
```

\MT@protrusion Set up for protrusion?

```
1177 (*pdftex-def|xetex-def|luatex-def)
1178 \def\MT@protrusion{\MT@maybe@do{pr}}
```

\MT@set@pr@codes This macro is called by \MT@setupfont, and does all the work for setting up a font for protrusion.

```
1179 \def\MT@set@pr@codes{%
1180   \MT@nofamilyfalse
```

Check whether and if, which list should be applied to the current font. If family-specific settings don't exist, we write it to the log (for each encoding).

```
1181 \MT@if@list@exists{%
1182   \ifMT@nofamily
1183     \MT@ifdefined@n@TF{\MT@encoding-\MT@family-settings}\relax{%
1184       \MT@info@n{Loading generic protrusion settings for font family\MessageBreak
1185         `'\MT@family' (encoding: \MT@encoding).\MessageBreak
1186         For optimal results, create family-specific settings.\MessageBreak
1187         See the microtype manual for details}%
1188       \MT@glet@nc{\MT@encoding-\MT@family-settings}@empty
1189     }%
1190   \fi
1191   \MT@get@font@dimen@six{%
1192     \MT@get@opt
1193     \MT@reset@pr@codes
```

Get the name of the inheritance list and parse it.

```
1194 \MT@get@inh@list
```

Set an input encoding?

```
1195 \MT@set@inputenc{c}%
```

Load additional lists?

```
1196 \MT@load@list\MT@pr@c@name
1197 \MT@set@listname
```

Load the main list.

```
1198 \MT@let@cn\@tempc{\MT@pr@c@\MT@pr@c@name}%
1199 \expandafter\MT@set@codes@\@tempc,\relax,%
1200 }\MT@reset@pr@codes
1201 }
```

\MT@get@font@dimen@six \MT@dimen@six If \fontdimen 6 is zero, character protrusion, spacing, kerning and tracking won't work, and we can skip the settings (for example, the dsfont and fourier fonts don't specify this dimension; this is probably a bug in the fonts).

```
1202 \def\MT@get@font@dimen@six{%
1203   \ifnum\fontdimen6\MT@font=\z@
1204     \MT@warning@n{%
1205       Font `'\MT@font' does not specify its\MessageBreak
1206       \@backslashchar fontdimen 6 (width of an 'em')! Therefore,\MessageBreak
1207       '@nameuse{\MT@abbr@\MT@feat} will not work with this font}%
1208     \expandafter\@gobble
1209   \else
1210     \edef\MT@dimen@six{\number\fontdimen6\MT@font}%
1211     \expandafter\@firstofone
1212   \fi
1213 }
```

| | |
|---------------------|---|
| \MT@set@all@pr | Set all protrusion codes of the font. |
| 1214 | \def\MT@set@all@pr#1#2{% |
| 1215 | <code>(debug)</code> \MT@dinfo@n{3}{-- 1p/rp: setting all to #1/#2}% |
| 1216 | \let\MT@temp@\empty |
| 1217 | \MT@ifempty{#1}\relax{\g@addto@macro\MT@temp{\lpcode\MT@font\@tempcnta=#1}}% |
| 1218 | \MT@ifempty{#2}\relax{\g@addto@macro\MT@temp{\rppcode\MT@font\@tempcnta=#2}}% |
| 1219 | \MT@do@font\MT@temp |
| 1220 | } |
| \MT@reset@pr@codes@ | All protrusion codes are zero for new fonts. However, if we have to reload the font due to different contexts, we have to reset them. This command will be changed by <code>\microtypecontext</code> if necessary. |
| 1221 | \def\MT@reset@pr@codes@{\MT@set@all@pr\z@\z@} |
| 1222 | \let\MT@reset@pr@codes\relax |
| \MT@the@pr@code | If the font is letterspaced, we have to add half the letterspacing amount to the margin kerns. This will be activated in <code>\MT@set@tr@codes</code> . |
| \MT@the@pr@code@tr | |
| 1223 | \def\MT@the@pr@code{\@tempcntb} |
| 1224 | <code>(*pdftex-def luatex-def)</code> |
| 1225 | <code>(pdftex-def)</code> \MT@requires@pdftex6 |
| 1226 | <code>(luatex-def)</code> \MT@requires@luatex3 |
| 1227 | {\def\MT@the@pr@code@tr{% |
| 1228 | \numexpr@\tempcntb+\MT@letterspace@/2\relax |
| 1229 | }} |
| 1230 | \relax |
| 1231 | <code>(/pdftex-def luatex-def)</code> |
| \MT@set@codes | Split up the values and set the codes. |
| 1232 | \def\MT@set@codes#1,{% |
| 1233 | \ifx\relax#1\empty\else |
| 1234 | \MT@split@codes #1=\relax |
| 1235 | \expandafter\MT@set@codes |
| 1236 | \fi |
| 1237 | } |
| \MT@split@codes | The <code>keyval</code> package would remove spaces here, which we needn't do since <code>\SetProtrusion</code> ignores spaces in the protrusion list anyway. <code>\MT@get@char@unit</code> may mean different things. |
| 1238 | \def\MT@split@codes#1#2#3\relax{% |
| 1239 | \def\@tempa{#1}% |
| 1240 | \ifx\@tempa\empty \else |
| 1241 | \MT@get@slot |
| 1242 | <code>(pdftex-def luatex-def)</code> \ifnum\MT@char > \m@ne |
| 1243 | \ifx\MT@char\empty \else |
| 1244 | \MT@get@char@unit |
| 1245 | \csname MT@\MT@feat @split@val\endcsname#2\relax |
| 1246 | \fi |
| 1247 | \fi |
| 1248 | } |
| \MT@pr@split@val | |
| 1249 | \def\MT@pr@split@val#1,#2\relax{% |
| 1250 | \def\f@tempb{#1}% |
| 1251 | \MT@ifempty\f@tempb\relax{% |
| 1252 | \MT@scale@to@em |
| 1253 | \lpcode\MT@font\MT@char=\MT@the@pr@code |
| 1254 | <code>(debug)</code> \MT@dinfo@n{4}{;;; 1p (\MT@char): \number\lpcode\MT@font\MT@char\space: [#1]}% |
| 1255 | } |
| 1256 | \def\f@tempb{#2}% |
| 1257 | \MT@ifempty\f@tempb\relax{% |
| 1258 | \MT@scale@to@em |
| 1259 | \rppcode\MT@font\MT@char=\MT@the@pr@code |
| 1260 | <code>(debug)</code> \MT@dinfo@n{4}{;;; rp (\MT@char): \number\rppcode\MT@font\MT@char\space: [#2]}% |

```
1261 }%
```

Now we can set the values for the inheriting characters. Their slot numbers are saved in the macro `\MT@inh@{list name}@{slot number}@`.

```
1262 \MT@ifdefined@c@T\MT@pr@inh@name{%
1263   \MT@ifdefined@n@T{\MT@inh@\MT@pr@inh@name @\MT@char @}{%
1264     \MT@exp@cs\MT@map@tlist@%
1265     {\MT@inh@\MT@pr@inh@name @\MT@char @}%
1266     \MT@set@pr@heirs
1267   }%
1268 }%
1269 }
```

`\MT@scale@to@em` Since pdfTeX version 0.14h, we have to adjust the protrusion factors (i.e., convert numbers from thousandths of character width to thousandths of an em of the font). We have to do this *before* setting the inheriting characters, so that the latter inherit the absolute value, not the relative one if they have a differing width (e.g., the ‘ff’ ligature). Unlike `protcode.tex` and `pdfcprot`, we do not calculate with `\lpcode` resp. `\rancode`, since this would disallow protrusion factors larger than the character width (since `\[lr]pcode`’s limit is 1000). Now, the maximum protrusion is 1em of the font.

The unit is in `\MT@count`, the desired factor in `\@tempb`, and the result will be returned in `\@tempcntb`.

```
1270 (pdftex-def) \MT@requires@pdftex3{
1271 \def\MT@scale@to@em{%
1272   \@tempcntb=\MT@count\relax
```

For really huge fonts (100 pt or so), an arithmetic overflow could occur with vanilla TeX. Using e-TEx, this can’t happen, since the intermediate value is 64 bit, which could only be reached with a character width larger than `\maxdimen`.

```
1273 \MT@scale@\@tempcntb \@tempb \MT@dimen@six
1274 \ifnum@\@tempcntb=\z@ \else
1275   \MT@scale@factor
1276 \fi
1277 }
```

`\MT@get@charwd` Get the width of the character. When using e-TEx, we can employ `\fontcharwd` instead of building scratch boxes.

```
1278 \def\MT@get@charwd{%
1279 (pdftex-def)
1280 ^^X \MT@count=\fontcharwd\MT@font\MT@char\relax
1281 ^^Q \setbox\z@=\hbox{\MT@font \char\MT@char}%
1282 ^^Q \MT@count=\wd\z@
1283 (pdftex-def)
1284 (luatex-def) \MT@count=\fontcharwd\MT@font\MT@char\relax
```

`\MT@char` contains a slot number (legacy fonts), a Unicode number, or a glyph name (if `\MT@char@` is negative).

```
1285 (*xetex-def)
1286 \ifnum\MT@char@<\z@
1287   \setbox\z@=\hbox{\MT@font \XeTeXglyph-\MT@char@}%
1288   \MT@count=\wd\z@
1289 \else
1290   \MT@count=\fontcharwd\MT@font\MT@char@\relax
1291 \fi
1292 (/xetex-def)
1293 \ifnum\MT@count=\z@ \MT@info@missing@char \fi
1294 }
```

For letterspaced fonts, we have to subtract the letterspacing amount from the characters’ widths. The protrusion amounts will be adjusted in `\MT@set@pr@codes`.

The letterspaced font is already loaded so that 1em = \fontdimen 6.

```

1295 (*pdfTeX-def)
1296 \MT@requires@pdfTeX6{
1297   \g@addto@macro{\MT@get@charwd}{%
1298     \MT@ifdefined@c@T\MT@letterspace@%
1299     {\advance\MT@count -\dimexpr\MT@letterspace@ sp * \dimexpr 1em/1000\relax}%
1300   }
1301 }\relax
1302 }{

```

No adjustment with versions 0.14f and 0.14g.

```

1303 \def\MT@scale@to@em{%
1304   \MT@count=\@tempb\relax
1305   \ifnum\MT@count=\z@\else
1306     \MT@scale@factor
1307   \fi
1308 }

```

We need this in \MT@warn@code@too@large (neutralised).

```

1309 \def\MT@get@charwd{\MT@count=\MT@dimen@six}
1310 }
1311 (*pdfTeX-def)
1312 (*pdfTeX-def|xetex-def|luatex-def)

```

\MT@get@font@dimen For the space unit.

```

1313 (*package)
1314 \def\MT@get@font@dimen#1{%
1315   \ifnum\fontdimen#1\MT@font=\z@
1316     \MT@warning@n{Font `'\MT@font' does not specify its\MessageBreak
1317       \@backslashchar fontdimen #1 (it's zero)!}\MessageBreak
1318     You should use a different `unit' for \MT@curr@list@name}%
1319   \else
1320     \MT@count=\fontdimen#1\MT@font
1321   \fi
1322 }

```

\MT@info@missing@char Info about missing characters, or characters with zero width.

```

1323 \def\MT@info@missing@char{%
1324   \MT@info@n{l{Character `'\the\MT@toks'
1325 ^X   \ifnum\MT@char@<\z@ is missing\else
1326 ^X     \iffontchar\MT@font\MT@char@%
1327       has a width of Opt
1328 ^X     \else is missing\fi\fi
1329 ^Q   \MessageBreak (it's probably missing)
1330   \MessageBreak in font `'\MT@font'.\MessageBreak
1331   Ignoring protrusion settings for this character}%
1332 }

```

\MT@scale@factor Furthermore, we might have to multiply with a factor.

```

1333 \def\MT@scale@factor{%
1334   \ifnum\csname MT@\MT@feat @factor@\endcsname=\@m \else
1335     \expandafter\MT@scale\expandafter \@tempcntb
1336     \csname MT@\MT@feat @factor@\endcsname \@m
1337   \fi
1338   \ifnum\@tempcntb>\csname MT@\MT@feat @max\endcsname\relax
1339     \MT@exp@cs\MT@warn@code@too@large{MT@\MT@feat @max}%
1340   \else
1341     \ifnum\@tempcntb<\csname MT@\MT@feat @min\endcsname\relax
1342       \MT@exp@cs\MT@warn@code@too@large{MT@\MT@feat @min}%
1343     \fi
1344   \fi
1345 }

```

\MT@warn@code@too@large Type out a warning if a chosen protrusion factor is too large after the conversion.
As a special service, we also type out the maximum amount that may be specified

in the configuration.

```

1346 \def\MT@warn@code@too@large#1{%
1347   \relax
1348   \ifnum\csname MT@\MT@feat @factor@\endcsname=\@m \else
1349     \expandafter\MT@scale\expandafter\@tempcnta\expandafter
1350       \@m \csname MT@\MT@feat @factor@\endcsname
1351   \fi
1352   \MT@scale\@tempcnta \MT@dimen@six \MT@count
1353   \MT@warning@n{The \nameuse{MT@abbr@\MT@feat} code \tempb\space
1354     is too large for character\MessageBreak
1355     `the\MT@toks' in \curr@list@name.\MessageBreak
1356     Setting it to the maximum of \number\@tempcnta}%
1357   \tempcntb=#1\relax
1358 }
```

\MT@get@opt The optional argument to the configuration commands (except for \SetExpansion, which is being dealt with in \MT@get@ex@opt).

```

1359 \def\MT@get@opt{%
1360   \MT@set@listname
```

\MT@pr@factor@ Apply a factor?

```

\MT@sp@factor@ 1361 \MT@ifdefined@n@TF{MT@\MT@feat @c@\csname MT@\MT@feat @c@name\endcsname @factor}{%
1362   \MT@let@nn{MT@\MT@feat @factor@}
1363   {MT@\MT@feat @c@\csname MT@\MT@feat @c@name\endcsname @factor}%
1364   \MT@vinfo{... : Multiplying \nameuse{MT@abbr@\MT@feat} codes by
1365     \number\csname MT@\MT@feat @factor@\endcsname/1000}%
1366 }{%
1367   \MT@let@nn{MT@\MT@feat @factor@}{MT@\MT@feat @factor}%
1368 }
```

\MT@pr@unit@ The unit can only be evaluated here, since it might be font-specific. If it's \empty, it's relative to character widths, if it's -1, relative to space dimensions.

```

\MT@kn@unit@ 1369 \MT@ifdefined@n@TF{MT@\MT@feat @c@\csname MT@\MT@feat @c@name\endcsname @unit}{%
1370   \MT@let@nn{MT@\MT@feat @unit@}
1371   {MT@\MT@feat @c@\csname MT@\MT@feat @c@name\endcsname @unit}%
1372   \MT@exp@cs\ifx{MT@\MT@feat @unit@}\empty
1373   \MT@vinfo{... : Setting \nameuse{MT@abbr@\MT@feat} codes
1374     relative to character widths}%
1375 }{%
1376   \MT@exp@cs\ifx{MT@\MT@feat @unit@}\m@ne
1377   \MT@vinfo{... : Setting \nameuse{MT@abbr@\MT@feat} codes
1378     relative to width of space}%
1379 }{%
1380   \fi
1381 }{%
1382   \MT@let@nn{MT@\MT@feat @unit@}{MT@\MT@feat @unit}%
1383 }
```

\MT@get@space@unit The codes are either relative to character widths, or to a fixed width. For spacing and kerning lists, they may also be relative to the width of the interword glue. Only the setting from the top list will be taken into account.

```

1384 \let\MT@get@char@unit\relax
1385 \let\MT@get@space@unit\@gobble
1386 \MT@exp@cs\ifx{MT@\MT@feat @unit@}\empty
1387   \let\MT@get@char@unit\MT@get@charwd
1388 \else
1389   \MT@exp@cs\ifx{MT@\MT@feat @unit@}\m@ne
1390     \let\MT@get@space@unit\MT@get@font@dimen
1391   \else
1392     \MT@exp@cs\MT@get@unit{MT@\MT@feat @unit@}%
1393   \fi
1394 \fi
```

Preset all characters? If so, we surely don't need to reset, too.

```

1395   \MT@ifdefined@n@T{\MT@feat @c@\csname MT@\MT@feat @c@name\endcsname @preset}{%
1396     \csname MT@preset@\MT@feat\endcsname
1397     \MT@let@nc{MT@reset@\MT@feat @codes}\relax
1398   }%
1399 }
```

\MT@get@unit If unit contains an em or ex, we use the corresponding \fontdimen to obtain the real size. Simply converting the em into points might give a wrong result, since the font probably isn't set up yet, so that these dimensions haven't been updated, either.

```

1400 \def\MT@get@unit#1{%
1401   \expandafter\MT@get@unit#1 e!\@nil
1402   \ifx\x\@empty\else\let#1\x\fi
1403   \defaultunits\@tempdima#1 pt\relax\@nnil
1404   \ifdim\@tempdima=\z@
1405     \MT@warning@n{%
1406       Cannot set \nameuse{MT@abbr@\MT@feat} factors relative to zero\MessageBreak
1407       width. Setting factors of list `@\nameuse{MT@\MT@feat @c@name}'\MessageBreak
1408       relative to character widths instead}%
1409     \let#1\@empty
1410     \let\MT@get@char@unit\MT@get@charwd
1411   \else
1412     \MT@vinfo{... : Setting \nameuse{MT@abbr@\MT@feat} factors relative
1413                 to \the\@tempdima}%
1414     \MT@count=\@tempdima\relax
1415   \fi
1416 }
1417 \def\MT@get@unit@#1e#2#3\@nil{%
1418   \ifx\#3\@empty\else\let\x\@empty\else
1419     \if m#2%
1420       \edef\x{\#1\fontdimen6\MT@font}%
1421     \else
1422       \if x#2%
1423         \edef\x{\#1\fontdimen5\MT@font}%
1424       \fi
1425     \fi
1426   \fi
1427 }
```

\MT@set@inputenc The configurations may be under the regime of an input encoding.

```
1428 \def\MT@set@inputenc#1{%
```

\MT@cat We remember the current category (c or inh), in case of warnings later.

```

1429 \def\MT@cat#1{%
1430   \edef@\tempa{MT@\MT@feat @#1@\csname MT@\MT@feat @#1@name\endcsname @inputenc}%
1431   \MT@ifdefined@n@T@\tempa\MT@set@inputenc@%
1432 }
```

\MT@set@inputenc More recent versions of inputenc remember the current encoding, so that we can test whether we really have to load the encoding file.

```

1433 \MT@addto@setup{%
1434   \ifpackage{inputenc}{%
1435     \ifpackage{inputenc}{2006/02/22}{%
1436       \def\MT@set@inputenc@{%
1437         \MT@ifstreq\inputencodingname{\csname@\tempa\endcsname}\relax
1438           \MT@load@inputenc
1439         }%
1440       }{%
1441         \let\MT@set@inputenc@MT@load@inputenc
1442       }%
1443     }{%
1444       \def\MT@set@inputenc@{%
```

```

1445     \MT@warning@nl{Key `inputenc' used in \MT@curr@list@name, but the `inputenc'
1446     \MessageBreak package isn't loaded. Ignoring input encoding}%
1447   }%
1448 }%
1449 }

\MT@load@inputenc Set up normal catcodes, since, e.g., listings would otherwise want to actually
                     typeset the inputenc file when it is being loaded inside a listing.
1450 \def\MT@load@inputenc{%
1451   \MT@cfg@catcodes
1452 {debug}\MT@dinfo@nl{1}{loading input encoding: \nameuse{\@tempa}}%
1453   \inputencoding{\nameuse{\@tempa}}%
1454 }
1455 (/package)

\MT@set@pr@heirs Set the inheriting characters.
1456 (*pdftex-def|xetex-def|luatex-def)
1457 \def\MT@set@pr@heirs#1{%
1458   \lpcode\MT@font #1 =\lpcode\MT@font\MT@char\relax
1459   \rpcode\MT@font #1 =\rpcode\MT@font\MT@char\relax
1460 {debug}\MT@dinfo@nl{2}{-- heir of \MT@char: #1}%
1461 {debug}\MT@dinfo@nl{4}{;;; 1p/rp (#1): \number\lpcode\MT@font\MT@char\space/%
1462 {debug}                                \number\rpcode\MT@font\MT@char\space}%
1463 }

\MT@preset@pr Preset characters. Presetting them relative to their widths is not allowed.
\MT@preset@pr@ 1464 \def\MT@preset@pr{%
1465   \expandafter\expandafter\expandafter\MT@preset@pr@
1466   \csname MT@pr@c@\MT@pr@c@name @preset\endcsname@nil
1467 }
1468 \def\MT@preset@pr@#1,#2@nil{%
1469   \ifx\MT@pr@unit@\empty
1470     \MT@warn@preset@towidth{pr}%
1471   \let\MT@preset@aux\MT@preset@aux@factor
1472   \else
1473     \def\MT@preset@aux{\MT@preset@aux@space2}%
1474   \fi
1475   \MT@ifempty{#1}{\let\@tempa@\empty}{\MT@preset@aux{#1}\@tempa}%
1476   \MT@ifempty{#2}{\let\@tempb@\empty}{\MT@preset@aux{#2}\@tempb}%
1477   \MT@set@all@pr@\@tempa@\@tempb
1478 }

\MT@preset@aux Auxiliary macro for presetting. Store value #1 in macro #2.
\MT@preset@aux@factor 1479 \def\MT@preset@aux@factor#1#2{%
1480   \tempcntb=#1\relax
1481   \MT@scale@factor
1482   \edef#2{\number\tempcntb}%
1483 }
1484 \def\MT@preset@aux@space#1#2#3{%
1485   \def\@tempb{#2}%
1486   \MT@get@space@unit#1%
1487   \MT@scale@to@em
1488   \edef#3{\number\tempcntb}%
1489 }

\MT@warn@preset@towidth
1490 \def\MT@warn@preset@towidth#1{%
1491   \MT@warning@nl{%
1492     Cannot preset characters relative to their widths\MessageBreak
1493     for \nameuse{MT@abbr@#1} list `@\nameuse{MT@#1c@name}'. Presetting them\MessageBreak
1494     relative to 1em instead}%
1495 }
1496 (/pdftex-def|xetex-def|luatex-def)

```

14.2.2 Expansion

\MT@expansion Set up for expansion?

```
1497 (*pdftex-def|luatex-def)
1498 \def\MT@expansion{\MT@maybe@do{ex}}
```

\MT@set@ex@codes@n Setting up font expansion is a bit different because of the selected option. There are two versions of this macro.

If selected=true, we only apply font expansion to those fonts for which a list has been declared (i.e., like for protrusion).

```
1499 \def\MT@set@ex@codes@n{%
1500   \MT@if@list@exists{%
1501     \MT@get@ex@opt
1502     \let\MT@get@char@unit\relax
1503     \MT@reset@ef@codes
1504     \MT@get@inh@list
1505     \MT@set@inputenc{c}%
1506     \MT@load@list\MT@ex@c@name
1507     \MT@set@listname
1508     \MT@let@cn\@tempc{\MT@ex@c@\MT@ex@c@name}%
1509     \expandafter\MT@set@codes\@tempc,\relax,%
1510     \MT@expandfont
1511   }\relax
1512 }
1513 (/pdftex-def|luatex-def)
```

\MT@set@ex@codes@n If, on the other hand, all characters should be expanded by the same amount, we only take the first optional argument to \SetExpansion into account.

\ifMT@nonselected We need this boolean in \MT@if@list@exists so that no warning for missing lists will be issued.

```
1514 (package)\newif\ifMT@nonselected
1515 (*pdftex-def|luatex-def)
1516 \def\MT@set@ex@codes@n{%
1517   \MT@nonselectedtrue
1518   \MT@if@list@exists
1519   \MT@get@ex@opt
1520   {%
1521     \let\MT@stretch@\MT@stretch
1522     \let\MT@shrink@\MT@shrink
1523     \let\MT@step@\MT@step
1524   (pdftex-def) \let\MT@auto@\MT@auto
1525     \let\MT@ex@factor@\MT@ex@factor
1526   }%
1527   \MT@reset@ef@codes
1528   \MT@expandfont
1529   \MT@nonselectedfalse
1530 }
```

\MT@set@ex@codes Default is non-selected. It can be changed in the package options.

```
1531 \let\MT@set@ex@codes\MT@set@ex@codes@n
```

\MT@expandfont Expand the font. In LuaTeX, we try to go the lua way, if the font.setexpansion function exists.

```
1532 (*luatex-def)
1533 \directlua{\detokenize{
1534   if font.setexpansion == nil then
1535     tex.print("\\@firstoftwo")
1536   else
1537     tex.print("\\@secondoftwo")
1538   end
1539 }}{
1540 \MT@requires@luatex4{\let\pdffontexpand\expandglyphsinfont}\relax
```

```

1541 (/luatex-def)
1542 \def\MT@expandfont{%
1543   \pdffontexpand\MT@font \MT@stretch@ \MT@shrink@ \MT@step@ \MT@auto@ \relax
1544 }
1545 (*luatex-def)
1546 }{
1547 \def\MT@expandfont{%
1548   \directlua{font.setexpansion(font.current(), \MT@stretch@, \MT@shrink@, \MT@step@)}%
1549 }
1550 }
1551 (/luatex-def)

\MT@set@all@ex      At first, all expansion factors for the characters will be set to 1000 (respectively the
\MT@reset@ef@codes@ factor of this font).
1552 \def\MT@set@all@ex#1{%
1553 (debug)\MT@dinfo@n{3}{-- ex: setting all to \number#1}%
1554   \MT@do@font{\efcode\MT@font\@tempcnta=#1\relax}%
1555 }
1556 \def\MT@reset@ef@codes@{\MT@set@all@ex\MT@ex@factor@}

\MT@reset@ef@codes  However, this is only necessary for pdfTeX versions prior to 1.20, or LuaTeX < 0.90
                    (actually, I think, 0.87).
1557 (pdftex-def)\MT@requires@pdftex4
1558 (luatex-def)\MT@requires@luatex5
1559 {
1560   \def\MT@reset@ef@codes{%
1561     \ifnum\MT@ex@factor@=0m \else
1562       \MT@reset@ef@codes@
1563     \fi
1564   }
1565 }{
1566   \let\MT@reset@ef@codes\MT@reset@ef@codes@
1567 }

\MT@ex@split@val    There's only one number per character.
1568 \def\MT@ex@split@val#1\relax{%
1569   \@tempcntb=#1\relax

                    Take an optional factor into account.
1570   \ifnum\MT@ex@factor@=0m \else
1571     \MT@scale\@tempcntb \MT@ex@factor@ 0m
1572   \fi
1573   \ifnum\@tempcntb > \MT@ex@max
1574     \MT@warn@ex@too@large\MT@ex@max
1575   \else
1576     \ifnum\@tempcntb < \MT@ex@min
1577       \MT@warn@ex@too@large\MT@ex@min
1578     \fi
1579   \fi
1580   \efcode\MT@font\MT@char=\@tempcntb
1581 (debug)\MT@dinfo@n{4}{::: ef (\MT@char): \number\efcode\MT@font\MT@char: [#1]}%
```

Heirs, heirs, I love thy heirs.

```

1582 \MT@ifdefined@c@T\MT@ex@inh@name{%
1583   \MT@ifdefined@n@T{\MT@inh@\MT@ex@inh@name @\MT@char @}{%
1584     \MT@exp@cs\MT@map@tlist@c{\MT@inh@\MT@ex@inh@name @\MT@char @}\MT@set@ex@heirs
1585   }%
1586 }%
1587 }
```

\MT@warn@ex@too@large

```

1588 \def\MT@warn@ex@too@large#1{%
1589   \MT@warning@n{Expansion factor \number\@tempcntb\space too large for
1590   character\MessageBreak `\\the\\MT@toks' in \MT@curr@list@name.\MessageBreak}
```

```

1591     Setting it to the maximum of \number{#1}%
1592     \tempcntb=\#1\relax
1593 }

\MT@get@ex@opt      Apply different values to this font?

\MT@ex@factor@ 1594 \def\MT@get@ex@opt{%
  \MT@stretch@ 1595   \MT@set@listname
  1596   \MT@ifdefined@n@TF{\MT@ex@c@\MT@ex@c@name @factor}{%
  1597     \MT@let@cn\MT@ex@factor@{\MT@ex@c@\MT@ex@c@name @factor}%
  1598     \MT@vinfo{... : Multiplying expansion factors by \number{\MT@ex@factor@/1000}}%
  1599   }%
  1600   \let\MT@ex@factor@\MT@ex@factor
  1601 }%
  1602   \MT@get@ex@opt@{stretch}{Setting stretch limit to \number{\MT@stretch@}}%
  1603   \MT@get@ex@opt@{shrink}{Setting shrink limit to \number{\MT@shrink@}}%
  1604   \MT@get@ex@opt@{step}{Setting expansion step to \number{\MT@step@}}%
  1605 (pdftex-def) \def\@tempa{autoexpand}%
  1606 (pdftex-def) \MT@get@ex@opt@{auto}{\ifx\@tempa\MT@auto@ \else \if@fi able automatic expansion\fi\fi}%
  1607   \MT@ifdefined@n@T{\MT@ex@c@\MT@ex@c@name @preset}{%
  1608     \MT@preset@ex
  1609     \let\MT@reset@ef@codes\relax
  1610   }%
  1611 }

\MT@get@ex@opt@

1612 \def\MT@get@ex@opt@#1#2{%
  1613   \MT@ifdefined@n@TF{\MT@ex@c@\MT@ex@c@name @#1}{%
  1614     \MT@let@nn{\MT@#1}{\MT@ex@c@\MT@ex@c@name @#1}%
  1615     \MT@vinfo{... : #2}%
  1616   }%
  1617   \MT@let@nn{\MT@#1}{\MT@#1}%
  1618 }%
  1619 }

\MT@set@ex@heirs

1620 \def\MT@set@ex@heirs#1{%
  1621   \efcode{\MT@font#1=\efcode{\MT@font}\MT@char}
  1622 (debug)\MT@dinfo@n{2}{-- heir of \MT@char: #1}%
  1623 (debug)\MT@dinfo@n{4}{::: ef (#1) \number{\efcode{\MT@font}\MT@char}}%
  1624 }

\MT@preset@ex

1625 \def\MT@preset@ex{%
  1626   \tempcntb=\csname MT@ex@c@\MT@ex@c@name @preset\endcsname\relax
  1627   \MT@scale@factor
  1628   \MT@set@all@ex\tempcntb
  1629 }
  1630 (/pdftex-def|luatex-def)

```

14.2.3 Interword spacing (glue)

\MT@spacing Adjustment of interword spacing? Only works with pdfTEX.

```
1631 \def\pdftex-def{  
1632 \MT@requires@pdftex6{  
1633 \def\MT@spacing{\MT@maybe@do{sp}}}
```

\MT@set@sp@codes This is all the same.

```
1634 \def\MT@set@sp@codes{%
1635   \MT@if@list@exists{%
1636     \MT@get@font@dimen@six{%
1637       \MT@get@opt{%
1638         \MT@reset@sp@codes
1639       \MT@get@inh@list
```

```

1640   \MT@set@inputenc{c}%
1641   \MT@load@list\MT@sp@c@name
1642   \MT@set@listname
1643   \MT@let@cn\@tempc{\MT@sp@c@\MT@sp@c@name}%
1644   \expandafter\MT@set@codes\@tempc,\relax,}%
1645 } \MT@reset@sp@codes
1646 }

\MT@sp@split@val If unit=space, \MT@get@space@unit will be defined to fetch the corresponding
fontdimen (2 for the first, 3 for the second and 4 for the third argument).
1647 \def\MT@sp@split@val#1,#2,#3\relax{%
1648   \def\@tempb{#1}%
1649   \MT@ifempty\@tempb\relax{%
1650     \MT@get@space@unit2%
1651     \MT@scale@to@em
1652     \knbscode\MT@font\MT@char=\@tempcntb
1653   \debug\MT@dinfo@n{4}{;;; knbs (\MT@char): \number\knbscode\MT@font\MT@char: [#1]}%
1654   }%
1655   \def\@tempb{#2}%
1656   \MT@ifempty\@tempb\relax{%
1657     \MT@get@space@unit3%
1658     \MT@scale@to@em
1659     \stbscode\MT@font\MT@char=\@tempcntb
1660   \debug\MT@dinfo@n{4}{;;; stbs (\MT@char): \number\stbscode\MT@font\MT@char: [#2]}%
1661   }%
1662   \def\@tempb{#3}%
1663   \MT@ifempty\@tempb\relax{%
1664     \MT@get@space@unit4%
1665     \MT@scale@to@em
1666     \shbscode\MT@font\MT@char=\@tempcntb
1667   \debug\MT@dinfo@n{4}{;;; shbs (\MT@char): \number\shbscode\MT@font\MT@char: [#3]}%
1668   }%
1669   \MT@ifdefined@c@T\MT@sp@inh@name{%
1670     \MT@ifdefined@n@T{\MT@inh@\MT@sp@inh@name @\MT@char @}{%
1671       \MT@exp@cs\MT@map@tlist@c{\MT@inh@\MT@sp@inh@name @\MT@char @}\MT@set@sp@heirs
1672     }%
1673   }%
1674 }

\MT@set@sp@heirs
1675 \def\MT@set@sp@heirs#1{%
1676   \knbscode\MT@font#1\knbscode\MT@font\MT@char
1677   \stbscode\MT@font#1\stbscode\MT@font\MT@char
1678   \shbscode\MT@font#1\shbscode\MT@font\MT@char
1679   \debug\MT@dinfo@n{2}{-- heir of \MT@char: #1}%
1680   \debug\MT@dinfo@n{4}{;;; knbs/stbs/shbs (#1): \number\knbscode\MT@font\MT@char/%
1681   \debug           \number\stbscode\MT@font\MT@char/\number\shbscode\MT@font\MT@char}%
1682 }

\MT@set@all@sp
\MT@reset@sp@codes 1683 \def\MT@set@all@sp#2#3{%
\MT@reset@sp@codes@ 1684   \debug\MT@dinfo@n{3}{-- knbs/stbs/shbs: setting all to #1/#2/#3}%
1685   \let\MT@temp\empty
1686   \MT@ifempty{#1}\relax{\g@addto@macro\MT@temp{\knbscode\MT@font\@tempcnta=#1\relax}}%
1687   \MT@ifempty{#2}\relax{\g@addto@macro\MT@temp{\stbscode\MT@font\@tempcnta=#2\relax}}%
1688   \MT@ifempty{#3}\relax{\g@addto@macro\MT@temp{\shbscode\MT@font\@tempcnta=#3\relax}}%
1689   \MT@do@font\MT@temp
1690 }
1691 \def\MT@reset@sp@codes@{\MT@set@all@sp\z@\z@\z@}
1692 \let\MT@reset@sp@codes\relax

\MT@preset@sp
\MT@preset@sp@ 1693 \def\MT@preset@sp{%
1694   \expandafter\expandafter\expandafter\MT@preset@sp@
1695   \csname MT@sp@c@\MT@sp@c@name @\preset\endcsname\@nil

```

```

1696 }
1697 \def\MT@preset@sp#1,#2,#3@nil{%
1698   \ifx\MT@sp@unit@{\empty}
1699     \MT@warn@preset@towidth{sp}%
1700     \MT@ifempty{#1}{\let\@tempa\empty}{\MT@preset@aux@factor{#1}\@tempa}%
1701     \MT@ifempty{#2}{\let\@tempc\empty}{\MT@preset@aux@factor{#2}\@tempc}%
1702     \MT@ifempty{#3}{\let\@tempb\empty}{\MT@preset@aux@factor{#3}\@tempb}%
1703   \else
1704     \MT@ifempty{#1}{\let\@tempa\empty}{\MT@preset@aux@space2{#1}\@tempa}%
1705     \MT@ifempty{#2}{\let\@tempc\empty}{\MT@preset@aux@space3{#2}\@tempc}%
1706     \MT@ifempty{#3}{\let\@tempb\empty}{\MT@preset@aux@space4{#3}\@tempb}%
1707   \fi
1708   \MT@set@all@sp\@tempa\@tempc\@tempb
1709 }
1710 }\relax

```

14.2.4 Additional kerning

\MT@kerning Again, only check for additional kerning for new versions of pdfTEX.

```

1711 \MT@requires@pdftex6{%
1712 \def\MT@kerning{\MT@maybe@do{kn}}%

```

\MT@set@kn@codes It's getting boring, I know.

```

1713 \def\MT@set@kn@codes{%
1714   \MT@if@list@exists{%
1715     \MT@get@font@dimen@six{%
1716       \MT@get@opt
1717       \MT@reset@kn@codes
1718       \MT@get@inh@list
1719       \MT@set@inputenc{c}%
1720       \MT@load@list\MT@kn@c@name
1721       \MT@set@listname
1722       \MT@let@cn\@tempc{\MT@kn@c@\MT@kn@c@name}%
1723       \expandafter\MT@set@codes\@tempc,\relax,}%
1724   }\MT@reset@kn@codes
1725 }%

```

\MT@kn@split@val Again, the unit may be measured in the space dimension; this time only \fontdimen 2.

```

1726 \def\MT@kn@split@val#1,#2\relax{%
1727   \def\@tempb{#1}%
1728   \MT@ifempty\@tempb\relax{%
1729     \MT@get@space@unit2%
1730     \MT@scale@to@em
1731     \knbccode\MT@font\MT@char=\@tempcntb
1732   (debug)\MT@dinfo@n{4}{;;; knbc (\MT@char): \number\knbccode\MT@font\MT@char: [#1]}%
1733   }%
1734   \def\@tempb{#2}%
1735   \MT@ifempty\@tempb\relax{%
1736     \MT@get@space@unit2%
1737     \MT@scale@to@em
1738     \knacccode\MT@font\MT@char=\@tempcntb
1739   (debug)\MT@dinfo@n{4}{;;; knac (\MT@char): \number\knacccode\MT@font\MT@char: [#2]}%
1740   }%
1741   \MT@ifdefined@c@T\MT@kn@inh@name{%
1742     \MT@ifdefined@n@T{\MT@inh@{\MT@kn@inh@name} @\MT@char @}{%
1743       \MT@exp@cs\MT@map@t@list@c{\MT@inh@{\MT@kn@inh@name} @\MT@char @}\MT@set@kn@heirs
1744     }%
1745   }%
1746 }%

```

\MT@set@kn@heirs

```

1747 \def\MT@set@kn@heirs#1{%
1748   \knbccode\MT@font#1=\knbccode\MT@font\MT@char
1749   \knacccode\MT@font#1=\knacccode\MT@font\MT@char

```

```

1750 (debug)\MT@dinfo@n{2}{-- heir of \MT@char: #1}%
1751 (debug)\MT@dinfo@n{4}{;;; knbc (#1): \number\knbccode\MT@font\MT@char/%
1752 (debug)                                \number\knaccode\MT@font\MT@char}%
1753 }

\MT@set@all@kn
\MT@reset@kn@codes 1754 \def\MT@set@all@kn#1#2{%
\MT@reset@kn@codes@ 1755 (debug)\MT@dinfo@n{3}{-- knac/knbc: setting all to #1/#2}%
1756   \let\MT@temp\empty
1757   \ifempty{#1}\relax{\g@addto@macro\MT@temp{\knbccode\MT@font\@tempcnta=#1\relax}}%
1758   \ifempty{#2}\relax{\g@addto@macro\MT@temp{\knaccode\MT@font\@tempcnta=#2\relax}}%
1759   \do@font\MT@temp
1760 }
1761 \def\MT@reset@kn@codes@{\MT@set@all@kn\z@\z@}
1762 \let\MT@reset@kn@codes\relax

\MT@preset@kn
\MT@preset@kn@ 1763 \def\MT@preset@kn{%
1764   \expandafter\expandafter\expandafter\MT@preset@kn@
1765     \csname MT@kn@c@\MT@kn@c@name @preset\endcsname\@nil
1766 }
1767 \def\MT@preset@kn@#1,#2@nil{%
1768   \ifx\MT@kn@unit@\empty
1769     \warn@width{kn}%
1770   \let\MT@preset@aux\MT@preset@aux@factor
1771   \else
1772     \def\MT@preset@aux{\MT@preset@aux@space2}%
1773   \fi
1774   \ifempty{#1}{\let\@tempa\empty{\MT@preset@aux{#1}\@tempa}%
1775   \ifempty{#2}{\let\@tempb\empty{\MT@preset@aux{#2}\@tempb}%
1776   \set@all@kn\@tempa\@tempb
1777 }
1778 }\relax
1779 (pdftex-def)

```

14.2.5 Tracking

This only works with pdfTeX 1.40 or LuaTeX 0.62.

```

1780 (*pdftex-def|luatex-def)
1781 (pdftex-def)\MT@requires@pdftex6
1782 (luatex-def)\MT@requires@luatex3
1783 {

```

\MT@tracking We only check whether a font should not be letterspaced at all, not whether we've already done that (because we have to do it again).

```

\MT@tr@font@list 1784 \let\MT@tr@font@list\empty
1785 \def\MT@tracking@{%
1786   \MT@exp@one@{\MT@in@clist\MT@font\MT@tr@font@list
1787   \ifinlist@{%
1788     \MT@maybe@do{tr}%
1789     \ifMT@do{%
1790       \xdef\MT@tr@font@list{\MT@tr@font@list\MT@font,}%
1791     \fi
1792   }%
1793 }
1794 (pdftex-def|luatex-def)
1795 (pdftex-def|luatex-def|letterspace)\let\MT@tracking@
1796 (pdftex-def|luatex-def) \MT@tracking@
1797 (letterspace) \relax

```

\MT@set@tr@codes The tracking amount is determined by the optional argument to \textls, settings from \SetTracking, or the global letterspace option, in this order.

```

1798 (*pdftex-def|luatex-def|letterspace)

```

```

1799 \def\MT@set@tr@codes{%
1800   (*pdftex-def|luatex-def)
1801     \MT@vinfo{Tracking font `}\MT@font`\on@line}%
1802     \MT@get@font@dimen@six{%
1803       \MT@if@list@exists
1804         \MT@get@tr@opt
1805         \relax
1806   (/pdftex-def|luatex-def)
1807     \MT@ifdefined@c@TF\MT@letterspace@\relax{\let\MT@letterspace@\MT@letterspace}%
1808     \ifnum\MT@letterspace@=\z@

```

Zero tracking requires special treatment.

```

1809   \MT@set@tr@zero
1810   \else
1811   (*pdftex-def|luatex-def) \MT@vinfo{... Tracking by \number\MT@letterspace@}%

```

Letterspacing only works in PDF mode.

```

1812   \MT@warn@tracking@DVI

```

\MT@lsfont The letterspaced font instances are saved in macros $\langle\text{font name}\rangle/\langle\text{letterspacing amount}\rangle$ s.

In contrast to \MT@font, which may reflect the font characteristics more accurately (taking substitutions into account), \font@name is guaranteed to correspond to an actual font identifier.

```

1813   \xdef\MT@lsfont{\csname\expandafter\string\font@name
1814                           /\number\MT@letterspace@ \ls\endcsname}%
1815   \expandafter\ifx\MT@lsfont\relax
1816   (*debug)\MT@dinfo@n{1}{... new letterspacing instance}%

```

In case of nested letterspacing with different amounts, we have to extract the base font again.

```

1817   \MT@get@ls@basefont

```

luaotfload provides the faux font feature kernfactor, which we will use when dealing with non-legacy fonts, as it is less problematic and faster than the pdfTeX primitive \letterspacefont.

```

1818 (*luatex-def|letterspace)
1819   \MT@if@fontspec@font{%
1820   (*luatex-def&debug)\MT@dinfo@n{1}{... fontspec font: \MessageBreak
1821   (*luatex-def&debug) \expandafter\fontname\font@name}%
1822   \ifnum\MT@letterspace@<\z@\def\MT@minus{-}\else\let\MT@minus\empty\fi
1823   \global\expandafter\font\MT@lsfont=%
1824   \expandafter\MT@exp@two@c\expandafter\MT@ls@fontspec@font
1825   \expandafter\fontname\expandafter\font@name\space \@nil
1826   }{%
1827   (*luatex-def|letterspace)
1828   (*luatex-def&debug)\MT@dinfo@n{1}{... legacy font}%
1829   \global\expandafter\letterspacefont\MT@lsfont\font@name\MT@letterspace@%
1830   (*luatex-def|letterspace) }%

```

Scale interword spacing (not configurable in letterspace).

```

1831 (*pdftex-def|luatex-def)
1832   \MT@ifdefined@c@TF\MT@tr@ispace
1833   {\let\@tempa\MT@tr@ispace}%
1834   {\edef\@tempa{\MT@letterspace@*,,}}%
1835   \MT@ifdefined@c@TF\MT@tr@ospace
1836   {\edef\@tempa{\@tempa,\MT@tr@ospace}}%
1837   {\edef\@tempa{\@tempa,,,}}%
1838   \expandafter\MT@tr@set@space\@tempa,%
1839   (/pdftex-def|luatex-def)
1840   (*letterspace)
1841   % spacing = {<letterspace amount>*,,}
1842   \fontdimen2\MT@lsfont=\dimexpr\numexpr 1000+\MT@letterspace@\relax sp

```

```

1843 * \fontdimen2\MT@lsfont/1000\relax
1844 (/letterspace)
    Adjust outer kerning (microtype only).
1845 (*pdftex-def|luatex-def)
1846   \MT@ifdefined@c@T\MT@tr@okern{\let@\tempa\MT@tr@okern}{\def@\tempa{*,*}}%
1847   \expandafter\MT@tr@set@okern@\tempa,%

    Disable ligatures (not configurable in letterspace).
1848   \MT@ifdefined@c@T\MT@tr@ligatures\MT@tr@noligatures
1849 (/pdftex-def|luatex-def)
1850 (*letterspace)
1851   % no ligatures = {f}
1852   \tagcode\MT@lsfont`f=\m@ne
1853 (/letterspace)

    Adjust protrusion values now, and maybe later (in \MT@pr@split@val) (not for
    LuaTeX, though, where letterspacing does not interfere with protrusion).
1854 (luatex-def|letterspace) \MT@if@fontspec@font\relax{%
1855 (debug)\MT@dinfo@n{2}{... compensating for tracking (\number\MT@letterspace@)}%
1856   \MT@do@font{\lpcode\MT@lsfont@tempcpta=\numexpr\MT@letterspace@/2\relax
1857   \rpcode\MT@lsfont@tempcpta=\numexpr\MT@letterspace@/2\relax}%
1858   \let\MT@the@pr@code\MT@the@pr@code@tr
1859 (luatex-def|letterspace) }%
1860 \fi

    Finally, let the letterspaced font propagate. With LuaTeX, we also need to load.
1861   \aftergroup\MT@set@lsfont
1862 (pdftex-def|luatex-def) \let\MT@font\MT@lsfont
1863 (luatex-def) \MT@if@fontspec@font\MT@font\relax

\MT@set@curr@ls We need to remember the current letterspacing amount (for \lslig).
1864 \xdef\MT@set@curr@ls{\def\noexpand\MT@curr@ls{\MT@letterspace@}}%
1865 \aftergroup\MT@set@curr@ls

    Adjust surrounding spacing and kerning.
\MT@set@curr@os We get the current outer spacing and adjust it, then, after the end of the current
    outer group, set the current outer spacing, again, and adjust.
1866 (*pdftex-def|luatex-def)
1867   \MT@outer@space=\csname MT@outer@space\expandafter\string\font@name\endcsname\relax
1868   \xdef\MT@set@curr@os{\MT@outer@space=\the\MT@outer@space\relax}%
1869   \MT@tr@outer@1
1870 (/pdftex-def|luatex-def)

    If \MT@ls@adjust is empty, it's the starred version of \textls. Use scaling to avoid
    a 'Dimension too large'.
1871   \ifx\MT@ls@adjust\empty
1872 (letterspace) % \textls : outer kerning = {*,*} ; \textls* : outer kerning = {0,0}
1873   \MT@outer@kern=-\dimexpr\MT@letterspace@ sp * \fontdimen6\font@name/2000\relax
1874   \MT@ls@outer@0

    Otherwise, get the current outer kerning and adjust it, for left and right side
    (microtype only).
1875 (*pdftex-def|luatex-def)
1876   \else
1877   \MT@outer@kern=\expandafter\expandafter\expandafter\firsto@two
1878   \csname MT@outer@kern\expandafter\string\font@name\endcsname\relax
1879   \ifdim\MT@outer@kern=0\else \MT@ls@outer@0 \fi
1880   \MT@outer@kern=\expandafter\expandafter\expandafter@secondo@two
1881   \csname MT@outer@kern\expandafter\string\font@name\endcsname\relax
1882 (/pdftex-def|luatex-def)
1883 (*letterspace)
1884   \xdef\MT@set@curr@ok{\MT@outer@kern=\the\MT@outer@kern\relax}%
1885   \MT@afteraftergroup{%

```

```

1886      \MT@set@curr@ok
1887      \noexpand\MT@ls@outer@k
1888      }%
1889  (/letterspace)
1890  \fi
1891  (*pdftex-def|luatex-def)

\MT@set@curr@ok   Carry the outer kerning amount to outside the next group, then set outer spacing
                   (which will set kerning, if no space follows).
1892  \xdef\MT@set@curr@ok{\MT@outer@kern=\the\MT@outer@kern\relax}%

Stuff to be done after the letterspace group. The letterspace package only adjusts
the kerning.
1893  \MT@afteraftergroup{%
1894      \MT@set@curr@os
1895      \MT@set@curr@ok
1896      \noexpand\MT@tr@outer@r
1897      }%
1898  (/pdftex-def|luatex-def)
1899  \fi
1900  (pdftex-def|luatex-def) }%
1901 }

\MT@afteraftergroup This helper macro carries stuff outside of the current group to the end of the next
group, but will then respect grouping, which is crucial for nested letterspacing.
(Following an idea of Will Robertson.)
1902 \def\MT@afteraftergroup#1{%
1903  (!letterspace) \MT@maybe@gobble@with@tikz{%
1904      \MT@ifdefined@n@TF{\MT@aftergroup@\number\currentgrouplevel}\relax{%
1905          \MT@exp@cs\xdef{\MT@aftergroup@\number\currentgrouplevel}{%
1906              {\MT@exp@cs\MT@glet{\MT@aftergroup@\number\currentgrouplevel}\noexpand@undefined#1}%
1907              \expandafter\aftergroup\expandafter\aftergroup\MT@exp@cs\aftergroup
1908              {\MT@aftergroup@\number\currentgrouplevel}}%
1909          }%
1910      (!letterspace) }%
1911  }
1912  (/pdftex-def|luatex-def|letterspace)

\MT@ls@fontspec@colon Add the kernfactor feature to a font loaded by fontspec (we might have to add
\MT@ls@fontspec@font the colon ourselves).
1913  (*luatex-def|letterspace)
1914  \def\MT@ls@fontspec@colon#1:#2:#3:#4@nil{\ifx\\#1:\\#2\else#1:#2:#3\fi}
1915  \def\MT@ls@fontspec@font#1:#2@nil{%
1916      "\MT@ls@fontspec@colon#1:::\relax@nil
1917      kernfactor=\MT@minus \ifnum\MT@letterspace@=1000 1\else 0.%"
1918      \ifnum\MT@minus\MT@letterspace@<100 0\fi
1919      \ifnum\MT@minus\MT@letterspace@<10 0\fi
1920      \number\MT@minus\MT@letterspace@ \fi;"%
1921      \ifx\\#2\\ at \f@size pt\else#2\fi\relax
1922  }
1923  (/luatex-def|letterspace)

\MT@get@tr@opt Various settings (only for the microtype version).
1924  (*pdftex-def|luatex-def)
1925  \def\MT@get@tr@opt{%
1926  \MT@set@listname
1927  \MT@ifdefined@n@T{\MT@tr@c@\MT@tr@c@name}{%
1928      \MT@let@cn\MT@letterspace{\MT@tr@c@\MT@tr@c@name}}}

\MT@tr@unit@ Different unit?
1929  \MT@ifdefined@n@T{\MT@tr@c@\MT@tr@c@name @unit}{%
1930      \MT@let@cn\MT@tr@unit@{\MT@tr@c@\MT@tr@c@name @unit}%
1931      \ifdim\MT@tr@unit@=1em

```

```

1932      \let\MT@tr@unit@\undefined
1933      \else
1934          \MT@let@cn\@tempb{MT@tr@c@\MT@tr@c@name}%
1935          \MT@get@unit\MT@tr@unit@
1936          \let\MT@tr@factor@\empty
1937          \MT@scale@to@em
1938          \edef\MT@letterspace{\number\@tempcntb}%
1939      \fi
1940  }%
1941 }%

\MT@tr@inspace   Adjust interword spacing.
\MT@tr@ospace  1942 \MT@get@tr@opt@{spacing}    {inspace}%
1943 \MT@get@tr@opt@{outerspacing}{ospace}%

\MT@tr@okern   Adjust outer kerning.
1944 \MT@get@tr@opt@{outerkern}{okern}%

\MT@tr@ligatures Which ligatures should we disable (empty means all, undefined none)?
1945 \MT@get@tr@opt@{noligatures} {ligatures}%
1946 }

\MT@get@tr@opt@

1947 \def\MT@get@tr@opt@#1#2{%
1948     \MT@ifdefined@n@T{MT@tr@c@\MT@tr@c@name @#1}%
1949     {\MT@let@nn{MT@tr@#2}{MT@tr@c@\MT@tr@c@name @#1}}%
1950 }
1951 (/pdftex-def|luatex-def)

\MT@set@lsfont  Redefine \font@name, which will be called a second later (in \selectfont).
1952 (*pdftex-def|luatex-def|letterspace)
1953 (plain)\MT@requires@latex2{
1954 \def\MT@set@lsfont{\MT@exp@two@c\let\font@name\MT@lsfont}

\lsstyle   Disable the tests whether the font should be letterspaced, then trigger the setup.
Only \textls can be used in math mode (\lsstyle may be used inside another
text switch, of course). Still, we have to ensure that math fonts are set up again.
Setting \glb@currsize to \empty (our previous solution) could throw us into an
infinite loop (e.g., with the psnfss packages, via \every@math@size), so we issue
\glb@settings instead.
1955 \DeclareRobustCommand\lsstyle{%
1956     \not@math@alphabet\lsstyle{textls}
1957 (pdftex-def|luatex-def) \MT@maybe@gobble@with@tikz{\aftergroup\glb@settings}%
1958 (pdftex-def|luatex-def) \def\MT@feat{tr}%
1959 \let\MT@tracking\MT@set@tr@codes
1960 \selectfont
1961 }
```

Now the definitions for the letterspace package with plain TeX.

```

1962 (*plain)
1963 }{
1964 \def\MT@set@lsfont{\MT@lsfont}
1965 \def\lsstyle{%
1966     \begingroup
1967     \escapechar\m@ne
1968     \xdef\font@name{\csname\expandafter\string\the\font\endcsname}%
1969     \MT@set@tr@codes
1970     \endgroup
1971 }
1972 \let\textls@\undefined
1973 \let\lslig@\undefined
1974 }
1975 (/plain)
```

\lslig For Fraktur fonts, some ligatures shouldn't be broken up. This command will temporarily select the base font and insert the correct kerning.

```

1976 \DeclareRobustCommand{\lslig}[1]{%
1977   {\MT@ifdefined@c@TF\MT@curr@ls{%
1978     \escapechar\m@ne
1979     \MT@get@ls@basefont
1980     \MT@outer@kern=\dimexpr\MT@curr@ls sp * \fontdimen6\font@name/2000\relax
1981     \kern\MT@outer@kern
1982     \font@name #1%
1983     \kern\MT@outer@kern
1984   }{#1}%
1985 }}
```

\MT@ls@basefont pdfTeX cannot letterspace fonts that already are letterspaced. Therefore, we have to save the base font in \font name@base.

The previous solution (checking the macro's meaning with \pdfmatch), where we were loading the base font via the \font primitive again, would destroy all previously set up micro-typographic features of the font.

```

1986 \def\MT@get@ls@basefont{%
1987   \xdef\MT@ls@basefont{\csname\expandafter\string\font@name @base\endcsname}%
1988   \expandafter\ifx\MT@ls@basefont\relax
1989     \MT@exp@two@c\MT@glet\MT@ls@basefont\font@name
1990   \else
1991   {debug}\MT@dinfo@n{1}{... fixing base font}%
1992     \MT@exp@two@c\let\font@name\MT@ls@basefont
1993   \fi
1994 }
```

\MT@set@lsbasefont If tracking is switched off in the middle of the document, or if \textls is called with a zero letterspacing amount, we have to retrieve the base font and select it.

```

1995 \def\MT@set@lsbasefont{\MT@exp@two@c\let\font@name\MT@ls@basefont}
1996 \def\MT@set@tr@zero{%
1997 {debug}\MT@dinfo@n{1}{... zero tracking}%
1998   \xdef\MT@ls@basefont{\csname\expandafter\string\font@name @base\endcsname}%
1999   \expandafter\ifx\MT@ls@basefont\relax \else
2000 {debug}\MT@dinfo@n{1}{... fixing base font}%
2001   \aftergroup\MT@set@lsbasefont
2002   \fi
2003 }
2004 {pdftex-def|luatex-def|letterspace}
```

\MT@tr@noligatures pdfTeX 1.40.0–1.40.3 disabled all ligatures in letterspaced fonts.

```

2005 {*pdftex-def|luatex-def}
2006 (pdftex-def)\MT@requires@pdftex7{
2007   \def\MT@tr@noligatures{%
2008     \ifx\MT@tr@ligatures@\empty
2009       \MT@noligatures@\MT@lsfont@\undefined
2010     \else
2011       \MT@noligatures@\MT@lsfont\MT@tr@ligatures
2012     \fi
2013   }
2014 {*pdftex-def}
2015 }{
2016   \def\MT@tr@noligatures{%
2017     \MT@warning@n{%
2018       Disabling selected ligatures is only possible since\MessageBreak
2019       pdftex 1.40.4. Disabling all ligatures instead}%
2020     \MT@glet\MT@tr@noligatures\relax
2021   }
2022 }
2023 {pdftex-def}
```

\MT@outer@space A new skip for outer spacing.

2024 \newskip\MT@outer@space

\MT@tr@set@space Adjust interword spacing (\fontdimen 2,3,4) for inner and outer space. For inner spacing, the font dimensions will be adjusted, the settings for outer spacing will be remembered in a macro.

```
2025 \def\MT@tr@set@space#1,#2,#3,#4,#5,#6{%
2026   debug\MT@dinfo@n12{... orig. space: \the\fontdimen2\MT@lsfont,
2027   debug   \the\fontdimen3\MT@lsfont, \the\fontdimen4\MT@lsfont
2028   debug   \MessageBreak... (#1,#2,#3) (#4,#5,#6)}%
2029   \let\MT@temp\empty
2030   \MT@tr@set@space@{#1}{#4}{2}\empty
2031   \MT@tr@set@space@{#2}{#5}{3}\plus
2032   \MT@tr@set@space@{#3}{#6}{4}\minus
2033   \MT@glet@nc{\MT@outer@space\expandafter\string\font@name}\MT@temp
2034   debug\MT@dinfo@n12{... inner space: \the\fontdimen2\MT@lsfont,
2035   debug   \the\fontdimen3\MT@lsfont, \the\fontdimen4\MT@lsfont}%
2036   debug\MT@dinfo@n12{... outer space: \MT@temp}%
2037 }
```

\MT@tr@set@space@ If settings for outer spacing (#2) don't exist, they will be inherited from the inner spacing settings (#1).

```
2038 \def\MT@tr@set@space@#1#2#3#4{%
2039   \MT@ifempty{#2}{%
2040     \MT@ifempty{#1}{%
2041       \edef\MT@temp{\MT@temp#4\the\fontdimen#3\MT@lsfont}%
2042     }{%
2043       \MT@tr@set@space@{#1}{#3}{1000}%
2044       \edef\MT@temp{\MT@temp#4\the\@tempdima}%
2045       \fontdimen#3\MT@lsfont=\@tempdima
2046     }%
2047   }{%
2048     \MT@tr@set@space@{#2}{#3}{2000}%
2049     \edef\MT@temp{\MT@temp#4\the\@tempdima}%
2050     \MT@ifempty{#1}\relax{%
2051       \MT@tr@set@space@{#1}{#3}{1000}%
2052       \fontdimen#3\MT@lsfont=\@tempdima
2053     }%
2054   }%
2055 }
```

\MT@tr@set@space@@ If the value is followed by an asterisk, the fontdimen will be scaled by the respective amount, otherwise the value denotes the desired dimension in the respective unit.

```
2056 \def\MT@tr@set@space@@#1#2#3{%
2057   \MT@test@ast#1*\@nil{%
2058     \MT@ifdefined@c@TF\MT@tr@unit@
2059     {\edef\@tempb{#1}\MT@scale@to@em}
2060     {\@tempcntb=#1\relax}%
2061     \@tempdima=\dimexpr\dimexpr\@tempcntb sp*\MT@dimen@six/1000\relax
2062     -\fontdimen#2\MT@lsfont\relax
2063 }
```

For \fontdimen 2, we also have to subtract the kerning that letterspacing adds to each side of the characters (only half if it's for outer spacing).

```
2063   \ifnum#2=\tweo
2064     \advance\@tempdima -\dimexpr\MT@letterspace@ sp*\MT@dimen@six/#3\relax
2065   \fi
2066   \fontdimen#2\MT@lsfont+\@tempdima\relax
2067 }{%
2068   \MT@ifempty{\@tempa}{\let\@tempa\MT@letterspace@}\relax
2069   \fontdimen#2\MT@lsfont/\numexpr1000+\@tempa sp *\fontdimen#2\MT@lsfont/1000\relax
2070 }%
2071 debug\MT@dinfo@n13{... : font dimen #2 (#1): \the\@tempdima}%
2072 }
```

\MT@tr@outer@1 Recall the last skip (must really be an interword space, not just a marker, nor a ‘hard’ space, i.e., one that doesn’t contain stretch or shrink parts).

```
2073 \def\MT@tr@outer@1{%
2074   \ifhmode
2075     \ifdim\lastskip>5sp
2076       \edef\x{\the\lastskip minus Opt}%
2077       \setbox\z@\hbox{\MT@outer@space=\x}%
2078       \ifdim\wd\z@>\z@
2079     <debug>\MT@dinfo2{[[[ adjusting pre space: \the\MT@outer@space]%
2080       \unskip \hskip\MT@outer@space\relax
```

Disable left outer kerning.

```
2081   \let\MT@ls@outer@k\relax
2082   \else
```

The ragged2e package sets \spaceskip without glue.

```
2083   \ifdim\lastskip=%
2084     \ifnum\spacefactor<2000
2085       \spaceskip
2086     \else
2087       \ifdim\xspaceskip=\z@
2088         \dimexpr\spaceskip+\fontdimen7\font@name\relax
2089       \else
2090         \xspaceskip
2091       \fi
2092     \fi
2093   <debug>\MT@dinfo2{[[[ adjusting pre space (skip): \the\MT@outer@space]%
2094     \unskip \hskip\MT@outer@space\relax
2095     \let\MT@ls@outer@k\relax
2096   \fi
2097   \fi
2098   \fi
2099   \fi
2100 }
```

\MT@tr@outer@next microtype also adjusts spacing. The following is borrowed from soul. I’ve added the cases for italic correction, since tracking may also be triggered by text commands (e.g., \textsc).

```
2101 \def\MT@tr@outer@r{%
2102   \futurelet\MT@tr@outer@next\MT@tr@outer@r@%
2103 }
```

\MT@if@outer@next We avoid using \ifx tests, in case \MT@tr@outer@next is \let to \fi etc.

```
2104 \def\MT@if@outer@next#1{%
2105   \ifx\MT@tr@outer@next#1\expandafter\@firstoftwo\else\expandafter\@secondoftwo\fi
2106 }
```

\MT@tr@outer@r@

```
2107 \def\MT@tr@outer@r@{%
2108   \def\MT@temp*{}%
```

Don’t adjust in math mode. There was a tricky bug when \textls was the last command in a \mathchoice group.

```
2109 \ifmmode \else
```

A similar bug occurred when adjustment would happen inside a discretionary group, which we prevent here. This only works with e-TeX (which we know is available).

```
2110   \ifnum\currentgroup=10 \else
2111     \def\MT@temp*##1{\ifhmode\hskip\MT@outer@space
2112   <debug>\MT@dinfo2{]]] adjusting post space (1): \the\MT@outer@space}%
2113     \fi}%
2114     \expandafter\ifcat\expandafter\noexpand\csname MT@tr@outer@next\endcsname\egroup
```

```

2115      \ifhmode\unkern\f\egroup
2116      \MT@set@curr@ok \MT@set@curr@os
2117      \def\MT@temp*{\afterassignment\MT@tr@outer@r\let\MT@temp=%
2118 \else

```

If the next token is `\maybe@ic` (from an enclosing text command), we gobble it, read the next one, feed it to `\maybe@ic@` (via `\MT@tr@outer@icr`) and then call ourselves again.

```

2119      \MT@if@outer@next\maybe@ic{%
2120          \MT@set@curr@ok \MT@set@curr@os
2121          \def\MT@temp*{\afterassignment\MT@tr@outer@icr\let\MT@temp=%
2122      }%

```

If the next token is `\check@icr` (from an inner text command), we insert ourselves just before it. This will then call `\maybe@ic` again the next round (which however will always insert an italic correction, since it doesn't read beyond our group).

```

2123      \MT@if@outer@next\check@icr{%
2124          \def\MT@temp*{\aftergroup\MT@tr@outer@r\check@icr\let\MT@temp=%
2125      }%
2126          \MT@if@outer@next@\sptoken{%
2127              \def\MT@temp* {\ifhmode\hskip\MT@outer@space
2128 (debug)\MT@dinfo2{}]]] adjusting post space (2): \the\MT@outer@space}%
2129          \fi}%
2130      }%
2131          \MT@if@outer@next-{%
2132              \def\MT@temp*-\nobreak\hskip\MT@outer@space
2133 (debug)\MT@dinfo2{}]]] adjusting post space (3): \the\MT@outer@space}%
2134          }%
2135      }%
2136          \MT@if@outer@next\relax{%
2137              \MT@if@outer@next\space\relax{%
2138                  \MT@if@outer@next\xobeysp\relax{%

```

`xspace` requires special treatment.

```

2139      \MT@if@outer@next\xspace{%
2140          \def\MT@temp*\xspace{\MT@xspace}%
2141      }%

```

If there's no outer spacing, there may be outer kerning.

```

2142          \def\MT@temp*{\ifdim\MT@outer@kern=0\else\MT@ts@outer@kern}%
2143 (debug)\MT@dinfo2{--- adjusting post kern: \the\MT@outer@kern}%
2144          \fi}%
2145          \MT@let@nc{\MT@tr@outer@next}\relax
2146          }}}} }}}}\fi
2147      \fi\fi
2148      \MT@temp*%
2149 }

```

`\MT@tr@outer@icr` Helper macros for the italic correction mess.

```

\MT@tr@outer@icr@ 2150 \def\MT@tr@outer@icr{\afterassignment\MT@tr@outer@icr@\MT@tr@outer@r}
2151 \def\MT@tr@outer@icr@{%
2152     \let@\let@token= \MT@tr@outer@next
2153     \maybe@ic@
2154 }

```

`\MT@xspace` If the group is followed by `\xspace`, we first feed `\xspace` with the next token, then check whether it has inserted a space. `\@let@token` might be something evil, so it should be encapsulated here.

```

2155 \def\MT@xspace{\futurelet\@let@token\MT@xspace@}
2156 \def\MT@xspace@{\@xspace@firsttrue\@xspace
2157     \ifdim\lastskip>5sp
2158         \unskip\hskip\MT@outer@space
2159     \else

```

```

2160     \ifdim\MT@outer@kern=\z@\else\MT@ls@outer@k \fi
2161   \fi
2162 }
```

For older pdfTeX versions and LuaTeX, throw an error.

```

2163 }{
2164   \DeclareRobustCommand{\lsstyle}{%
2165     \MT@error{Letterspacing only works with \MT@engine tex version
2166 (pdftex-def) 1.40%
2167 (luatex-def) 0.62%
2168   \MessageBreak or newer}
2169   {Upgrade \MT@engine tex, or try the `soul' package instead.}%
2170   \MT@glet{\lsstyle}\relax
2171 }
2172 }
```

And for XeTeX, too.

```

2173 (/pdftex-def|luatex-def)
2174 (*xetex-def)
2175 \DeclareRobustCommand{\lsstyle}{%
2176   \MT@error{Letterspacing currently doesn't work with xetex}
2177   {Run pdftex or luatex, or use the `soul' package instead.}%
2178   \MT@glet{\lsstyle}\relax
2179 }
2180 (/xetex-def)
```

\textls[
 \MT@ls@adjust@
 \MT@textls This command may be used like the other text commands. The starred version removes kerning on the sides. The optional argument changes the letterspacing factor.

```

2181 (*package|letterspace)
2182 \DeclareRobustCommand{\textls}[%
2183   \@ifstar{\let\MT@ls@adjust@\MT@ls@adjust@empty\MT@textls}{%
2184     \let\MT@ls@adjust@\MT@ls@adjust@relax\MT@textls}%
2185 }
```

\MT@textls This is now almost L^AT_EX's \DeclareTextFontCommand, with the difference that we
 \MT@letterspace@ adjust the outer spacing and kerning also for \lsstyle, while L^AT_EX's text *switches*
 don't bother about italic correction.

```

2186 \newcommand{\MT@textls}[2][]{%
2187   \ifmmode
2188     \nfss@text{\MT@ls@set@ls{#1}\lsstyle#2}%
2189   \else
2190     \hmode@bgroup
2191     \MT@ls@set@ls{#1}%
2192     \lsstyle #2%
2193     \expandafter
2194     \egroup
2195   \fi
2196 }
```

\MT@ls@adjust Set current letterspacing amount and outer kerning. This has to be done inside the
 \MT@ls@adjust@empty same group as the letterspacing command.

```

\MT@ls@adjust@relax 2197 \def\MT@ls@adjust@empty{\let\MT@ls@adjust@\empty}
2198 \def\MT@ls@adjust@relax{\let\MT@ls@adjust\relax}
2199 \def\MT@ls@set@ls#1{%
2200   \MT@ifempty{#1}{%
2201     {\let\MT@letterspace@\@undefined}%
2202     {\KV@sp@def\MT@letterspace@{#1}%
2203      \edef\MT@letterspace@{\number\MT@letterspace@}%
2204      \MT@ls@too@large\MT@letterspace@}%
2205   \MT@ls@adjust@
2206 }
```

\MT@ls@too@large Test whether letterspacing amount is too large.

```

2207 \def\MT@ls@too@large#1{%
2208   \ifnum#1>\MT@tr@max
2209     \MT@warning{Maximum for option `letterspace' is \number\MT@tr@max}%
2210     \let#1\MT@tr@max
2211   \else
2212     \ifnum#1<\MT@tr@min
2213       \MT@warning{Minimum for option `letterspace' is \number\MT@tr@min}%
2214       \let#1\MT@tr@min
2215     \fi
2216   \fi
2217 }
```

\MT@outer@kern This dimen is used for the starred version of \textls, for \lslig and for adjusted outer kerning.

```

2218 \newdimen\MT@outer@kern
2219 (/package|letterspace)
2220 (*pdftex-def|luatex-def)
2221 \def\MT@tr@set@okern#1,#2,{%
2222   \let\MT@temp\@empty
2223   \MT@ifempty{#1}{\MT@tr@set@okern@{*}}{\MT@tr@set@okern@{#1}}%
2224   \MT@ifempty{#2}{\MT@tr@set@okern@{*}}{\MT@tr@set@okern@{#2}}%
2225   \MT@glet@nc{\MT@outer@kern}\expandafter\string\font@name\MT@temp
2226 (debug)\MT@dinfo@n12{... outer kerning: (#1,#2)
2227 (debug)           = \nameuse{\MT@outer@kern}\expandafter\string\font@name}%
2228 }
```

\MT@tr@set@okern@

```

2229 \def\MT@tr@set@okern@#1{%
2230   \MT@test@ast#1*\@nil{%
2231     \MT@ifdefined@c@TF\MT@tr@unit@
2232       {\edef@tempb{#1}\MT@scale@to@em}
2233       {\@tempcntb=#1\relax}%
2234       \@tempdima=\dimexpr\@tempcntb sp * \MT@dimen@six/1000\relax
2235   }{%
2236     \MT@ifempty{@tempa}{\let{@tempa}{0m}\relax
2237     \@tempdima=\dimexpr\numexpr@tempa*\MT@letterspace@/1000\relax sp
2238     * \fontdimen6\MT@lsfont/2000\relax
2239   }%
2240   \advance\@tempdima -\dimexpr\MT@letterspace@ sp
2241   * \fontdimen6\MT@lsfont/2000\relax
2242   \edef\MT@temp{\MT@temp{\the\@tempdima}}%
2243 }
2244 (/pdftex-def|luatex-def)
```

\MT@ls@outer@k Adjust outer kerning. We additionally add a marker (\kern3sp\kern-3sp) for cases of nested letterspacing without anything actually printed.

```

2245 (*pdftex-def|luatex-def|letterspace)
2246 \def\MT@ls@outer@k{%
2247   \ifhmode
2248     \ifdim\lastkern=-3sp \unkern
2249     \ifdim\lastkern=3sp \kern-3sp
2250       \expandafter\expandafter\expandafter\gobble
2251     \else \unkern
2252       \expandafter\expandafter\expandafter\firstrione
2253     \fi
2254   \else
2255     \expandafter\firstrione
2256   \fi
2257   {\kern\MT@outer@kern\kern3sp\kern-3sp\relax}%
2258   \fi
2259 }
2260 (/pdftex-def|luatex-def|letterspace)
```

14.2.6 Disabling ligatures

\MT@noligatures The possibility to disable ligatures is a new features of pdfTeX 1.30, and also works with LuaTeX.

```

2261 {*pdftex-def|luatex-def}
2262 (pdftex-def)\MT@requires@pdftex5{
2263 \def\MT@noligatures{%
2264   \MT@dotrue
2265   \let\@tempa\MT@nl@setname
2266   \MT@map@list@n{font,encoding,family,series,shape,size}{%
2267     \MT@ifdefined@n@TF{\MT@checklist@##1}{%
2268       \csname MT@checklist@##1\endcsname{%
2269         \MT@checklist@##1}{%
2270       {n1}}{%
2271     }{%
2272     \ifMT@do
2273       \MT@noligatures@\MT@font\MT@nl@ligatures
2274     \fi
2275   }

```

\MT@noligatures@ This is also used by \MT@set@tr@codes.

```

2276 (luatex-def)\MT@requires@luatex4{\let\pdfnoligatures\ignoreligaturesinfont}\relax
2277 \def\MT@noligatures@#1#2{%
2278   \MT@ifdefined@c@TF#2{%

```

Early MiKTeX versions (before 2.5.2579) didn't know \tagcode.

```

2279   \MT@ifdefined@c@TF\tagcode{%

```

No ‘inputenc’ key.

```

2280   \let\MT@warn@maybe@inputenc@\empty
2281   \def\MT@curr@list@name{\@backslashchar DisableLigatures}{%
2282     \MT@map@list@c#2{%
2283       \KV@sp@def\@tempa{##1}\MT@get@slot
2284       \ifnum\MT@char>\m@ne
2285         \tagcode#1\MT@char=\m@ne

```

With LuaTeX, we additionally register the ligatures that should be inhibited in a table (used by the luatofload function `keepligature`).

```

2286 (luatex-def)      \MT@if@fontspec@font
2287 (luatex-def)      {\MT@lua{microtype.noligatures([[#1]], [[\MT@char]])}}\relax
2288 \fi
2289 }%
2290 \MT@vinfo{... Disabling ligatures for characters: #2}%
2291 }{%
2292 \pdfnoligatures#1%
2293 \MT@warning{Cannot disable selected ligatures (pdftex doesn't\MessageBreak
2294   know \@backslashchar tagcode). Disabling all ligatures of\MessageBreak
2295   the font instead}%
2296 }%
2297 }{%
2298 \pdfnoligatures#1%
2299 (luatex-def)      \MT@if@fontspec@font
2300 (luatex-def)      {\MT@lua{microtype.noligatures([[#1]], "_all_")}}\relax
2301 \MT@vinfo{... Disabling all ligatures}%
2302 }%
2303 }
2304 (pdftex-def)\relax
2305 (/pdftex-def|luatex-def)

```

For each potential ligature, luatofload will call the `keepligature` function, which expects the first node of the ligature, to check whether they should be kept or inhibited. Here's our concoction of this function. The table `microtype.ligs` will be populated in `\MT@noligatures@`.

```

2306 (*luafile)
2307 microtype.ligs = microtype.ligs or { }
2308
2309 local function noligatures(fontcs, liga)
2310   local fontcs = match(fontcs, "([^\n]+)")
2311   microtype.ligs[fontcs] = microtype.ligs[fontcs] or { }
2312   table.insert(microtype.ligs[fontcs], liga)
2313 end
2314 microtype.noligatures = noligatures
2315
2316 local function keepligature(c)
2317   local nodedirect = node.direct
2318   local getfield = nodedirect.getfield
2319   local getfont = nodedirect.getfont
2320   local f, ch
2321   if type(c) == "userdata" then -- in older luatdfload versions, c was a node
2322     f = c.font
2323     ch = c.components.char
2324   else                                -- since 2.6, c is a (direct node) number
2325     f = getfont(c)
2326     ch = getfield(getfield(c, "components"), "char")
2327   end
2328 -- if ch then -- should always be true
2329 local ligs = microtype.ligs[match(tex.fontidentifier(f), "\\\\[^\n]+")]
2330 if ligs then
2331   for _, lig in pairs(ligs) do
2332     if lig == "_all_" or tonumber(lig) == ch then
2333       return false
2334     end
2335   end
2336 end
2337 return true
2338 -- end
2339 end
2340
2341 if luatdfload and luatdfload.letterspace then
2342   if luatdfload.letterspace.keepligature then
2343     microtype.info("overwriting function `keepligature'")
2344   end
2345   luatdfload.letterspace.keepligature = keepligature
2346 end
2347
2348 (/luafile)

```

14.2.7 Loading the configuration

\MT@load@list Recurse through the lists to be loaded.

```

2349 (*package)
2350 \def\MT@load@list#1{%
2351   \edef\@tempa{#1}%
2352   \MT@let@cn\@tempb{\MT@\MT@feat \c@0\@tempa \@load}%
2353   \MT@ifstreq\@tempa\@tempb{%
2354     \MT@error{\@nameuse{\MT@abbr@\MT@feat} list `@\tempa' cannot load itself}{}}%
2355   }{%
2356     \ifx\@tempb\relax \else
2357       \MT@ifdefined@n@TF{\MT@\MT@feat \c@0\@tempb}{%
2358         \MT@vinfo{... : First loading \@nameuse{\MT@abbr@\MT@feat} list `@\tempb'}%
2359         \begingroup
2360           \MT@load@list\@tempb
2361         \endgroup
2362         \edef\MT@curr@list@name{\@nameuse{\MT@abbr@\MT@feat} list
2363           \noexpand\MessageBreak`@\tempb'}%
2364         \MT@let@cn\@tempc{\MT@\MT@feat \c@0\@tempb}%
2365         \expandafter\MT@set@codes\@tempc,\relax,%

```

```

2366   }{%
2367     \MT@error{\@nameuse{\MT@abbr@\MT@feat} list `@\tempb' undefined.\MessageBreak
2368       Cannot load it from list `@\tempa'{}}%
2369   }%
2370   \fi
2371 }%
2372 }

```

\MT@find@file Micro-typographic settings may be written into a file `mt-font family.cfg`.
\MT@file@list We must also record whether we've already loaded the file.

```

2373 \let\MT@file@list\empty
2374 \def\MT@find@file#1{%

```

Check for existence of the file only once.

```

2375 \MT@in@clist{\#1}\MT@file@list
2376 \ifMT@inlist@ \else

```

Don't forget that because reading the files takes place inside a group, all commands that may be used there have to be defined globally.

```

2377 \MT@begin@catcodes
2378   \let\MT@begin@catcodes\relax
2379   \let\MT@end@catcodes\relax
2380   \InputIfFileExists{mt-\#1.cfg}{%
2381     \edef\MT@curr@file{mt-\#1.cfg}%
2382     \MT@vinfo{... Loading configuration file \MT@curr@file}%
2383     \MT@xadd\MT@file@list{\#1,}%
2384   }{%
2385     \MT@get@basefamily{\#1}\empty\empty\empty\nil
2386     \MT@exp@one@n\MT@in@list@\tempa\MT@file@list
2387     \ifMT@inlist@
2388       \MT@xadd\MT@file@list{\#1,}%
2389     \else
2390       \InputIfFileExists{mt-\@tempa.cfg}{%
2391         \edef\MT@curr@file{mt-\@tempa.cfg}%
2392         \MT@vinfo{... Loading configuration file \MT@curr@file}%
2393         \MT@xadd\MT@file@list{\@tempa,\#1,}%
2394       }{%
2395         \MT@vinfo{... No configuration file mt-\#1.cfg}%
2396         \MT@xadd\MT@file@list{\#1,}%
2397       }%
2398     \fi
2399   }%
2400   \endgroup
2401 \fi
2402 }

```

\MT@cfg@catcodes We have to make sure that all characters have the correct category code. Especially, new lines and spaces should be ignored, since files might be loaded in the middle of the document. This is basically `\nfss@catcodes` (from the L^AT_EX kernel). I've added: & (in tabulars), !, ?, :, : (french), ,, \$, _, ~, and = (Turkish babel).

OK, now all printable characters up to 127 are 'other'. We hope that letters are always letters and numbers other. (`listings` makes them active, see section 14.1.5.)

We leave ^ at catcode 7, so that stuff like '^ff' remains possible.

```

2403 \def\MT@cfg@catcodes{%
2404   \makeatletter
2405   \catcode`^7%
2406   \catcode`\ 9%
2407   \catcode`\^I9%
2408   \catcode`\^M9%
2409   \catcode`\\\z@
2410   \catcode`\{@ne
2411   \catcode`\}`two

```

```

2412 \catcode`\#%
2413 \catcode`\%14%
2414 \MT@map@tlist@n
2415 { ! $" \$ & ' ( ) * + , - . / : ; < = > ? [ ] _ \ ` ~ } %
2416 \makeother
2417 }

```

\MT@begin@catcodes This will be used before reading the files as well as in all configuration commands, so that catcodes are also harmless when these commands are used outside the configuration files.

```

2418 \def\MT@begin@catcodes{%
2419   \begingroup
2420   \MT@cfg@catcodes
2421 }

```

\MT@end@catcodes End group if outside configuration file (otherwise relax).

```
2422 \let\MT@end@catcodes\endgroup
```

\MT@get@basefamily The family name might have a suffix e.g., for expert set (x), old style numbers (j) swash capitals (w) etc. We mustn't simply remove the last letter, as this would make for instance cms out of cmss and cmsy (OK, cmex will still become cme ...).

We only work on the font name if it is longer than three characters.

```

2423 \def\MT@get@basefamily#1#2#3#4@nil{%
2424   \ifx\@empty#4%
2425     \def\@tempa{#1#2#3}%
2426   \else
2427     \let\@tempa\@empty
2428     \edef\@tempb{#1#2#3#4}%
2429     \expandafter\MT@get@basefamily@\@tempb@nil
2430   \fi
2431 }

```

\MT@get@basefamily@ This will only remove one suffix (the longest match), so that *combinations* of suffixes would have to be added manually (e.g., \DeclareMicrotypeVariants*{aw}). But otherwise, something like ‘padx’ would be truncated to ‘p’.

```

2432 \def\MT@get@basefamily@#1#2@nil{%
2433   \edef\@tempa{\@tempa#1}%
2434   \ifx\@tempa#2\\ \expandafter\@gobble\else\expandafter\@firstofone\fi
2435   {\MT@in@tlist{#2}\MT@variants
2436     \ifMT@in@list@\else\MT@get@basefamily@#2@nil\fi}%
2437 }

```

\MT@listname Try all combinations of font family, series, shape and size to get a list for the current font.

```

\MT@get@listname@ 2438 \def\MT@get@listname#1{%
2439   debug \MT@info@nl{1}{trying to find \@nameuse{MT@abbr@#1} list for font ` \MT@font' }%
2440   \let\MT@listname\@undefined
2441   \def\@tempb{#1}%
2442   \MT@map@tlist@c\MT@try@order\MT@get@listname@
2443 }
2444 \def\MT@get@listname@#1{%
2445   \expandafter\MT@next@listname#1%
2446   \ifx\MT@listname\@undefined \else
2447     \expandafter\MT@tlist@break
2448   \fi
2449 }

```

\MT@try@order Beginning with version 1.7, we always check for the font size. Since the matching order has become more logical now, it can be described in words, so that we don't need table 4 in the documentation part any longer and can cast it off here.

```

2450 \def\MT@try@order{%
2451   {1111}{1110}{1101}{1100}{1011}{1010}{1001}{1000}%

```

Table 4:

Order for matching font attributes

| | 1. | 2. | 3. | 4. | 5. | 6. | 7. | 8. | 9. | 10. | 11. | 12. | 13. | 14. | 15. | 16. |
|----------|----|----|----|----|----|----|----|----|----|-----|-----|-----|-----|-----|-----|-----|
| Encoding | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • |
| Family | • | • | • | • | • | • | • | • | - | - | - | - | - | - | - | - |
| Series | • | • | • | • | - | - | - | - | • | • | • | • | - | - | - | - |
| Shape | • | • | - | - | • | • | - | - | • | • | - | - | • | • | - | - |
| Size | • | - | • | - | • | - | • | - | • | - | • | - | • | - | • | - |

```
2452 {0111}{0110}{0101}{0100}{0011}{0010}{0001}{0000}%
2453 }
```

\MT@next@listname The current context is added to the font attributes. That is, the context must match.

```
2454 \def\MT@next@listname#1#2#3#4{%
2455   \ifnum#1=\z@\MT@nofamilytrue\fi
2456   \edef\@tempa{\MT@encoding
2457   /\ifnum#1=\@ne \MT@family \fi
2458   /\ifnum#2=\@ne \MT@series \fi
2459   /\ifnum#3=\@ne \MT@shape \fi
2460   /\ifnum#4=\@ne *\fi
2461   \MT@context}%
2462 (debug)\MT@dinfo@n{1}{trying \@tempa}%
2463 \MT@ifdefined@n@T{MT@\@tempb \@tempa}%
2464   \MT@next@listname@#4%
2465 }{%
```

Also try with an alias family.

```
2466 \ifnum#1=\@ne
2467   \ifx\MT@familyalias\empty \else
2468     \edef\@tempa{\MT@encoding
2469     /\MT@familyalias
2470     /\ifnum#2=\@ne \MT@series\fi
2471     /\ifnum#3=\@ne \MT@shape\fi
2472     /\ifnum#4=\@ne *\fi
2473     \MT@context}%
2474 (debug)\MT@dinfo@n{1}{(alias) \@tempa}%
2475   \MT@ifdefined@n@T{MT@\@tempb \@tempa}%
2476   \MT@next@listname@#4%
2477 }%
2478 \fi
2479 \fi
2480 }%
2481 }
```

\MT@next@listname@ If size is to be evaluated, do that, otherwise use the current list.

```
2482 \def\MT@next@listname@#1{%
2483   \ifnum#1=\@ne
2484     \MT@exp@cs\MT@in@rlist{MT@\@tempb \@tempa @sizes}%
2485     \ifMT@inlist@%
2486       \let\MT@listname\MT@size@name
2487     \fi
2488   \else
2489     \MT@let@cn\MT@listname{MT@\@tempb \@tempa}%
2490   \fi
2491 }
```

\MT@if@list@exists

```
2492 \def\MT@if@list@exists{%
2493   \MT@let@cn\MT@context{MT@\MT@feat @context}%
2494   \MT@ifstreq{@}\MT@context{\let\MT@context\empty}\relax
2495   \MT@get@listname{\MT@feat @c}%
2496   \MT@ifdefined@c@TF\MT@listname{%
```

```

2497   \MT@edef@n{\MT@\MT@feat @c@name}{\MT@listname}%
2498   \ifMT@nonselected
2499     \MT@vinfo{... Applying non-selected expansion (list `^{\MT@listname}')}%
2500   \else
2501     \MT@vinfo{... Loading \nameuse{\MT@abbr@\MT@feat} list `^{\MT@listname}')}%
2502   \fi
2503   \@firstoftwo
2504 }{%

```

Since the name cannot be `\empty`, this is a sound proof that no matching list exists.

```
2505   \MT@let@nc{\MT@\MT@feat @c@name}\empty
```

Don't warn if `selected=false`.

```

2506   \ifMT@nonselected
2507     \MT@vinfo{... Applying non-selected expansion (no list)}%
2508   \else

```

Tracking doesn't require a list, either.

```

2509   \MT@ifstreq{\MT@feat{tr}}{\relax}%
2510   \MT@warning{I cannot find a \nameuse{\MT@abbr@\MT@feat} list
2511     for font\MessageBreak`^{\MT@font}'%
2512     \ifx{\MT@context}{\empty}\else\space(context: `^{\MT@context}')\fi.
2513     Switching off\MessageBreak\nameuse{\MT@abbr@\MT@feat} for this font}%
2514   }%
2515   \fi
2516   \@secondoftwo
2517 }%
2518 }
```

`\MT@get@inh@list` The inheritance lists are global (no context).

```

\MT@context 2519 \def\MT@get@inh@list{%
2520   \let\MT@context\empty
2521   \MT@get@listname{\MT@feat @inh}%
2522   \MT@ifdefined{c@TF}{\MT@listname}{%
2523     \MT@edef@n{\MT@\MT@feat @inh@name}{\MT@listname}%
2524   }%
2525   \MT@info@nl{1}{... Using \nameuse{\MT@abbr@\MT@feat} inheritance list
2526   }%
2527   \MT@let@cn{\tempc{\MT@\MT@feat @inh@\MT@listname}}%
```

If the list is `\empty`, it has already been parsed.

```

2527   \ifx{\tempc}{\empty} \else
2528   \MT@info@nl{1}{parsing inheritance list ...}%

```

The group is only required in case an input encoding is given.

```

2529   \begingroup
2530   \edef\MT@curr@list@name{\inheritance list\noexpand\MessageBreak`^{\MT@listname}'}%
2531   \MT@set@inputenc{inh}%
2532   \expandafter\MT@inh@do\@tempc,\relax,%
2533   \MT@let@nc{\MT@\MT@feat @inh@\MT@listname}\empty
2534   \endgroup
2535   \fi
2536 }{%
2537   \MT@let@nc{\MT@\MT@feat @inh@name}\undefined
2538 }%
2539 }
```

14.2.8 Translating characters into slots

Get the slot number of the character in the current encoding.

`\MT@get@slot` There are lots of possibilities how a character may be specified in the configuration files, which makes translating them into slot numbers quite expensive. Also, we

want to have this as robust as possible, so that the user does not have to solve a sphinx's riddle if anything goes wrong.

\MT@char The character is in \tempa, we want its slot number in \MT@char.

```
2540 \def\MT@get@slot{%
2541   \escapechar`\\
2542   \let\MT@char@\m@ne
2543   \MT@noresttrue
```

Save unexpanded string in case we need to issue a warning message.

```
2544 \MT@toks=\expandafter{\tempa}%
```

It might be an active character, i.e., an 8-bit character defined by `inputenc`. If so, we will expand it here to its L^IC_R form.

```
2545 \MT@exp@two@c\MT@is@active$string\tempa\nil
```

Now, let's walk through (hopefully) all possible cases.

- It's a letter, a character or a number.

```
2546 \expandafter\MT@is@letter\tempa\relax\relax
2547 \ifnum\MT@char@ < \z@
```

- OK, so it must be a macro. We do not allow random commands but only those defined in L^AT_EX's idiosyncratic font encoding scheme:

If $\langle encoding \rangle \langle command \rangle$ (that's *one* command) is defined, we try to extract the slot number.

We must be cautious not to stumble over accented characters consisting of two commands, like `\'i` or `\U\CYRI`, hence, `string` wouldn't be safe enough.

```
2548 \MT@ifdefined@n@TF{\MT@encoding\MT@detokenize@c\tempa}%
2549 \MT@is@symbol
```

- Now, we'll catch the rest, which hopefully is an accented character (e.g. `\"a`).

```
2550 {\expandafter\MT@is@composite\tempa\relax\relax}%
2551 \ifnum\MT@char@ < \z@
```

- It could also be a `\chardef` command (e.g., the percent character). This seems the least likely case, so it's last.

```
2552 \expandafter\MT@exp@two@c\expandafter\MT@is@char\expandafter
2553   \meaning\expandafter\tempa\MT@charstring\relax\relax\relax
2554 \fi
2555 \fi
2556 \let\MT@char\MT@char@
2557 \MT@get@slot@
2558 \escapechar\m@ne
2559 }
2560 (package)
```

\MT@get@slot@

```
2561 (*pdfTeX-def|luatex-def|xetex-def)
2562 \def\MT@get@slot@{%
```

If it's a legacy (i.e., TFM) font, proceed as usual.

```
2563 (xetex-def) \ifnum\XeTeXfonttype\MT@font=\z@
2564 \ifnum\MT@char > \m@ne
```

In LuaT_EX, it may also be a glyph name, prefixed with '/'.

```
2565 (*luatex-def)
```

```

2566 \ifnum\MT@char=47\relax
2567 \ifMT@norest \else
2568   \otempccta=\MT@lua{
2569     local glyph = microtype.name_to_slot([[\expandafter\@gobble\@tempa]],true)
2570     if glyph then tex.write(glyph)
2571     else tex.write(-1)
2572     end
2573   }\relax
2574   \ifnum\@tempccta<\z@
2575     \MT@warn@unknown
2576     \let\MT@char\m@ne
2577   \else
2578     \edef\MT@char{\the\@tempccta}%
2579   <debug>\MT@dinfo@n{3}{> `\\the\\MT@toks' is a glyph name (\the\@tempccta)}%
2580   \fi
2581   \fi
2582 \else
2583   \luatex-def

```

If the user has specified something like ‘fi’, or wanted to define a number but forgot to use three digits, we’ll have something left of the string. In this case, we issue a warning and forget the complete string.

```

2584   \ifMT@norest \else
2585     \MT@warn@rest
2586   <pdfTeX-def|luatex-def> \let\MT@char\m@ne
2587   <xetex-def> \let\MT@char\empty
2588   \fi
2589   <luatex-def> \fi
2590   \else
2591     \MT@warn@unknown
2592   <xetex-def> \let\MT@char\empty
2593   \fi
2594   <xetex-def>
2595   \else

```

There are more possibilities for X_ET_EX: It may also be a glyph name (prefixed with ‘/’). We indicate this to \MT@get@charwd by reversing the sign of \MT@char@.

```

2596 \ifnum\MT@char=47\relax
2597 \ifMT@norest \edef\MT@char{U47}%
2598 \else
2599   \otempccta=\XeTeXglyphindex"\expandafter\@gobble\@tempa"\relax
2600   \ifnum\@tempccta=\z@
2601     \MT@warn@unknown
2602     \let\MT@char\empty
2603   \else
2604     \edef\MT@char{\@tempa\space}%
2605     \edef\MT@char@{-\the\@tempccta}%
2606   <debug>\MT@dinfo@n{3}{> `\\the\\MT@toks' is a glyph name (\the\@tempccta)}%
2607   \fi
2608   \fi
2609 \else
2610   \ifnum\MT@char > \m@ne
2611     \ifMT@norest

```

Or, it’s a Unicode number, which we mustn’t translate into a glyph number, since the latter is font-specific.

```

2612   \otempccta=\XeTeXcharglyph\MT@char\relax
2613   \ifnum\@tempccta=\z@
2614     \MT@info@missing@char
2615     \let\MT@char\empty
2616   \else
2617   <debug>\MT@dinfo@n{3}{> (glyph number: \the\@tempccta,
2618   <debug>           glyph name: \XeTeXglyphname\MT@font\@tempccta)}%
2619   \edef\MT@char{U\MT@char}%

```

```

2620         \fi
2621     \else
2622         \MT@warn@rest
2623         \let\MT@char\empty
2624     \fi
2625 \else
2626     \MT@warn@unknown
2627     \let\MT@char\empty
2628 \fi
2629 \fi
2630 \fi
2631 (/xetex-def)
2632 }
2633 (/pdftex-def|luatex-def|xetex-def)

```

This is the lua function to translate glyph name into slot number. Beginning with v2.2, luatfload provides this function in an API, which we use if available, but (for now, at least) keep the old code for backward compatibility.

```

2634 (*luafile)
2635 if luatfload and luatfload.aux and luatfload.aux.slot_of_name then
2636   local slot_of_name = luatfload.aux.slot_of_name
2637   microtype.name_to_slot = function(name, unsafe)
2638     return slot_of_name(font.current(), name, unsafe)
2639   end
2640 else
2641   -- we dig into internal structure (should be avoided)
2642   local function name_to_slot(name, unsafe)
2643     if fonts then
2644       local unicodes
2645       if fonts.ids then      --- legacy luatfload
2646         local tfmdata = fonts.ids[font.current()]
2647         if not tfmdata then return end
2648         unicodes = tfmdata.shared.otfdata.luatex.unicodes
2649       else --- new location
2650         local tfmdata = fonts.hashes.identifiers[font.current()]
2651         if not tfmdata then return end
2652         unicodes = tfmdata.resources.unicodes
2653       end
2654       local unicode = unicodes[name]
2655       if unicode then --- does the 'or' branch actually exist?
2656         return type(unicode) == "number" and unicode or unicode[1]
2657       end
2658     end
2659   end
2660   microtype.name_to_slot = name_to_slot
2661 end
2662
2663 (/luafile)

```

\MT@is@letter Input is a letter, a character or a number.

\MT@max@char Warning if resulting character or slot number is too large.

\MT@max@slot 2664 *(*pdftex-def|luatex-def|xetex-def)*
2665 \def\MT@max@char
2666 *(pdftex-def)* {127 }
2667 *(luatex-def|xetex-def)* {1114111 }
2668 \def\MT@max@slot
2669 *(pdftex-def)* {255 }
2670 *(luatex-def|xetex-def)* {1114111 }
2671 *(/pdftex-def|luatex-def|xetex-def)*

\ifMT@norest Test whether all of the string has been used up.

```

2672 (*package)
2673 \newif\ifMT@norest
2674 \def\MT@is@letter#1#2\relax{%

```

```

2675   \ifcat a\noexpand#1\relax
2676     \edef\MT@char@{\number`#1}%
2677     \ifx\\#2\\%
2678   <debug>\MT@dinfo@n{3}{> `the\MT@toks' is a letter (\MT@char@)}%
2679   \else
2680     \MT@norestfalse
2681   \fi
2682   \else
2683     \ifcat !\noexpand#1\relax
2684       \edef\MT@char@{\number`#1}%
2685   <debug>\MT@dinfo@n{3}{> `the\MT@toks' is a character (\MT@char@)}%
2686     \ifx\\#2\\%
2687       \ifnum\MT@char@ > \MT@max@char \MT@warn@ascii \fi
2688     \else
2689       \MT@norestfalse
2690       \expandafter\MT@is@number#1#2\relax\relax
2691     \fi
2692   \fi
2693 \fi
2694 }

```

\MT@is@number Numbers may be specified as a three-digit decimal number (029), as a hexadecimal number (prefixed with ":" "1D) or as a octal number (prefixed with ':' '35). They must consist of at least three characters (including the prefix), that is, "F is not permitted.

```

2695 \def\MT@is@number#1#2#3\relax{%
2696   \ifx\relax#3\relax \else
2697     \ifx\relax#2\relax \else
2698       \MT@norestrue
2699       \if#1"\relax
2700         \def\x{\uppercase{\edef\MT@char@{\number#1#2#3}}}\x
2701   <debug>\MT@dinfo@n{3}{> ... a hexadecimal number: \MT@char@}%
2702   \else
2703     \if#1'\relax
2704       \def\MT@char@{\number#1#2#3}%
2705   <debug>\MT@dinfo@n{3}{> ... an octal number: \MT@char@}%
2706   \else
2707     \MT@ifint{#1#2#3}{%
2708       \def\MT@char@{\number#1#2#3}%
2709   <debug>\MT@dinfo@n{3}{> ... a decimal number: \MT@char@}%
2710     }\MT@norestfalse
2711   \fi
2712 \fi
2713 \ifnum\MT@char@ > \MT@max@slot
2714   \MT@warn@number@too@large{\noexpand#1\noexpand#2\noexpand#3}%
2715   \let\MT@char@\m@ne
2716 \fi
2717 \fi
2718 \fi
2719 }

```

\MT@is@active Expand an active character. (This was completely broken in v1.7, and only worked by chance before.) We \set@display@protect to translate, e.g., Ä into \"A, that is to whatever it is defined in the inputenc encoding file.

Unfortunately, the (older) inputenc definitions prefer the protected/generic variants (e.g., \copyright instead of \textcopyright), which our parser won't be able to understand. (I'm fed up now, so you have to complain if you really, really want to be able to write '©' instead of \textcopyright, thus rendering your configuration files unportable.)

Unicode characters (inputenc/utf8,utf8x) are also supported.

```
2720 \def\MT@is@active#1#2@nil{%
```

```

2721 \ifnum\catcode`#1 = \active
2722   \begingroup
2723     \set@display@protect
2724     \let\IeC@firstofone
2725     \let\@inenc@undefined@\MT@undefined@char

```

Unicode handling has changed again with L^AT_EX 2019/10/01.

```

2726   \let\UTF@two@octets@noexpand@empty
2727   \let\UTF@three@octets@noexpand@empty
2728   \let\UTF@four@octets@noexpand@empty

```

We refrain from checking whether there is a sufficient number of octets.

```

2729 \def\UTFviii@defined##1{\ifx ##1\relax
2730   \MT@undefined@char{utf8}\else\expandafter##1\fi}%

```

For ucs (utf8x). Let's call it experimental ...

```

2731 \MT@ifdefined@c@T\PrerenderUnicode
2732   {\PrerenderUnicode{@tempa}\let\unicode@charfilter@firstofone}%

```

The \expandafter hocus-pocus should please newunicodechar.

```

2733 \edef\x{\endgroup
2734   \def\noexpand@tempa{\expandafter\expandafter\expandafter@empty@tempa}%

```

Append what we think the translation is to the token register we use for the log.

```

2735 \MT@toks={\the\MT@toks\space=
2736   \expandafter\expandafter\expandafter@empty@tempa}%
2737 }%
2738 \x
2739 \fi
2740 }

```

\MT@undefined@char For characters not defined in the current input encoding.

```
2741 \def\MT@undefined@char#1{undefined in input encoding ``#1''}
```

\MT@is@symbol The symbol commands might expand to funny stuff, depending on context. Instead of simply expanding \⟨command⟩, we construct the command \⟨encoding⟩\⟨command⟩ and see whether its meaning is \char"⟨hex number⟩, which is the case for everything that has been defined with \DeclareTextSymbol in the encoding definition files.

```

2742 \def\MT@is@symbol{%
2743   \expandafter\def\expandafter\MT@char\expandafter
2744     {\csname\MT@encoding\MT@detokenize@c@tempa\endcsname}%
2745   \expandafter\MT@exp@two@c\expandafter\MT@is@char\expandafter
2746     \meaning\expandafter\MT@char\MT@charstring\relax\relax\relax
2747   \ifnum\MT@char@ < \z@

```

For TU encoding, the commands \textquotesingle, \textasciigrave and \textquotedbl are defined by means of the auxiliary macro \remove@tlig, which we take care of here.

```

2748   \expandafter\expandafter\expandafter\MT@is@tlig\MT@char\relax\relax
2749   \ifnum\MT@char@ < \z@

```

Finally, if it hasn't been defined by \DeclareTextSymbol, it could be a letter (e.g., \i, when using frenchpro).

```

2750   \expandafter\expandafter\expandafter\MT@is@letter\MT@char\relax\relax
2751   \fi
2752   \fi
2753 }

```

\MT@is@char A helper macro that inspects the \meaning of its argument.

```

\MT@charstring 2754 \begingroup
2755   \catcode`\\=\z@
2756   /MT@map@tlist@n{/CHARLEX}/@makeother

```

```

2757 /lowercase{%
2758   /def/x{/endgroup
2759   /def/MT@charstring{\CHAR"}%
2760   /def/MT@is@char##1\CHAR"##2##3##4/relax{%
2761     /ifx/relax##4/relax
2762     /ifMT@xunicode
2763       /expandafter/MT@is@charx/MT@strip@prefix##1>/relax\CHAR "%
2764       /relax/relax/relax/relax/relax
2765     /fi
2766   /else
2767     /ifx/relax##1/relax
2768     /if##3\relax
2769       /edef/MT@char@{/number"##2}%
2770       /MT@ifstreq/MT@charstring{##3##4}/relax/MT@norestfalse
2771     /else
2772       /edef/MT@char@{/number"##2##3}%
2773       /MT@ifstreq/MT@charstring{##4}/relax
2774         {/MT@is@xchar##2##3|##4\CHAR"/relax}%
2775       /fi
2776   {debug} /MT@dinfo@n1{3}{> `/the/MT@toks' is a \char (/MT@char@)}%
2777   /fi
2778   /fi
2779 }%

```

\MT@is@xchar With fontspec's TU encoding, glyph numbers may be up to four digits.

```

2780   /def/MT@is@xchar##1|##2\CHAR"##3##4/relax{%
2781     /MT@ifstreq/MT@charstring{##3##4}%
2782       {/edef/MT@char@{/number"##1##2}}/MT@norestfalse
2783   }%

```

\MT@charxstring For xunicode, which doesn't \countdef, but rather \defs the chars.

```

\MT@strip@prefix 2784 /def/MT@charxstring{\CHAR"}%
2785   /def/MT@strip@prefix##1>##2/relax{##2}%
2786   /def/MT@is@charx##1\CHAR "##2##3##4##5##6/relax{%
2787     /ifx/relax##1/relax
2788     /ifx/relax##6/relax/else
2789       /edef/MT@char@{/number"##2##3##4##5}%
2790       /MT@ifstreq{\RELAX >\CHAR "##6}/relax/MT@norestfalse
2791   {debug} /MT@dinfo@n1{3}{> `/the/MT@toks' is a xunicode \char (/MT@char@)}%
2792   /fi
2793   /fi
2794   }%
2795 }%
2796 }
2797 /x

```

\MT@is@tlig This might have to change again with the next L^AT_EX release.

```

2798 \def\MT@is@tlig#1#2{%
2799   /ifx#1\remove@tlig
2800     \MT@is@number #2\relax\relax
2801   \fi
2802 }%

```

\MT@is@composite Here, we are dealing with accented characters, specified as two tokens.

```

2803 \def\MT@is@composite#1#2\relax{%
2804   \ifx\#2\\else

```

Again, we construct a control sequence, this time of the form: \\⟨encoding⟩ ⟨accent⟩-⟨character⟩, e.g., \\T1\"-a, which we then expand once to see if it is a letter (if it has been defined by \DeclareTextComposite). This should be robust, finally, especially, since we also \detokenize the input instead of only \stringifying it. Thus, we will die gracefully even on wrong Unicode input without utf8.

```

2805   \expandafter\def\expandafter\MT@char\expandafter{\csname\expandafter

```

```
2806           \string\csname\MT@encoding\endcsname
2807           \MT@detokenize@n{\#1}-\MT@detokenize@n{\#2}\endcsname}%
```

In 2017, L^AT_EX introduced a new way of declaring accented Unicode commands (`\DeclareUnicodeComposite`), which we take care of here (`\UnicodeEncodingName` has been introduced at the same time):

```
2808   \ifx\UnicodeEncodingName@undefined\else
2809     \expandafter\expandafter\expandafter
2810     \MT@is@uni@comp\MT@char\iffontchar\else\fi\relax
2811   \fi
2812   \expandafter\expandafter\expandafter\MT@is@letter\MT@char\relax\relax
```

Again, `xunicode`.

```
2813   \ifnum\MT@char@ < \z@
2814     \ifMT@xunicode
2815       \edef\MT@char{\MT@exp@two@c\MT@strip@prefix\meaning\MT@char>\relax}%
2816       \expandafter\MT@exp@two@c\expandafter\MT@is@charx\expandafter
2817         \MT@char\MT@charxstring\relax\relax\relax\relax
2818     \fi
2819   \fi
2820   \fi
2821 }
```

`\MT@is@uni@comp` Helper for `\DeclareUnicodeComposite`.

```
2822 \def\MT@is@uni@comp#1\iffontchar#2\else#3\fi\relax{%
2823   \ifx\\#2\\ \else\edef\MT@char{\iffontchar#2\fi}\fi
2824 }
```

[What about math? Well, for a moment the following looked like a solution, with `\mt@is@mathchar` defined accordingly, analogous to `\MT@is@char` above, to pick up the last two tokens (the `\meaning` of a `\mathchardef`ed command expands to its hexadecimal notation):]

```
\def\MT@is@mathchar#1{%
  \if\relax\noexpand#1% it's a macro
    \let\x#1%
  \else % it's a character
    \mathchardef\x=\mathcode`#1\relax
  \fi
  \expandafter\MT@exp@two@c\expandafter\mt@is@mathchar\expandafter
    \meaning\expandafter\x\mt@mathcharstring\relax\relax\relax
}
```

However, the problem is that `\mathcodes` and `\mathchardef`s have global scope. Therefore, if they are changed by a package that loads different math fonts, there is no guarantee whatsoever that things will still be correct (e.g., the minus in `cmsy` when the `euler` package is loaded). So, no way to go, unfortunately.]

Some warning messages, for performance reasons separated here.

`\MT@curr@list@name` The type and name of the current list, defined at various places.

```
2825 \def\MT@set@listname{%
2826   \edef\MT@curr@list@name{\@nameuse{\MT@abbr@\MT@feat} list\noexpand\MessageBreak
2827     `@\nameuse{\MT@\MT@feat @c@name}'%
2828 }
```

`\MT@warn@ascii` For ‘other’ characters > 127, we issue a warning (`inputenc` probably hasn’t been loaded), since correspondence with the slot numbers would be purely coincidental.

```
2829 \def\MT@warn@ascii{%
2830   \MT@warning@nl{Character `~\the\MT@toks' (= \MT@char@)
2831     is outside of ASCII range.\MessageBreak
2832     You must load the `inputenc' package before using\MessageBreak
2833     8-bit characters in \MT@curr@list@name}%
2834 }
```

```

\MT@warn@number@too@large    Number too large.
2835 \def\MT@warn@number@too@large#1{%
2836   \MT@warning@nl{%
2837     Number #1 in encoding `\\MT@encoding' too large!\MessageBreak
2838     Ignoring it in \\MT@curr@list@name}%
2839 }

\MT@warn@rest    Not all of the string has been parsed.
2840 \def\MT@warn@rest{%
2841   \MT@warning@nl{%
2842     Unknown slot number of character\MessageBreak`\\the\\MT@toks'%
2843     \\MT@warn@maybe@inputenc\MessageBreak
2844     in font encoding `\\MT@encoding'.\\MessageBreak
2845     Make sure it's a single character\MessageBreak
2846     (or a number) in \\MT@curr@list@name}%
2847 }

\MT@warn@unknown  No idea what went wrong.
2848 \def\MT@warn@unknown{%
2849   \MT@warning@nl{%
2850     Unknown slot number of character\MessageBreak`\\the\\MT@toks'%
2851     \\MT@warn@maybe@inputenc\MessageBreak
2852     in font encoding `\\MT@encoding' in \\MT@curr@list@name}%
2853 }

\MT@warn@maybe@inputenc  In case an input encoding had been requested.
2854 \def\MT@warn@maybe@inputenc{%
2855   \MT@ifdefined@n@T
2856   {\\MT@\\MT@feat @\\MT@cat @\\csname MT@\\MT@feat @\\MT@cat @name\\endcsname @inputenc}%
2857   { (input encoding `\\@nameuse
2858     {\\MT@\\MT@feat @\\MT@cat @\\csname MT@\\MT@feat @\\MT@cat @name\\endcsname @inputenc}') }%
2859 }

```

14.2.9 Hook into L^AT_EX's font selection

We append `\MT@setupfont` to `\pickup@font`, which is called by L^AT_EX every time a font is selected. We then check whether we've already seen this font, and if not, set it up for micro-typography. This ensures that we will catch all fonts, and that we will not set up fonts more than once. The whole package really hangs on this command.

In contrast to the `pdfcprot` package, it is not necessary to declare in advance which fonts should benefit from micro-typographic treatment. Also, only those fonts that are actually being used will be set up.

For my reference:

- `\pickup@font` is called by `\selectfont`, `\wrong@fontshape`, or `\getanddefine@fonts` (for math).
- `\pickup@font` calls `\define@newfont`.
- `\define@newfont` may call (inside a group!)
 - `\wrong@fontshape`, which in turn will call `\pickup@font`, and thus `\define@newfont` again, or
 - `\extract@font`.
- `\get@external@font` is called by `\extract@font`, by itself, and by the substitution macros.

Up to version 1.3 of this package, we were using `\define@newfont` as the hook, which is only called for *new* fonts, and therefore seemed the natural choice. However, this meant that we had to take special care to catch all fonts: we additionally had to set up the default font, the error font (if it wasn't the default font), we had to check for some packages that might have been loaded before `microtype` and were loading fonts, e.g., `jurabib`, `ledmac`, `pifont` (loaded by `hyperref`), `tipa`, and probably many more. Furthermore, we had to include a hack for the `IEEEtran` class which loads all fonts in the class file itself (to fine tune inter-word spacing), and the `memoir` class, too. To cut this short: it seemed to get out of hand, and I decided that it would be better to use `\pickup@font` and decide for ourselves whether we've already seen that font. I hope the overhead isn't too large.

`\MT@font@list` We use a comma separated list.

```
2860 \let\MT@font@list@\empty
2861 \let\MT@font@\empty
```

All this is done at the beginning of the document. It doesn't work for plain, of course, which doesn't have `\pickup@font`.

```
2862 (/package)
2863 (*package|letterspace)
2864 (plain)\MT@requires@lateX2{
2865 \MT@addto@setup{%
```

`\MT@orig@pickupfont` The `luatexja` package redefines `\char`, which will upset our parsing of text symbols and commands; instead of fixing this, we won't bother, at least for the moment, but simply issue a warning and disable all further warnings. The fix is left to the user by not specifying any text commands but only (Unicode) letters. The `xeCJK` package, or rather its `xunicode-addon`, also modifies the way text symbols are defined (like `luatexja` but in a different way). Again, we only issue a warning.

```
2866 (package) \MT@with@package@T{luatexja}{\MT@warn@unknown@once{luatexja}}%
2867 (package) \MT@with@package@T{xeCJK} {\MT@warn@unknown@once{xeCJK}}%
```

`microtype` also works with CJK in the sense that nothing will break when both packages are used at the same time. However, since CJK has its own way of encoding, it is currently not possible to create character-specific settings. That is, the only feature available with CJK fonts is (non-selected) expansion. (Tracking doesn't really work for other reasons.) Like us, CJK redefines `\pickup@font`.

```
2868 \@ifpackageloaded{CJK} {
```

The `xeCJK` package in turn pretends that CJK was loaded, but does not change the definition of `\pickup@font`. With `xeCJK`, protrusion should be possible also for C/J/K characters; I haven't tried it, though.

```
2869 \@ifpackageloaded{xeCJK}{\@firstofone}{%
2870 \@ifpackagelater{CJK}{2006/10/17}{ 4.7.0
2871 {\def\MT@orig@pickupfont{\CJK@ifundefined{CJK@plane}}}{%
2872 {\def\MT@orig@pickupfont{\@ifundefined{CJK@plane}}}{%
2873 \g@addto@macro\MT@orig@pickupfont
2874 {{\expandafter\ifx\font@name\relax\def\newfont\fi}}{}}
```

`CJKutf8` redefines `\pickup@font` once more (recent versions, in PDF mode, as determined by `\ifpdf`, which `CJKutf8` loads).

```
2875 \@ifpackageloaded{CJKutf8}{%
2876 {\@ifpackagelater{CJKutf8}{2008/05/22}{ 4.8.0
2877 {\ifpdf\expandafter\else\expandafter\@firstoftwo\fi}{%
2878 {\@firstoftwo}{%
2879 {\@firstoftwo}{%
2880 {\g@addto@macro\MT@orig@pickupfont{%
2881 {\expandafter\ifx\csname\curr@fontshape/\f@size\endcsname\relax
```

```

2882     \define@newfont\else\xdef\font@name{%
2883         \csname \curr@fontshape/\f@size/\CJK@plane\endcsname\fi}}}%
2884 {\g@addto@macro\MT@orig@pickupfont{%
2885     \expandafter\ifx\csname \curr@fontshape/\f@size/\CJK@plane\endcsname\relax
2886     \define@newfont\def\CJK@temp{v}{%
2887         \ifx\CJK@temp\CJK@plane
2888             \expandafter\ifx\csname CJK@cmap@\f@family\CJK@plane\endcsname\relax
2889             \else\csname CJK@cmap@\f@family\CJK@plane\endcsname\fi
2890             \else \CJK@addcmap\CJK@plane \fi
2891             \else\xdef\font@name{%
2892                 \csname \curr@fontshape/\f@size/\CJK@plane\endcsname\fi}}}}%
2893     \@gobble
2894 }%
2895 }{\@firstofone}%

```

This is the normal L^AT_EX definition.

```
2896 {\def\MT@orig@pickupfont{\expandafter\ifx\font@name\relax\define@newfont\fi}}%
```

Check whether \pickup@font is defined as expected. The warning issued by \CheckCommand* would be a bit too generic.

```

2897 \ifx\pickup@font\MT@orig@pickupfont \else
2898   \MT@warning@n{%
2899     Command \string\pickup@font\space is not defined as expected.%
2900     \MessageBreak Patching it anyway. Some things may break%
2901   (*package)
2902     .\MessageBreak Double-check whether micro-typography is indeed%
2903     \MessageBreak applied to the document.%
2904     \MessageBreak (Hint: Turn on `verbose' mode)%
2905   (/package)
2906 }%
2907 \fi

```

\pickup@font Then we append our stuff. Everything is done inside a group.

```
2908 \g@addto@macro\pickup@font{\begingroup}%
```

If the trace package is loaded, we turn off tracing of microtype's setup, which is extremely noisy.

```

2909 \MT@with@package@T{trace}{\g@addto@macro\pickup@font{\conditionally@traceoff}}%
2910 \g@addto@macro\pickup@font{%
2911   \escapechar\m@ne
2912 (*package)
2913 {debug}   \global\MT@inannottrue
2914 {debug}   \MT@let\MT@pdf@annot@\empty
2915 {debug}   \MT@addto@annot{(\line \number\inputlineno)}%

```

If \MT@font is empty, no substitution has taken place, hence \font@name is correct. Otherwise, if they are different, \font@name does not describe the font actually used. This test will catch first order substitutions, like bx to b, but it will still fail if the substituting font is itself substituted.

```

2916 \MT@let\cn\MT@font\MT@subst@\expandafter\string\font@name}%
2917 \ifx\MT@font\relax
2918   \let\MT@font\font@name
2919 \else
2920   \ifx\MT@font\font@name \else
2921     {debug} \MT@addto@annot{= substituted with \MT@font}%
2922     \MT@register@subst@font
2923   \fi
2924 \fi
2925 \MT@setupfont
2926 (/package)
2927 {letterspace} \MT@tracking
2928 \endgroup
2929 }%
2930 (*package)

```

| | |
|-------------------------|---|
| \MT@pickupfont | Remember the patched command, because we may have to disable ourselves in certain situations. |
| \MT@MT@pickupfont | |
| \MT@ltx@pickupfont 2931 | \let\MT@pickupfont\pickup@font |
| 2932 | \def\MT@MT@pickupfont {\let\pickup@font\MT@pickupfont}% |
| 2933 | \def\MT@ltx@pickupfont{\let\pickup@font\MT@orig@pickupfont}% |
| \do@subst@correction | Additionally, we hook into \do@subst@correction, which is called if a substitution has taken place, to record the name of the ersatz font. Unfortunately, this will only work for one-level substitutions. We have to remember the substitute for the rest of the document, not just for the first time it is called, since we need it every time a font is letterspaced. |
| 2934 | \g@addto@macro\do@subst@correction |
| 2935 | {\edef\MT@font{\csname\curr@fontshape/\f@size\endcsname}% |
| 2936 | \MT@glet@nc{\MT@subst@\expandafter\string\font@name}\MT@font}% |
| \add@accent | Inside \add@accent, we have to disable microtype's setup, since the grouping in the patched \pickup@font would break the accent if different fonts are used for the base character and the accent. Fortunately, L ^A T _E X takes care that the fonts used for the \accent are already set up, so that we cannot be overlooking them. |
| \MT@orig@add@accent | |
| 2937 | \let\MT@orig@add@accent\add@accent |
| 2938 | \def\add@accent#1#2{% |
| 2939 | \MT@ltx@pickupfont |
| 2940 | \MT@orig@add@accent{#1}{#2}% |
| 2941 | \MT@MT@pickupfont |
| 2942 | } |
| 2943 | (<i>package</i>) |
| 2944 | } |
| 2945 | (<i>plain</i>)\relax |
| 2946 | (* <i>package</i>) |
| | Consequently (if all goes well), we are the last ones to change these commands, therefore there is no need to check whether our definition has survived. |
| \MT@check@font | Check whether we've already seen the current font. |
| 2947 | \def\MT@check@font{\MT@exp@one@n\MT@in@clist\MT@font\MT@font@list} |
| \MT@register@font | Register the current font. |
| 2948 | \def\MT@register@font{\xdef\MT@font@list{\MT@font@list\MT@font,}} |
| \MT@register@subst@font | Register the substituted font (only if it isn't registered already). Additionally, we have to remove the substitute font from the list of fonts, so that we set it up again. |
| 2949 | \def\MT@register@subst@font{% |
| 2950 | \MT@exp@one@n\MT@in@clist\font@name\MT@font@list |
| 2951 | \ifMT@inlist@\else |
| 2952 | \xdef\MT@font@list{\MT@font@list\font@name,}% |
| 2953 | \expandafter\MT@rem@from@clist\MT@font\MT@font@list |
| 2954 | \fi |
| 2955 | } |

14.2.10 Context-sensitive setup

| | |
|-------------------------------------|--|
| \MT@active@features | Here are the variants for context-sensitive setup. The activated features are stored in this command. |
| 2956 \let\MT@active@features@\empty | Every feature has its own list of fonts that have already been dealt with. If the font needn't be set up for a feature, we temporarily disable the corresponding setup command. This should be more efficient than book-keeping the fonts in lists associated with the combination of contexts, as we've done it before. |

```

2957 \def\MT@check@font@cx{%
2958   \MT@if@true
2959   \MT@map@clist@c\MT@active@features{%
2960     \expandafter\MT@exp@one@n\expandafter\MT@in@clist\expandafter\MT@font
2961     \csname MT@##1@\csname MT@##1@context\endcsname font@list\endcsname
2962     \ifMT@inlist@%
2963       \MT@let@nc{\MT@\@nameuse{\MT@abbr@##1}}\relax
2964     \else
2965       \MT@if@false
2966     \fi
2967   }%
2968   \ifMT@if@ \MT@inlist@true \else \MT@inlist@false \fi
2969 }

```

\MT@register@subst@font@cx Add the substituted font to each feature list and possibly remove substitute font.

```

2970 \def\MT@register@subst@font@cx{%
2971   \MT@map@clist@c\MT@active@features{%
2972     \expandafter\MT@exp@one@n\expandafter\MT@in@clist\expandafter\font@name
2973     \csname MT@##1@\csname MT@##1@context\endcsname font@list\endcsname
2974     \ifMT@inlist@ \else
2975       \MT@exp@cs\MT@xadd
2976       {MT@##1@\csname MT@##1@context\endcsname font@list}%
2977       {\font@name,}%
2978     \expandafter\MT@exp@one@n\expandafter\MT@rem@from@clist\expandafter\MT@font
2979     \csname MT@##1@\csname MT@##1@context\endcsname font@list\endcsname
2980   \fi
2981 }%
2982 }

```

\MT@register@font@cx For each feature, add the current font to the list, unless we didn't set it up.

```

2983 \def\MT@register@font@cx{%
2984   \MT@map@clist@c\MT@active@features{%
2985     \MT@exp@cs\ifx{\MT@\@nameuse{\MT@abbr@##1}}\relax\else
2986       \MT@exp@cs\MT@xadd
2987       {MT@##1@\csname MT@##1@context\endcsname font@list}%
2988       {\MT@font,}%
2989     \def\@tempa{##1}%
2990     \MT@exp@cs\MT@map@tlist@c{MT@##1@doc@contexts}\MT@maybe@rem@from@list
2991   \fi
2992 }%
2993 }

```

\MT@maybe@rem@from@list Recurse through all context font lists of the document and remove the font, unless it's the current context.

```

2994 \def\MT@maybe@rem@from@list#1{%
2995   \MT@ifstreq{\@tempa/#1}{\@tempa/\csname MT@\@tempa @context\endcsname}\relax{%
2996     \expandafter\MT@exp@one@n\expandafter\MT@rem@from@clist\expandafter
2997     \MT@font \csname MT@\@tempa @#1font@list\endcsname
2998   }%
2999 }

```

\microtypecontext The user may change the context, so that different setups are possible. This is especially useful for multi-lingual documents.

Inside the preamble, it shouldn't actually do anything but remember it for later.

```

3000 \def\microtypecontext#1{\MT@addto@setup{\microtypecontext{#1}}}
3001 \MT@addto@setup{%
3002   \DeclareRobustCommand\microtypecontext[1]{%
3003     \MT@setup@contexts
3004     \let\MT@reset@context\relax

```

We need to ensure that math fonts are set up anew.

```

3005   \MT@glet\glb@currsize\empty
3006   \setkeys{MTC}{#1}%
3007   \selectfont

```

```

3008     \MT@reset@context
3009   }%
3010 }

\textmicrotypecontext This is just a wrapper around \microtypecontext.
3011 \DeclareRobustCommand\textmicrotypecontext[2]{{\microtypecontext{\#1}\#2}}

\MT@reset@context We have to reset the font at the end of the group, provided there actually was a
\MT@reset@context@ change.
3012 \def\MT@reset@context@{%
3013   \MT@vinfo{<<< Resetting contexts\on@line
3014 (debug)  \MessageBreak= \MT@pr@context/\MT@ex@context
3015 (debug)          /\MT@tr@context/\MT@kn@context/\MT@sp@context
3016 }%
3017 \selectfont
3018 }

\MT@setup@contexts The first time \microtypecontext is called, we initialise the context lists and
redefine the commands used in \pickup@font.
3019 \def\MT@setup@contexts{%
3020   \MT@map@clist@c\MT@active@features
3021   { \MT@glet@nc{\MT@##1@font@list}\MT@font@list}%
3022   \MT@glet\MT@check@font\MT@check@font@cx
3023   \MT@glet\MT@register@font\MT@register@font@cx
3024   \MT@glet\MT@register@subst@font\MT@register@subst@font@cx
3025   \MT@glet\MT@setup@contexts\relax
3026 }

Define context keys.
3027 \MT@map@clist@c\MT@features@long{%
3028   \define@key{MTC}{#1}[]{%
3029     \edef\@tempb{\@nameuse{\MT@rbba@#1}}%
3030     \MT@exp@one@n\MT@in@clist\@tempb\MT@active@features
3031     \ifMT@inlist@

Using an empty context is only asking for trouble, therefore we choose the '@'
instead (hoping for the LATEX users' natural awe of this character).
3032   \MT@ifempty{##1}{\def\MT@val{@}{\def\MT@val{##1}}%
3033   \MT@exp@cs\ifx\MT@\@tempb @context\MT@val
3034 (debug) \MT@dinfo{1}{>> no change of #1 context: `~\MT@val`}%
3035   \else
3036     \MT@vinfo{>> Changing #1 context to `~\MT@val'\MessageBreak\on@line
3037 (debug)           \space(previous: `~\@nameuse{\MT@\@tempb @context}')%
3038   }%
3039   \def\MT@reset@context{\aftergroup\MT@reset@context@}%

The next time we see the font, we have to reset all factors.
3040 \MT@glet@nn{\MT@reset@\@tempb @codes}{\MT@reset@\@tempb @codes@}%

We must also keep track of all contexts in the document.
3041   \expandafter\MT@exp@one@n\expandafter\MT@in@tlist\expandafter
3042     \MT@val \csname MT@\@tempb @doc@contexts\endcsname
3043   \ifMT@inlist@ \else
3044     \MT@exp@cs\MT@xadd{\MT@\@tempb @doc@contexts}{\MT@val}%
3045 (debug) \MT@dinfo{1}{||| added #1 context: \@nameuse{\MT@\@tempb @doc@contexts}}%
3046   \fi
3047   \MT@edef@n{\MT@\@tempb @context}{\MT@val}%
3048   \fi
3049   \fi
3050 }%
3051 }

We also allow the activate shortcut.
3052 \define@key{MTC}{activate}[]{%

```

```

3053  \setkeys{MT}{protrusion={#1}}%
3054  \setkeys{MT}{expansion={#1}}%
3055 }

\MT@pr@context Initialise the contexts.
\MT@ex@context 3056 \MT@exp@one@n\MT@map@clist@n{\MT@features,n1}{%
\MT@tr@context 3057  \MT@def@n{\MT@#1@context}{}@}%
\MT@sp@context 3058  \MT@def@n{\MT@#1@doc@contexts}{{@}}%
3059 }
\MT@kn@context 3060 \let\MT@extra@context\empty

```

\MT@pr@doc@contexts

\MT@ex@doc@contexts

\MT@tr@doc@contexts

\MT@sp@doc@contexts

```

\MT@kn@doc@contexts
\DeclareMicrotypeSet*
\MT@extra@context
\DeclareMicrotypeSet*

```

14.3 Configuration

14.3.1 Font sets

Calling this macro will create a comma list for every font attribute of the form: `\MT<feature>|list@<attribute>@<set name>`. If the optional argument is empty, lists for all available features will be created.

The third argument must be a list of key=value pairs. If a font attribute is not specified, we define the corresponding list to \relax, so that it does not constitute a constraint.

```

3061 \def\DeclareMicrotypeSet{%
3062   \MT@begin@catcodes
3063   \@ifstar
3064     \MT@DeclareSetAndUseIt
3065     \MT@DeclareSet
3066 }

```

\MT@DeclareSet

```

3067 \newcommand\MT@DeclareSet[3][]{%
3068   \MT@ifempty{#1}{%
3069     \MT@map@clist@c\MT@features{{\MT@declare@sets##1}{#2}{#3}}}%
3070 }{%
3071   \MT@map@clist@n{#1}{%
3072     \MT@ifempty{##1}\relax{%
3073       \MT@is@feature{##1}{set declaration `#2'}{%
3074         \MT@exp@one@n\MT@declare@sets
3075         {\csname MT@rbba##1\endcsname}{#2}{#3}}%
3076       }%
3077     }%
3078   }%
3079 }%
3080 \MT@end@catcodes
3081 }

```

\MT@DeclareSetAndUseIt

```

3082 \newcommand\MT@DeclareSetAndUseIt[3][]{%
3083   \MT@DeclareSet[#1]{#2}{#3}%
3084   \UseMicrotypeSet[#1]{#2}%
3085 }

```

\MT@curr@set@name We need to remember the name of the set currently being declared.

```

3086 \let\MT@curr@set@name\empty

```

\MT@declare@sets Define the current set name and parse the keys.

```

3087 \def\MT@declare@sets#1#2#3{%
3088   \def\MT@curr@set@name{#2}%
3089   \MT@ifdefined@n@T{\MT@#1@set@0\MT@curr@set@name}{%
3090     \MT@warning{Redefining \@nameuse{MT@abbr@#1} set `~\MT@curr@set@name'}%
3091     \MT@map@clist@n{font,encoding,family,series,shape,size}{%
3092       \MT@glet@nc{MT@#1@list@##1@{\MT@curr@set@name}}\@undefined

```

```

3093     }%
3094   }%
3095   \MT@glet@nc{\MT@#1@set@{\MT@curr@set@name}}\@empty
3096   (debug)\MT@dinfo{1}{declaring `@\nameuse{\MT@abbr@#1} set `@\MT@curr@set@name'}%
3097   \setkeys{\MT@#1@set}{#3}%
3098 }

```

\MT@define@set@key@ (#1) = font axis, (#2) = feature.

```

3099 \def\MT@define@set@key@#1#2{%
3100   \define@key{\MT@#2@set}{#1}[]{%
3101     \MT@glet@nc{\MT@#2list@#1@{\MT@curr@set@name}}\@empty
3102     \MT@map@clist@{\#1}{%
3103       \KV@sp@def{\MT@val}{###1}%
3104     \MT@get@highlevel{#1}%

```

We do not add the expanded value to the list ...

```

3105   \MT@exp@two@n\g@addto@macro
3106     {\csname MT@#2list@#1@{\MT@curr@set@name}\expandafter\endcsname}%
3107     {\MT@val,}%
3108   }%

```

... but keep in mind that the list has to be expanded at the end of the preamble.

```

3109   \expandafter\g@addto@macro\expandafter\MT@font@sets
3110     \csname MT@#2list@#1@{\MT@curr@set@name}\endcsname
3111   (debug)\MT@dinfo@n{1}{-- #1: `@\nameuse{\MT@#2list@#1@{\MT@curr@set@name}}'}%
3112   }%
3113 }

```

\MT@get@highlevel Saying, for instance, ‘family=rm*’ or ‘shape=bf*’ will expand to \rmdefault resp. \bfdefault.

```

3114 \def\MT@get@highlevel#1{%
3115   \expandafter\MT@test@ast\MT@val*\@nil\relax{%

```

And ‘family = *’ will become \familydefault.

```

3116 \MT@ifempty{@tempa}{\def@tempa{#1}}\relax

```

Test whether the command is actually defined.

```

3117 \MT@ifdefined@n@TF{@tempa default}{%
3118   {\edef\MT@val{\expandafter\noexpand\csname @tempa default\endcsname}%
3119   {\MT@warning{`\\backslash@tempa default' is not a defined command.\MessageBreak
3120     Ignoring `#1 = {\@tempa*' in font set\MessageBreak`@\MT@curr@set@name'}}%
3121   \let\MT@val\empty}%

```

In contrast to earlier version, these values will not be expanded immediately but at the end of the preamble.

```

3122 }%
3123 }

```

\MT@test@ast It the last character is an asterisk, execute the second argument, otherwise the first one.

```

3124 \def\MT@test@ast#1#2\@nil{%
3125   \def@tempa{#1}%
3126   \MT@ifempty{#2}%
3127 }

```

\MT@font@sets Fully expand the font specification and fix catcodes for all font sets. Also remove \MT@fix@font@set fontspec’s counters.

```

3128 \let\MT@font@sets\empty
3129 \def\MT@fix@font@set#1{%
3130   \MT@ifdefined@c@T{#1}{%
3131     \xdef{#1}%
3132     \ifMT@fontspec
3133       \xdef{#1}{\expandafter\MT@scrubfeatures#1()}\relax}%
3134   \fi

```

```

3135      \global\@onelevel@sanitize#1%
3136  }%
3137 }

\MT@define@set@key@size    size requires special treatment.

3138 \def\MT@define@set@key@size#1{%
3139   \define@key{MT@#1@set}{size}[]{%
3140     \MT@map@clist@n{\##1}{%
3141       \def\MT@val{\###1}%
3142       \expandafter\MT@get@range\MT@val--\@nil
3143       \ifx\MT@val\relax \else
3144         \MT@exp@cs\MT@xadd
3145         {MT@#1list@size@\MT@curr@set@name}%
3146         {{\{ \MT@lower \} \MT@upper} \relax}%
3147       \fi
3148     }%
3149   \debug\MT@dinfo@n{1}{-- size: \nameuse{MT@#1list@size@\MT@curr@set@name}}%
3150 }%
3151 }

```

Font sizes may also be specified as ranges. This has been requested by Andreas Bühmann, who has also offered valuable help in implementing this. Now, it is for instance possible to set up different lists for fonts with optical sizes. (The *MinionPro* project does this for the OpenType version of Adobe's Minion. (Available from CTAN at [pkg/minionpro](#)))

\MT@get@range Ranges will be stored as triplets of {\langle lower bound\rangle} {\langle upper bound\rangle} {\langle list name\rangle}. For simple sizes, the upper boundary is -1.

```

\MT@lower 3152 \def\MT@get@range#1-#2-#3\@nil{%
3153   \MT@ifempty{#1}{%
3154     \MT@ifempty{#2}{%
3155       \let\MT@val\relax
3156     }{%
3157       \def\MT@lower{0}%
3158       \def\MT@val{#2}%
3159       \MT@get@size
3160       \edef\MT@upper{\MT@val}%
3161     }%
3162   }{%
3163     \def\MT@val{#1}%
3164     \MT@get@size
3165     \ifx\MT@val\relax \else
3166       \edef\MT@lower{\MT@val}%
3167       \MT@ifempty{#2}{%
3168         \MT@ifempty{#3}{%
3169           \def\MT@upper{-1}%

```

2048 pt is TeX's maximum font size.

```

3170   \def\MT@upper{2048}%
3171 }{%
3172   \def\MT@val{#2}%
3173   \MT@get@size
3174   \ifx\MT@val\relax \else
3175     \MT@ifdim\MT@lower>\MT@val{%
3176       \MT@error{%
3177         Invalid size range (\MT@lower\space > \MT@val) in font set
3178         ` \MT@curr@set@name'. \MessageBreak Swapping sizes}{}%
3179       \edef\MT@upper{\MT@lower}%
3180       \edef\MT@lower{\MT@val}%
3181     }{%
3182       \edef\MT@upper{\MT@val}%
3183     }%
3184   \MT@ifdim\MT@lower=\MT@upper
3185   \def\MT@upper{-1}%

```

```

3186          \relax
3187          \fi
3188      }%
3189      \fi
3190  }%
3191 }
```

\MT@get@size Translate a size selection command and normalise it.

```
3192 \def\MT@get@size{%
```

A single star would mean \sizedefault, which doesn't exist, so we define it to be \normalsize.

```

3193 \if*\MT@val\relax
3194   \def\@tempa{\normalsize}%
3195 \else
3196   \MT@let@cn\@tempa{\MT@val}%
3197 \fi
3198 \ifx\@tempa\relax \else
```

The `relsize` solution of parsing \set@fontsize does not work with the AMS classes, among others. I hope my hijacking doesn't do any harm. We redefine \set@fontsize instead of \set@fontsize because some classes might define the size selection commands by simply using \fontsize (e.g., the `a0poster` class).

```

3199 \begingroup
3200   \def\set@fontsize##1##2##3##4\@nil{\endgroup\def\MT@val{##2}}%
3201   \@tempa\@nil
3202 \fi
```

Test whether we finally got a number or dimension so that we can strip the 'pt' (\@defaultunits and \strip@pt are kernel macros).

```

3203 \MT@ifdimen\MT@val{%
3204   \@defaultunits\@tempdima\MT@val pt\relax\@nnil
3205   \edef\MT@val{\strip@pt\@tempdima}%
3206 }{%
3207   \MT@warning{Could not parse font size `"\MT@val"\MessageBreak
3208   in font set `"\MT@curr@set@name"}%
3209   \let\MT@val\relax
3210 }%
3211 }
```

\MT@define@set@key@font

```

3212 \def\MT@define@set@key@font#1{%
3213   \define@key{MT@#1@set}{font}[]{%
3214     \MT@glet@nc{MT@#1list@font@\MT@curr@set@name}\@empty
3215     \MT@map@clist@n{\#1}{%
3216       \def\MT@val{\#\#\#1}%
3217       \MT@ifstreq\MT@val*{\def\MT@val{*//*/*}}\relax
3218       \expandafter\MT@get@font\MT@val////\@nil
3219       \MT@exp@two@n\g@addto@macro
3220         {\csname MT@#1list@font@\MT@curr@set@name\expandafter\endcsname}%
3221         {\MT@val,}%
3222     }%
3223     \expandafter\g@addto@macro\expandafter\MT@font@sets
3224     \csname MT@#1list@font@\MT@curr@set@name\endcsname
3225   }%
3226 }%
3227 }
```

\MT@get@font Translate any asterisks.

```

3228 \def\MT@get@font#1/#2/#3/#4/#5/#6\@nil{%
3229   \MT@get@font@{\#1}{\#2}{\#3}{\#4}{\#5}{\#6}%
3230   \ifx\MT@val\relax\def\MT@val{0}\fi
3231   \expandafter\g@addto@macro\expandafter\@tempb\expandafter{\MT@val}%
```

```

3232   \let\MT@val\@tempb
3233 }

\MT@get@font@ Helper macro, also used by \MT@get@font@and@size.
3234 \def\MT@get@font#1#2#3#4#5#6{%
3235   \let\@tempb\empty
3236   \def\MT@temp{#1/#2/#3/#4/#5}%
3237   \MT@get@axis{encoding}{#1}%
3238   \MT@get@axis{family} {#2}%
3239   \MT@get@axis{series} {#3}%
3240   \MT@get@axis{shape} {#4}%
3241   \ifnum#6>\z@\edef\@tempb{\@tempb*\}\fi
3242   \MT@ifempty{#5}{%
3243     \MT@warn@axis@empty{size}{\string\normalsize}%
3244     \def\MT@val{*}%
3245   }{%
3246     \def\MT@val{#5}%
3247   }%
3248   \MT@get@size
3249 }

\MT@get@axis
3250 \def\MT@get@axis#1#2{%
3251   \def\MT@val{#2}%
3252   \MT@get@highlevel{#1}%
3253   \MT@ifempty\MT@val{%
3254     \MT@warn@axis@empty{#1}{\csname #1default\endcsname}%
3255     \expandafter\def\expandafter\MT@val\expandafter{\csname #1default\endcsname}%
3256   }\relax
3257   \expandafter\g@addto@macro\expandafter\@tempb\expandafter{\MT@val}%
3258 }

\MT@warn@axis@empty
3259 \def\MT@warn@axis@empty#1#2{%
3260   \MT@warning{#1 axis is empty in font specification\MessageBreak
3261     `MT@temp'. Using `#2' instead}%
3262 }

```

We can finally assemble all pieces to define \DeclareMicrotypeSet's keys. They are also used for \DisableLigatures.

```

3263 \MT@exp@one@n\MT@map@clist@n{\MT@features,n1}{%
3264   \MT@define@set@key@{encoding}{#1}%
3265   \MT@define@set@key@{family} {#1}%
3266   \MT@define@set@key@{series} {#1}%
3267   \MT@define@set@key@{shape} {#1}%
3268   \MT@define@set@key@size {#1}%
3269   \MT@define@set@key@font {#1}%
3270 }

```

\UseMicrotypeSet To use a particular set we simply redefine MT@<feature>@setname. If the optional argument is empty, set names for all features will be redefined.

```

3271 \def\UseMicrotypeSet{%
3272   \MT@begin@catcodes
3273   \MT@UseMicrotypeSet
3274 }

```

```

\MT@UseMicrotypeSet
3275 \newcommand*\MT@UseMicrotypeSet[2][]{%
3276   \MT@ifempty{#1}{%
3277     \MT@map@clist@c\MT@features{{\MT@use@set{##1}{#2}}}%
3278   }{%
3279     \MT@map@clist@n{#1}{%
3280       \MT@ifempty{##1}\relax{%
3281         \MT@is@feature{##1}{activation of set `#2'}}%
3282     }%
3283   }%
3284 }

```

```

3282          \MT@exp@one@n\MT@use@set
3283          {\csname MT@rbba@\#\#1\endcsname}{#2}%
3284      }%
3285  }%
3286 }%
3287 }%
3288 \MT@end@catcodes
3289 }

```

\MT@pr@setname Only use sets that have been declared.

```

\MT@ex@setname 3290 \def\MT@use@set#1#2{%
\MT@tr@setname 3291 \MT@ifdefined@n@TF{\MT@#1@set@#2}{%
\MT@sp@setname 3292 \MT@xdef@n{\MT@#1@setname}{#2}%
3293 }{%
\MT@kn@setname 3294 \MT@ifdefined@n@TF{\MT@#1@setname}\relax{%
\MT@use@set 3295 \MT@xdef@n{\MT@#1@setname}{\@nameuse{\MT@default@#1@set}}%
3296 }%
3297 \MT@error{%
3298   The \@nameuse{\MT@abbr@#1} set `#2' is undeclared.\MessageBreak
3299   Using set `@\nameuse{\MT@#1@setname}' instead{}}%
3300 }%
3301 }

```

\DeclareMicrotypeSetDefault This command can be used in the main configuration file to declare the default font set, in case no set is specified in the package options.

```

3302 \def\DeclareMicrotypeSetDefault{%
3303   \MT@begin@catcodes
3304   \MT@DeclareMicrotypeSetDefault
3305 }

```

```

\MT@DeclareMicrotypeSetDefault
3306 \newcommand*\MT@DeclareMicrotypeSetDefault[2][]{%
3307   \MT@ifempty{#1}{%
3308     \MT@map@clist@c\MT@features{{\MT@set@default@set{\##1}{#2}}}%
3309   }{%
3310     \MT@map@clist@n{#1}{%
3311       \MT@ifempty{#1}\relax{%
3312         \MT@is@feature{\##1}{declaration of default set `#2'}{%
3313           \MT@exp@one@n\MT@set@default@set
3314           {\csname MT@rbba@\#\#1\endcsname}{#2}%
3315         }%
3316       }%
3317     }%
3318   }%
3319   \MT@end@catcodes
3320 }

```

\MT@default@pr@set

```

\MT@default@ex@set 3321 \def\MT@set@default@set#1#2{%
\MT@default@tr@set 3322 \MT@ifdefined@n@TF{\MT@#1@set@#2}{%
\MT@default@sp@set 3323 (debug)\MT@dinfo{1}{declaring default \@nameuse{\MT@abbr@#1} set `#2'}%
\MT@default@kn@set 3324 \MT@xdef@n{\MT@default@#1@set}{#2}%
\MT@default@kn@set 3325 }{%
\MT@set@default@set 3326 \MT@error{%
3327   The \@nameuse{\MT@abbr@#1} set `#2' is not declared.\MessageBreak
3328   Cannot make it the default set. Using set\MessageBreak `all' instead{}}%
3329 \MT@xdef@n{\MT@default@#1@set}{all}%
3330 }%
3331 }

```

14.3.2 Variants and aliases

\DeclareMicrotypeVariants Specify suffixes for variants (see `fontname/variants.map`). The starred version appends to the list.

```

3332 \let\MT@variants\@empty
3333 \def\DeclareMicrotypeVariants{%
3334   \MT@begin@catcodes
3335   \@ifstar
3336     \MT@DeclareVariants
3337   {\let\MT@variants\@empty\MT@DeclareVariants}%
3338 }
```

\MT@DeclareVariants

```

3339 \def\MT@DeclareVariants#1{%
3340   \MT@map@clist@n{\#1}{%
3341     \def\@tempa{\#1}%
3342     \onelevel@sanitize\@tempa
3343     \xdef\MT@variants{\MT@variants{\@tempa}}%
3344   }%
3345   \MT@end@catcodes
3346 }
```

\DeclareMicrotypeAlias This can be used to set an alias name for a font, so that the file and the settings for the aliased font will be loaded.

```

3347 \def\DeclareMicrotypeAlias{%
3348   \MT@begin@catcodes
3349   \MT@DeclareMicrotypeAlias
3350 }
```

\MT@DeclareMicrotypeAlias

```

3351 \newcommand*\MT@DeclareMicrotypeAlias[2]{%
3352   \def\@tempb{\#2}%
3353   \onelevel@sanitize\@tempb
3354   \MT@ifdefined@n@T{\MT@#1@alias}{%
3355     \MT@warning{Alias font family `@\tempb' will override
3356     alias `@\nameuse{\MT@#1@alias}'\MessageBreak
3357     for font family `#1'}}%
3358   \MT@xdef@n{\MT@#1@alias}{\@tempb}}
```

If we encounter this command while a font is being set up, we also set the alias for the current font so that if \DeclareMicrotypeAlias has been issued inside a configuration file, the configuration file for the alias font will be loaded, too.

```

3359 \MT@ifdefined@c@T\MT@family{%
3360   (debug)\MT@dinfo{1}{Activating alias font `@\tempb' for `@\family'}%
3361   \MT@get\MT@familyalias\@tempb
3362 }%
3363 \MT@end@catcodes
3364 }
```

\LoadMicrotypeFile May be used to load a configuration file manually.

```

3365 \def\LoadMicrotypeFile#1{%
3366   \edef\@tempa{\zap@space#1 \@empty}%
3367   \onelevel@sanitize\@tempa
3368   \MT@exp@one@n\MT@in@clist\@tempa\MT@file@list
3369   \ifMT@in@list%
3370     \MT@vinfo{... Configuration file mt-\@tempa.cfg already loaded}%
3371   \else
3372     \MT@xadd\MT@file@list{\@tempa,}%
3373     \MT@begin@catcodes
3374     \InputIfFileExists{mt-\@tempa.cfg}{%
3375       \edef\MT@curr@file{mt-\@tempa.cfg}%
3376       \MT@vinfo{... Loading configuration file \MT@curr@file}%
3377     }{%
3378   }
```

```

3378     \MT@warning{Configuration file mt-\@tempa.cfg\MessageBreak
3379             does not exist}%
3380     }%
3381     \MT@end@catcodes
3382     \fi
3383 }
3384 {/package}
3385 {/package|letterspace}

```

14.3.3 Disabling ligatures

\DisableLigatures
\MT@DisableLigatures This is really simple now: we can re-use the set definitions of \DeclareMicrotypeSet; there can only be one set, which we'll call 'no ligatures'.

The optional argument may be used to disable selected ligatures only.

```

\MT@n1@setname 3386 {*pdftex-def|luatex-def}
3387 {pdftex-def}\MT@requires@pdftex5{
3388 \def\DisableLigatures{%
3389   \MT@begin@catcodes
3390   \MT@DisableLigatures
3391 }
3392 \newcommand*\MT@DisableLigatures[2][]{%
3393   \MT@ifempty{\#1}{\relax}{\gdef\MT@n1@ligatures{\#1}}%
3394   \xdef\MT@active@features{\MT@active@features,n1}%
3395   \global\MT@noligaturestrue
3396   \MT@declare@sets{n1}{no ligatures}{\#2}%
3397   \gdef\MT@n1@setname{no ligatures}%
3398   \MT@end@catcodes
3399 }
3400 {pdftex-def}%
3401 {/pdftex-def|luatex-def}

```

If pdfTeX is too old, we throw an error.

```

3402 {*pdftex-def|xetex-def}
3403 \renewcommand*\DisableLigatures[2][]{%
3404   \MT@error{Disabling ligatures of a font is only possible\MessageBreak
3405   with pdftex version 1.30 or newer.\MessageBreak
3406   Ignoring \string\DisableLigatures}%
3407 {pdftex-def} Upgrade
3408 {xetex-def} Use
3409   pdftex.}%
3410 }
3411 {pdftex-def}%
3412 {/pdftex-def|xetex-def}

```

14.3.4 Interaction with babel

\DeclareMicrotypeBabelHook Declare the context that should be loaded when a babel language is selected. The command will not check whether a previous declaration will be overwritten.

```

3413 {*package}
3414 \def\DeclareMicrotypeBabelHook#1#2{%
3415   \MT@map@clist@n{\#1}{%
3416     \KV@sp@def\@tempa{\#\#1}%
3417     \MT@gdef@n{\MT@babel@\@tempa}{\#2}%
3418   }%
3419 }
3420 {/package}

```

14.3.5 Fine tuning

The commands \SetExpansion and \SetProtrusion provide an interface for setting the character protrusion resp. expansion factors for a set of fonts.

\SetProtrusion This macro accepts three arguments: [options,] set of font attributes and list of character protrusion factors.

A new macro called \MT@pr@c@*(name)* will be defined to be *(#3)* (i.e., the list of characters, not expanded).

```
3421 (*pdftex-def|xetex-def|luatex-def)
3422 \def\SetProtrusion{%
3423   \MT@begin@catcodes
3424   \MT@SetProtrusion
3425 }
```

\MT@SetProtrusion We want the catcodes to be correct even if this is called in the preamble.

```
\MT@pr@c@name 3426 \newcommand*\MT@SetProtrusion[3] [] {%
\MT@extra@context 3427   \let\MT@extra@context\empty
```

\MT@permute@list Parse the optional first argument. We first have to know the name before we can deal with the extra options.

```
3428 \MT@set@named@keys{\MT@pr@c}{#1}%
3429 (debug)\MT@dinfo{1}{creating protrusion list `'\MT@pr@c@name'}%
3430 \def\MT@permute@list{\pr@c}%
3431 \setkeys{\MT@cfg}{#2}%
```

We have parsed the second argument, and can now define macros for all permutations of the font attributes to point to \MT@pr@c@*(name)*, ...

```
3432 \MT@permute
```

... which we can now define to be *(#3)*. Here, as elsewhere, we have to make the definitions global, since they will occur inside a group.

```
3433 \MT@gdef@n{\MT@pr@c@\MT@pr@c@name}{#3}%
3434 \MT@end@catcodes
3435 }
3436 (*pdftex-def|xetex-def|luatex-def)
```

\SetExpansion \SetExpansion only differs in that it allows some extra options (stretch, shrink, step, auto).

```
3437 (*pdftex-def|luatex-def)
3438 \def\SetExpansion{%
3439   \MT@begin@catcodes
3440   \MT@SetExpansion
3441 }
```

\MT@SetExpansion

```
\MT@ex@c@name 3442 \newcommand*\MT@SetExpansion[3] [] {%
\MT@extra@context 3443   \let\MT@extra@context\empty
3444   \MT@set@named@keys{\MT@ex@c}{#1}%
\MT@permute@list 3445   \MT@ifdefined@n@T{\MT@ex@c@\MT@ex@c@name @factor}{%
3446     \ifnum\csname\MT@ex@c@\MT@ex@c@name @factor\endcsname > \OM
3447       \MT@warning@n{Expansion factor \number\OM@nameuse{\MT@ex@c@\MT@ex@c@name @factor}%
3448         too large in list}\MessageBreak `'\MT@ex@c@name'. Setting it to the
3449         maximum of 1000}%
3450     \MT@glet@nc{\MT@ex@c@\MT@ex@c@name @factor}\OM
3451   \fi
3452 }%
3453 (debug)\MT@dinfo{1}{creating expansion list `'\MT@ex@c@name'}%
3454 \def\MT@permute@list{\ex@c}%
3455 \setkeys{\MT@cfg}{#2}%
3456 \MT@permute
3457 \MT@gdef@n{\MT@ex@c@\MT@ex@c@name}{#3}%
3458 \MT@end@catcodes
3459 }
```

\SetTracking

```
3460 \def\SetTracking{%
```

```

3461  \MT@begin@catcodes
3462  \MT@SetTracking
3463 }

\MT@SetTracking Third argument may be empty.
3464 \newcommand*\MT@SetTracking[3] [] {%
3465   \let\MT@extra@context\empty
3466   \MT@set@named@keys{MT@tr@c}{#1}%
3467   (debug)\MT@dinfo{1}{creating tracking list `\\MT@tr@c@name'}%
3468   \def\MT@permute@list{tr@c}%
3469   \setkeys{MT@cfg}{#2}%
3470   \MT@permute
3471   \KV@sp@def\@tempa{#3}%
3472   \MT@ifempty\@tempa\relax{%
3473     \MT@ifint\@tempa
3474     {\MT@xdef@n{MT@tr@c}{\\MT@tr@c@name}{\\@tempa}}%
3475     {\MT@warning{Value `\\@tempa' is not a number in\MessageBreak
3476                   tracking set `\\MT@curr@set@name'}}}%
3477   \MT@end@catcodes
3478 }
3479 (/pdftex-def|luatex-def)

\SetExtraSpacing
3480 (*pdftex-def)
3481 \def\SetExtraSpacing{%
3482   \MT@begin@catcodes
3483   \MT@SetExtraSpacing
3484 }

\MT@SetExtraSpacing
3485 \newcommand*\MT@SetExtraSpacing[3] [] {%
3486   \let\MT@extra@context\empty
3487   \MT@set@named@keys{MT@sp@c}{#1}%
3488   (debug)\MT@dinfo{1}{creating spacing list `\\MT@sp@c@name'}%
3489   \def\MT@permute@list{sp@c}%
3490   \setkeys{MT@cfg}{#2}%
3491   \MT@permute
3492   \MT@gdef@n{MT@sp@c}{\\MT@sp@c@name}{#3}%
3493   \MT@end@catcodes
3494 }

\SetExtraKerning
3495 \def\SetExtraKerning{%
3496   \MT@begin@catcodes
3497   \MT@SetExtraKerning
3498 }

\MT@SetExtraKerning
3499 \newcommand*\MT@SetExtraKerning[3] [] {%
3500   \let\MT@extra@context\empty
3501   \MT@set@named@keys{MT@kn@c}{#1}%
3502   (debug)\MT@dinfo{1}{creating kerning list `\\MT@kn@c@name'}%
3503   \def\MT@permute@list{kn@c}%
3504   \setkeys{MT@cfg}{#2}%
3505   \MT@permute
3506   \MT@gdef@n{MT@kn@c}{\\MT@kn@c@name}{#3}%
3507   \MT@end@catcodes
3508 }
3509 (/pdftex-def)

\MT@set@named@keys We first set the name (if specified), then remove it from the list, and set the
\MT@options remaining keys.
3510 (*package)
3511 \def\MT@set@named@keys#1#2{%

```

```

3512 \def\x##1name##2##3\@nil{%
3513   \setkeys{#1}{name##2}%
3514   \gdef\MT@options##1##3{%
3515     \MT@rem@from@clist{name=}\MT@options
3516   }%
3517   \x#2,name=,\@nil
3518   \expandafter\setkeys{#1}\MT@options
3519 }

```

\MT@define@code@key Define the keys for the configuration lists (which are setting the codes, in pdfTeX speak).

```

3520 \def\MT@define@code@key#1#2{%
3521   \define@key{MT@#2}{#1}[]{%
3522     \tempcnta=\@ne
3523     \MT@map@clist@n##1{%
3524       \KV@sp@def\MT@val{####1}%

```

Here, too, we allow for something like ‘bf*’. It will be expanded immediately.

```

3525   \MT@get@highlevel{#1}%
3526   \MT@edef@n{\MT@temp#1\the\tempcnta}{\MT@val}%
3527   \advance\tempcnta \@ne
3528 }%
3529 }%
3530 }

```

\MT@define@code@key@family Remove fontspec’s internal feature counter.

```

3531 \def\MT@define@code@key@family#1{%
3532   \define@key{MT@#1}{family}[]{%
3533     \tempcnta=\@ne
3534     \MT@map@clist@n##1{%
3535       \KV@sp@def\MT@val{####1}%
3536       \MT@get@highlevel{family}%
3537       \ifMT@fontspec
3538         \edef\x{\edef\noexpand\MT@val{\noexpand\MT@scrubfeature\MT@val()}\relax}\x
3539       \fi
3540       \MT@edef@n{\MT@tempfamily\the\tempcnta}{\MT@val}%
3541       \advance\tempcnta \@ne
3542     }%
3543   }%
3544 }

```

\MT@tempsize must be in a \csname, so that it is at least \relax, not undefined.

```

3545 \def\MT@define@code@key@size#1{%
3546   \define@key{MT@#1}{size}[]{%
3547     \MT@map@clist@n##1{%
3548       \KV@sp@def\MT@val{####1}%
3549       \expandafter\MT@get@range\MT@val--\@nil
3550       \ifx\MT@val\relax \else
3551         \MT@exp@cs\MT@xadd{\MT@tempsize}%
3552         {{\MT@lower}{\MT@upper}{\MT@curr@set@name}}%
3553       \fi
3554     }%
3555   }%
3556 }

```

\MT@define@code@key@font

```

3557 \def\MT@define@code@key@font#1{%
3558   \define@key{MT@#1}{font}[]{%
3559     \MT@map@clist@n##1{%
3560       \KV@sp@def\MT@val{####1}%
3561       \MT@ifstreq\MT@val*{\def\MT@val{*//*/*}}\relax
3562       \expandafter\MT@get@font@and@size\MT@val////\@nil
3563       \ifMT@fontspec
3564         \edef\tempb{\expandafter\MT@scrubfeatures\tempb}\relax%
3565       \fi

```

```

3566      \MT@xdef@n{\MT@{\MT@permute@list @\@tempb\MT@extra@context}%
3567      {\csname MT@{\MT@permute@list @name}\endcsname}%
3568  (debug)\MT@dinfo@n{1}{initialising: use list for font \@tempb=\MT@val
3569  (debug)          \ifx\MT@extra@context@empty\else\MessageBreak
3570  (debug)          (context: \MT@extra@context)\fi}%
3571  \MT@exp@cs\MT@xaddb
3572  {\MT@{\MT@permute@list @\@tempb\MT@extra@context @sizes}%
3573  {{\{\MT@val\}{\m@ne}{\MT@curr@set@name}}}}%
3574 }%
3575 }%
3576 }

```

\MT@get@font@and@size Translate any asterisks and split off the size.

```

3577 \def\MT@get@font@and@size#1/#2/#3/#4/#5/#6\@nil{%
3578   \MT@get@font@{#1}{#2}{#3}{#4}{#5}{1}%
3579 }

3580 \MT@define@code@key{encoding}{cfg}
3581 \MT@define@code@key@family {cfg}
3582 \MT@define@code@key{series} {cfg}
3583 \MT@define@code@key{shape} {cfg}
3584 \MT@define@code@key@size {cfg}
3585 \MT@define@code@key@font {cfg}

```

\MT@define@opt@key

```

3586 \def\MT@define@opt@key#1#2{%
3587   \define@key{MT@#1@c}{#2}[] {\MT@ifempty{##1}\relax{%
3588     \MT@xdef@n{\MT@#1@c\MT@curr@set@name 0#2}{##1}}}}%
3589 }

```

\MT@listname@count The options in the optional first argument.

```

3590 \newcount\MT@listname@count
3591 \MT@map@clist@c\MT@features{%

```

Use file name and line number as the list name if the user didn't bother to invent one – also check whether the name already exists (in case more than one unnamed list is loaded in the same line, for example \AtBeginDocument).

```

3592 \define@key{MT@#1@c}{name}[] {%
3593   \MT@ifempty{##1}{%
3594     \MT@ifdefined@n@TF{\MT@#1@c\MT@curr@file/\the\inputlineno}{%
3595       \global\advance\MT@listname@count@ne
3596       \MT@edef@n{\MT@#1@c@name}{\MT@curr@file/\the\inputlineno
3597         (\number\MT@listname@count)}%
3598     }{%
3599       \MT@edef@n{\MT@#1@c@name}{\MT@curr@file/\the\inputlineno}%
3600     }%
3601   }{%
3602     \MT@edef@n{\MT@#1@c@name}{##1}%
3603     \MT@ifdefined@n@T{\MT@#1@c\csname MT@#1@c@name\endcsname}{%
3604       \MT@warning{Redefining \nameuse{MT@abbr##1} list `~\nameuse{MT@#1@c@name}'}%
3605     }%
3606   }%
3607   \MT@let@cn\MT@curr@set@name{\MT@#1@c@name}%
3608 }%
3609 \MT@define@opt@key{#1}{load}%
3610 \MT@define@opt@key{#1}{factor}%
3611 \MT@define@opt@key{#1}{preset}%
3612 \MT@define@opt@key{#1}{inputenc}%

```

Only one context is allowed. This might change in the future.

```

3613 \define@key{MT@#1@c}{context}[] {\MT@ifempty{##1}\relax{\def\MT@extra@context{##1}}}}%
3614 }
3615 (/package)

```

Automatically enable font copying if we find a protrusion or expansion context.

After the preamble, check whether font copying is enabled. For older pdfTeX versions, disallow. It also works with LuaTeX 0.30 or newer.

```

3616 (*pdftex-def|luatex-def)
3617 (pdftex-def)\MT@requires@pdftex7{
3618   \define@key{MT@ex@c}{context}[]{%
3619     \MT@ifempty{#1}\relax{%
3620       \MT@glet\MT@copy@font\MT@copy@font@%
3621       \def\MT@extra@context{#1}%
3622     }%
3623   }%
3624   \MT@addto@setup{%
3625     \define@key{MT@ex@c}{context}[]{%
3626       \ifx\MT@copy@font\MT@copy@font@%
3627         \MT@ifempty{#1}\relax{\def\MT@extra@context{#1}}%
3628       \else%
3629         \MT@error{\MT@MT\space isn't set up for expansion contexts.\MessageBreak%
3630           Ignoring `context' key\on@line}%
3631         {Either move the settings inside the preamble,\MessageBreak%
3632           or load the package with the `copyfonts' option.}%
3633       \fi%
3634     }%
3635   }

```

Protrusion contexts *might* also work without copying the font, so we don't issue an error but only a warning. The problem is that pdfTeX only allows one set of protrusion factors for a given font within one paragraph (those that are in effect at the end of the paragraph will be in effect for the whole paragraph). When different fonts are loaded – like in the example with the footnote markers – we don't need to copy the fonts.

```

3636   \define@key{MT@pr@c}{context}[]{%
3637     \MT@ifempty{#1}\relax{%
3638       \MT@glet\MT@copy@font\MT@copy@font@%
3639       \def\MT@extra@context{#1}%
3640     }%
3641   }%
3642   \MT@addto@setup{%
3643     \define@key{MT@pr@c}{context}[]{%
3644       \MT@ifempty{#1}\relax{\def\MT@extra@context{#1}}%
3645       \ifx\MT@copy@font\MT@copy@font@\else%
3646         \MT@warning@nl{If protrusion contexts don't work as expected,%
3647           \MessageBreak load the package with the `copyfonts' option}%
3648       \fi%
3649     }%
3650   }
3651 (/pdftex-def|luatex-def)
3652 (*pdftex-def)
3653 }{%
3654   \define@key{MT@ex@c}{context}[]{%
3655     \MT@error{Expansion contexts only work with pdftex 1.40.4\MessageBreak%
3656       or later. Ignoring `context' key\on@line}%
3657     {Upgrade pdftex.}%
3658   }
3659 (/pdftex-def)
3660 (*pdftex-def|xetex-def)
3661   \define@key{MT@pr@c}{context}[]{%
3662     \MT@error{Protrusion contexts only work with pdftex%
3663     (pdftex-def)      1.40.4\MessageBreak or later.%
3664     (xetex-def)      \MessageBreak or luatex.%
3665     Ignoring `context' key\on@line}%
3666     (pdftex-def)      {Upgrade pdftex.}%
3667     (xetex-def)      {Use pdftex or luatex.}%
3668   }
3669 (/pdftex-def|xetex-def)

```

3670 *(pdftex-def)*

```
\MT@warn@nodim
3671 (*package)
3672 \def\MT@warn@nodim#1{%
3673   \MT@warning` `\@tempa' is not a dimension.\MessageBreak
3674   Ignoring it and setting values relative to\MessageBreak #1}%
3675 }
3676 (/package)
```

Protrusion codes may be relative to character width, or to any dimension.

3677 *(*pdftex-def|xetex-def|luatex-def)*

```
\define@key{MT@pr@c}{unit}[character]{%
3679   \MT@glet@nc{MT@pr@c@MT@curr@set@name @unit}\@empty
3680   \def@\tempa{#1}%
3681   \MT@ifstreq@\tempa{character}\relax%
```

Test whether it's a dimension, but do not translate it into its final form here, since it may be font-specific.

```
3682   \MT@ifdimen@\tempa
3683   {\MT@glet@nc{MT@pr@c@MT@curr@set@name @unit}\@tempa}%
3684   {\MT@warn@nodim{character widths}}%
3685 }%
3686 }
3687 (/pdftex-def|xetex-def|luatex-def)
```

Tracking may only be relative to a dimension.

3688 *(*pdftex-def|luatex-def)*

```
\define@key{MT@tr@c}{unit}[1em]{%
3690   \MT@glet@nc{MT@tr@c@MT@curr@set@name @unit}\@empty
3691   \def@\tempa{#1}%
3692   \MT@ifdimen@\tempa
3693   {\MT@glet@nc{MT@tr@c@MT@curr@set@name @unit}\@tempa}%
3694   {\MT@warn@nodim{1em}}%
3695   \MT@gdef@n{MT@tr@c@MT@curr@set@name @unit}{1em}}%
3696 }
3697 (/pdftex-def|luatex-def)
```

Spacing and kerning codes may additionally be relative to space dimensions.

3698 *(*pdftex-def)*

```
\MT@map@clist@n{sp,kn}{%
3700   \define@key{MT@#1@c}{unit}[space]{%
3701     \MT@glet@nc{MT@#1@c@MT@curr@set@name @unit}\@empty
3702     \def@\tempa{##1}%
3703     \MT@ifstreq@\tempa{character}\relax{%
3704       \MT@glet@nc{MT@#1@c@MT@curr@set@name @unit}\m@ne
3705       \MT@ifstreq@\tempa{space}\relax{%
3706         \MT@ifdimen@\tempa
3707         {\MT@glet@nc{MT@#1@c@MT@curr@set@name @unit}\@tempa}%
3708         {\MT@warn@nodim{width of space}}%
3709       }%
3710     }%
3711   }%
3712 }
3713 (/pdftex-def)
```

The first argument to `\SetExpansion` accepts some more options.

3714 *(*pdftex-def|luatex-def)*

```
\MT@map@clist@n{stretch,shrink,step}{%
3715   \define@key{MT@ex@c}{#1}[]{%
3716     \MT@ifempty{##1}\relax{%
3717       \MT@ifint{##1}{%
```

A space terminates the number.

```
3719   \MT@gdef@n{MT@ex@c@MT@curr@set@name @#1}{##1} }
```

```

3720     }{%
3721     \MT@warning{%
3722       Value `##1' for option `#1' is not a number.\MessageBreak
3723       Ignoring it}%
3724     }%
3725   }%
3726 }
3727 }
3728 \define@key{MT@ex@c}{auto}[true]{%
3729   \def\@tempa{#1}%
3730   \csname if\@tempa\endcsname

```

Don't use `autoexpand` for pdfTEX version older than 1.20.

```

3731 (*pdftex-def)
3732   \MT@requires@pdftex4{%
3733     \MT@gdef@n{MT@ex@c@MT@curr@set@name @auto}{autoexpand}%
3734   }{%
3735     \MT@warning{pdftex too old for automatic font expansion}%
3736   }
3737 (/pdftex-def)
3738 \else
3739 (*pdftex-def)
3740   \MT@requires@pdftex4{%
3741     \MT@glet@nc{MT@ex@c@MT@curr@set@name @auto}\@empty
3742   }\relax
3743 (/pdftex-def)
3744 (*luatex-def)
3745   \MT@warning{Non-automatic font expansion doesn't work with\MessageBreak
3746   luatex}%
3747 (/luatex-def)
3748 \fi
3749 }

```

Tracking: Interword spacing and outer kerning. The variant with space just in case `\SetTracking` is called inside an argument (e.g., to `\IfFileExists`).

```

3750 \MT@define@opt@key{tr}{spacing}
3751 \MT@define@opt@key{tr}{outerspacing}
3752 \MT@define@opt@key{tr}{outerkerning}

```

Which ligatures should be disabled?

```

3753 \define@key{MT@tr@c}{noligatures}[]%
3754   {\MT@xdef@n{MT@tr@c@MT@curr@set@name @noligatures}{#1}}
3755 \define@key{MT@tr@c}{outer spacing}[]{\setkeys{MT@tr@c}{outerspacing={#1}}}
3756 \define@key{MT@tr@c}{outer kerning}[]{\setkeys{MT@tr@c}{outerkerning={#1}}}
3757 \define@key{MT@tr@c}{no ligatures}[]{\setkeys{MT@tr@c}{noligatures={#1}}}
3758 (/pdftex-def|luatex-def)

```

14.3.6 Character inheritance

`\DeclareCharacterInheritance`

This macro may be used in the configuration files to declare characters that should inherit protrusion resp. expansion values from other characters. Thus, there is no need to define all accented characters (e.g., `\'a`, `\`a`, `\^a`, `\~a`, `\"a`, `\r{a}`, `\k{a}`, `\u{a}`), which will make the configuration files look much nicer and easier to maintain. If a single character of an inheritance list should have a different value, one can simply override it.

`\MT@inh@feat`
`\MT@extra@inputenc` The optional argument may be used to restrict the list to some features, and to specify an input encoding.

```

3759 (*package)
3760 \renewcommand*\DeclareCharacterInheritance[1][]{%
3761   \let\MT@extra@context\empty
3762   \let\MT@extra@inputenc\undefined

```

```

3763 \let\MT@inh@feat\empty
3764 \setkeys{MT@inh@}{#1}%
3765 \MT@begin@catcodes
3766 \MT@set@inh@list
3767 }

\MT@set@inh@list      Safe category codes.

3768 \def\MT@set@inh@list#1#2{%
3769   \MT@ifempty{\MT@inh@feat}{%
3770     \MT@map@clist@c\MT@features{{\MT@declare@char@inh##1}{#1}{#2}}}%
3771 }{%
3772   \MT@map@clist@c\MT@inh@feat{%
3773     \KV@sp@def@tempa{#1}%
3774     \MT@ifempty{\tempa}{relax{%
3775       \MT@exp@one@n\MT@declare@char@inh
3776       {\csname MT@rbba@\tempa\endcsname}{#1}{#2}}%
3777     }%
3778   }%
3779 }%
3780 \MT@end@catcodes
3781 }

```

The keys for the optional argument.

```

3782 \MT@map@clist@c\MT@features@long{%
3783   \define@key{MT@inh@}{#1}[] {\edef\MT@inh@feat{\MT@inh@feat#1,}}}
3784 \define@key{MT@inh@}{inputenc}{\def\MT@extra@inputenc{#1}}

```

\MT@declare@char@inh The lists cannot be given a name by the user.

```

3785 \def\MT@declare@char@inh#1#2#3{%
3786   \MT@edef@n{MT@#1@inh@name}{%
3787     {\MT@curr@file/\the\inputlineno (\@nameuse{MT@abbr@#1})}%
3788     \MT@let@cn\MT@curr@set@name{MT@#1@inh@name}%
3789     \MT@ifdefined@c@T\MT@extra@inputenc{%
3790       \MT@xdef@n{MT@#1@inh@MT@curr@set@name @inputenc}{\MT@extra@inputenc}%
3791     }%
3792     \MT@gdef@n{MT@#1@inh@\csname MT@#1@inh@name\endcsname}{#3}%
3793   \def\MT@permute@list{#1@inh}%
3794   \setkeys{MT@inh}{#2}%
3795   \MT@permute
3796 }

```

Parse the second argument. \DeclareCharacterInheritance may also be set up for various combinations. We can reuse the key setup from the configuration lists (\Set...).

```

3797 \MT@define@code@key{encoding}{inh}
3798 \MT@define@code@key@family {inh}
3799 \MT@define@code@key{series} {inh}
3800 \MT@define@code@key{shape} {inh}
3801 \MT@define@code@key@size {inh}
3802 \MT@define@code@key@font {inh}

```

\MT@inh@do Now parse the third argument, the inheritance lists. We define the commands \MT@inh@{@name}@{@slot}@, containing the inheriting characters. They will also be translated to slot numbers here, to save some time. The following will be executed only once, namely the first time this inheritance list is encountered (in \MT@set@{@feature}@codes).

```

3803 \def\MT@inh@do#1{%
3804   \ifx\relax#1\empty \else
3805     \MT@inh@split #1=\relax
3806     \expandafter\MT@inh@do
3807   \fi
3808 }

```

\MT@inh@split Only gather the inheriting characters here. Their codes will actually be set in \MT@set@{feature}@codes.

```

3809 〈/package〉
3810 〈*pdftex-def|xetex-def|luatex-def〉
3811 \def\MT@inh@split#1-#2-#3\relax{%
3812   \def\@tempa{#1}%
3813   \ifx\@tempa\empty\else
3814     \MT@get@slot
3815 〈pdftex-def|luatex-def〉 \ifnum\MT@char > \m@ne
3816 〈xetex-def〉 \ifx\MT@char\empty\else
3817   \let\MT@val\MT@char
3818   \MT@map@clist@n{#2}{%
3819     \def\@tempa{##1}%
3820     \ifx\@tempa\empty\else
3821       \MT@get@slot
3822 〈pdftex-def|luatex-def〉 \ifnum\MT@char > \m@ne
3823 〈xetex-def〉 \ifx\MT@char\empty\else
3824   \MT@exp@cs\MT@xadd{\MT@inh@\MT@listname @\MT@val 0}{{\MT@char}}%
3825   \fi
3826   \fi
3827 }%
3828 〈debug〉\MT@dinfo@n{2}{children of #1 (\MT@val):}
3829 〈debug〉 \nameuse{\MT@inh@\MT@listname @\MT@val 0}%
3830   \fi
3831   \fi
3832 }
3833 〈/pdftex-def|xetex-def|luatex-def〉

```

14.3.7 Permutation

\MT@permute Calling \MT@permute will define commands for all permutations of the specified font attributes of the form \MT@{list type}@{/encoding}/⟨family⟩/⟨series⟩/⟨shape⟩/⟨| *⟩ to be the expansion of \MT@{list type}@name, i.e., the name of the currently defined list. Size ranges are held in a separate macro called \MT@{list type}@{/font axes}@sizes, which in turn contains the respective ⟨list name⟩s attached to the ranges.

```

3834 〈*package〉
3835 \def\MT@permute{%
3836   \let\MT@cnt@encoding\@ne
3837   \MT@permute@
3838   Undefine commands for the next round.
3839   \MT@map@tlist@n{{encoding}{family}{series}{shape}}\MT@permute@reset
3840   \MT@glet\MT@tempsize\@undefined
3841   \def\MT@permute@{%
3842     \let\MT@cnt@family\@ne
3843     \MT@permute@@
3844     \MT@increment\MT@cnt@encoding
3845     \MT@ifdefined@n@T{\MT@tempencoding\MT@cnt@encoding}%
3846     \MT@permute@
3847   }
3848   \def\MT@permute@@{%
3849     \let\MT@cnt@series\@ne
3850     \MT@permute@ @@
3851     \MT@increment\MT@cnt@family
3852     \MT@ifdefined@n@T{\MT@tempfamily\MT@cnt@family}%
3853     \MT@permute@ @@
3854   }
3855   \def\MT@permute@@@{%
3856     \let\MT@cnt@shape\@ne
3857     \MT@permute@@@@
3858     \MT@increment\MT@cnt@series

```

```

3859  \MT@ifdefined@n@T{MT@tempseries\MT@cnt@series}%
3860    \MT@permute@@@%
3861  }
3862 \def\MT@permute@@@{%
3863   \MT@permute@@@%
3864   \MT@increment\MT@cnt@shape
3865   \MT@ifdefined@n@T{MT@tempshape\MT@cnt@shape}%
3866   \MT@permute@@@%
3867 }

```

\MT@permute@@@ In order to save some memory, we can ignore unused encodings (inside the document).

```

3868 \def\MT@permute@@@{%
3869   \MT@permute@define{encoding}%
3870   \ifMT@document
3871     \ifx\MT@tempencoding\@empty \else
3872       \MT@ifdefined@n@TF{T@{\MT@tempencoding}}\relax
3873       {\expandafter\expandafter\expandafter\@gobble}%
3874     \fi
3875   \fi
3876   \MT@permute@@@%
3877 }

```

\MT@permute@@@

```

3878 \def\MT@permute@@@{%
3879   \MT@permute@define{family}%
3880   \MT@permute@define{series}%
3881   \MT@permute@define{shape}%
3882   \edef\@tempa{\MT@tempencoding
3883     /\MT@tempfamily
3884     /\MT@tempseries
3885     /\MT@tempshape
3886     /\MT@ifdefined@c@T\MT@tempsize *}%

```

Some sanity checks: an encoding must be specified (unless nothing else is).

```

3887 \MT@ifstreq@\@tempa{////}\relax{%
3888   \ifx\MT@tempencoding\@empty
3889     \MT@warning{%
3890       You have to specify an encoding for\MessageBreak
3891       \nameuse{MT@abbr@\MT@permutablelist} list
3892       `@\nameuse{MT@\MT@permutablelist @name}'.\MessageBreak
3893       Ignoring it}%
3894   \else
3895     \MT@ifdefined@c@TF\MT@tempsize{%

```

Add the list of ranges to the beginning of the current combination, after checking for conflicts.

```

3896   \MT@ifdefined@n@T{MT@\MT@permutablelist @\@tempa\MT@extra@context @sizes}{%
3897     \MT@map@tlist@c\MT@tempsize\MT@check@rlist
3898   }%
3899   \MT@exp@cs\MT@xaddb
3900   {MT@\MT@permutablelist @\@tempa\MT@extra@context @sizes}%
3901   \MT@tempsize
3902   debug \MT@info@n@1{initialising: use list for font \@tempa,\MessageBreak
3903   debug sizes: \csname MT@\MT@permutablelist @\@tempa\MT@extra@context
3904   debug @sizes\endcsname}%
3905 }{%

```

Only one list can apply to a given combination. But we don't warn if the overridden list is to be loaded by the current one.

```

3906   \MT@ifdefined@n@T{MT@\MT@permutablelist @\@tempa\MT@extra@context}{%
3907     \MT@ifstreq@\csname MT@\MT@permutablelist @\@tempa\MT@extra@context\endcsname}%
3908     {\csname MT@\MT@permutablelist @\csname MT@\MT@permutablelist @name\endcsname @load\endcsname}%
3909     \relax{%

```

```

3910          \MT@warning{\@nameuse{MT@abbr@\MT@permulist} list
3911              ` \@nameuse{MT@\MT@permulist @name}' will\MessageBreak override
3912              list ` \@nameuse{MT@\MT@permulist @\@tempa\MT@extra@context}'%
3913              for \MessageBreak font ` \@tempa' }%
3914      }%
3915  }%
3916 {debug}\MT@dinfo@nl{1}{initialising: use list for font \@tempa
3917 {debug}          \ifx\MT@extra@context\empty\else\MessageBreak
3918 {debug}          (context: \MT@extra@context)\fi}%
3919 }%
3920 \MT@xdef@n{MT@\MT@permulist @\@tempa\MT@extra@context}%
3921     {\csname MT@\MT@permulist @name\endcsname}%
3922 \fi
3923 }%
3924 }

```

\MT@permute@define Define the commands.

```

3925 \def\MT@permute@define#1{%
3926   \@tempcpta=\csname MT@cnt@#1\endcsname\relax
3927   \MT@ifdefined@n@TF{MT@temp#1\the\@tempcpta}{%
3928     {\MT@edef@n{MT@temp#1}{\csname MT@temp#1\the\@tempcpta\endcsname}}%
3929     {\MT@let@nc{MT@temp#1}\empty}%
3930   }

```

\MT@permute@reset Reset the commands.

```

3931 \def\MT@permute@reset#1{%
3932   \@tempcpta=\@ne
3933   \MT@loop
3934     \MT@let@nc{MT@temp#1\the\@tempcpta}\undefined
3935     \advance\@tempcpta\@ne
3936     \MT@ifdefined@n@TF{MT@temp#1\the\@tempcpta}{%
3937       \iftrue
3938       \iffalse
3939       \MT@repeat
3940   }

```

\MT@check@rlist For every new range item in \MT@tempsize, check whether it overlaps with ranges in the existing list.

```
3941 \def\MT@check@rlist#1{\expandafter\MT@check@rlist@ #1}
```

\MT@check@rlist@ Define the current new range and ...

```

3942 \def\MT@check@rlist@#1#2#3{%
3943   \def\@tempb{#1}%
3944   \def\@tempc{#2}%
3945   \MT@if@false
3946   \MT@exp@cs\MT@map@tlist@c
3947     {MT@\MT@permulist @\@tempa\MT@extra@context @sizes}%
3948   \MT@check@range
3949 }

```

\MT@check@range ... recurse through the list of existing ranges.

```
3950 \def\MT@check@range#1{\expandafter\MT@check@range@ #1}
```

\MT@check@range@ \@tempb and \@tempc are lower resp. upper bound of the new range, (#1) and (#2) those of the existing range. (#3) is the list name.

```

3951 \def\MT@check@range@#1#2#3{%
3952   \MT@ifdim{#2}=\m@ne{%
3953     \MT@ifdim\@tempc=\m@ne{%

```

- Both items are simple sizes.

```

3954     \MT@ifdim@\tempb={#1}\MT@if@true\relax
3955   }{%

```

- Item in list is a simple size, new item is a range.

```

3956      \MT@ifdim@\tempb{#1}\relax{%
3957          \MT@ifdim@\tempc{#1}{%
3958              \MT@if@true
3959                  \edef@\tempb{#1 (with range: \tempb\space to \tempc)}%
3960              }\relax
3961          }%
3962      }{%
3963  }\{%
3964      \MT@ifdim@\tempc=\m@ne{%

```

- Item in list is a range, new item is a simple size.

```

3965      \MT@ifdim@\tempb{#2}{%
3966          \MT@ifdim@\tempb{#1}\relax\MT@if@true
3967      }\relax
3968  }{%

```

- Both items are ranges.

```

3969      \MT@ifdim@\tempb{#2}{%
3970          \MT@ifdim@\tempc{#1}{%
3971              \MT@if@true
3972                  \edef@\tempb{#1 to #2 (with range: \tempb\space to \tempc)}%
3973              }\relax
3974          }\relax
3975      }%
3976  }{%
3977 \ifMT@if@
3978     \MT@ifstreq{#3}%
3979         {\csname MT@\MT@permulist \csname MT@\MT@permulist @name\endcsname @load\endcsname}%
3980         \relax{%
3981             \MT@warning{\@nameuse{MT@abbr@\MT@permulist} list
3982                 `@\nameuse{MT@\MT@permulist @name}' will override\MessageBreak
3983                 list `#3' for font \tempa,\MessageBreak size \tempb}%
3984     }%

```

If we've already found a conflict with this item, we can skip the rest of the list.

```

3985      \expandafter\MT@tlist@break
3986  \fi
3987 }

```

14.4 Package options

14.4.1 Declaring the options

\ifMT@opt@expansion Keep track of whether the user explicitly set these options.

```

\ifMT@opt@auto 3988 \newif\ifMT@opt@expansion
\ifMT@opt@DVI 3989 \newif\ifMT@opt@auto
3990 \newif\ifMT@opt@DVI

```

\MT@optwarn@admissible Some warnings.

```

3991 \def\MT@optwarn@admissible#1#2{%
3992     \MT@warning@nl{`#1' is not an admissible value for option\MessageBreak
3993                 `#2'. Assuming `false'}%
3994 }

```

```

\MT@optwarn@nan
3995 </package>
3996 (*package|letterspace)
3997 (plain)\MT@requires@lateX1{
3998 \def\MT@optwarn@nan#2{%

```

```

3999  \MT@warning@nl{Value `#1' for option `#2' is not a\MessageBreak number.
4000          Using default value of \number\@nameuse{\MT@#2@default}}%
4001 }
4002 (plain)\relax
4003 (/package|letterspace)
4004 (*package)
```

\MT@opt@def@set

```

4005 \def\MT@opt@def@set#1{%
4006   \MT@ifdefined@n@TF{\MT@\@tempb @set@@\MT@val}{%
4007     \MT@xdef@n{\MT@\@tempb @setname}{\MT@val}}%
4008   }{%
4009   \MT@xdef@n{\MT@\@tempb @setname}{\@nameuse{\MT@default@}\@tempb @set}}%
4010   \MT@warning@nl{The #1 set `^{\MT@val}' is undeclared.\MessageBreak
4011           Using set `^{\@nameuse{\MT@\@tempb @setname}}' instead}%
4012   }%
4013 }
```

expansion and protrusion may be true, false, compatibility, nocompatibility and/or a (*set name*).

```

4014 \MT@map@clist@n{protrusion,expansion}{%
4015   \define@key{MT}{#1}[true]{%
4016     \csname MT@opt@#1true\endcsname
4017     \MT@map@clist@n{##1}{%
4018       \KV@sp@def{\MT@val}{####1}%
4019       \MT@ifempty{\MT@val}\relax{%
4020         \csname MT@#1true\endcsname
4021         \edef{\@tempb}{\csname MT@rbba@#1\endcsname}%
4022         \MT@ifstreq{\MT@val}{true}\relax
4023         {%
4024           \MT@ifstreq{\MT@val}{false}{%
4025             \csname MT@#1false\endcsname
4026           }{%
4027             \MT@ifstreq{\MT@val}{compatibility}{%
4028               \MT@let@nc{\MT@\@tempb @level}{\one
4029             }{%
4030               \MT@ifstreq{\MT@val}{nocompatibility}{%
4031                 \MT@let@nc{\MT@\@tempb @level}{\tw@}
4032               }{%
4033               }%
4034             }%
4035           }%
4036         }%
4037       }%
4038     }%
4039   }%
4040 }%
4041 }
```

If everything failed, it should be a set name.

```

4033   \MT@opt@def@set#1}%
4034   }%
4035   }%
4036   }%
4037   }%
4038   }%
4039   }%
4040 }%
4041 }
```

activate is a shortcut for protrusion and expansion.

```

4042 \define@key{MT}{activate}[true]{%
4043   \setkeys{MT}{protrusion={#1}}%
4044   \setkeys{MT}{expansion={#1}}%
4045 }
```

spacing, kerning and tracking do not have a compatibility level.

```

4046 \MT@map@clist@n{spacing,kerning,tracking}{%
4047   \define@key{MT}{#1}[true]{%
4048     \MT@map@clist@n{##1}{%
4049       \KV@sp@def{\MT@val}{####1}%
4050       \MT@ifempty{\MT@val}\relax{%
4051         \csname MT@#1true\endcsname
4052         \MT@ifstreq{\MT@val}{true}\relax
```

```

4053      {%
4054        \MT@ifstreq{\MT@val}{false}{%
4055          \csname MT@#1false\endcsname
4056        }{%
4057          \edef@\tempb{\csname MT@rbba@#1\endcsname}%
4058          \MT@opt@def@set{#1}%
4059        }%
4060      }%
4061    }%
4062  }%
4063 }%
4064 }

```

\MT@def@bool@opt The true/false options: draft, final (may be inherited from the class options), auto, selected, babel, DVIoutput, defersetup, copyfonts.

```

4065 \def\MT@def@bool@opt#1#2{%
4066   \define@key{MT}{#1}[true]{%
4067     \def@\tempa{##1}%
4068     \MT@ifstreq@\tempa{true}\relax{%
4069       \MT@ifstreq@\tempa{false}\relax{%
4070         \MT@optwarn@admissible{##1}{#1}%
4071         \def@\tempa{false}%
4072       }%
4073     }%
4074   #2%
4075 }%
4076 }

```

Boolean options that only set the switch.

```

4077 \MT@map@clist@n{draft,selected,babel}{%
4078   \MT@def@bool@opt{#1}{\csname MT@#1\@tempa\endcsname}%
4079 \MT@def@bool@opt{auto}{\csname MT@auto\@tempa\endcsname \MT@opt@autotrue}

```

The DVIoutput option will change \pdfoutput immediately to minimise the risk of confusing other packages.

```

4080 (/package)
4081 (*pdftex-def|luatex-def|xetex-def)
4082 (luatex-def)\MT@requires@luatex4{\let\pdfoutput\outputmode}\relax
4083 \MT@def@bool@opt{DVIoutput}{%
4084   \csname if@\tempa\endcsname
4085 (*pdftex-def|luatex-def)
4086   \ifnum\pdfoutput>z@ \MT@opt@DVIttrue \fi
4087   \pdfoutput\z@
4088 \else
4089   \ifnum\pdfoutput<\@ne \MT@opt@DVIttrue \fi
4090   \pdfoutput\@ne
4091 (/pdftex-def|luatex-def)
4092 (xetex-def) \MT@warning@n{Ignoring `DVIoutput' option}%
4093 \fi
4094 }
4095 (/pdftex-def|luatex-def|xetex-def)

```

Setting the defersetup option to false will restore the old behaviour, where the setup took place at the time when the package was loaded. This is *undocumented*, since I would like to learn about the cases where this is necessary.

The only problem with the new deferred setup I can think of is when a box is being constructed inside the preamble and this box contains a font that is not loaded before the box is being used.

```

4096 (*package)
4097 \MT@def@bool@opt{defersetup}{%
4098   \csname if@\tempa\endcsname \else
4099     \AtEndOfPackage{%
4100       \MT@setup@

```

```

4101      \let\MT@setup@\empty
4102      \let\MT@addto@setup@\firstofone
4103  }%
4104  \fi
4105 }
4106 (/package)

```

`copyfonts` will copy all fonts before setting them up. This allows protrusion and expansion with different parameters. This option is also *undocumented* in the hope that we can always find out automatically whether it's required. It also works with `LuaTeX` 0.30 or newer.

```

4107 (*pdftex-def|luatex-def)
4108 (pdftex-def)\MT@requires@pdftex7{
4109   \MT@def@bool@opt{copyfonts}{%
4110     \csname if\@tempa\endcsname
4111     \MT@glet\MT@copy@font\MT@copy@font@
4112   \else
4113     \MT@glet\MT@copy@font\relax
4114   \fi
4115 }
4116 (pdftex-def){
4117 (/pdftex-def|luatex-def)
4118 (*pdftex-def|xetex-def)
4119   \MT@def@bool@opt{copyfonts}{%
4120     \csname if\@tempa\endcsname
4121       \MT@error
4122     (pdftex-def)      {The pdftex version you are using is too old\MessageBreak
4123     (pdftex-def)      to use the `copyfonts' option}{Upgrade pdftex.}%
4124     (xetex-def)      {The `copyfonts' option does not work with xetex}
4125     (xetex-def)      {Use pdfTeX or luatex instead.}%
4126   \fi
4127 }
4128 (pdftex-def)}
4129 (/pdftex-def|xetex-def)

```

`final` is the opposite to `draft`.

```

4130 (*package)
4131 \MT@def@bool@opt{final}{%
4132   \csname if\@tempa\endcsname
4133     \MT@draftfalse
4134   \else
4135     \MT@drafttrue
4136   \fi
4137 }

```

For verbose output, we redefine `\MT@vinfo`.

```

4138 \define@key{MT}{verbose}[true]{%
4139   \let\MT@vinfo\MT@info@n
4140   \def\@tempa{\#1}%
4141   \MT@ifstreq\@tempa{true}\relax{%

```

Take problems seriously.

```

4142   \MT@ifstreq\@tempa{errors}{%
4143     \let\MT@warning\MT@warn@err
4144     \let\MT@warning@n\MT@warn@err
4145   }{%
4146     \let\MT@vinfo@gobble

```

Cast warnings to the winds.

```

4147   \MT@ifstreq\@tempa{silent}{%
4148     \let\MT@warning\MT@info
4149     \let\MT@warning@n\MT@info@n
4150   }{%
4151     \MT@ifstreq\@tempa{false}\relax{\MT@optwarn@admissible{\#1}{verbose}}%

```

```

4152      }%
4153      }%
4154      }%
4155 }
4156 (/package)

```

Options with numerical keys: factor, stretch, shrink, step, letterspace.

```

4157 (*package|letterspace)
4158 (plain)\MT@requires@lateX1{
4159 \MT@map@clist@n{%
4160 (package) stretch,shrink,step,%
4161 letterspace}{%
4162 \define@key{MT}{#1}[\csname MT@#1@default\endcsname]{%
4163 \def\@tempa##1 }%

```

No nonsense in \MT@factor et al.? A space terminates the number.

```

4164 \MT@ifint\@tempa
4165   {\MT@edef@n{\MT@#1}{\@tempa}}%
4166   {\MT@optwarn@nan{\#1}{#1}}%
4167 }%
4168 }
4169 (plain)\relax
4170 (/package|letterspace)

```

factor will define the protrusion factor only.

```

4171 (*package)
4172 \define@key{MT}{factor}[\MT@factor@default]{%
4173   \def\@tempa{#1 }%
4174   \MT@ifint\@tempa
4175   {\edef\MT@pr@factor{\@tempa}}
4176   {\MT@optwarn@nan{\#1}{factor}}%
4177 }

```

Unit for protrusion codes.

```

4178 \define@key{MT}{unit}[character]{%
4179   \def\@tempa{#1}%
4180   \MT@ifstreq@\tempa{character}\relax{%
4181     \MT@ifdimen@\tempa
4182     {\let\MT@pr@unit\@tempa}%
4183     {\MT@warning@nl{'\@tempa' is not a dimension.\MessageBreak
4184       Ignoring it and setting values relative to\MessageBreak
4185       character widths}}%
4186   }%
4187 }

```

14.4.2 Loading the definition file

\MT@endinput Abort if no capable engine found.

```

4188 \let\MT@endinput\relax
4189 \ifx\MT@engine\relax
4190   \MT@warning@nl{You don't seem to be using pdftex, luatex or xetex.\MessageBreak
4191     `MT@MT' only works with these engines.\MessageBreak
4192     I will quit now}
4193   \MT@clear@options
4194 \else

```

Otherwise load the engine-specific code (as strewn across this file).

```

4195 \input{microtype-\MT@engine tex.def}
4196 \fi
4197 \MT@endinput

```

14.4.3 Reading the configuration file

The package should just work if called without any options. Therefore, expansion will be switched off by default if output is DVI, since it isn't likely that expanded fonts are available. (This grows more important as modern TeX systems have switched to the pdfTeX engine even for DVI output, so that the user might not even be aware of the fact that she's running pdfTeX.)

```
4198 \MT@protrusiontrue
4199 〈/package〉
4200 (*pdftex-def|luatex-def)
4201 \ifnum\pdfoutput<\@ne \else
```

Also, we only enable expansion by default if pdfTeX can expand the fonts automatically.

```
4202 (pdftex-def) \MT@requires@pdftex4{
4203   \MT@expansiontrue
4204 (pdftex-def) \MT@autotrue
4205 (pdftex-def) }\relax
4206 \fi
4207 (luatex-def)\MT@autotrue
4208 (/pdftex-def|luatex-def)
```

The main configuration file will be loaded before processing the package options. However, the config option must of course be evaluated beforehand. We also have to define a no-op for the regular option processing later.

```
4209 (*package)
4210 \define@key{MT}{config}[]{\relax}
4211 \def\MT@get@config#1config=#2,#3\@nil{%
4212   \MT@ifempty{#2}{%
4213     {\def\MT@config@file{\MT@MT.cfg}}%
4214     {\def\MT@config@file{#2.cfg}}%
4215   }%
4216 \expandafter\expandafter\expandafter\MT@get@config
4217   \csname opt@\currname.\@currext\endcsname,config,\@nil}
```

Load the file.

```
4218 \IfFileExists{\MT@config@file}{%
4219   \MT@info@nl{Loading configuration file \MT@config@file}%
4220   \MT@begin@catcodes
4221     \let\MT@begin@catcodes\relax
4222     \let\MT@end@catcodes\relax
4223     \let\MT@curr@file\MT@config@file
4224     \input{\MT@config@file}%
4225   \endgroup
4226 }{\MT@warning@nl{%
4227   Could not find configuration file `~\MT@config@file'!\MessageBreak
4228   This will almost certainly cause undesired results.\MessageBreak
4229   Please fix your installation}%
4230 }
```

\MT@check@active@set We have to make sure that font sets are active. If the user didn't activate any, we use those sets declared by \DeclareMicrotypeSetDefault (this is done at the end of the preamble).

```
4231 \def\MT@check@active@set#1{%
4232   \MT@ifdefined@n@TF{\MT@#1@setname}{%
4233     \MT@info@nl{Using \nameuse{\MT@abbr@#1} set `~\nameuse{\MT@#1@setname}'}%
4234   }{%
4235     \MT@ifdefined@n@TF{\MT@default@#1@set}{%
4236       \MT@glet@nn{\MT@#1@setname}{\MT@default@#1@set}%
4237       \MT@info@nl{Using default \nameuse{\MT@abbr@#1} set `~\nameuse{\MT@#1@setname}'}%
4238     }{%
```

If no default font set has been declared in the main configuration file, we use the (empty, non-existent) set ‘`\empty`’, and issue a warning.

```

4239   \MT@gdef@n{\MT@#1@setname}{\empty}%
4240   \MT@warning@n{No \nameuse{\MT@abbr@#1} set chosen, no default set declared.%
4241           \MessageBreak Using empty set}%
4242   }%
4243 }%
4244 }
```

14.4.4 Hook for other packages

`\Microtype@Hook`

This hook may be used by font package authors, e.g., to declare alias fonts. If it is defined, it will be executed here, i.e., after the main configuration file has been loaded, and before the package options are evaluated.

This hook was needed in versions prior to 1.9a to overcome the situation that (1) the `microtype` package should be loaded after all font defaults have been set up (hence, using `\@ifpackageloaded` in the font package was not viable), and (2) checking `\AtBeginDocument` could be too late, since fonts might already have been loaded, and consequently set up, in the preamble. With the new deferred setup, one could live without this command, however, it remains here since it's simpler than testing whether the package was loaded both in the preamble as well as at the beginning of the document (which is what one would have to do).

Package authors should check whether the command is already defined so that existing definitions by other packages aren't overwritten. Example:

```

\def\MinionPro@MT@Hook{\DeclareMicrotypeAlias{MinionPro-LF}{MinionPro}}%
\@ifpackageloaded{microtype}%
  \MinionPro@MT@Hook%
  {\@ifundefined{Microtype@Hook}%
    {\let\Microtype@Hook\MinionPro@MT@Hook}%
    {\g@addto@macro\Microtype@Hook{\MinionPro@MT@Hook}}}}
```

`\MicroType@Hook` with a capital T (which only existed in version 1.7) is provided for compatibility reasons. At some point in the future, it will no longer be available, hence it should not be used.

```

4245 \MT@ifdefined@c@T\MicroType@Hook{\MT@warning{%
4246   Command \string\MicroType@Hook\space is deprecated.\MessageBreak%
4247   Use \string\Microtype@Hook\space instead}\MicroType@Hook%
4248 \MT@ifdefined@c@T\Microtype@Hook\Microtype@Hook}
```

14.4.5 Changing options later

`\microtypesetup`

Inside the preamble, `\microtypesetup` accepts the same options as the package (unless `defersetup=false`). In the document body, it accepts the options: `protrusion`, `expansion`, `activate`, `tracking`, `spacing` and `kerning`. Specifying font sets is not allowed.

```

4249 \def\microtypesetup{\setkeys{MT}}
4250 \MT@addto@setup{\def\microtypesetup#1{\setkeys{MTX}{#1}\selectfont}%
4251 \package}
4252 {*pdftex-def|luatex-def|xetex-def}
4253 \def\MT@define@optionX#1#2{%
4254   \define@key{MTX}{#1}[true]{%
4255     \edef@\tempb{\csname MT@rbba@#1\endcsname}%
4256     \MT@map@clist@n{##1}{%
4257       \KV@sp@def\MT@val{####1}%
4258       \MT@ifempty\MT@val\relax{%
```

```
4259     \@tempcnda=\m@ne
4260     \MT@ifstreq\MT@val{true}{%
```

Enabling micro-typography in the middle of the document is not allowed if it has been disabled in the package options since fonts might already have been loaded and hence wouldn't be set up.

```
4261     \MT@checksetup{\#1}{%
4262         \@tempcnda=\csname MT@\@tempb @level\endcsname
4263         \MT@vinfo{Enabling #1
4264             (@level \number\csname MT@\@tempb @level\endcsname)\on@line}%
4265         }%
4266     }{%
4267         \MT@ifstreq\MT@val{false}{%
4268             \@tempcnda=\z@
4269             \MT@vinfo{Disabling #1\on@line}%
4270         }{%
4271             \MT@ifstreq\MT@val{compatibility}{%
4272                 \MT@checksetup{\#1}{%
4273                     \@tempcnda=\@ne
4274                     \MT@let@nc{\MT@\@tempb @level}\@ne
4275                     \MT@vinfo{Setting #1 to level 1\on@line}%
4276                 }%
4277             }{%
4278                 \MT@ifstreq\MT@val{nocompatibility}{%
4279                     \MT@checksetup{\#1}{%
4280                         \@tempcnda=\tw@%
4281                         \MT@let@nc{\MT@\@tempb @level}\tw@
4282                         \MT@vinfo{Setting #1 to level 2\on@line}%
4283                     }%
4284                     {\MT@error{Value `\\MT@val' for key `#1' not recognised}
4285                         {Use any of `true', `false', `compatibility' or
4286                         `nocompatibility'.}%
4287                     }%
4288                 }%
4289             }%
4290         }%
4291         \ifnum\@tempcnda>\m@ne
4292             #2\@tempcnda\relax
4293         \fi
4294     }%
4295 }%
4296 }%
4297 }
```

\MT@checksetup Test whether the feature wasn't disabled in the package options.

```
4298 \def\MT@checksetup#1{%
4299     \csname ifMT@\#1\endcsname
4300     \expandafter\@firstofone
4301 \else
4302     \MT@error{You cannot enable #1 if it was disabled\MessageBreak
4303                 in the package options}{Load microtype with #1 enabled.}%
4304     \expandafter\@gobble
4305 \fi
4306 }

4307 \MT@define@optionX{protrusion}\MT@protrudechars
4308 (/pdftex-def|luatex-def|xetex-def)
4309 (*pdftex-def|luatex-def)
4310 \MT@define@optionX{expansion}\MT@adjustspacing
```

\MT@protrudechars

```
4311 (*luatex-def)
4312 \MT@requires@luatex4{
4313     \let\pdfprotrudechars\protrudechars
4314     \let\pdfadjustspacing\adjustspacing
```

```

4315 } \relax
4316 (/luatex-def)
4317 \let\MT@protrudechars\pdfprotrudechars
4318 \let\MT@adjustspacing\pdfadjustspacing
4319 (/pdftex-def|luatex-def)
4320 (*xetex-def)
4321 \let\MT@protrudechars\XeTeXprotrudechars
4322 \define@key{MTX}{expansion}[true]{\MT@warning{Ignoring expansion setup}}
4323 (/xetex-def)

```

\MT@define@optionX@ The same for tracking, spacing and kerning, which do not have a compatibility level.

```

4324 (*pdftex-def|luatex-def)
4325 (pdftex-def) \MT@requires@pdftex6{
4326 (luatex-def) \MT@requires@luatex3{
4327   \def\MT@define@optionX@#1#2{%
4328     \define@key{MTX}{#1}[true]{%
4329       \MT@map@clist@n{##1}{%
4330         \KV@cs@p@def\MT@val{####1}%
4331       }{\MT@ifempty\MT@val\relax{%
4332         \tempcnta=\m@ne
4333         \MT@ifstreq\MT@val{true}{%
4334           \MT@checksetup{#1}{%
4335             \tempcnta=\@ne
4336             \MT@vinfo{Enabling #1\on@line}%
4337           }%
4338         }{%
4339           \MT@ifstreq\MT@val{false}{%
4340             \tempcnta=\z@
4341             \MT@vinfo{Disabling #1\on@line}%
4342             \MT@error{Value `~\MT@val' for key `#1' not recognised}%
4343               {Use either `true' or `false'}%
4344             }%
4345           }%
4346         \ifnum\tempcnta>\m@ne
4347           #2\relax
4348         \fi
4349       }%
4350     }%
4351   }%
4352 }

```

We cannot simply let \MT@tracking relax, since this may select the already letter-spaced font instance.

```

4353   \MT@define@optionX@{tracking}{\ifnum\tempcnta=\z@ \let\MT@tracking\MT@set@tr@zero
4354                                         \else \let\MT@tracking\MT@tracking@ \fi}
4355 (pdftex-def) \MT@define@optionX@{spacing}{\pdfadjustinterwordglue\tempcnta}
4356 (pdftex-def) \MT@define@optionX@{kerning}{\pdfprependkern\tempcnta
4357 (pdftex-def)                                         \pdfappendkern\tempcnta}
4358 }%
4359 (/pdftex-def|luatex-def)
4360 (*pdftex-def|luatex-def|xetex-def)

```

Disable for older pdfTeX versions and for XeTeX and LuaTeX.

```

4361 \define@key{MTX}{tracking}[true]{\MT@warning{Ignoring tracking setup}}
4362 (luatex-def)
4363 \define@key{MTX}{kerning}[true]{\MT@warning{Ignoring kerning setup}}
4364 \define@key{MTX}{spacing}[true]{\MT@warning{Ignoring spacing setup}}
4365 (pdftex-def)
4366 \define@key{MTX}{activate}[true]{%
4367   \setkeys{MTX}{protrusion={#1}}%
4368 (pdftex-def|luatex-def) \setkeys{MTX}{expansion={#1}}%
4369 }%
4370 (/pdftex-def|luatex-def|xetex-def)

```

\MT@saved@setupfont Disable everything – may be used as a temporary work-around in case setting up fonts doesn't work under certain circumstances, but only until that specific problem is fixed. This is *undocumented*, as it completely deprives us of the possibility to act – we're blind and paralysed.

```
4371 <*package>
4372 \let\MT@saved@setupfont\MT@setupfont
4373 \define@key{MTX}{disable}[]{%
4374   \MT@info{Inactivate `MTOMT' package}%
4375   \let\MT@setupfont\relax
4376 }
4377 \define@key{MTX}{enable}[]{%
4378   \MT@info{Reactivate `MTOMT' package}%
4379   \let\MT@setupfont\MT@saved@setupfont
4380 }
4381 </package>
```

14.4.6 Processing the options

\MT@ProcessOptionsWithKV Parse options.

```
4382 <*package|letterspace>
4383 <plain>\MT@requires@latex1{
4384 \def\MT@ProcessOptionsWithKV#1{%
4385   \let\@tempc\relax
4386   \let\MT@temp\@empty
4387   <plain> \MT@requires@latex2{
4388     \MT@map@clist@c\@classoptionslist{%
4389       \def\CurrentOption{\#1}%
4390       \MT@ifdefined@n@T{KV@#1@}\expandafter\MT@getkey\CurrentOption=\@nil}{%
4391         \edef\MT@temp{\MT@temp,\CurrentOption,}%
4392         \expandtwoargs\removeelement\CurrentOption
4393         \@unusedoptionlist\@unusedoptionlist
4394       }%
4395     }%
4396     \edef\MT@temp{\noexpand\setkeys{#1}%
4397                   {\MT@temp\@optionlist{\@currname.\@currext}}}}%
```

eplain can handle package options.

```
4398 <*plain>
4399   }{\edef\MT@temp{\noexpand\setkeys{#1}%
4400             {\csname usepkg@options@\usepkg@pk@\endcsname}}}
4401 </plain>
4402 \MT@temp
4403 \MT@clear@options
4404 }
```

\MT@getkey For key=val in class options.

```
4405 \def\MT@getkey#1=#2\@nil{#1}
4406 \MT@ProcessOptionsWithKV{MT}
4407 <plain>}\relax
4408 </package|letterspace>
4409 <*package>
```

Now we can take the appropriate actions. We also tell the log file which options the user has chosen (in case it's interested).

```
4410 \MT@addto@setup{%
4411 \ifMT@draft
```

We disable most of what we've just defined in the 4411 lines above if we are running in draft mode.

```
4412 \MT@warning@nl{`draft' option active.\MessageBreak
4413           Disabling all micro-typographic extensions.\MessageBreak
```

```

4414           This might lead to different line and page breaks}%
4415   \let\MT@setupfont\relax
4416   \renewcommand*\LoadMicrotypeFile[1]{}%
4417   \renewcommand*\microtypesetup[1]{}%
4418   \renewcommand*\microtypecontext[1]{}%
4419   \renewcommand*\lsstyle{}%
4420 \else
4421   \MT@setup@PDF
4422   \MT@setup@copies

```

Fix the font sets.

```

4423   \MT@map@tlist@c\MT@font@sets\MT@fix@font@set
4424   \MT@setup@protrusion
4425   \MT@setup@expansion
4426   \MT@setup@tracking
4427   \MT@setup@warntacking
4428   \MT@setup@spacing
4429   \MT@setup@kerning
4430   \MT@setup@noligatures
4431 }
4432 (/package)

```

\MT@setup@PDF pdfTeX can create DVI output, too. However, both the DVI viewer and dvips need to find actual fonts. Therefore, expansion will only work if the fonts for different degrees of expansion are readily available.

Some packages depend on the value of \pdfoutput and will get confused if it is changed after they have been loaded. These packages are, among others: color, graphics, hyperref, crop, contour, pstricks and, as a matter of course, ifpdf. Instead of testing for each package (that's not our job), we only say that it was microtype that changed it. This must be sufficient!

```

4433 (*pdftex-def|luatex-def)
4434 \def\MT@setup@PDF{%
4435   \MT@info@n{Generating \ifnum\pdfoutput<\@ne DVI \else PDF \fi output}%
4436   \ifMT@opt@DVI\space (changed by \MT@MT)\fi}%
4437 }

```

\MT@setup@copies Working on font copies?

```

4438 \def\MT@setup@copies{%
4439   \ifx\MT@copy@font\relax\else \MT@info@n{Using font copies for contexts}\fi
4440 }
4441 (/pdftex-def|luatex-def)
4442 (*xetex-def)
4443 \let\MT@setup@PDF\relax
4444 \let\MT@setup@copies\relax
4445 (/xetex-def)

```

\MT@setup@protrusion Protrusion.

```

4446 (*pdftex-def|xetex-def|luatex-def)
4447 \def\MT@setup@protrusion{%
4448   \ifMT@protrusion
4449     \edef\MT@active@features{\MT@active@features,pr}%
4450     \MT@protrudechars\MT@pr@level
4451     \MT@info@n{Character protrusion enabled (level \number\MT@pr@level)}%
4452     \ifnum\MT@pr@factor=\MT@factor@default \else,\MessageBreak
4453     factor: \number\MT@pr@factor\fi
4454     \ifx\MT@pr@unit\empty \else,\MessageBreak unit: \MT@pr@unit\fi}%
4455     \MT@check@active@set{pr}%
4456   \else
4457     \let\MT@protrusion\relax
4458     \MT@info@n{No character protrusion}%
4459   \fi
4460 }
4461 (/pdftex-def|xetex-def|luatex-def)

```

\MT@setup@expansion For DVI output, the user must have explicitly passed the expansion option to the package.

```
4462 (*pdftex-def|luatex-def)
4463 \def\MT@setup@expansion{%
4464   \ifnum\pdfoutput<\@ne
4465     \ifMT@opt@expansion \else
4466       \MT@expansionfalse
4467     \fi
4468   \fi
4469   \ifMT@expansion
```

Set up the values for font expansion: if stretch has not been specified, we take the default value of 20.

```
4470   \ifnum\MT@stretch=\m@ne
4471     \let\MT@stretch\MT@stretch@default
4472   \fi
```

If shrink has not been specified, it will inherit the value from stretch.

```
4473   \ifnum\MT@shrink=\m@ne
4474     \let\MT@shrink\MT@stretch
4475   \fi
```

If step has not been specified, we will just set it to 1 for recent pdfTeX versions. My tests did not show much difference neither in compilation time (within the margin of error) nor in file size (less than 1% difference for *microtype.pdf* with step=1 compared to step=5). With older versions, we set it to min(stretch,shrink)/5, rounded off, minimum value 1.

```
4476   \ifnum\MT@step=\m@ne
4477   (*pdftex-def) \MT@requires@pdftex6{%
4478     \def\MT@step{1}%
4479   (*pdftex-def)
4480   }{%
4481     \ifnum\MT@stretch>\MT@shrink
4482       \ifnum\MT@shrink=\z@
4483         \tempcnta=\MT@stretch
4484       \else
4485         \tempcnta=\MT@shrink
4486       \fi
4487     \else
4488       \ifnum\MT@stretch=\z@
4489         \tempcnta=\MT@shrink
4490       \else
4491         \tempcnta=\MT@stretch
4492       \fi
4493     \fi
4494     \divide\tempcnta 5\relax
4495     \ifnum\tempcnta=\z@ \tempcnta=\@ne \fi
4496     \edef\MT@step{\number\tempcnta}%
4497   }%
4498 (*pdftex-def)
4499 \fi
4500 \ifnum\MT@step=\z@
4501   \MT@warning@nl{The expansion step cannot be set to zero.\MessageBreak
4502   Setting it to one}%
4503   \def\MT@step{1}%
4504 \fi
```

\MT@auto Automatic expansion of the font? This new feature of pdfTeX 1.20 makes the *hz* programme really usable. It must be either ‘autoexpand’ or empty (or ‘1000’ for older versions of pdfTeX). With LuaTeX, we just leave it empty, as there’s actually no difference – non-automatic font expansion doesn’t work anymore. In LuaTeX 1.0.6, the ‘autoexpand’ option seems to have been removed altogether and would

trigger an error.

```
4505 (luatex-def)    \let\MT@auto@\empty
4506 (pdftex-def)   \let\MT@auto@\empty
4507     \ifMT@auto
```

We turn off automatic expansion if output mode is DVI and we're running pdfTeX.

```
4508 (*pdftex-def)
4509     \MT@requires@pdftex4{%
4510         \ifnum\pdfoutput<\@ne
4511         \ifMT@opt@auto
4512             \MT@error{%
4513                 Automatic font expansion only works for PDF output.\MessageBreak
4514                 However, you are creating a DVI file}
4515                 {If you have created expanded fonts instances, remove `auto' from%
4516                  \MessageBreak the package options. Otherwise, you have to switch
4517                  off expansion\MessageBreak completely.}%
4518             \fi
4519             \MT@autofalse
4520         \else
4521             \def\MT@auto{autoexpand}%
4522         \fi
4523     }{%
4524         \MT@error{%
4525             The pdftex version you are using is too old for\MessageBreak
4526             automatic font expansion}%
4527             {If you have created expanded fonts instances, remove `auto' from\MessageBreak
4528                 the package options. Otherwise, you have to switch off expansion\MessageBreak
4529                 completely, or upgrade pdftex to version 1.20 or newer.}%
4530         \MT@autofalse
4531         \def\MT@auto{1000 }%
4532     }%
4533 (/pdftex-def)
4534     \else
4535 (*pdftex-def)
```

Also, if pdfTeX is too old.

```
4523     }{%
4524         \MT@error{%
4525             The pdftex version you are using is too old for\MessageBreak
4526             automatic font expansion}%
4527             {If you have created expanded fonts instances, remove `auto' from\MessageBreak
4528                 the package options. Otherwise, you have to switch off expansion\MessageBreak
4529                 completely, or upgrade pdftex to version 1.20 or newer.}%
4530         \MT@autofalse
4531         \def\MT@auto{1000 }%
4532     }%
4533 (/pdftex-def)
4534     \else
4535 (*pdftex-def)
```

No automatic expansion.

```
4536     \MT@requires@pdftex4\relax{%
4537         \def\MT@auto{1000 }%
4538     }%
4539 (/pdftex-def)
4540 (*luatex-def)
4541     \ifMT@opt@auto
4542         \MT@error{Non-automatic font expansion does not work with\MessageBreak
4543                     luatex}{Remove `auto=false' from the package options, or use pdftex.}%
4544     \fi
4545 (/luatex-def)
4546     \fi
```

Choose the appropriate macro for selected expansion.

```
4547     \ifMT@selected
4548         \let\MT@set@ex@codes\MT@set@ex@codes@s
4549     \else
4550         \let\MT@set@ex@codes\MT@set@ex@codes@n
4551     \fi
```

Filter out stretch=0, shrink=0, since it would result in a pdfTeX error.

```
4552     \ifnum\MT@stretch=\z@
4553     \ifnum\MT@shrink=\z@
4554         \MT@warning{nl}{%
4555             Both the stretch and shrink limit are set to zero.\MessageBreak
4556             Disabling font expansion}%
4557         \MT@expansionfalse
4558     \fi
```

```

4559   \fi
4560   \fi
4561 \ifMT@expansion
4562   \edef\MT@active@features{\MT@active@features,ex}%
4563   \MT@adjustspacing\MT@ex@level
4564   \MT@info@nl{\ifMT@auto A\else Non-a\fi utomatic font expansion enabled
4565   (level \number\MT@ex@level),\MessageBreak
4566   stretch: \number\MT@stretch, shrink: \number\MT@shrink,
4567   step: \number\MT@step, \ifMT@selected\else non-\fi selected}%

```

\MT@check@step Check whether stretch and shrink are multiples of step.

```

4568 \def\MT@check@step##1{%
4569   \otempcnta=\csname MT##1\endcsname
4570   \divide\otempcnta \MT@step
4571   \multiply\otempcnta \MT@step
4572   \ifnum\otempcnta=\csname MT##1\endcsname\else
4573     \MT@warning@nl{The ##1 amount is not a multiple of step.\MessageBreak
4574     The effective maximum ##1 is \the\otempcnta\space
4575     (step \number\MT@step)}%
4576   \fi
4577 }%
4578 \MT@check@step{stretch}%
4579 \MT@check@step{shrink}%
4580 \MT@check@active@set{ex}%

```

\showhyphens Inside \showhyphens, font expansion should be disabled. (Since 2017/01/10, the L^AT_EX format contains a different version for X_ET_EX, but since expansion doesn't work with X_ET_EX, we don't have to bother.) Since 2019/10/01, the command is robust.

```

4581 \MT@ifdefined@n@TF{showhyphens }{%
4582   \def\MT@temp##1##2{%
4583     \expandafter\CheckCommand\csname showhyphens \endcsname[1]{##1}%
4584     \DeclareRobustCommand\showhyphens[1]{##2}%
4585   }%
4586   \def\MT@temp##1##2{%
4587     \CheckCommand*\showhyphens[1]{##1}%
4588     \gdef\showhyphens##1##2{##2}%
4589   }%
4590   \MT@temp
4591   {\setbox0\vbox{\color@begingroup
4592     \everypar{}\parfillskip\z@skip
4593     \hsize\maxdimen\normalfont\pretolerance\m@ne\tolerance\m@ne
4594     \hbadness\z@\showboxdepth\z@\ ##1\color@endgroup}%
4595   {\setbox0\vbox{\color@begingroup\pdfadjustspacing\z@
4596     \everypar{}\parfillskip\z@skip
4597     \hsize\maxdimen\normalfont\pretolerance\m@ne\tolerance\m@ne
4598     \hbadness\z@\showboxdepth\z@\ ##1\color@endgroup}%
4599   \else
4600     \let\MT@expansion\relax
4601     \MT@info@nl{No font expansion}%
4602   \fi
4603 }
4604 (pdftex-def|luatex-def)
4605 (*xetex-def)
4606 \def\MT@setup@expansion{%
4607   \ifMT@expansion
4608     \ifMT@opt@expansion
4609       \MT@error{Font expansion does not work with xetex}
4610       {Use pdftex or luatex instead.}%
4611     \fi
4612   \fi
4613 }
4614 (/xetex-def)

```

\MT@setup@tracking Tracking, spacing and kerning.

```

4615 (*pdftex-def|luatex-def)
4616 (pdftex-def)\MT@requires@pdftex6{%
4617 (luatex-def)\MT@requires@luatex3{%
4618 \def\MT@setup@tracking{%
4619   \ifMT@tracking
4620     \edef\MT@active@features{\MT@active@features,tr}%
4621     \MT@info@nl{Tracking enabled}%
4622     \MT@check@active@set{tr}%

```

Enable protrusion for compensation at the line edges.

```

4623   \ifMT@protrusion\else\MT@protrudechars@ne\fi
4624   \else
4625     \let\MT@tracking\relax
4626     \MT@info@nl{No adjustment of tracking}%
4627   \fi
4628 }
4629 (/pdftex-def|luatex-def)

```

\MT@setup@spacing

```

4630 (*pdftex-def)
4631   \def\MT@setup@spacing{%
4632     \ifMT@spacing
4633       \edef\MT@active@features{\MT@active@features,sp}%
4634       \pdfadjustinterwordglue@ne
4635       \MT@info@nl{Adjustment of interword spacing enabled}%

```

The ragged2e package sets interword spaces to a fixed value without glue. microtype's modifications can therefore have undesired effects. Therefore, we issue a warning.

```

4636 \MT@with@package@T{ragged2e}{%
4637   \MT@warning@nl{You are using the `ragged2e' package.\MessageBreak
4638   Adjustment of interword spacing may lead to\MessageBreak
4639   undesired results when used with `ragged2e'.\MessageBreak
4640   In this case, disable the `spacing' option}%
4641 }
4642 \MT@check@active@set{sp}%
4643 \else
4644   \let\MT@spacing\relax
4645   \MT@info@nl{No adjustment of interword spacing}%
4646 \fi
4647 }

```

\MT@setup@spacing@check Warning if \nonfrenchspacing is active, since space factors will be ignored with \pdfadjustinterwordglue>0. Why 1500? Because some packages redefine \frenchspacing.¹⁵

```

4648 \def\MT@setup@spacing@check{%
4649   \ifMT@spacing
4650     \ifMT@babel \else
4651       \ifnum\sfcodes`.>1500
4652         \MT@ifstreq\MT@sp@context{nonfrench}\relax{%
4653           \MT@warning@nl{%
4654             \string\nonfrenchspacing\space is active. Adjustment of\MessageBreak
4655             interword spacing will disable it. You might want\MessageBreak
4656             to add `@\backslashchar\MT@MT context{spacing=nonfrench}'\MessageBreak
4657             to your preamble}%
4658         }%
4659       \fi
4660     \fi
4661   \fi
4662 }

```

¹⁵ Cf. the c.t.t. thread '\frenchspacing with AMS packages and babel', started by Philipp Lehman on 16 August 2005, MID: dd tcbaj\$rob\$1@online.de

```
\MT@setup@kerning
```

```
4663 \def\MT@setup@kerning{%
4664   \ifMT@kerning
4665     \edef\MT@active@features{\MT@active@features,kn}%
4666     \pdfprependkern\@ne
4667     \pdfappendkern\@ne
4668     \MT@info@nl{Adjustment of character kerning enabled}%
4669     \MT@check@active@set{kn}%
4670   \else
4671     \let\MT@kerning\relax
4672     \MT@info@nl{No adjustment of character kerning}%
4673   \fi
4674 }
4675 (/pdftex-def)
```

\MT@error@doesnt@work If pdf_{TEX} is too old, we disable tracking, spacing and kerning, and throw an error message. We also switch the features off for Lua_{TEX} and X_ETEX.

```
4676 (pdftex-def|luatex-def){}
4677 (*luatex-def)
4678 \def\MT@setup@tracking{%
4679   \ifMT@tracking
4680     \MT@error{The tracking feature only works with luatex 0.62\MessageBreak
4681       or newer. Switching it off}{Upgrade luatex.}%
4682     \MT@trackingfalse
4683     \MT@let@nc{\MT@tracking}\relax
4684   \else
4685     \MT@info@nl{No adjustment of tracking (luatex too old)}%
4686   \fi
4687 }
4688 (/luatex-def)
4689 (*pdftex-def|xetex-def|luatex-def)
4690 \def\MT@error@doesnt@work#1{%
4691   \csname ifMT@#1\endcsname
4692   \MT@error{The #1 feature only works with pdftex 1.40\MessageBreak
4693     or newer. Switching it off}{Upgrade pdftex.}%
4694   (pdftex-def) {Upgrade pdftex.}%
4695   (luatex-def|xetex-def) {Use pdftex instead.}%
4696   \csname MT@#1false\endcsname
4697   \MT@let@nc{\MT@#1}\relax
4698   \else
4699     \MT@info@nl{No adjustment of #1}%
4700   (pdftex-def) \space(pdftex too old)%
4701   }%
4702   \fi
4703 }
4704 }
4705 (pdftex-def|xetex-def) \def\MT@setup@tracking{\MT@error@doesnt@work{tracking}}
4706 \def\MT@setup@kerning {\MT@error@doesnt@work{kerning}}
4707 \def\MT@setup@spacing {\MT@error@doesnt@work{spacing}}
4708 (pdftex-def)
4709 (/pdftex-def|xetex-def|luatex-def)
```

```
\MT@setup@warntracking
```

```
4710 (letterspace)\MT@addto@setup
4711 (pdftex-def|luatex-def)\def\MT@setup@warntracking
```

\MT@warn@tracking@DVI With pdf_{TEX}, we issue a warning, when letterspacing in DVI mode, since it will probably not work. We also switch on protrusion if it isn't already, to compensate for the letterspacing kerns.

```
4712 (*pdftex-def|luatex-def|letterspace)
4713 {%
4714 (*pdftex-def|letterspace)
4715 \ifnum\pdfoutput<\@ne
4716   \def\MT@warn@tracking@DVI{%
```

```

4717 (letterspace)      \MT@pdf@or@lua{%
4718   \MT@warning@nl{%
4719     You are using tracking/letterspacing in DVI mode.\MessageBreak
4720     This will probably not work, unless the post-\MessageBreak
4721     processing program (dvips, dvipdfm(x), ...) is\MessageBreak
4722     able to create the virtual fonts on the fly}%
4723 (letterspace)      }\relax
4724   \MT@glet\MT@warn@tracking@DVI\relax
4725 }%
4726 \else
4727 (pdftex-def|letterspace)
4728   \def\MT@warn@tracking@DVI{%
4729     \ifnum\pdfprotrudechars<\@ne \global\pdfprotrudechars\@ne \fi
4730     \MT@glet\MT@warn@tracking@DVI\relax
4731   }%
4732 (pdftex-def|letterspace) \fi
4733 \ifnum\MT@letterspace=\@ne
4734   \let\MT@letterspace\MT@letterspace@default
4735 \else
4736   \MT@ls@too@large\MT@letterspace
4737 \fi
4738 }
4739 (pdftex-def|luatex-def|letterspace)
4740 (xetex-def)\let\MT@setup@warntracking\relax

```

\MT@setup@noligatures \DisableLigatures is only admissible in the preamble, therefore we can now disable the corresponding macro, if it was never called.

```

4741 (pdftex-def|luatex-def)
4742 \def\MT@setup@noligatures{%
4743 (pdftex-def) \MT@requires@pdftex5{%
4744   \ifMT@noligatures \else
4745     \let\MT@noligatures\relax
4746   \fi
4747 (pdftex-def) }\relax
4748 }
4749 (pdftex-def|luatex-def)
4750 (xetex-def)\let\MT@setup@noligatures\relax

```

Remove the leading comma in \MT@active@features, and set the document switch to true.

```

4751 (*package)
4752 \MT@addto@setup{%
4753   \ifx\MT@active@features\empty \else
4754     \edef\MT@active@features{\expandafter\gobble\MT@active@features}%
4755   \fi
4756   \MT@documenttrue
4757 }

```

\MT@set@babel@context Interaction with babel.

```

4758 \def\MT@set@babel@context#1{%
4759   \MT@ifdefined@n@TF{\MT@babel@#1}{%
4760     \MT@vinfo{*** Changing to language context `#1'\MessageBreak\on@line}%
4761     \expandafter\MT@exp@one@n\expandafter\microtypecontext
4762     \csname MT@babel@#1\endcsname
4763   }{%
4764     \microtypecontext{protrusion=,expansion=,spacing=,kerning=}%
4765   }%
4766 }

```

\MT@shorthandoff Active characters can only be switched off if babel isn't loaded after microtype.

```

4767 \@ifpackageloaded{babel}{%
4768   \def\MT@shorthandoff#1#2{%
4769     \MT@info@nl{Switching off #1 babel's active characters (#2)}%
4770     \shorthandoff{#2}}

```

```

4771 }{
4772   \def\MT@shorthandoff#1#2{%
4773     \MT@error{You must load `babel' before `^{\MT@MT}'}
4774     {Otherwise, `^{\MT@MT}' cannot switch off #1 babel's\MessageBreak
4775      active characters.}}
4776 }

```

We patch the language switching commands to enable language-dependent setup.

```

4777 \MT@addto@setup{%
4778   \ifMT@babel
4779     \@ifpackageloaded{babel}{%
4780       \MT@info@nl{Redefining babel's language switching commands}%
4781       \let\MT@orig@select@language\select@language
4782       \def\select@language#1{%
4783         \MT@orig@select@language{#1}%
4784         \MT@set@babel@context{#1}%
4785       }%
4786       \let\MT@orig@foreign@language\foreign@language
4787       \def\foreign@language#1{%
4788         \MT@orig@foreign@language{#1}%
4789         \MT@set@babel@context{#1}%
4790       }%
4791     }\ifMT@kerning

```

Disable French babel's active characters.

```

4792   \MT@if@false
4793     \MT@with@babel@and@T{french} \MT@if@true
4794     \MT@with@babel@and@T{frenchb} \MT@if@true
4795     \MT@with@babel@and@T{francais} \MT@if@true
4796     \MT@with@babel@and@T{canadien} \MT@if@true
4797     \MT@with@babel@and@T{acadian} \MT@if@true
4798   \ifMT@if@{\MT@shorthandoff{French}{::!?\}}\fi

```

Disable Turkish babel's active characters.

```

4799   \MT@if@false
4800     \MT@with@babel@and@T{turkish} \MT@if@true
4801     \ifMT@if@{\MT@shorthandoff{Turkish}{::!=}\fi
4802   \fi

```

In case babel was loaded before microtype:

```

4803   \MT@set@babel@context\languagename
4804 }{%
4805   \MT@warning@nl{You did not load the babel package.\MessageBreak
4806     The `babel' option won't have any effect}%
4807 }%
4808 \fi
4809 }

```

Now we close the \fi from \ifMT@draft.

```
4810 \MT@addto@setup{\fi}
```

Set up the current font, most likely the normal font. This has to come after all of the setup (including anything from the preamble) has been dealt with.

```
4811 \selectfont
```

\MT@curr@file This is the current file (hopefully with the correct extension).

```

4812 \edef\MT@curr@file{\jobname.tex}
4813 {/package}

```

Finally, execute the setup macro at the end of the preamble, and empty it (the combine class calls it repeatedly).

```

4814 {*package|letterspace}
4815 {plain}\MT@requires@lateX1{
4816 \AtBeginDocument{\MT@setup@ \MT@glet\MT@setup@\empty}
4817 {plain}}\relax

```

4818 *(/package|letterspace)*

Must come at the very, very end.

4819 *(package)*\MT@ifdefined@c@T\MT@setup@spacing@check

4820 *(package)* {\AtBeginDocument{\MT@setup@spacing@check}}

Restore catcodes.

4821 *(package|letterspace)*\MT@restore@catcodes

That was that.

15 Configuration files

Let's now write the font configuration files.

4822 *(*config)*

4823

15.1 Font sets

We first declare some sets in the main configuration file.

```

4824 (*m-t)
4825 %%%
4826 %%% FONT SETS
4827
4828 \DeclareMicrotypeSet{all}
4829 { }
4830
4831 \DeclareMicrotypeSet{allmath}
4832 { encoding = {OT1,T1,T2A,LY1,OT4,QX,T5,EU1,EU2,TU,TS1,OML,OMS,U} }
4833
4834 \DeclareMicrotypeSet{alltext}
4835 { encoding = {OT1,T1,T2A,LY1,OT4,QX,T5,TS1,EU1,EU2,TU} }
4836
4837 \DeclareMicrotypeSet{allmath-nott}
4838 { encoding = {OT1,T1,T2A,LY1,OT4,QX,T5,EU1,EU2,TU,TS1,OML,OMS,U},
4839   family = {rm*,sf*}
4840 }
4841
4842 \DeclareMicrotypeSet{alltext-nott}
4843 { encoding = {OT1,T1,T2A,LY1,OT4,QX,T5,TS1,EU1,EU2,TU},
4844   family = {rm*,sf*}
4845 }
4846
4847 \DeclareMicrotypeSet{basicmath}
4848 { encoding = {OT1,T1,T2A,LY1,OT4,QX,T5,EU1,EU2,TU,OML,OMS},
4849   family = {rm*,sf*},
4850   series = {md*},
4851   size = {normalsize,footnotesize,small,large}
4852 }
4853
4854 \DeclareMicrotypeSet{basictext}
4855 { encoding = {OT1,T1,T2A,LY1,OT4,QX,T5,EU1,EU2,TU},
4856   family = {rm*,sf*},
4857   series = {md*},
4858   size = {normalsize,footnotesize,small,large}
4859 }
4860
4861 \DeclareMicrotypeSet{smallcaps}
4862 { encoding = {OT1,T1,T2A,LY1,OT4,QX,T5,TS1,EU1,EU2,TU},
4863   shape = {sc*,si,scit}
4864 }
4865
4866 \DeclareMicrotypeSet{footnotesize}
4867 { encoding = {OT1,T1,T2A,LY1,OT4,QX,T5,TS1,EU1,EU2,TU},
4868   size = {-small}
4869 }
4870
4871 \DeclareMicrotypeSet{scriptsize}
4872 { encoding = {OT1,T1,T2A,LY1,OT4,QX,T5,TS1,EU1,EU2,TU},

```

```

4873     size      = {-footnotesize}
4874 }
4875
4876 \DeclareMicrotypeSet{normalfont}
4877   { font = *//*/*/* }
4878

```

The default sets.

```

4879 %% -----
4880 %% DEFAULT SETS
4881
4882 \DeclareMicrotypeSetDefault[protrusion]{alltext}
4883 \DeclareMicrotypeSetDefault[expansion] {basictext}
4884 \DeclareMicrotypeSetDefault[spacing]   {basictext}
4885 \DeclareMicrotypeSetDefault[kerning]  {alltext}
4886 \DeclareMicrotypeSetDefault[tracking] {smallcaps}
4887

```

15.2 Font variants and aliases

```

4888 %% -----
4889 %% FONT VARIANTS AND ALIASES

```

These are the variants I happen to be using (expert encoding, oldstyle numerals, swashes, alternative, display, inferior and superior numerals):

```

4890
4891 \DeclareMicrotypeVariants{x,j,w,a,d,0,1}

```

Other candidates: 2 (proportional digits), e (engraved), f (Fraktur), g (small text), h (shadow), l (outline), n (informal), p (ornaments), r (roman), s (sans serif), t (typewriter). I've omitted them since they seem hardly be used and/or they are actually more than just a variant, i.e., they shouldn't share a file.

Fonts that are ‘the same’: The `fontspec` package will set `lmr` as the default font, whose declarations for EU1/EU2/TU encoding are in `mt-LatinModernRoman.cfg`. Since 2016/12/03, the default encoding with X_ET_EX and LuaT_EX in the L_AT_EX format is TU, even if `fontspec` is not loaded.

```

4892
4893 \MT@if@false
4894 \ifx\UnicodeEncodingName@\undefined\else
4895   \MT@ifstreq{\encodingdefault}{\UnicodeEncodingName}\MT@if@true\relax
4896 \fi
4897 \ifMT@fontspec\MT@if@true\fi
4898 \ifMT@if@0
4899 \DeclareMicrotypeAlias{lmr}{Latin Modern Roman}
4900 \else
4901 \DeclareMicrotypeAlias{lmr}{cmr}      % lmodern
4902 \fi

```

The Latin Modern fonts, the virtual fonts from the `ae` and `zefonts`, and the `eco` and `hfoldsty` packages (oldstyle numerals) all inherit the (basic) settings from Computer Modern Roman. Some of them are in part overwritten later. We mustn’t forget the Latin Modern math fonts.

```

4903 \DeclareMicrotypeAlias{lmsy}{cmsy}
4904 \DeclareMicrotypeAlias{lmm}{cmm}
4905 \DeclareMicrotypeAlias{aer}{cmr}      % ae
4906 \DeclareMicrotypeAlias{zer}{cmr}      % zefonts
4907 \DeclareMicrotypeAlias{cmor}{cmr}     % eco
4908 \DeclareMicrotypeAlias{hfor}{cmr}     % hfoldsty

```

The packages `pxfonts` and `txfonts` fonts inherit Palatino and Times settings respectively, also the T_EX Gyre fonts Pagella and Termes (formerly: `qfonts`).

```
4909 \DeclareMicrotypeAlias{pxr}{ppl} % pxfonts
4910 \DeclareMicrotypeAlias{qpl}{ppl} % TeX Gyre Pagella (formerly: qfonts/QuasiPalatino)
```

The ‘FPL Neu’ fonts, a ‘re-implementation’ of Palatino.

```
4911 \DeclareMicrotypeAlias{fp9x}{pplx} % FPL Neu
4912 \DeclareMicrotypeAlias{fp9j}{pplj} % "
```

The newpx package, a replacement for pxfonts.

```
4913 \DeclareMicrotypeAlias{zpllf}{ppl} % newpxtext
4914 \DeclareMicrotypeAlias{zplosf}{ppl} % "
4915 \DeclareMicrotypeAlias{zpltlf}{ppl} % "
4916 \DeclareMicrotypeAlias{zpltosf}{ppl} % "
4917 \DeclareMicrotypeAlias{txr}{ptm} % txfonts
```

The newtx package, a replacement for txfonts.

```
4918 \DeclareMicrotypeAlias{ntxlf}{ptm} % newtxtext
4919 \DeclareMicrotypeAlias{ntxosf}{ptm} % "
4920 \DeclareMicrotypeAlias{ntxtlf}{ptm} % "
4921 \DeclareMicrotypeAlias{ntxtosf}{ptm} % "
```

The tempora package.

```
4922 \DeclareMicrotypeAlias{Tempora-TLF}{ptm} % tempora
4923 \DeclareMicrotypeAlias{Tempora-T0sF}{ptm} % "
4924 \DeclareMicrotypeAlias{qtm}{ptm} % TeX Gyre Termes (formerly: qfonts/QuasiTimes)
```

The OpenType versions:

```
4925 \DeclareMicrotypeAlias{TeX Gyre Pagella}{Palatino Linotype}
4926 \DeclareMicrotypeAlias{Palatino LT Std}{Palatino Linotype}
4927 \DeclareMicrotypeAlias{Palatino}{Palatino Linotype}
4928 \DeclareMicrotypeAlias{Asana Math}{Palatino Linotype}
```

More Times variants, to be checked: pns, mns (TimesNewRomanPS); mnt (Times-NewRomanMT, TimesNRSevenMT), mtm (TimesSmallTextMT); pte (TimesEuropa); ptt (TimesTen); TimesEighteen; TimesModernEF.

The eulervm package virtually extends the Euler fonts.

```
4929 \DeclareMicrotypeAlias{zeur}{eur} % Euler VM
4930 \DeclareMicrotypeAlias{zeus}{eus} % "
```

MicroPress’s Charter version (chmath).

```
4931 \DeclareMicrotypeAlias{chr}{bch} % CH Math
```

The XCharter package extends the Charter fonts.

```
4932 \DeclareMicrotypeAlias{XCharter-TLF}{bch} % XCharter
4933 \DeclareMicrotypeAlias{XCharter-T0sF}{bch} % "
```

The mathdesign package provides math fonts matching Bitstream Charter and URW Garamond.

```
4934 \DeclareMicrotypeAlias{mdbch}{bch} % mathdesign/Charter
4935 \DeclareMicrotypeAlias{mdugm}{ugm} % mathdesign/URW Garamond
```

The garamondx package, an extension of URW Garamond, providing small caps and oldstyle figures.

```
4936 \DeclareMicrotypeAlias{zgmx}{ugm} % garamondx
4937 \DeclareMicrotypeAlias{zgmj}{ugm} % "
4938 \DeclareMicrotypeAlias{zgmi}{ugm} % "
4939 \DeclareMicrotypeAlias{zgmq}{ugm} % "
```

URW Letter Gothic is similar enough to Bitstream Letter Gothic to share the configuration.

```
4940 \DeclareMicrotypeAlias{ulg}{blg} % URW LetterGothic -> Bitstream LetterGothic12Pitch
```

Euro symbol fonts, to save some files.

```
4941 \DeclareMicrotypeAlias{zpeus}{zpeu} % Adobe Euro sans -> serif
4942 \DeclareMicrotypeAlias{eurosans}{zpeu} % Adobe Euro sans -> serif
4943 \DeclareMicrotypeAlias{euroitcs}{euroitc} % ITC Euro sans -> serif
4944
```

15.3 Interaction with babel

Contexts that are to be set when switching to a language.

```
4945 %% -----
4946 %% INTERACTION WITH THE `babel' PACKAGE
4947
4948 \DeclareMicrotypeBabelHook
4949   {english,UKenglish,british,USenglish,american}
4950   {kerning=, spacing=nonfrench}
4951
4952 \DeclareMicrotypeBabelHook
4953   {french,francais,acadian,canadien}
4954   {kerning=french, spacing=}
4955
4956 \DeclareMicrotypeBabelHook
4957   {turkish}
4958   {kerning=turkish, spacing=}
4959
```

15.4 Note on admissible characters

All printable ASCII characters are allowed in the settings, with the following exceptions (on the left hand side, the replacements on the right):

```
\ : \textbackslash
{ : \textbraceleft
} : \textbraceright
^ : \textasciicircum
% : \%
# : \#
```

Comma and equal sign must be guarded with braces ('{,}', '{=}') to keep `keyval` happy.

Character commands are allowed as far as they have been defined in the proper L^AT_EX way, that is, when they have been assigned a slot in the font encoding with `\DeclareTextSymbol` or `\DeclareTextComposite`. Characters defined via `\chardef` are also possible.

Ligatures and `\mathchardef` symbols have to be specified numerically. Of course, numerical identification is possible in any other case, too.

8-bit characters are also admissible, provided they have been declared in the input encoding file. They should, however, only be used in private configuration files, where the proper input encoding is guaranteed, or else in combination with the 'inputenc' key.

With X_ET_EX or LuaT_EX, in contrast, it is advisable to use the proper Unicode characters.

15.5 Character inheritance

First the lists of inheriting characters. We only declare those characters that are the same on *both* sides, i.e., not CE for O.

```
4960 (/m-t)
4961 (*m-t|zpeu|mvs)
4962 %% -----
4963 %% CHARACTER INHERITANCE
4964
```

```
4965 (/m-t|zpeu|mvs)
4966 (*m-t)
```

15.5.1 OT1

Glyphs that should possibly inherit settings on one side only: 012 ('fi' ligature), 013 ('fl'), 014 ('ffi'), 015 ('ffl'), \AE , \ae , \OE , \oe .

```
4967 \DeclareCharacterInheritance
4968 { encoding = OT1 }
4969 { f = {011}, % ff
4970   i = {\i},
4971   j = {\j},
4972   O = {\O},
4973   o = {\o}
4974 }
4975
```

15.5.2 T1

Candidates here: 028 ('fi'), 029 ('fl'), 030 ('ffi'), 031 ('ffl'), 156 ('IJ' ligature, since L^AT_EX 2005/12/01 accessible as \IJ), 188 ('ij', \ij), \AE , \ae , \OE , \oe .

```
4976 \DeclareCharacterInheritance
4977 { encoding = T1 }
4978 { A = {\`A,\^A,\~A,\^a,\~a,\r A,\k A,\u a},
4979   a = {\`a,\^a,\~a,\^a,\~a,\r a,\k a,\u a},
4980   C = {\^C,\c C,\v C},
4981   c = {\^c,\c c,\v c},
4982   D = {\v D,\DH},
4983   d = {\v d,\dj},
4984   E = {\`E,\^E,\~E,\^E,\~E,\k E,\v E},
4985   e = {\`e,\^e,\~e,\^e,\~e,\k e,\v e},
4986   f = {027}, % ff
4987   G = {\u G},
4988   g = {\u g},
4989   I = {\`I,\^I,\~I,\^I,\~I,\.I},
4990   i = {\`i,\^i,\~i,\^i,\~i,\i},
4991   j = {\j},
4992   L = {\L,\^L,\v L},
4993   l = {\l,\^l,\v l},
4994   N = {\^N,\~N,\v N},
4995   n = {\^n,\~n,\v n},
4996   O = {\O,\^O,\~O,\^O,\~O,\^O,\H O},
4997   o = {\o,\^o,\~o,\^o,\~o,\^o,\H o},
4998   R = {\^R,\v R},
4999   r = {\^r,\v r},
5000   S = {\^S,\c S,\v S,\SS},
5001   s = {\^s,\c s,\v s},
5002   T = {\c T,\v T},
5003   t = {\c t,\v t},
5004   U = {\`U,\^U,\~U,\^U,\~U,\H U,\r U},
5005   u = {\`u,\^u,\~u,\^u,\~u,\H u,\r u},
5006   Y = {\^Y,\~Y},
5007   y = {\^y,\~y},
5008   Z = {\^Z,\.Z,\v Z},
5009   z = {\^z,\.z,\v z}
```

The 'soft hyphen' often has reduced right side bearing so that it may already be protruded, hence no inheritance.

```
5010 % - = {127},
5011 }
5012
```

15.5.3 LY1

More characters: 008 ('fl'), 012 ('fi'), 014 ('ffi'), 015 ('ffl'), Æ, æ, œ, œ.

```

5013 \DeclareCharacterInheritance
5014   { encoding = LY1 }
5015   { A = {\`A,\^A,\~A,\^A,\r A},
5016     a = {\`a,\^a,\~a,\~a,\^a,\r a},
5017     C = {\c C},
5018     c = {\c c},
5019     D = {\DH},
5020     E = {\`E,\^E,\~E,\^E},
5021     e = {\`e,\^e,\~e,\^e},
5022     f = {011}, % ff
5023     I = {\`I,\^I,\~I,\^I},
5024     i = {\`i,\^i,\~i,\^i,\i},
5025     L = {\L},
5026     l = {\l},
5027     N = {\N},
5028     n = {\n},
5029     O = {\`O,\^O,\~O,\~O,\^O,\o},
5030     o = {\`o,\^o,\~o,\~o,\^o,\o},
5031     S = {\v S},
5032     s = {\v s},
5033     U = {\`U,\^U,\~U,\^U},
5034     u = {\`u,\^u,\~u,\^u},
5035     Y = {\Y,\^Y},
5036     y = {\y,\^y},
5037     Z = {\v Z},
5038     z = {\v z}
5039   }
5040

```

15.5.4 OT4

The Polish OT1 extension. More interesting characters here: 009 ('fk'), 012 ('fi'), 013 ('fl'), 014 ('ffi'), 015 ('ffl'), Æ, æ, œ, œ.

```

5041 \DeclareCharacterInheritance
5042   { encoding = OT4 }
5043   { A = {\k A},
5044     a = {\k a},
5045     C = {\C},
5046     c = {\c},
5047     E = {\k E},
5048     e = {\k e},
5049     f = {011}, % ff
5050     i = {\i},
5051     j = {\j},
5052     L = {\L},
5053     l = {\l},
5054     N = {\N},
5055     n = {\n},
5056     O = {\O,\^O},
5057     o = {\o,\^o},
5058     S = {\S},
5059     s = {\s},
5060     Z = {\Z,\.Z},
5061     z = {\z,\.z},
5062     \textquotedblleft = "FF
5063   }
5064

```

15.5.5 QX

The Central European QX encoding.¹⁶ Ligatures: 009 ('fk'), 012 ('fi'), 013 ('fl'), 014 ('ffi'), 015 ('ffl'), Æ, æ, œ, œ.

```

5065 \DeclareCharacterInheritance
5066   { encoding = QX }
5067   { A = {\`A,\`A,\^A,\~A,\\"A,\k A,\AA},
5068     a = {\`a,\`a,\^a,\~a,\\"a,\k a,\aa},
5069     C = {\`C,\c C},
5070     c = {\`c,\c c},
5071     D = {\DH},
5072     E = {\`E,\`E,\^E,\\"E,\k E},
5073     e = {\`e,\`e,\^e,\\"e,\k e},
5074     f = {011}, % ff
5075     I = {\`I,\`I,\^I,\\"I,\k I},
5076     i = {\`i,\`i,\^i,\\"i,\k i,\i},
5077     j = {\j},
5078     L = {\L},
5079     l = {\l},
5080     N = {\`N,\~N},
5081     n = {\`n,\~n},
5082     O = {\O,\`O,\^O,\\"O,\-O,\\"O},
5083     o = {\o,\`o,\^o,\\"o,\-o,\\"o},

```

The Romanian \textcommabelow accents are actually replacements for the \c variants, which had previously (and erroneously¹⁷) been included in QX encoding. They are still kept for backwards compatibility.

```

5084   S = {\`S,\c S,\textcommabelow S,\v S},
5085   s = {\`s,\c s,\textcommabelow s,\v s},
5086   T = {\c T,\textcommabelow T},
5087   t = {\c t,\textcommabelow t},
5088   U = {\`U,\`U,\^U,\\"U,\k U},
5089   u = {\`u,\`u,\^u,\\"u,\k u},
5090   Y = {\`Y,\\"Y},
5091   y = {\`y,\\"y},
5092   Z = {\`Z,\.Z,\v Z},
5093   z = {\`z,\.z,\v z},
5094   . = \textellipsis
5095 }
5096

```

15.5.6 T5

The Vietnamese encoding T5. It is so crowded with accented and double-accented characters that there is no room for any ligatures.

```

5097 \DeclareCharacterInheritance
5098   { encoding = T5 }
5099   { A = {\`A,\`A,\~A,\h A,\d A,\^A,\u A,
5100     \`Acircumflex,\`Acircumflex,\~Acircumflex,\hAcircumflex,\dAcircumflex,
5101     \`Abreve,\`Abreve,\~Abreve,\hAbreve,\dAbreve},
5102     a = {\`a,\`a,\~a,\h a,\d a,\^a,\u a,
5103     \`acircumflex,\`acircumflex,\~acircumflex,\hacircumflex,\dacircumflex,
5104     \`abreve,\`abreve,\~abreve,\habreve,\dabreve},
5105     D = {\DJ},
5106     d = {\dj},
5107     E = {\`E,\`E,\~E,\h E,\d E,\^E,
5108     \`Ecircumflex,\`Ecircumflex,\~Ecircumflex,\hEcircumflex,\dEcircumflex},
5109     e = {\`e,\`e,\~e,\h e,\d e,\^e,
5110     \`ecircumflex,\`ecircumflex,\~ecircumflex,\h\ecircumflex,\d\ecircumflex},

```

¹⁶ Contributed by Maciej Eder.

¹⁷ Cf. <http://tug.org/pipermail/tex-live/2008-August/017204.html>

```

5111   I = {'\I', '\I', '\I', '\h I', '\d I},
5112   i = {'\i', '\i', '\i', '\h i', '\d i', '\i},
5113   O = {'\O', '\O', '\O', '\h O', '\d O', '\^O', '\horn O,
5114     '\circumflex', '\circumflex', '\circumflex', '\h\circumflex', '\d\circumflex,
5115     '\ohorn', '\ohorn', '\ohorn', '\h\ohorn', '\d\ohorn},
5116   o = {'\o', '\o', '\o', '\h o', '\d o', '\^o', '\horn o,
5117     '\circumflex', '\circumflex', '\circumflex', '\h\circumflex', '\d\circumflex,
5118     '\ohorn', '\ohorn', '\ohorn', '\h\ohorn', '\d\ohorn},
5119   U = {'\U', '\U', '\U', '\h U', '\d U', '\horn U,
5120     '\uhorn', '\uhorn', '\uhorn', '\h\uhorn', '\d\uhorn},
5121   u = {'\u', '\u', '\u', '\h u', '\d u', '\horn u,
5122     '\uhorn', '\uhorn', '\uhorn', '\h\uhorn', '\d\uhorn},
5123   Y = {'\Y', '\Y', '\Y', '\h Y', '\d Y},
5124   y = {'\y', '\y', '\y', '\h y', '\d y}
5125 }
5126

```

15.5.7 EU1, EU2, TU

The EU1 (X_ET_EX), EU2 (LuaT_EX), and, since fontspec version 2.5, TU encodings are not well-defined in the sense that they don't contain a fixed number of glyphs, all of which must be present. OpenType fonts may contain thousands of glyphs, but we only define those that should be present in every font (basically T1). This inheritance list should be overridden by font-specific ones.

```

5127 \DeclareCharacterInheritance
5128 { encoding = {EU1,EU2,TU} }
5129 { A = {'\A', '\A', '\A', '\A', '\A', '\r A', '\k A', '\u A},
5130   a = {'\a', '\a', '\a', '\a', '\a', '\r a', '\k a', '\u a},
5131   C = {'\C', '\c C', '\v C},
5132   c = {'\c C', '\c c', '\v c},
5133   D = {'\D', '\DH'},
5134   d = {'\v D', '\dj'},
5135   E = {'\E', '\E', '\E', '\E', '\E', '\k E', '\v E},
5136   e = {'\e', '\e', '\e', '\e', '\e', '\k e', '\v e},
5137 %   f = {'\f_f}, % sometimes /f_f, sometimes /ff
5138   G = {'\u G},
5139   g = {'\u g},
5140   I = {'\I', '\I', '\I', '\I', '\I', '\.I},
5141   i = {'\i', '\i', '\i', '\i', '\i', '\.i},
5142 %
5143   j = {'\j},
5144   L = {'\L', '\L', '\v L},
5145   T = {'\T', '\T', '\v T},
5146   N = {'\N', '\N', '\v N},
5147   n = {'\n', '\n', '\v n},
5148   O = {'\O', '\O', '\O', '\O', '\O', '\H O},
5149   o = {'\o', '\o', '\o', '\o', '\o', '\H o},
5150   R = {'\R', '\v R},
5151   r = {'\r', '\v r},
5152   S = {'\S', '\c S', '\v S}, % \SS
5153   s = {'\s', '\c s', '\v s},
5154   T = {'\c T', '\v T},
5155   t = {'\c t', '\v t},
5156   U = {'\U', '\U', '\U', '\U', '\U', '\H U},
5157   u = {'\u', '\u', '\u', '\u', '\u', '\H u},
5158   Y = {'\Y', '\Y'},
5159   y = {'\y', '\y},
5160   Z = {'\Z', '\.Z', '\v Z},
5161   z = {'\z', '\.z', '\v z}
5162 }
5163 </m-t>

```

15.5.8 Euro symbols

Make Euro symbols settings simpler.

```

5164 (*zpeu)
5165 \DeclareCharacterInheritance
5166 { encoding = U,
5167   family = {zpeu,zpeus,eurosans} }
5168 { E = 128 }
5169
5170 (/zpeu)
5171 (*mvs)

```

Since 2006/05/11 (that is, one week after I've added these settings, after the package had been dormant for six years!), marvosym's encoding is (correctly) U instead of OT1.

```

5172 \DeclareCharacterInheritance
5173 { encoding = {OT1,U},
5174   family = mvs }
5175 { 164 = {099,100,101} } % \EURhv,\EURcr,\EURtm
5176
5177 (/mvs)

```

15.6 Tracking

By default, we only disable the ‘f*’ ligatures, for those fonts that have any. Thus, ligatures and especially kerning for all other characters will be retained.

```

5178 (*m-t)
5179 %% -----
5180 %% TRACKING/LETTERSPACING
5181
5182 \SetTracking
5183 [ name      = default,
5184   no ligatures = {f} ]
5185 { encoding    = {OT1,T1,T2A,LY1,OT4,QX,EU2,TU} }
5186 { }
5187

```

15.7 Font expansion

These are H n Th  Thành's original expansion settings. They are used for all fonts (until somebody shows mercy and creates font-specific settings).

```

5188 %% -----
5189 %% EXPANSION
5190
5191 \SetExpansion
5192 [ name      = default      ]
5193 { encoding = {OT1,OT4,QX,T1,LY1} }
5194 {
5195   A = 500,      a = 700,
5196   \AE = 500,    \ae = 700,
5197   B = 700,      b = 700,
5198   C = 700,      c = 700,
5199   D = 500,      d = 700,
5200   E = 700,      e = 700,
5201   F = 700,
5202   G = 500,      g = 700,
5203   H = 700,      h = 700,
5204   K = 700,      k = 700,
5205   M = 700,      m = 700,
5206   N = 700,      n = 700,
5207   O = 500,      o = 700,

```

```

5208   \OE = 500,    \oe = 700,
5209   P = 700,      p = 700,
5210   Q = 500,      q = 700,
5211   R = 700,
5212   S = 700,      s = 700,
5213   U = 700,      u = 700,
5214   W = 700,      w = 700,
5215   Z = 700,      z = 700,
5216   2 = 700,
5217   3 = 700,
5218   6 = 700,
5219   8 = 700,
5220   9 = 700
5221 }
5222

```

Settings for Cyrillic T2A encoding.¹⁸

```

5223 \SetExpansion
5224 [ name      = T2A ]
5225 { encoding = T2A }
5226 {
5227   A = 500,      a = 700,
5228   B = 700,      b = 700,
5229   C = 700,      c = 700,
5230   D = 500,      d = 700,
5231   E = 700,      e = 700,
5232   F = 700,
5233   G = 500,      g = 700,
5234   H = 700,      h = 700,
5235   K = 700,      k = 700,
5236   M = 700,      m = 700,
5237   N = 700,      n = 700,
5238   O = 500,      o = 700,
5239   P = 700,      p = 700,
5240   Q = 500,      q = 700,
5241   R = 700,
5242   S = 700,      s = 700,
5243   U = 700,      u = 700,
5244   W = 700,      w = 700,
5245   Z = 700,      z = 700,
5246   2 = 700,
5247   3 = 700,
5248   6 = 700,
5249   8 = 700,
5250   9 = 700,
5251   \CYRA = 500,    \cyra = 700,
5252   \CYRB = 700,    \cyrb = 700,
5253   \CYRV = 700,    \cyrv = 700,
5254   \CYRG = 700,    \cyrg = 700,
5255   \CYRD = 700,    \cyrd = 700,
5256   \CYRE = 700,    \cyre = 700,
5257   \CYRZH = 700,   \cyrzh = 700,
5258   \CYRZ = 700,    \cyrz = 700,
5259   \CYRI = 700,    \cyri = 700,
5260   \CYRISHRT = 700, \cyrishrt = 700,
5261   \CYRK = 700,    \cyrk = 700,
5262   \CYRL = 700,    \cyr1 = 700,
5263   \CYRM = 700,    \cymr = 700,
5264   \CYRN = 700,    \cyrn = 700,
5265   \CYRO = 500,    \cyro = 700,
5266   \CYRP = 700,    \cyrp = 700,
5267   \CYRR = 700,    \cyrr = 700,
5268   \CYRS = 700,    \cyrs = 700,
5269   \CYRT = 700,    \cyrt = 700,

```

```

5270      \CYRU = 700,      \cyrus = 700,
5271      \CYRF = 700,      \cyrfs = 700,
5272      \CYRH = 700,      \cyrhs = 700,
5273      \CYRC = 700,      \cyrcc = 700,
5274      \CYRCH = 700,      \cyrchc = 700,
5275      \CYRSH = 700,      \cyrshs = 700,
5276      \CYRSCH = 700,      \cyrshch = 700,
5277      \CYRHRDSN = 700,  \cyrhrdsn = 700,
5278      \CYRERY = 700,      \cyrerys = 700,
5279      \CYRSFTSN = 700,  \crysftsn = 700,
5280      \CYREREV = 700,     \cyrerevs = 700,
5281      \CYRYU = 700,      \cyrus = 700,
5282      \CYRYA = 700,      \carya = 700
5283  }
5284

```

T5 encoding does not contain \AE, \ae, \OE and \oe.

```

5285 \SetExpansion
5286   [ name      = T5 ]
5287   { encoding = T5 }
5288   {
5289     A = 500,      a = 700,
5290     B = 700,      b = 700,
5291     C = 700,      c = 700,
5292     D = 500,      d = 700,
5293     E = 700,      e = 700,
5294     F = 700,
5295     G = 500,      g = 700,
5296     H = 700,      h = 700,
5297     K = 700,      k = 700,
5298     M = 700,      m = 700,
5299     N = 700,      n = 700,
5300     O = 500,      o = 700,
5301     P = 700,      p = 700,
5302     Q = 500,      q = 700,
5303     R = 700,
5304     S = 700,      s = 700,
5305     U = 700,      u = 700,
5306     W = 700,      w = 700,
5307     Z = 700,      z = 700,
5308     2 = 700,
5309     3 = 700,
5310     6 = 700,
5311     8 = 700,
5312     9 = 700
5313   }
5314
5315  (/m-t)

```

15.8 Character protrusion

```

5316 %% -----
5317 %% PROTRUSION
5318

```

For future historians, Hàn Thê Thành's original settings (from protcode.tex, converted to microtype notation).

```

\SetProtrusion
[ name      = thanh ]
{ encoding = OT1 }
{
  A = {50,50},
  F = { ,50},
  J = {50, },

```

```

K = { ,50},
L = { ,50},
T = {50,50},
V = {50,50},
W = {50,50},
X = {50,50},
Y = {50,50},
k = { ,50},
r = { ,50},
t = { ,50},
v = {50,50},
w = {50,50},
x = {50,50},
y = {50,50},
. = { ,700},   {,}= { ,700},
: = { ,500},   ; = { ,500},
! = { ,200},   ? = { ,200},
( = {50, },    ) = { ,50},
- = { ,700},
\textendash = { ,300}, \textemdash = { ,200},
\textquotelleft = {700, }, \textquoteright = { ,700},
\textquotedblleft = {500, }, \textquotedblright = { ,500}
}

```

15.8.1 Normal

The default settings always use the most moderate value.

```

5319 <cfg-t>
5320 \SetProtrusion
5321 <m-t> [ name      = default ]

```

We also create configuration files for the fonts

- Bitstream Charter (NFSS code bch)

```
5322 <bch> [ name      = bch-default ]
```

- Bitstream Letter Gothic (blg)

```
5323 <blg> [ name      = blg-default ]
```

- Computer Modern Roman (cmr)

```
5324 <cmr> [ name      = cmr-default ]
```

- Adobe Garamond (pad, padx, padj)

```
5325 <pad> [ name      = pad-default ]
```

- Minion¹⁹ (pmnx, pmnj)

```
5326 <pmn> [ name      = pmnj-default ]
```

- Palatino (ppl, pplx, pplj)

```
5327 <ppl> [ name      = ppl-default ]
```

- Times (ptm, ptmx, ptmj)

```
5328 <ptm> [ name      = ptm-default ]
```

- URW Garamond (ugm)

¹⁹ Contributed by Harald Harders and Karl Karlsson.

```

5329 <ugm> [ name      = ugm-default ]
5330 <m-t|cmr|pmn> { }
5331 <bch|blg|pad|ugm> { encoding = OT1,
5332 <ppl|ptm>   { encoding = {OT1,OT4},
5333 <bch>     family = bch }
5334 <blg>     family = blg }
5335 <pad>     family = {pad,padx,padj} }
5336 <ppl>     family = {ppl,pplx,pplj} }
5337 <ptm>     family = {ptm,ptmx,ptmj} }
5338 <ugm>     family = ugm }
5339 {
5340 <m-t|bch|blg|cmr|pad|pmn|ppl|ptm>      A = {50,50},
5341 <ugm>      A = {50,100},
5342 <pad|ptm> \AE = {50, },
5343 <ugm> \AE = {150,50},
5344 <ugm> B = { ,50},
5345 <bch|pad|pmn|ugm>      C = {50, },
5346 <bch|pad|pmn> D = { ,50},
5347 <ugm> D = { ,70},
5348 <ugm> E = { ,50},
5349 <m-t|bch|cmr|pad|pmn|ptm>      F = { ,50},
5350 <ugm> F = { ,70},
5351 <bch|pad|pmn> G = {50, },
5352 <ugm> G = {50,50},
5353 <blg> I = {150,150},
5354 <m-t|cmr|pad|pmn|ppl|ptm|ugm>      J = {50, },
5355 <bch|blg> J = {100, },
5356 <!blg> K = { ,50},
5357 <blg> K = {50, },
5358 <m-t|bch|cmr|pad|pmn|ppl>      L = { ,50},
5359 <blg> L = { ,150},
5360 <ptm> L = { ,80},
5361 <ugm> L = { ,120},
5362 <bch|pad|pmn|ugm> O = {50,50},
5363 <pad> \OE = {50, },
5364 <ugm> \OE = {50,50},
5365 <blg> P = { ,100},
5366 <ugm> P = { ,50},
5367 <bch|pad|pmn> Q = {50,70},
5368 <ugm> Q = {50,50},
5369 <bch> R = { ,50},
5370 <ugm> R = { ,70},
5371 <m-t|bch|cmr|pad|pmn|ppl|ptm>      T = {50,50},
5372 <blg> T = {100,100},
5373 <ugm> T = {70,70},
5374 <m-t|bch|cmr|pad|pmn|ppl|ptm>      V = {50,50},
5375 <blg|ugm> V = {70,70},
5376 <m-t|bch|cmr|pad|pmn|ppl|ptm>      W = {50,50},
5377 <ugm> W = {70,70},
5378 <m-t|bch|cmr|pad|pmn|ppl|ptm>      X = {50,50},
5379 <ugm> X = {50,70},
5380 <m-t|bch|cmr|pad|pmn|ppl>      Y = {50,50},
5381 <blg|ptm|ugm> Y = {80,80},
5382 <ugm> Z = {50,50},
5383 <blg> f = {150,100},
5384 <blg> i = {150,150},
5385 <blg> j = {100,100},
5386 <m-t|bch|cmr|pad|pmn|ppl|ptm>      k = { ,50},
5387 <ugm> k = { ,70},
5388 <blg> l = {150,150},
5389 <pmn> l = { , -50},
5390 <pad|ppl> p = {50,50},
5391 <ugm> p = { ,50},
5392 <pad|ppl> q = {50, },
5393 <!blg> r = { ,50},

```

```

5394 ⟨blg⟩      r = {100, 80},
5395 ⟨cmr|pad|pmn⟩    t = { ,70},
5396 ⟨bch⟩      t = { ,50},
5397 ⟨blg⟩      t = {150, 80},
5398 ⟨ugm⟩      t = { ,100},
5399 ⟨m-t|bch|cmr|pad|pmn|ppl|ptm⟩    v = {50,50},
5400 ⟨blg⟩      v = {100,100},
5401 ⟨ugm⟩      v = {50,70},
5402 ⟨m-t|bch|cmr|pad|pmn|ppl|ptm⟩    w = {50,50},
5403 ⟨ugm⟩      w = {50,70},
5404 ⟨!blg⟩     x = {50,50},
5405 ⟨blg⟩      x = {100,100},
5406 ⟨m-t|bch|pad|pmn⟩      y = { ,50},
5407 ⟨blg⟩      y = { 50,100},
5408 ⟨cmr|ppl|ptm⟩      y = {50,70},
5409 ⟨ugm⟩      y = { ,70},

5410 ⟨cmr⟩      0 = { ,50},
5411 ⟨m-t⟩      1 = {50,50},
5412 ⟨bch|blg|pad|ptm|ugm⟩    1 = {150,150},
5413 ⟨cmr⟩      1 = {100,200},
5414 ⟨pmn⟩      1 = { ,50},
5415 ⟨ppl⟩      1 = {100,100},
5416 ⟨bch|cmr|pad|ugm⟩    2 = {50,50},
5417 ⟨blg⟩      2 = { ,100},
5418 ⟨bch|pmn⟩      3 = {50, },
5419 ⟨cmr|pad|ugm⟩    3 = {50,50},
5420 ⟨blg⟩      3 = {100, },
5421 ⟨m-t|pad⟩      4 = {50,50},
5422 ⟨bch⟩      4 = {100,50},
5423 ⟨blg⟩      4 = {100, },
5424 ⟨cmr|ugm⟩    4 = {70,70},
5425 ⟨pmn⟩      4 = {50, },
5426 ⟨ptm⟩      4 = {70, },
5427 ⟨cmr⟩      5 = { ,50},
5428 ⟨pad⟩      5 = {50,50},
5429 ⟨bch⟩      6 = {50, },
5430 ⟨cmr⟩      6 = { ,50},
5431 ⟨pad⟩      6 = {50,50},
5432 ⟨m-t⟩      7 = {50,50},
5433 ⟨bch|pad|pmn|ugm⟩    7 = {50,80},
5434 ⟨blg⟩      7 = {100,100},
5435 ⟨cmr|ptm⟩    7 = {50,100},
5436 ⟨ppl⟩      7 = { ,50},
5437 ⟨cmr⟩      8 = { ,50},
5438 ⟨bch|pad⟩      9 = {50,50},
5439 ⟨cmr⟩      9 = { ,50},
5440 ⟨m-t|cmr|pad|pmn|ppl|ptm|ugm⟩    . = { ,700},
5441 ⟨bch⟩      . = { ,600},
5442 ⟨blg⟩      . = {400,500},
5443 ⟨!blg⟩     {,} = { ,500},
5444 ⟨blg⟩      {,} = {300,400},
5445 ⟨m-t|cmr|pad|pmn|ppl|ptm|ugm⟩    : = { ,500},
5446 ⟨bch⟩      : = { ,400},
5447 ⟨blg⟩      : = {300,400},
5448 ⟨m-t|bch|pad|pmn|ptm⟩      ; = { ,300},
5449 ⟨blg⟩      ; = {200,300},
5450 ⟨cmr|ppl⟩    ; = { ,500},
5451 ⟨ugm⟩      ; = { ,400},
5452 ⟨!blg⟩     ! = { ,100},
5453 ⟨blg⟩      ! = {200,200},
5454 ⟨m-t|pad|pmn|ptm⟩      ? = { ,100},
5455 ⟨bch|cmr|ppl|ugm⟩    ? = { ,200},
5456 ⟨blg⟩      ? = {150,150},
5457 ⟨pmn⟩      " = {300,300},
5458 ⟨m-t|bch|cmr|pad|pmn|ppl⟩    @ = {50,50},

```

```

5459 ⟨ptm⟩      @ = {100,100},
5460 ⟨m-t|bch|blg|cmr|pad|pmn|ppl|ptm⟩      ~ = {200,250},
5461 ⟨ugm⟩      ~ = {300,350},
5462 ⟨pad|ppl|ptm⟩      & = {50,100},
5463 ⟨ugm⟩      & = { ,100},
5464 ⟨m-t|cmr|pad|pmn⟩      \% = {50,50},
5465 ⟨bch⟩      \% = { ,50},
5466 ⟨ppl|ptm⟩      \% = {100,100},
5467 ⟨ugm⟩      \% = {50,100},
5468 ⟨blg⟩      \# = {100,100},
5469 ⟨m-t|ppl|ptm|ugm⟩      * = {200,200},
5470 ⟨bch|pmn⟩      * = {200,300},
5471 ⟨blg⟩      * = {150,200},
5472 ⟨cmr|pad⟩      * = {300,300},
5473 ⟨m-t|cmr|ppl|ptm⟩      + = {250,250},
5474 ⟨bch⟩      + = {150,250},
5475 ⟨pad⟩      + = {300,300},
5476 ⟨blg|pmn⟩      + = {150,200},
5477 ⟨ugm⟩      + = {250,300},
5478 ⟨blg|ugm⟩      {=} = {200,200},
5479 ⟨m-t|pad|pmn|ptm⟩      ( = {100,   },   ) = {   ,200},
5480 ⟨bch|ugm⟩      ( = {200,   },   ) = {   ,200},
5481 ⟨cmr|blg⟩      ( = {300,   },   ) = {   ,300},
5482 ⟨ppl⟩      ( = {100,   },   ) = {   ,300},
5483 ⟨bch|pmn⟩      [ = {100,   },   ] = {   ,100},
5484 ⟨blg⟩      [ = {300,100},   ] = {   ,300},

5485 ⟨m-t|pad|pmn|ptm⟩      / = {100,200},
5486 ⟨bch⟩      / = { ,200},
5487 ⟨blg⟩      / = {300,300},
5488 ⟨cmr|ppl⟩      / = {200,300},
5489 ⟨ugm⟩      / = {100,300},
5490 ⟨m-t|ptm⟩      - = {500,500},
5491 ⟨bch|cmr|ppl⟩      - = {400,500},
5492 ⟨blg⟩      - = {300,400},
5493 ⟨pad⟩      - = {300,500},
5494 ⟨pmn⟩      - = {200,400},
5495 ⟨ugm⟩      - = {500,600},
5496 ⟨blg⟩      < = {200,100},   > = {100,200},
5497 ⟨blg⟩      _ = {150,250},
5498 ⟨blg⟩      | = {250,250},
5499 ⟨m-t|pmn⟩      \textendash = {200,200},   \textemdash = {150,150},
5500 ⟨bch⟩      \textendash = {200,300},   \textemdash = {150,250},
5501 ⟨cmr⟩      \textendash = {400,300},   \textemdash = {300,200},
5502 ⟨pad|ppl|ptm⟩      \textendash = {300,300},   \textemdash = {200,200},
5503 ⟨ugm⟩      \textendash = {250,300},   \textemdash = {250,250},

```

Why settings for left and right quotes? Because in some languages they might be used like that (see the csquotes package for examples).

```

5504 ⟨m-t|bch|pmn⟩      \textquoteleft = {300,400},   \textquoteright = {300,400},
5505 ⟨blg⟩      \textquoteleft = {400,600},   \textquoteright = {400,600},
5506 ⟨cmr⟩      \textquoteleft = {500,700},   \textquoteright = {500,600},
5507 ⟨pad|ppl⟩      \textquoteleft = {500,700},   \textquoteright = {500,700},
5508 ⟨ptm⟩      \textquoteleft = {500,500},   \textquoteright = {300,500},
5509 ⟨ugm⟩      \textquoteleft = {300,600},   \textquoteright = {300,600},
5510 ⟨m-t|bch|pmn⟩      \textquotedblleft = {300,300},   \textquotedblright = {300,300}
5511 ⟨blg⟩      \textquotedblleft = {300,400}
5512 ⟨cmr⟩      \textquotedblleft = {500,300},   \textquotedblright = {200,600}
5513 ⟨pad|ppl|ptm⟩      \textquotedblleft = {300,400},   \textquotedblright = {300,400}
5514 ⟨ugm⟩      \textquotedblleft = {400,400},   \textquotedblright = {400,400}
5515   }
5516

```

Greek uppercase letters are in OT1 encoding only.

```
5517 (*m-t|cmr|pmn)
```

```

5518 \SetProtrusion
5519 ⟨m-t⟩ [ name = OT1-default,
5520 ⟨cmr⟩ [ name = cmr-OT1,
5521 ⟨pmn⟩ [ name = pmnj-OT1,
5522 ⟨m-t⟩ load = default ]
5523 ⟨cmr⟩ load = cmr-default ]
5524 ⟨pmn⟩ load = pmnj-default ]
5525 ⟨m-t⟩ { encoding = OT1 }
5526 ⟨cmr⟩ { encoding = {OT1,OT4},
5527 ⟨pmn⟩ { encoding = OT1,
5528 ⟨cmr⟩ family = cmr }
5529 ⟨pmn⟩ family = pmnj }
5530 {
5531 ⟨m-t|cmr⟩ \AE = {50, },
5532 ⟨pmn⟩ \OE = {50, }
5533 (*cmr)
5534 "00 = { ,150}, % \Gamma
5535 "01 = {100,100}, % \Delta
5536 "02 = { 50, 50}, % \Theta
5537 "03 = {100,100}, % \Lambda
5538 "06 = { 50, 50}, % \Sigma
5539 "07 = {100,100}, % \Upsilon
5540 "08 = { 50, 50}, % \Phi
5541 "09 = { 50, 50} % \Psi

```

Remaining slots can be found in the source file.

```

5542 ⟨/cmr⟩
5543 }
5544
5545 ⟨/m-t|cmr|pmn⟩

```

T1 and LY1 encodings contain some more characters. The default list will be loaded first. For X_ET_EX (EU1) and LuaT_EX (EU2) we simply use the T1 list as default (for now).

```

5546 \SetProtrusion
5547 ⟨m-t⟩ [ name = T1-default,
5548 ⟨bch⟩ [ name = bch-T1,
5549 ⟨blg⟩ [ name = blg-T1,
5550 ⟨cmr⟩ [ name = cmr-T1,
5551 ⟨pad⟩ [ name = pad-T1,
5552 ⟨pmn⟩ [ name = pmnj-T1,
5553 ⟨ppl⟩ [ name = ppl-T1,
5554 ⟨ptm⟩ [ name = ptm-T1,
5555 ⟨ugm⟩ [ name = ugm-T1,
5556 ⟨m-t⟩ load = default ]
5557 ⟨bch⟩ load = bch-default ]
5558 ⟨blg⟩ load = blg-default ]
5559 ⟨cmr⟩ load = cmr-default ]
5560 ⟨pad⟩ load = pad-default ]
5561 ⟨pmn⟩ load = pmnj-default ]
5562 ⟨ppl⟩ load = ppl-default ]
5563 ⟨ptm⟩ load = ptm-default ]
5564 ⟨ugm⟩ load = ugm-default ]
5565 ⟨m-t⟩ { encoding = {T1,LY1,EU1,EU2,TU} }
5566 ⟨bch|cmr|pad|pmn|ppl⟩ { encoding = {T1,LY1},
5567 ⟨blg|ptm|ugm⟩ { encoding = {T1},
5568 ⟨bch⟩ family = bch }
5569 ⟨blg⟩ family = blg }
5570 ⟨cmr⟩ family = cmr }
5571 ⟨pad⟩ family = {pad,padx,adj} }
5572 ⟨pmn⟩ family = pmnj }
5573 ⟨ppl⟩ family = {ppl,pplx,pplj} }
5574 ⟨ptm⟩ family = {ptm,ptmx,ptmj} }
5575 ⟨ugm⟩ family = ugm }
5576 {

```

```

5577 (m-t|cmr)      \AE = {50, },
5578 (bch|pmn)      \OE = {50, },
5579 (pmn)          \TH = { ,50},
5580 (blg)          \v L = { ,250},
5581 (blg)          \v d = { ,250},
5582 (blg)          \v l = { ,250},
5583 (blg)          \v t = { ,250},
5584 (blg)          127 = {300,400},
5585 (blg)          156 = {100, }, % IJ
5586 (blg)          188 = {80, 80}, % ij
5587 (m-t|bch|pad|pmn|ppl|ptm) - = {100,100},
5588 (cmr)          - = {200,200},
5589 (ugm)          - = {100,200},
5590 (m-t|pad|pmn|ptm) \textbackslashslash = {100,200},
5591 (bch)          \textbackslashslash = {150,200},
5592 (blg)          \textbackslashslash = {250,300},
5593 (cmr|ppl)       \textbackslashslash = {200,300},
5594 (ugm)          \textbackslashslash = {100,300},
5595 (ugm)          \textbar = {200,200},
5596 (blg)          \textendash = {300,300}, \textemdash = {150,150},
5597 (blg)          \textquotedbl = {300,400}, \textquotedblleft = {300,400},
5598 (cmr)          \textquotedbl = {300,300}, \textquotedblleft = {200,600},

```

The EC fonts do something weird: they insert an implicit kern between quote and boundary character. Therefore, we must override the settings from OT1.

```

5599 (m-t|cmr|pad|ppl|ptm|ugm) \quotesinglbase = {400,400}, \quotedblbase = {400,400},
5600 (blg) \quotesinglbase = {400,400}, \quotedblbase = {300,400},
5601 (bch|pmn) \quotesinglbase = {400,400}, \quotedblbase = {300,300},
5602 (m-t|bch|pmn) \guilsinglleft = {400,300}, \guilsinglright = {300,400},
5603 (blg) \guilsinglleft = {300,500}, \guilsinglright = {300,500},
5604 (cmr|pad|ppl|ptm) \guilsinglleft = {400,400}, \guilsinglright = {300,500},
5605 (ugm) \guilsinglleft = {400,400}, \guilsinglright = {300,600},
5606 (m-t) \guillemotleft = {200,200}, \guillemotright = {200,200},
5607 (cmr) \guillemotleft = {300,200}, \guillemotright = {100,400},
5608 (bch|pmn) \guillemotleft = {200,200}, \guillemotright = {150,300},
5609 (blg|pad|ppl|ptm) \guillemotleft = {300,300}, \guillemotright = {200,400},
5610 (ugm) \guillemotleft = {300,400}, \guillemotright = {300,400},
5611 (m-t|bch|cmr|pad|pmn|ppl|ugm) \textexclamdown = {100, }, \textquestiondown = {100, },
5612 (blg) \textexclamdown = {200, }, \textquestiondown = {100, },
5613 (ptm) \textexclamdown = {200, }, \textquestiondown = {200, },
5614 (m-t|cmr|pad|ppl|ptm|ugm) \textbraceleft = {400,200}, \textbraceright = {200,400},
5615 (bch|blg|pmn) \textbraceleft = {200, }, \textbraceright = { ,300},
5616 (m-t|bch|cmr|pad|ppl|ptm|ugm) \textless = {200,100}, \textgreater = {100,200}
5617 (pmn) \textless = {100, }, \textgreater = { ,100},
5618 (pmn) \textvisiblespace = {100,100} % not in LY1
5619 }
5620

```

The lmodern fonts used to restore the original settings from OT1 fonts. Now, they require even other settings, though.

```

5621 (*cmr)
5622 \SetProtrusion
5623 [ name      = lmr-T1,
5624   load      = cmr-T1 ]
5625 { encoding  = {T1,LY1},
5626   family    = lmr     }
5627 {
5628   \textquotedblleft = {300,400}, \textquotedblright = {300,400}
5629 }
5630
5631 (/cmr)

```

Settings for the T2A encoding (generic, Computer Modern Roman, and Minion).²⁰

```

5632 (*m-t | cmr | pmn)
5633 \SetProtrusion
5634 (m-t) [ name      = T2A-default,
5635 (cmr)  [ name      = cmr-T2A,
5636 (pmn)  [ name      = pmnj-T2A,
5637 (m-t)   load      = default    ]
5638 (cmr)  load      = cmr-default ]
5639 (pmn)  load      = pmnj-default ]
5640 { encoding = T2A,
5641 (m-t)   }
5642 (cmr)  family   = cmr }
5643 (pmn)  family   = pmnj }
5644 {
5645   \CYRA = {50,50},
5646   \CYRG = { ,50},
5647   \CYRK = { ,50},
5648   \CYRT = {50,50},
5649   \CYRH = {50,50},
5650   \CYRU = {50,50},
5651 (pmn)   \CYRS = {50, },
5652 (pmn)   \CYRO = {50,50},
5653   \cyrk = { ,50},
5654   \cyrg = { ,50},
5655   \cyrh = {50,50},
5656 (m-t | pmn) \cyr = {50,50},
5657 (cmr)  \cyr = {50,70},
5658 (m-t)   - = {100,100},
5659 (cmr)  - = {200,200},
5660 (m-t)   \textbackslashlash = {100,200}, \quotedblbase = {400,400},
5661 (cmr)  \textbackslashlash = {200,300}, \quotedblbase = {400,400},
5662 (pmn)  \textbackslashlash = {100,200}, \quotedblbase = {300,300},
5663 (cmr)  \textquotedbl = {300,300}, \textquotedblleft = {200,600},
5664 (m-t)   \guillemotleft = {200,200}, \guillemotright = {200,200},
5665 (cmr)  \guillemotleft = {300,200}, \guillemotright = {100,400},
5666 (pmn)  \guillemotleft = {200,200}, \guillemotright = {150,300},
5667 (m-t | cmr) \textbraceleft = {400,200}, \textbraceright = {200,400},
5668 (pmn)  \textbraceleft = {200, }, \textbraceright = { ,300},
5669 (m-t | cmr) \textless   = {200,100}, \textgreater = {100,200}
5670 (pmn)  \textless   = {100, }, \textgreater = { ,100}
5671 }
5672
5673 (/m-t | cmr | pmn)

```

Settings for the QX encoding (generic and Times).²¹ It also includes some glyphs otherwise in TS1.

```

5674 (*m-t | ptm)
5675 \SetProtrusion
5676 (m-t) [ name      = QX-default,
5677 (ptm)  [ name      = ptm-QX,
5678 (m-t)   load      = default    ]
5679 (ptm)  load      = ptm-default ]
5680 (m-t) { encoding = QX }
5681 (ptm) { encoding = QX,
5682 (ptm)   family   = {ptm,ptmx,ptmj} }
5683 {
5684   \AE = {50, },
5685 (ptm)   * = {200,200},
5686   {=} = {100,100},
5687   \textunderscore = {100,100},
5688   \textbackslashlash = {100,200},
5689   \quotedblbase = {400,400},

```

20 Contributed by Karl Karlsson.

21 Contributed by Maciej Eder.

```

5690 (m-t)      \guillemotleft   = {200,200},  \guillemotright  = {200,200},
5691 (ptm)      \guillemotleft   = {300,300},  \guillemotright  = {200,400},
5692 \textexcldown  = {100, },     \textquestiondown = {100, },
5693 (m-t)      \textbraceleft   = {400,200},  \textbraceright  = {200,400},
5694 (ptm)      \textbraceleft   = {200,200},  \textbraceright  = {200,300},
5695 \textless        = {200,100},    \textgreater     = {100,200},
5696 \textminus       = {200,200},    \textdegree     = {300,300},
5697 (m-t)      \copyright     = {100,100},   \textregistered = {100,100}
5698 (ptm)      \copyright     = {100,150},   \textregistered = {100,150},
5699 (ptm)      \textxgeq      = { ,100},     \textxleg      = {100, },
5700 (ptm)      \textalpha     = { ,50},      \textDelta     = { 70, 70},
5701 (ptm)      \textpi        = { 50, 80},   \textSigma     = { , 70},
5702 (ptm)      \textmu        = { , 80},     \texteuro     = { 50, 50},
5703 (ptm)      \textellipsis  = {150,200},   \textasciitilde = { 80, 80},
5704 (ptm)      \textapprox    = { 50, 50},   \textinfty    = {100,100},
5705 (ptm)      \textdagger    = {150,150},   \textdaggerdbl = {100,100},
5706 (ptm)      \textdiv        = { 50,150},   \textsection  = { 80, 80},
5707 (ptm)      \texttimes     = {100,150},   \textppm      = { 50, 80},
5708 (ptm)      \textbullet    = {150,150},   \textperiodcentered = {300,300},
5709 (ptm)      \textquotesingle = {500,500},   \textquotedbl = {300,300},
5710 (ptm)      \textperthousand = { ,50}
5711 }
5712
5713 (/m-t |ptm)

```

T5 is based on OT1; it shares some but not all extra characters of T1. All accented characters are already taken care of by the inheritance list.

```

5714 (*cmr|bch)
5715 \SetProtrusion
5716 (cmr) [ name   = cmr-T5,
5717 (cmr)   load   = cmr-default ]
5718 (bch) [ name   = bch-T5,
5719 (bch)   load   = bch-default ]
5720 { encoding = T5,
5721 (cmr)   family = cmr }
5722 (bch)   family = bch }
5723 {
5724 (bch)   _ = {100,100},
5725 (bch)   \textbackslashlash = {150,200},
5726 (cmr)   \textbackslashlash = {200,300},
5727 (cmr)   \textquotedblleft = {200,600},
5728 (cmr)   \textquotedbl = {300,300},
5729 (bch)   \textquotesinglbase = {400,400}, \textquotedblbase = {300,300},
5730 (cmr)   \textquotesinglbase = {400,400}, \textquotedblbase = {400,400},
5731 (bch)   \textguilsinglleft = {400,300}, \textguilsinglright = {300,400},
5732 (cmr)   \textguilsinglleft = {400,400}, \textguilsinglright = {300,500},
5733 (bch)   \textguillemotleft = {200,200}, \textguillemotright = {150,300},
5734 (cmr)   \textguillemotleft = {300,200}, \textguillemotright = {100,400},
5735 (bch)   \textbraceleft   = {200, },   \textbraceright = { ,300},
5736 (cmr)   \textbraceleft   = {400,200}, \textbraceright = {200,400},
5737 \textless        = {200,100},   \textgreater     = {100,200}
5738 }
5739
5740 (/cmr|bch)

```

Minion with lining numbers.

```

5741 (*pmn)
5742 \SetProtrusion
5743 [ name   = pmnx-OT1,
5744   load   = pmnj-default ]
5745 { encoding = OT1,
5746   family = pmnx }
5747 {
5748   1 = {230,180}
5749 }

```

```

5750
5751 \SetProtrusion
5752   [ name      = pmnx-T1,
5753     load      = pmnj-T1 ]
5754   { encoding  = {T1,LY1},
5755     family    = pmnx      }
5756   {
5757     1 = {230,180}
5758   }
5759
5760 \SetProtrusion
5761   [ name      = pmnx-T2A,
5762     load      = pmnj-T2A ]
5763   { encoding  = {T2A},
5764     family    = pmnx      }
5765   {
5766     1 = {230,180}
5767   }
5768
5769 (/pmn)

```

Times is the default font for LY1, therefore we provide settings for the additional characters in this encoding, too.

```

5770 (*ptm)
5771 \SetProtrusion
5772   [ name      = ptm-LY1,
5773     load      = ptm-T1 ]
5774   { encoding  = LY1,
5775     family    = {ptm,ptmx,ptmj} }
5776   {
5777     _           = {100,100},
5778     \texttrademark = {100,100},
5779     \textregistered = {100,100},
5780     \textcopyright = {100,100},
5781     \textdegree   = {300,300},
5782     \textminus    = {200,200},
5783     \textellipsis = {150,200},
5784 %    \texteuro     = { , , }, % ?
5785     \textcent    = {100,100},
5786     \textquotesingle = {500,500},
5787     \textflorin  = { 50, 70},
5788     \textdagger   = {150,150},
5789     \textdaggerdbl = {100,100},
5790     \textperthousand = { , 50},
5791     \textbullet   = {150,150},
5792     \textonesuperior = {100,100},
5793     \texttwosuperior = { 50, 50},
5794     \textthreesuperior = { 50, 50},
5795     \textperiodcentered = {300,300},
5796     \textplusminus = { 50, 80},
5797     \textmultiply  = {100,100},
5798     \textdivide   = { 50,150}

```

Remaining slots in the source file.

```

5799   }
5800
5801 (/ptm)

```

15.8.2 Italics

To find default settings for italic is difficult, since the character shapes and their behaviour at the beginning or end of line may be wildly different for different fonts. In the generic settings we therefore omit the letters, and only set up the

punctuation characters.

The italic glyphs of Computer Modern Roman feature a lot of side bearing, therefore almost all of them have to protrude.²²

```

5802 \SetProtrusion
5803 <m-t> [ name      = OT1-it   ]
5804 <bch>  [ name      = bch-it   ]
5805 <blg>  [ name      = blg-it,    ]
5806 <blg>  load      = blg-default ]
5807 <cmr>  [ name      = cmr-it   ]
5808 <pad>  [ name      = pad-it   ]
5809 <pnn>  [ name      = pnnj-it  ]
5810 <ppl>  [ name      = ppl-it   ]
5811 <ptm>  [ name      = ptm-it   ]
5812 <ugm>  [ name      = ugm-it   ]
5813 <m-t|bch|blg|pad|ugm> { encoding = OT1,
5814 <ppl|ptm> { encoding = {OT1,OT4},
5815 <bch>   family    = bch,
5816 <blg>   family    = blg,
5817 <pad>   family    = {pad,padx,padj},
5818 <ppl>   family    = {ppl,pplx,pplj},
5819 <ptm>   family    = {ptm,ptmx,ptmj},
5820 <ugm>   family    = ugm,
5821 <m-t|bch|pad|ppl|ptm> shape     = {it,s1}  }
5822 <blg|ugm> shape     = it  }
5823 <cmr|pnn> { }
5824 {
5825 <cmr>   A = {100,100},
5826 <ptm>   A = {100,50},
5827 <pad|pnn> A = {50,  },
5828 <ugm>   A = { ,150},
5829 <ppl>   A = {50,50},
5830 <ptm>   \AE = {100,  },
5831 <pad|ppl> \AE = {50,  },
5832 <cmr>   B = {83,-40},
5833 <pad|ppl|ptm> B = {50,  },
5834 <pnn>   B = {20,-50},
5835 <bch|ppl|ptm|ugm> C = {50,  },
5836 <cmr>   C = {165,-75},
5837 <pad>   C = {100,  },
5838 <pnn>   C = {50,-50},
5839 <cmr>   D = {75, -28},
5840 <pad|ppl|ptm> D = {50,50},
5841 <pnn>   D = {20,  },
5842 <cmr>   E = {80,-55},
5843 <pad|ppl|ptm> E = {50,  },
5844 <pnn>   E = {20,-50},
5845 <cmr>   F = {85,-80},
5846 <pad|ptm> F = {100,  },
5847 <pnn>   F = {10,  },
5848 <ppl>   F = {50,  },
5849 <bch|ppl|ptm|ugm> G = {50,  },
5850 <cmr>   G = {153,-15},
5851 <pad>   G = {100,  },
5852 <pnn>   G = {50,-50},
5853 <cmr>   H = {73,-60},
5854 <pad|ppl|ptm> H = {50,  },
5855 <cmr>   I = {140,-120},
5856 <pad|ptm> I = {50,  },
5857 <pnn>   I = {20,-50},
5858 <cmr>   J = {135,-80},
5859 <pad>   J = {50,  },
5860 <pnn>   J = {20,  },

```

```
5861 <ptm>      J = {100, },
5862 <cmr>      K = {70,-30},
5863 <pad|ppl|ptm>   K = {50, },
5864 <pmn>      K = {20, },
5865 <cmr>      L = {87, 40},
5866 <pad|ppl|ptm>   L = {50, },
5867 <pmn>      L = {20,50},
5868 <ugm>      L = { ,100},
5869 <cmr>      M = {67,-45},
5870 <pmn>      M = { , -30},
5871 <ptm>      M = {50, },
5872 <cmr>      N = {75,-55},
5873 <pmn>      N = { , -30},
5874 <ptm>      N = {50, },
5875 <bch|pmn|ppl|ptm>   O = {50, },
5876 <cmr>      O = {150,-30},
5877 <pad>      O = {100, },
5878 <ugm>      O = {70,50},
5879 <ppl|ptm>   \OE = {50, },
5880 <pad>      \OE = {100, },
5881 <cmr>      P = {82,-50},
5882 <pad|ppl|ptm>   P = {50, },
5883 <pmn>      P = {20,-50},
5884 <bch|pmn|ppl|ptm>   Q = {50, },
5885 <cmr>      Q = {150,-30},
5886 <pad>      Q = {100, },
5887 <ugm>      Q = {70,50},
5888 <cmr>      R = {75, 15},
5889 <pad|ppl|ptm>   R = {50, },
5890 <pmn>      R = {20, },
5891 <bch|pad|ppl|ptm>   S = {50, },
5892 <cmr>      S = {90,-65},
5893 <pmn>      S = {20,-30},
5894 <bch|pad|ppl|ptm>   \$ = {50, },
5895 <cmr>      \$ = {100,-20},
5896 <pmn>      \$ = {20,-30},
5897 <bch|pmn|ugm>   T = {70, },
5898 <cmr>      T = {220,-85},
5899 <pad|ppl|ptm>   T = {100, },
5900 <cmr>      U = {230,-55},
5901 <pad|ppl|ptm>   U = {50, },
5902 <pmn>      U = {50,-50},
5903 <cmr>      V = {260,-60},
5904 <pad|pmn|ugm>   V = {100, },
5905 <ppl|ptm>   V = {100,50},
5906 <cmr>      W = {185,-55},
5907 <pad|pmn|ugm>   W = {100, },
5908 <ppl>      W = {50, },
5909 <ptm>      W = {100,50},
5910 <cmr>      X = {70,-30},
5911 <ppl|ptm>   X = {50, },
5912 <cmr>      Y = {250,-60},
5913 <pmn>      Y = {50, },
5914 <ppl>      Y = {100,50},
5915 <ptm>      Y = {100, },
5916 <cmr>      Z = {90,-60},
5917 <pmn>      Z = { , -50},
5918 <cmr>      a = {150,-10},
5919 <cmr>      b = {170, },
5920 <cmr>      c = {173,-10},
5921 <cmr>      d = {150,-55},
5922 <pmn>      d = { , -50},
5923 <cmr>      e = {180, },
5924 <cmr>      f = { , -250},
5925 <pad|pmn>   f = { , -100},
```

```

5926 <cmr>      g = {150,-10},
5927 <cmr>      h = {100, },
5928 <cmr>      i = {210, },
5929 <pmn>      i = { , -30},
5930 <cmr>      j = { , -40},
5931 <pmn>      j = { , -30},
5932 <cmr>      k = {110,-50},
5933 <cmr>      l = {240,-110},
5934 <pmn>      l = { , -100},
5935 <cmr>      m = {80, },
5936 <cmr>      n = {115, },
5937 <bch>      o = {50,50},
5938 <cmr>      o = {155, },
5939 <bch>      p = { ,50},
5940 <pmn>      p = {-50, },
5941 <bch>      q = {50, },
5942 <cmr>      q = {170,-40},
5943 <cmr>      r = {155,-40},
5944 <pmn>      r = { ,50},
5945 <cmr>      s = {130, },
5946 <bch>      t = { ,50},
5947 <cmr>      t = {230,-10},
5948 <cmr>      u = {120, },
5949 <cmr>      v = {140,-25},
5950 <pmn|ugm>    v = {50, },
5951 <bch>      w = { ,50},
5952 <cmr>      w = {98,-20},
5953 <pmn|ugm>    w = {50, },
5954 <cmr>      x = {65,-40},
5955 <bch>      y = { ,50},
5956 <cmr>      y = {130,-20},
5957 <cmr>      z = {110,-80},
5958 <cmr>      0 = {170,-85},
5959 <bch|ptm>    1 = {150,100},
5960 <cmr>      1 = {230,110},
5961 <pad>      1 = {150, },
5962 <pmn>      1 = {50, },
5963 <ppl>      1 = {100, },
5964 <ugm>      1 = {150,150},
5965 <cmr>      2 = {130,-70},
5966 <pad|ppl|ptm> 2 = {50, },
5967 <pmn>      2 = {-50, },
5968 <bch>      3 = {50, },
5969 <cmr>      3 = {140,-70},
5970 <pmn>      3 = {-100, },
5971 <ptm>      3 = {100,50},
5972 <bch>      4 = {100, },
5973 <cmr>      4 = {130,80},
5974 <pad>      4 = {150, },
5975 <ppl|ptm>  4 = {50, },
5976 <cmr>      5 = {160, },
5977 <ptm>      5 = {50, },
5978 <bch>      6 = {50, },
5979 <cmr>      6 = {175,-30},
5980 <bch|pad|ptm> 7 = {100, },
5981 <cmr>      7 = {250,-150},
5982 <pmn>      7 = {20, },
5983 <ppl>      7 = {50, },
5984 <cmr>      8 = {130,-40},
5985 <cmr>      9 = {155,-80},
5986 <m-t|cmr|pad|pmn|ppl>   . = { ,500},
5987 <blg>      . = {400,600},
5988 <bch|ptm|ugm>  . = { ,700},
5989 <blg>      {,}= {300,500},
5990 <m-t|pad|pmn|ppl>  {,}= { ,500},

```

```

5991 {cmr}      {,}= { ,450},
5992 {bch|ugm}    {,}= { ,600},
5993 {ptm}      {,}= { ,700},
5994 (m-t|cmr|pad|ppl)   : = { ,300},
5995 {bch|ugm}    : = { ,400},
5996 {pmn}      : = { ,200},
5997 {ptm}      : = { ,500},
5998 (m-t|cmr|pad|ppl)   ; = { ,300},
5999 {bch|ugm}    ; = { ,400},
6000 {pmn}      ; = { ,200},
6001 {ptm}      ; = { ,500},
6002 {ptm}      ! = { ,100},
6003 {bch}      ? = { ,200},
6004 {ptm}      ? = { ,100},
6005 {ppl}      ? = { ,300},
6006 {pmn}      " = {400,200},
6007 (m-t|pad|pmn|ppl|ptm) & = {50,50},
6008 {bch}      & = { ,80},
6009 {cmr}      & = {130,30},
6010 {ugm}      & = {50,100},
6011 (m-t|pad|pmn) \% = {100, },
6012 {cmr}      \% = {180,50},
6013 {bch}      \% = {50,50},
6014 {ppl|ptm}  \% = {100,100},
6015 {ugm}      \% = {100,50},
6016 (m-t|pmn|ppl) * = {200,200},
6017 {bch}      * = {300,200},
6018 {cmr}      * = {380,20},
6019 {pad}      * = {500,100},
6020 {ptm|ugm}  * = {400,200},
6021 (m-t|pmn|ppl) + = {150,200},
6022 {cmr}      + = {180,200},
6023 {bch|ugm}  + = {250,250},
6024 {pad|ptm}  + = {250,200},
6025 (m-t|pad|pmn|ppl) @ = {50,50},
6026 {bch}      @ = {80,50},
6027 {cmr}      @ = {180,10},
6028 {ptm}      @ = {150,150},
6029 (m-t|bch|ugm) ~ = {150,150},
6030 {cmr|pad|pmn|ppl|ptm} ~ = {200,150},
6031 {ugm}      {=} = {200,200},
6032 (m-t|bch|pad|pmn|ppl|ptm|ugm) ( = {200, }, ) = { ,200},
6033 {cmr}      ( = {300, }, ) = { ,70},
6034 (m-t|pad|ppl|ptm|ugm) / = {100,200},
6035 {cmr}      / = {100,100},
6036 {bch}      / = { ,150},
6037 {pmn}      / = {100,150},
6038 (m-t)      - = {300,300},
6039 {bch|pad}  - = {300,400},
6040 {pmn}      - = {200,300},
6041 {cmr}      - = {500,300},
6042 {ppl}      - = {300,500},
6043 {ptm}      - = {500,500},
6044 {ugm}      - = {400,700},
6045 {blg}      - = {0,300},
6046 (m-t|pmn) \textendash = {200,200}, \textemdash = {150,150},
6047 {bch}      \textendash = {200,300}, \textemdash = {150,200},
6048 {cmr}      \textendash = {500,300}, \textemdash = {400,170},
6049 (pad|ppl|ptm|ugm) \textendash = {300,300}, \textemdash = {200,200},
6050 (m-t|bch|pmn|ugm) \textquotel = {400,200}, \textquoter = {400,200},
6051 {blg}      \textquotel = {400,400}, \textquoter = {400,400},
6052 {cmr}      \textquotel = {800,200}, \textquoter = {800,-20},
6053 {pad}      \textquotel = {800,200}, \textquoter = {800,200},
6054 {ppl}      \textquotel = {700,400}, \textquoter = {700,400},
6055 {ptm}      \textquotel = {800,500}, \textquoter = {800,500},

```

```

6056 (m-t|bch|pmn)      \textquotedblleft = {400,200},   \textquotedblright = {400,200}
6057 (blg)          \textquotedblleft = {300,300}
6058 (cmr)          \textquotedblleft = {540,100},   \textquotedblright = {500,100}
6059 (pad)          \textquotedblleft = {700,200},   \textquotedblright = {700,200}
6060 (ppl)          \textquotedblleft = {500,300},   \textquotedblright = {500,300}
6061 (ptm)          \textquotedblleft = {700,400},   \textquotedblright = {700,400}
6062 (ugm)          \textquotedblleft = {600,200},   \textquotedblright = {600,200}
6063 }
6064
6065 (*cmr|pmn)
6066 \SetProtrusion
6067 (cmr) [ name    = cmr-it-OT1,
6068 (pmn)  [ name    = pmnj-it-OT1,
6069 (cmr)  load     = cmr-it ]
6070 (pmn)  load     = pmnj-it ]
6071 (cmr)  { encoding = {OT1,OT4},
6072 (pmn)  { encoding = OT1,
6073 (cmr)  family   = cmr,
6074 (pmn)  family   = pmnj,
6075 (cmr)  shape    = it
6076 (pmn)  shape    = {it,s1} }
6077 {
6078 (cmr)  \AE = {100, },
6079 (pmn)  \AE = { , -50},
6080 (cmr)  \OE = {100, },
6081 (pmn)  \OE = {50, }
6082 (*cmr)
6083 "00 = {200,150}, % \Gamma
6084 "01 = {150,100}, % \Delta
6085 "02 = {150, 50}, % \Theta
6086 "03 = {150, 50}, % \Lambda
6087 "04 = {100,100}, % \Xi
6088 "05 = {100,100}, % \Pi
6089 "06 = {100, 50}, % \Sigma
6090 "07 = {200,150}, % \Upsilon
6091 "08 = {150, 50}, % \Phi
6092 "09 = {150,100}, % \Psi
6093 "0A = { 50, 50} % \Omega
6094 (/cmr)
6095 }
6096
6097 (*cmr|pmn)
6098 \SetProtrusion
6099 (m-t)  [ name    = T1-it-default,
6100 (bch)  [ name    = bch-it-T1,
6101 (blg)  [ name    = blg-it-T1,
6102 (cmr)  [ name    = cmr-it-T1,
6103 (pad)  [ name    = pad-it-T1,
6104 (pmn)  [ name    = pmnj-it-T1,
6105 (ppl)  [ name    = ppl-it-T1,
6106 (ptm)  [ name    = ptm-it-T1,
6107 (ugm)  [ name    = ugm-it-T1,
6108 (m-t)  load     = OT1-it ]
6109 (bch)  load     = bch-it ]
6110 (blg)  load     = blg-T1 ]
6111 (cmr)  load     = cmr-it ]
6112 (pmn)  load     = pmnj-it ]
6113 (pad)  load     = pad-it ]
6114 (ppl)  load     = ppl-it ]
6115 (ptm)  load     = ptm-it ]
6116 (ugm)  load     = ugm-it ]
6117 (m-t|bch|cmr|pad|pmn|ppl) { encoding = {T1,LY1},
6118 (blg|ptm|ugm)  { encoding = T1,
6119 (bch)   family   = bch,
6120 (blg)   family   = blg,

```

```

6121 (cmr)      family   = cmr,
6122 (pmn)      family   = pmnj,
6123 (pad)      family   = {pad,padx,padj},
6124 (ppl)      family   = {ppl,pplx,pplj},
6125 (ptm)      family   = {ptm,ptmx,ptmj},
6126 (ugm)      family   = ugm,
6127 (m-t|bch|pad|pmn|ppl|ptm)    shape    = {it,sl}  }
6128 (blg|cmr|ugm)  shape    = it      }
6129  {
6130 (m-t|bch|pmn)  _ = { ,100},
6131 (blg)        _ = {0,300},
6132 (cmr|ugm)    _ = {100,200},
6133 (pad|ppl|ptm) _ = {100,100},
6134 (blg)        . = {400,600},
6135 (blg)        ,.= {300,500},
6136 (cmr)       \AE = {100, },
6137 (pmn)       \AE = { , -50},
6138 (bch|pmn)   \OE = { 50, },
6139 (cmr)       \OE = {100, },
6140 (pmn)       031 = { ,-100}, % ffl
6141 (cmr|ptm)  156 = {100, }, % IJ
6142 (pad)      156 = {50, }, % IJ
6143 (pmn)      156 = {20, }, % IJ
6144 (pmn)      188 = { , -30}, % ij
6145 (pmn)      \v t = { ,100},
6146 (m-t|pad|ppl|ptm) \textbackslashlash = {100,200},
6147 (cmr|ugm)  \textbackslashlash = {300,300},
6148 (bch)      \textbackslashlash = {150,150},
6149 (pmn)      \textbackslashlash = {100,150},
6150 (ugm)      \textbar = {200,200},
6151 (cmr)      \textquotedblleft = {500,300},
6152 (blg)      \textquotelleft = {400,400}, \textquoteright = {400,400},
6153 (blg)      \textquotedbl = {300,300}, \textquotedblleft = {300,300},
6154 (blg)      \textquotedblright = {300,300}, \textquotedblbase = {200,600},
6155 (m-t|ptm) \textquotesinglbase = {300,700}, \textquotedblbase = {400,500},
6156 (cmr)      \textquotesinglbase = {300,700}, \textquotedblbase = {200,600},
6157 (bch|pmn) \textquotesinglbase = {200,500}, \textquotedblbase = {150,500},
6158 (pad|ppl) \textquotesinglbase = {500,500}, \textquotedblbase = {400,400},
6159 (ugm)      \textquotesinglbase = {300,700}, \textquotedblbase = {300,500},
6160 (m-t|ppl|ptm) \textguilsinglleft = {400,400}, \textguilsinglright = {300,500},
6161 (bch|pmn) \textguilsinglleft = {300,400}, \textguilsinglright = {200,500},
6162 (cmr)      \textguilsinglleft = {500,300}, \textguilsinglright = {400,400},
6163 (pad)      \textguilsinglleft = {500,400}, \textguilsinglright = {300,500},
6164 (ugm)      \textguilsinglleft = {400,400}, \textguilsinglright = {300,600},
6165 (m-t|ppl) \textguillemotleft = {300,300}, \textguillemotright = {300,300},
6166 (bch|pmn) \textguillemotleft = {200,300}, \textguillemotright = {150,400},
6167 (cmr)      \textguillemotleft = {400,100}, \textguillemotright = {200,300},
6168 (pad)      \textguillemotleft = {300,300}, \textguillemotright = {200,400},
6169 (ptm)      \textguillemotleft = {300,400}, \textguillemotright = {200,400},
6170 (ugm)      \textguillemotleft = {300,400}, \textguillemotright = {300,400},
6171 (m-t|pad|ppl|ugm) \texttexclamdown = {100, }, \textquestiondown = {200, },
6172 (cmr|ptm) \texttexclamdown = {200, }, \textquestiondown = {200, },
6173 (pmn)      \texttexclamdown = {-50, }, \textquestiondown = {-50, },
6174 (m-t|ppl|ugm) \textbraceleft = {200,100}, \textbraceright = {200,200},
6175 (bch|pmn) \textbraceleft = {200, }, \textbraceright = { ,200},
6176 (cmr|pad|ptm) \textbraceleft = {400,100}, \textbraceright = {200,200},
6177 (bch|pmn) \textless = {100, }, \textgreater = { ,100},
6178 (cmr|pad|ppl|ptm) \textless = {300,100}, \textgreater = {200,100}
6179 (pmn)      \textvisiblespace = {100,100}
6180  }
6181
6182 (*m-t|cmr|pmn)
6183 \SetProtrusion
6184 (m-t) [ name = T2A-it-default,
6185 (cmr) [ name = cmr-it-T2A,

```

```

6186 {pmn} [ name      = pmnj-it-T2A,
6187 {m-t}   load      = OT1-it   ]
6188 {cmr}   load      = cmr-it   ]
6189 {pmn}   load      = pmnj-it   ]
6190   { encoding = T2A,
6191 {cmr}   family    = cmr,
6192 {pmn}   family    = pmnj,
6193 {m-t|pmn} shape     = {it,s1}  }
6194 {cmr}   shape     = it       }
6195   {
6196 {cmr}   \CYRA = {100,50},
6197 {pmn}   \CYRA = {50, },
6198 {cmr}   \CYRB = {50, },
6199 {cmr}   \CYRV = {50, },
6200 {pmn}   \CYRV = {20,-50},
6201 {cmr}   \CYRG = {100, },
6202 {pmn}   \CYRG = {10, },
6203 {cmr}   \CYRD = {50, },
6204 {cmr}   \CYRE = {50, },
6205 {pmn}   \CYRE = {20,-50},
6206 {cmr}   \CYRZH = {50, },
6207 {cmr}   \CYRZ = {50, },
6208 {pmn}   \CYRZ = {20,-50},
6209 {cmr}   \CYRI = {50, },
6210 {pmn}   \CYRI = { , -30},
6211 {cmr}   \CYRISHRT = {50, },
6212 {cmr}   \CYRK = {50, },
6213 {pmn}   \CYRK = {20, },
6214 {cmr}   \CYRL = {50, },
6215 {cmr}   \CYRM = {50, },
6216 {pmn}   \CYRM = { , -30},
6217 {cmr}   \CYRN = {50, },
6218 {cmr}   \CYRO = {100, },
6219 {pmn}   \CYRO = {50, },
6220 {cmr}   \CYRP = {50, },
6221 {cmr}   \CYRR = {50, },
6222 {pmn}   \CYRR = {20,-50},
6223 {cmr}   \CYRS = {100, },
6224 {pmn}   \CYRS = {50, },
6225 {cmr}   \CYRT = {100, },
6226 {pmn}   \CYRT = {70, },
6227 {cmr}   \CYRU = {100, },
6228 {pmn}   \CYRU = {50, },
6229 {cmr}   \CYRF = {100, },
6230 {cmr}   \CYRH = {50, },
6231 {cmr}   \CYRC = {50, },
6232 {cmr}   \CYRCH = {100, },
6233 {cmr}   \CYRSH = {50, },
6234 {cmr}   \CYRSHCH = {50, },
6235 {cmr}   \CYRHRDSN = {100, },
6236 {cmr}   \CYRERY = {50, },
6237 {cmr}   \CYRSFTSN = {50, },
6238 {cmr}   \CYREREV = {50, },
6239 {cmr}   \CYRYU = {50, },
6240 {cmr}   \CYRYA = {50, },
6241 {pmn}   \CYRYA = { , 20},
6242 {pmn}   \cyrr = {-50, },
6243 {m-t|pmn} _ = { , 100},
6244 {cmr}   _ = {100,200},
6245 {pmn}   031 = { , -100}, % ffl
6246 {pmn}   \v t = { , 100},
6247 {m-t}   \textbackslash = {100,200}, \quotedblbase = {400,500},
6248 {cmr}   \textbackslash = {300,300}, \quotedblbase = {200,600},
6249 {pmn}   \textbackslash = {100,150}, \quotedblbase = {150,500},
6250 {m-t}   \guillemotleft = {300,300}, \guillemotright = {300,300},

```

```

6251 {cmr}    \guillemotleft   = {400,100}, \guillemotright = {200,300},
6252 {pmn}    \guillemotleft   = {200,300}, \guillemotright = {150,400},
6253 {m-t}    \textbraceleft   = {200,100}, \textbraceright = {200,200},
6254 {cmr}    \textbraceleft   = {400,100}, \textbraceright = {200,200},
6255 {pmn}    \textbraceleft   = {200, }, \textbraceright = { ,200},
6256 {cmr}    \textquotedblleft = {500,300},
6257 {cmr}    \textless         = {300,100}, \textgreater     = {200,100}
6258 {pmn}    \textless         = {100, }, \textgreater     = { ,100}
6259 }
6260
6261 (/m-t|cmr|pmn)
6262 (*m-t|ptm)
6263 \SetProtrusion
6264 {m-t} [ name      = QX-it-default,
6265 {ptm} [ name      = ptm-it-QX,
6266 {m-t} load       = OT1-it ]
6267 {ptm} load       = ptm-it ]
6268 { encoding = {QX},
6269 {ptm} family     = {ptm,ptmx,ptmj},
6270 shape      = {it,s1} }
6271 {
6272 {ptm} 009 = { , 50}, % fk
6273 {=} = {100,100},
6274 {m-t} \textunderscore = {100,100},
6275 {ptm} \textunderscore = {100,150},
6276 \textbackslash = {100,200},
6277 \quotedblbase = {300,400},
6278 {m-t} \guillemotleft = {300,300}, \guillemotright = {300,300},
6279 {ptm} \guillemotleft = {200,400}, \guillemotright = {200,400},
6280 \textexclamdown = {200, }, \textquestiondown = {200, },
6281 \textbraceleft = {200,100}, \textbraceright = {200,200},
6282 \textless     = {100,100}, \textgreater     = {100,100},
6283 \textminus   = {200,200}, \textdegree     = {300,150},
6284 {m-t} \copyright = {100,100}, \textregistered = {100,100}
6285 {ptm} \textregistered = {100,150}, \copyright = {100,150},
6286 {ptm} \textDelta = { 70, }, \textdelta = { , 50},
6287 {ptm} \textpi = { 50, 80}, \textmu = { , 80},
6288 {ptm} \texteuro = {200, }, \textellipsis = {100,200},
6289 {ptm} \textquotefont = {500,400}, \textquoteright = {500,400},
6290 {ptm} \textquotedblleft = {500,300}, \textquotedblright = {400,400},
6291 {ptm} \textapprox = { 50, 50}, \textinfty = {100,100},
6292 {ptm} \textdagger = {150,150}, \textdaggerdbl = {100,100},
6293 {ptm} \textdiv = {150,150}, \textasciicircum = { 80, 80},
6294 {ptm} \texttimes = {100,150}, \textpm = { 50, 80},
6295 {ptm} \textbullet = {300,100}, \textperiodcentered = {300,300},
6296 {ptm} \textquotesingle = {500,500}, \textquotedbl = {300,300},
6297 {ptm} \textperthousand = { ,50}
6298 }
6299
6300 (/m-t|ptm)
6301 (*cmr|bch)
6302 \SetProtrusion
6303 {cmr} [ name = cmr-it-T5,
6304 {cmr} load = cmr-it ]
6305 {bch} [ name = bch-it-T5,
6306 {bch} load = bch-it ]
6307 { encoding = T5,
6308 {bch} family = bch,
6309 {cmr} family = cmr,
6310 shape = it }
6311 {
6312 {bch} _ = { ,100},
6313 {cmr} _ = {100,200},
6314 {bch} \textbackslash = {150,150},
6315 {cmr} \textbackslash = {300,300},

```

```

6316 \bch      \quotesinglbase   = {200,500},   \quotedblbase    = {150,500},
6317 \cmr      \quotesinglbase   = {300,700},   \quotedblbase    = {200,600},
6318 \bch      \guilsinglleft  = {300,400},   \guilsinglright = {200,500},
6319 \cmr      \guilsinglleft  = {500,300},   \guilsinglright = {400,400},
6320 \bch      \guillemotleft  = {200,300},   \guillemotright = {150,400},
6321 \cmr      \guillemotleft  = {400,100},   \guillemotright = {200,300},
6322 \bch      \textbraceleft  = {200, },     \textbraceright = { ,200},
6323 \cmr      \textbraceleft  = {400,100},   \textbraceright = {200,200},
6324 \bch      \textless       = {100, },     \textgreater    = { ,100}
6325 \cmr      \textless       = {300,100},   \textgreater    = {200,100}
6326 }
6327
6328 \cmr|bch

```

Slanted is very similar to italic.

```

6329 \cmr
6330 \SetProtrusion
6331 [ name      = cmr-s1,
6332   load     = cmr-it-OT1 ]
6333 { encoding  = {OT1,OT4},
6334   family    = cmr,
6335   shape     = sl  }
6336 {
6337   L = { ,50},
6338   f = { ,-50},
6339   - = {300, },
6340   \textendash = {400, }, \textemdash = {300, }
6341 }
6342
6343 \SetProtrusion
6344 [ name      = cmr-sl-T1,
6345   load     = cmr-it-T1 ]
6346 { encoding  = {T1,LY1},
6347   family    = cmr,
6348   shape     = sl  }
6349 {
6350   L = { ,50},
6351   f = { ,-50},
6352   - = {300, },
6353   \textendash = {400, }, \textemdash = {300, }
6354 }
6355
6356 \SetProtrusion
6357 [ name      = cmr-sl-T2A,
6358   load     = cmr-it-T2A ]
6359 { encoding  = T2A,
6360   family    = cmr,
6361   shape     = sl  }
6362 {
6363   L = { ,50},
6364   f = { ,-50},
6365   - = {300, },
6366   \textendash = {400, }, \textemdash = {300, }
6367 }
6368
6369 \SetProtrusion
6370 [ name      = cmr-sl-T5,
6371   load     = cmr-it-T5 ]
6372 { encoding  = T5,
6373   family    = cmr,
6374   shape     = sl  }
6375 {
6376   L = { ,50},
6377   f = { ,-50},
6378   - = {300, },

```

```

6379      \textendash = {400, }, \textemdash = {300, }
6380    }
6381
6382 \SetProtrusion
6383   [ name      = lmr-it-T1,
6384     load      = cmr-it-T1 ]
6385   { encoding  = {T1,LY1},
6386     family    = lmr,
6387     shape     = {it,s1} }
6388   {
6389     \textquotedblleft = { ,200}, \textquotedblright = { ,200},
6390     \quotesinglbase = { ,400}, \quotedblbase      = { ,500}
6391   }
6392

```

Oldstyle numerals are slightly different.

```

6393 \SetProtrusion
6394   [ name = cmr(oldstyle)-it,
6395     load = cmr-it-T1 ]
6396   { encoding = T1,
6397     family   = {hfor,cmor},
6398     shape    = {it,s1} }
6399   {
6400     1 = {250, 50},
6401     2 = {150,-100},
6402     3 = {100,-50},
6403     4 = {150,150},
6404     6 = {200, },
6405     7 = {200, 50},
6406     8 = {150,-50},
6407     9 = {100, 50}
6408   }
6409
6410 </cmr>
6411 <*pmn>
6412 \SetProtrusion
6413   [ name      = pmnx-it,
6414     load      = pmnj-it-T1 ]
6415   { encoding  = OT1,
6416     family    = pmnx,
6417     shape     = {it,s1} }
6418   {
6419     1 = {100,150}
6420   }
6421
6422 \SetProtrusion
6423   [ name      = pmnx-it-T1,
6424     load      = pmnj-it-T1 ]
6425   { encoding  = {T1,LY1},
6426     family    = pmnx,
6427     shape     = {it,s1} }
6428   {
6429     1 = {100,150}
6430   }
6431
6432 \SetProtrusion
6433   [ name      = pmnx-it-T2A,
6434     load      = pmnj-it-T2A ]
6435   { encoding  = {T2A},
6436     family    = pmnx,
6437     shape     = {it,s1} }
6438   {
6439     1 = {100,150}
6440   }
6441

```

```

6442 ⟨/pmn⟩
6443 ⟨*ptm⟩
6444 \SetProtrusion
6445   [ name      = ptm-it-LY1,
6446     load      = ptm-it-T1  ]
6447   { encoding  = {LY1},
6448     family    = {ptm,ptmx,ptmj},
6449     shape     = {it,s1}  }
6450   {
6451     –          = {100,100},
6452     \texttrademark = {100,100},
6453     \textregistered = {100,100},
6454     \textcopyright = {100,100},
6455     \textdegree  = {300,100},
6456     \textminus   = {200,200},
6457     \textellipsis = {100,200},
6458 %   \texteuro    = { , , }, % ?
6459     \textcent   = {100,100},
6460     \textquotesingle = {500, },
6461     \textflorin = {100, 70},
6462     \textdagger  = {150,150},
6463     \textdaggerdbl = {100,100},
6464     \textbullet  = {150,150},
6465     \textonesuperior = {150,100},
6466     \texttwosuperior = {150, 50},
6467     \textthreesuperior = {150, 50},
6468     \textparagraph = {100, },
6469     \textperiodcentered = {500,300},
6470     \textonequarter = { 50, },
6471     \textonehalf   = { 50, },
6472     \textplusminus = {100,100},
6473     \textmultiply = {150,150},
6474     \textdivide   = {150,150}
6475   }
6476
6477 ⟨/ptm⟩

```

15.8.3 Small caps

Small caps should inherit the values from their big brothers. Since values are relative to character width, we don't need to adjust them any further (but we have to reset some characters).

```

6478 ⟨*! (blg|ugm)⟩
6479 \SetProtrusion
6480 ⟨m-t⟩   [ name      = OT1-sc,
6481 ⟨bch⟩   [ name      = bch-sc,
6482 ⟨cmr⟩   [ name      = cmr-sc-OT1,
6483 ⟨pad⟩   [ name      = pad-sc,
6484 ⟨pmn⟩   [ name      = pmnj-sc,
6485 ⟨ppl⟩   [ name      = ppl-sc,
6486 ⟨ptm⟩   [ name      = ptm-sc,
6487 ⟨m-t⟩   load      = default ]
6488 ⟨bch⟩   load      = bch-default ]
6489 ⟨cmr⟩   load      = cmr-OT1 ]
6490 ⟨pad⟩   load      = pad-default ]
6491 ⟨pmn⟩   load      = pmnj-default ]
6492 ⟨ppl⟩   load      = ppl-default ]
6493 ⟨ptm⟩   load      = ptm-default ]
6494 ⟨m-t|bch|pad|pmn⟩   { encoding = OT1,
6495 ⟨cmr|ppl|ptm⟩   { encoding = {OT1,OT4},
6496 ⟨bch⟩     family   = bch,
6497 ⟨cmr⟩     family   = cmr,
6498 ⟨pad⟩     family   = {pad,padx,padj},

```

```

6499 ⟨pmn⟩      family   = pmnj,
6500 ⟨ppl⟩      family   = {ppl,pplx,pplj},
6501 ⟨ptm⟩      family   = {ptm,ptmx,ptmj},
6502     shape    = sc }
6503   {
6504     a = {50,50},
6505   ⟨cmr|pad|ppl|ptm⟩ \ae = {50, },
6506   ⟨bch|pmn⟩   c = {50, },
6507   ⟨bch|pad|pmn⟩ d = { ,50},
6508   ⟨m-t|bch|cmr|pad|pmn|ptm⟩ f = { ,50},
6509   ⟨bch|pad|pmn⟩ g = {50, },
6510   ⟨m-t|cmr|pad|pmn|ppl|ptm⟩ j = {50, },
6511   ⟨bch⟩      j = {100, },
6512   ⟨m-t|bch|cmr|pad|pmn|ppl⟩ l = { ,50},
6513   ⟨ptm⟩      l = { ,80},
6514   ⟨m-t|bch|cmr|pad|pmn|ppl⟩ 013 = { ,50}, % fl
6515   ⟨ptm⟩ 013 = { ,80}, % fl
6516   ⟨bch|pad|pmn⟩ o = {50,50},
6517   ⟨pad|pmn⟩ \oe = {50, },
6518   ⟨ppl⟩      p = { 0, 0},
6519   ⟨bch|pad|pmn⟩ q = {50,70},
6520   ⟨ppl⟩      q = { 0, },
6521   ⟨m-t|cmr|pad|pmn|ppl|ptm⟩ r = { , 0},
6522   ⟨t⟩      t = {50,50},
6523   ⟨m-t|bch|cmr|pad|pmn|ppl⟩ y = {50,50}
6524   ⟨ptm⟩      y = {80,80}
6525   }
6526
6527 \SetProtrusion
6528 ⟨m-t⟩ [ name   = T1-sc,
6529   ⟨bch⟩ [ name   = bch-sc-T1,
6530   ⟨cmr⟩ [ name   = cmr-sc-T1,
6531   ⟨pad⟩ [ name   = pad-sc-T1,
6532   ⟨pmn⟩ [ name   = pmnj-sc-T1,
6533   ⟨ppl⟩ [ name   = ppl-sc-T1,
6534   ⟨ptm⟩ [ name   = ptm-sc-T1,
6535   ⟨m-t⟩ load   = T1-default ]
6536   ⟨bch⟩ load   = bch-T1 ]
6537   ⟨cmr⟩ load   = cmr-T1 ]
6538   ⟨pad⟩ load   = pad-T1 ]
6539   ⟨pmn⟩ load   = pmnj-T1 ]
6540   ⟨ppl⟩ load   = ppl-T1 ]
6541   ⟨ptm⟩ load   = ptm-T1 ]
6542   { encoding = {T1,LY1},
6543   ⟨bch⟩   family   = bch,
6544   ⟨cmr⟩   family   = cmr,
6545   ⟨pad⟩   family   = {pad,padx,padj},
6546   ⟨pmn⟩   family   = pmnj,
6547   ⟨ppl⟩   family   = {ppl,pplx,pplj},
6548   ⟨ptm⟩   family   = {ptm,ptmx,ptmj},
6549     shape    = sc }
6550   {
6551     a = {50,50},
6552   ⟨cmr|pad|ppl|ptm⟩ \ae = {50, },
6553   ⟨bch|pmn⟩   c = {50, },
6554   ⟨bch|pad|pmn⟩ d = { ,50},
6555   ⟨m-t|bch|cmr|pad|pmn|ptm⟩ f = { ,50},
6556   ⟨bch|pad|pmn⟩ g = {50, },
6557   ⟨m-t|cmr|pad|pmn|ppl|ptm⟩ j = {50, },
6558   ⟨bch⟩      j = {100, },
6559   ⟨m-t|bch|cmr|pad|pmn|ppl⟩ l = { ,50},
6560   ⟨ptm⟩      l = { ,80},
6561   ⟨m-t|bch|cmr|pad|pmn|ppl⟩ 029 = { ,50}, % fl
6562   ⟨ptm⟩ 029 = { ,80}, % fl
6563   ⟨bch|pad|pmn⟩ o = {50,50},

```

```

6564 ⟨bch|pad|pmn⟩    \oe = {50, },
6565 ⟨ppl⟩      p = { 0, 0},
6566 ⟨bch|pad|pmn⟩    q = {50,70},
6567 ⟨ppl⟩      q = { 0, },
6568 ⟨m-t|cmr|pad|pmn|ppl|ptm⟩    r = { , 0},
6569     t = {50,50},
6570 ⟨m-t|bch|cmr|pad|pmn|ppl⟩    y = {50,50}
6571 ⟨ptm⟩      y = {80,80}
6572   }
6573
6574 ⟨!/blg|ugm)
6575 ⟨*m-t|cmr)
6576 \SetProtrusion
6577 ⟨m-t⟩ [ name      = T2A-sc,
6578 ⟨cmr⟩ [ name      = cmr-sc-T2A,
6579 ⟨m-t⟩   load      = T2A-default ]
6580 ⟨cmr⟩   load      = cmr-T2A   ]
6581   { encoding = T2A,
6582 ⟨cmr⟩     family   = cmr,
6583     shape    = sc  }
6584   {
6585     \cyra = {50,50},
6586     \cyrg = { ,50},
6587     \cyrt = {50,50},
6588     \cyry = { ,50}
6589   }
6590
6591 ⟨/m-t|cmr)
6592 ⟨*m-t)
6593 \SetProtrusion
6594   [ name      = QX-sc,
6595     load      = QX-default ]
6596   { encoding = QX,
6597     shape    = sc  }
6598   {
6599     a = {50,50},
6600     f = { ,50},
6601     j = {50, },
6602     l = { ,50},
6603     013 = { ,50}, % f1
6604     r = { , 0},
6605     t = {50,50},
6606     y = {50,50}
6607   }
6608
6609 ⟨/m-t)
6610 ⟨*cmr|bch)
6611 \SetProtrusion
6612 ⟨bch⟩ [ name      = bch-sc-T5,
6613 ⟨bch⟩   load      = bch-T5 ]
6614 ⟨cmr⟩ [ name      = cmr-sc-T5,
6615 ⟨cmr⟩   load      = cmr-T5 ]
6616   { encoding = T5,
6617 ⟨bch⟩     family   = bch,
6618 ⟨cmr⟩     family   = cmr,
6619     shape    = sc  }
6620   {
6621     a = {50,50},
6622     bch)   c = {50, },
6623     bch)   d = { ,50},
6624     bch)   f = { ,50},
6625     bch)   g = {50, },
6626     bch)   j = {100, },
6627 ⟨cmr⟩   j = {50, },
6628     l = { ,50},

```

```

6629 ⟨bch⟩      o = {50,50},
6630 ⟨bch⟩      q = { 0,  },
6631 ⟨cmr⟩      r = { , 0},
6632      t = {50,50},
6633      y = {50,50}
6634 }
6635
6636 ⟨/cmr|bch⟩
6637 (*pmn)
6638 \SetProtrusion
6639   [ name      = pmnx-sc,
6640     load      = pmnj-sc ]
6641   { encoding  = OT1,
6642     family    = pmnx,
6643     shape     = sc }
6644 {
6645   1 = {230,180}
6646 }
6647
6648 \SetProtrusion
6649   [ name      = pmnx-sc-T1,
6650     load      = pmnj-sc-T1 ]
6651   { encoding  = {T1,LY1},
6652     family    = pmnx,
6653     shape     = sc }
6654 {
6655   1 = {230,180}
6656 }
6657

```

15.8.4 Italic small caps

Minion provides real small caps in italics. The `slantsc` package calls them `scit`, Philipp Lehman's `fontinstallationguide` suggests `si`.

```

6658 \SetProtrusion
6659   [ name      = pmnj-scit,
6660     load      = pmnj-it ]
6661   { encoding  = OT1,
6662     family    = pmnj,
6663     shape     = {scit,si} }
6664 {
6665   a = {50, },
6666   \ae = { ,-50},
6667   b = {20,-50},
6668   c = {50,-50},
6669   d = {20, 0},
6670   e = {20,-50},
6671   f = {10, 0},
6672   012 = {10,-50}, % fi
6673   013 = {10,-50}, % fl
6674   014 = {10,-50}, % ffi
6675   015 = {10,-50}, % ffl
6676   g = {50,-50},
6677   i = {20,-50},
6678   j = {20, 0},
6679   k = {20, },
6680   l = {20,50},
6681   m = { , -30},
6682   n = { , -30},
6683   o = {50, },
6684   \oe = {50,-50},
6685   p = {20,-50},
6686   q = {50, },
6687   r = {20, 0},

```

```
6688     s = {20,-30},
6689     t = {70, },
6690     u = {50,-50},
6691     v = {100, },
6692     w = {100, },
6693     y = {50, },
6694     z = { , -50}
6695   }
6696
6697 \SetProtrusion
6698   [ name      = pmnj-scit-T1,
6699     load      = pmnj-it-T1 ]
6700   { encoding  = {T1,LY1},
6701     family    = pmnj,
6702     shape     = {scit,si}   }
6703   {
6704     a = {50, },
6705     \ae = { , -50},
6706     b = {20,-50},
6707     c = {50,-50},
6708     d = {20, 0},
6709     e = {20,-50},
6710     f = {10, 0},
6711     028 = {10,-50}, % fi
6712     029 = {10,-50}, % fl
6713     030 = {10,-50}, % ffi
6714     031 = {10,-50}, % ffl
6715     g = {50,-50},
6716     i = {20,-50},
6717     188 = {20, 0}, % ij
6718     j = {20, 0},
6719     k = {20, },
6720     l = {20,50},
6721     m = { , -30},
6722     n = { , -30},
6723     o = {50, },
6724     \oe = {50,-50},
6725     p = {20,-50},
6726     q = {50, },
6727     r = {20, 0},
6728     s = {20,-30},
6729     t = {70, },
6730     u = {50,-50},
6731     v = {100, },
6732     w = {100, },
6733     y = {50, },
6734     z = { , -50}
6735   }
6736
6737 \SetProtrusion
6738   [ name      = pmnx-scit,
6739     load      = pmnj-scit ]
6740   { encoding  = OT1,
6741     family    = pmnx,
6742     shape     = {scit,si}   }
6743   {
6744     l = {100,150}
6745   }
6746
6747 \SetProtrusion
6748   [ name      = pmnx-scit-T1,
6749     load      = pmnj-scit-T1 ]
6750   { encoding  = {T1,LY1},
6751     family    = pmnx,
6752     shape     = {scit,si}   }
```

```

6753   {
6754     1 = {100,150}
6755   }
6756
6757 </pmn>

```

15.8.5 Text companion

Finally the TS1 encoding. Still quite incomplete for Times and especially Palatino.
Anybody?

```

6758 \SetProtrusion
6759 <m-t> [ name      = textcomp ]
6760 <bch>  [ name      = bch-textcomp ]
6761 <blg>  [ name      = blg-textcomp ]
6762 <cmr>  [ name      = cmr-textcomp ]
6763 <pad>  [ name      = pad-textcomp ]
6764 <pmn>  [ name      = pmn-textcomp ]
6765 <ppl>  [ name      = ppl-textcomp ]
6766 <ptm>  [ name      = ptm-textcomp ]
6767 <ugm>  [ name      = ugm-textcomp ]
6768 <m-t>  { encoding = TS1      }
6769 <!m-t> { encoding = TS1,
6770   <bch>    family = bch }
6771 <blg>    family = blg }
6772 <cmr>    family = cmr }
6773 <pad>    family = {pad,padx,padj} }
6774 <pmn>    family = {pmnx,pmnj} }
6775 <ppl>    family = {ppl,pplx,pplj} }
6776 <ptm>    family = {ptm,ptmx,ptmj} }
6777 <ugm>    family = ugm }

6778 {
6779 <blg>    \textquotestraightbase = {400,500},
6780 <cmr>    \textquotestraightbase = {300,300},
6781 <pad|pmn> \textquotestraightbase = {400,400},
6782 <blg>    \textquotestraightdblbase = {300,400},
6783 <cmr|pmn> \textquotestraightdblbase = {300,300},
6784 <pad>    \textquotestraightdblbase = {400,400},
6785 <bch|cmr|pad|pmn|ugm> \texttwelveudash = {200,200},
6786 <bch|cmr|pad|pmn> \texththreequartersdash = {150,150},
6787 <ugm>    \texththreequartersdash = {200,200},
6788 <blg>    \textquotesingle = {500,600},
6789 <cmr|pmn> \textquotesingle = {300,400},
6790 <pad>    \textquotesingle = {400,500},
6791 <ptm>    \textquotesingle = {500,500},
6792 <ugm>    \textquotesingle = {300,500},
6793 <bch|cmr|pmn> \textasteriskcentered = {200,300},
6794 <blg>    \textasteriskcentered = {150,200},
6795 <pad>    \textasteriskcentered = {300,300},
6796 <ugm>    \textasteriskcentered = {100,200},
6797 <pmn>    \textfractionsolidus = {-200,-200},
6798 <cmr>    \textoneoldstyle = {100,100},
6799 <pmn>    \textoneoldstyle = { , 50},
6800 <cmr>    \textthreeoldstyle = { , 50},
6801 <pad|pmn> \textthreeoldstyle = { 50, },
6802 <cmr>    \textfouroldstyle = { 50, 50},
6803 <pad|pmn> \textfouroldstyle = { 50, },
6804 <cmr|pad|pmn> \textsevenoldstyle = { 50, 80},
6805 <cmr>    \textlangue = {400, },
6806 <cmr>    \textrangle = { ,400},
6807 <m-t|bch|pmn|ptm> \textminus = {200,200},
6808 <cmr|pad|ppl> \textminus = {300,300},
6809 <blg|ugm> \textminus = {250,300},
6810 <bch|pad|pmn> \textlbrackdbl = {100, },
6811 <blg> \textlbrackdbl = {200, },

```

```

6812 {bch|pad|pmn} \textrbrackdbl = { ,100},
6813 {blg} \textrbrackdbl = { ,200},
6814 {pmn} \textasciigrave = {200,500},
6815 {bch|blg|cmr|pad|pmn} \texttildelow = {200,250},
6816 {pmn} \textasciibreve = {300,400},
6817 {pmn} \textasciicaron = {300,400},
6818 {pmn} \textacute dbl = {200,300},
6819 {pmn} \textgrave dbl = {150,300},
6820 {bch|pmn|ugm} \textdagger = { 80, 80},
6821 {blg} \textdagger = {200,200},
6822 {cmr|pad} \textdagger = {100,100},
6823 {ptm} \textdagger = {150,150},
6824 {blg} \textdaggerdbl = {150,150},
6825 {cmr|pad|pmn} \textdaggerdbl = { 80, 80},
6826 {ptm} \textdaggerdbl = {100,100},
6827 {bch} \textbardbl = {100,100},
6828 {blg|ugm} \textbardbl = {150,150},
6829 {bch} \textbullet = {200,200},
6830 {blg} \textbullet = {400,500},
6831 {cmr|pad|pmn} \textbullet = { ,100},
6832 {ptm} \textbullet = {150,150},
6833 {ugm} \textbullet = { 50,100},
6834 {bch|cmr|pmn} \textcelsius = { 50, },
6835 {pad} \textcelsius = { 80, },
6836 {bch} \textflorin = { 50, 50},
6837 {blg} \textflorin = {100,100},
6838 {pad|ugm} \textflorin = { ,100},
6839 {pmn} \textflorin = { 50,100},
6840 {ptm} \textflorin = { 50, 70},
6841 {cmr} \textcolonmonetary = { , 50},
6842 {pad|pmn} \textcolonmonetary = { 50, },
6843 {pmn} \textinterrobang = { ,100},
6844 {pmn} \textinterrobangdown = {100, },
6845 {m-t|pad|ptm} \texttrademark = {100,100},
6846 {bch} \texttrademark = {150,150},
6847 {blg|cmr|ppl} \texttrademark = {200,200},
6848 {pmn} \texttrademark = { 50, 50},
6849 {ugm} \texttrademark = {100,150},
6850 {bch|ugm} \textcent = { 50, },
6851 {ptm} \textcent = {100,100},
6852 {bch} \textsterling = { 50, },
6853 {ugm} \textsterling = { , 50},
6854 {bch} \textbrokenbar = {200,200},
6855 {blg} \textbrokenbar = {250,250},
6856 {ugm} \textbrokenbar = {200,300},
6857 {pmn} \textasciidieresis = {300,400},
6858 {m-t|bch|cmr|pad|ptm|ugm} \textcopyright = {100,100},
6859 {pmn} \textcopyright = {100,150},
6860 {ppl} \textcopyright = {200,200},
6861 {bch|cmr|ugm} \textordfeminine = {100,200},
6862 {pad|pmn} \textordfeminine = {200,200},
6863 {bch|cmr|pad|pmn|ugm} \textlnot = {200, },
6864 {blg} \textlnot = {200,100},
6865 {m-t|bch|cmr|pad|ptm|ugm} \textregistered = {100,100},
6866 {pmn} \textregistered = { 50,150},
6867 {ppl} \textregistered = {200,200},
6868 {pmn} \textasciimacron = {150,200},
6869 {m-t|ppl|ptm} \textdegree = {300,300},
6870 {bch} \textdegree = {150,200},
6871 {blg|ugm} \textdegree = {200,200},
6872 {cmr|pad} \textdegree = {400,400},
6873 {pmn} \textdegree = {150,400},
6874 {bch|cmr|pad|pmn|ugm} \textpm = {150,200},
6875 {blg} \textpm = {100,100},
6876 {ptm} \textpm = { 50, 80},

```

```

6877 {bch|blg|ugm} \texttwosuperior = {100,200},
6878 (cmr) \texttwosuperior = { 50,100},
6879 (pad|pmn) \texttwosuperior = {200,200},
6880 (ptm) \texttwosuperior = { 50, 50},
6881 {bch|blg|ugm} \textthreesuperior = {100,200},
6882 (cmr) \textthreesuperior = { 50,100},
6883 (pad|pmn) \textthreesuperior = {200,200},
6884 (ptm) \textthreesuperior = { 50, 50},
6885 (pmn) \textasciicircum = {300,400},
6886 (bch|ugm) \textmu = { ,100},
6887 (bch|pad|pmn) \textparagraph = { ,100},
6888 (bch|cmr|pad|pmn) \textperiodcentered = {300,400},
6889 (blg) \textperiodcentered = {400,500},
6890 (ptm) \textperiodcentered = {300,300},
6891 (ugm) \textperiodcentered = {200,500},
6892 (bch|blg|ugm) \textonesuperior = {200,300},
6893 (cmr|pad|pmn) \textonesuperior = {200,200},
6894 (ptm) \textonesuperior = {100,100},
6895 (bch|pad|pmn|ugm) \textordmasculine = {200,200},
6896 (blg|cmr) \textordmasculine = {100,200},
6897 (bch|cmr|pmn) \texteuro = {100, },
6898 (pad) \texteuro = { 50,100},
6899 (bch) \texttimes = {200,200},
6900 (blg|ptm) \texttimes = {100,100},
6901 (cmr) \texttimes = {150,250},
6902 (pad) \texttimes = {100,150},
6903 (pmn) \texttimes = { 70,100},
6904 (ugm) \texttimes = {200,300},
6905 (bch|pad|pmn) \textdiv = {150,200}
6906 (blg) \textdiv = {100,100}
6907 (cmr) \textdiv = {150,250}
6908 (ptm) \textdiv = { 50,100},
6909 (ugm) \textdiv = {200,300},
6910 (ptm) \textperthousand = { ,50}
6911 (ugm) \textsection = { ,100},
6912 (ugm) \textonehalf = { 50,100},
6913 (ugm) \textonequarter = { 50,100},
6914 (ugm) \textthreequarters = { 50,100},
6915 (ugm) \textsurd = { ,100}

```

Remaining slots in the source file.

```

6916 }
6917
6918 (*cmr|pad|pmn|ugm)
6919 \SetProtrusion
6920 (cmr) [ name = cmr-textcomp-it ]
6921 (pad) [ name = pad-textcomp-it ]
6922 (pmn) [ name = pmn-textcomp-it ]
6923 (ugm) [ name = ugm-textcomp-it ]
6924 { encoding = TS1,
6925 (cmr) family = cmr,
6926 (pad) family = {pad,padx,padj},
6927 (pmn) family = {pmnx,pmnj},
6928 (ugm) family = ugm,
6929 (!ugm) shape = {it,s1} }
6930 (ugm) shape = it }
6931 {
6932 (cmr) \textquotestraightbase = {300,600},
6933 (pad|pmn) \textquotestraightbase = {400,400},
6934 (cmr) \textquotestraightdblbase = {300,600},
6935 (pad) \textquotestraightdblbase = {300,400},
6936 (pmn) \textquotestraightdblbase = {300,300},
6937 \texttwelvevdash = {200,200},
6938 (cmr|pad|pmn) \textthreequartersemdash = {150,150},
6939 (ugm) \textthreequartersemdash = {200,200},

```

```

6940 (cmr)    \textquotesingle      = {600,300},
6941 (pad)    \textquotesingle      = {800,100},
6942 (pmn)    \textquotesingle      = {300,200},
6943 (ugm)    \textquotesingle      = {500,500},
6944 (cmr)    \textasteriskcentered = {300,200},
6945 (pad)    \textasteriskcentered = {500,100},
6946 (pmn)    \textasteriskcentered = {200,300},
6947 (ugm)    \textasteriskcentered = {300,150},
6948 (pmn)    \textfractionsolidus = {-200,-200},
6949 (cmr)    \textoneoldstyle   = {100, 50},
6950 (pad)    \textoneoldstyle   = {100, },
6951 (pmn)    \textoneoldstyle   = { 50, },
6952 (pad)    \texttwooldstyle   = { 50, },
6953 (pmn)    \texttwooldstyle   = {-50, },
6954 (cmr)    \textthreeoldstyle = {100, 50},
6955 (pmn)    \textthreeoldstyle = {-100, },
6956 (cmr)    \textfouroldstyle  = { 50, 50},
6957 (pad)    \textfouroldstyle  = { 50,100},
6958 (cmr)    \textsevenoldstyle = { 50, 80},
6959 (pad)    \textsevenoldstyle = { 50, },
6960 (pmn)    \textsevenoldstyle = { 20, },
6961 (cmr)    \textlangle      = {400, },
6962 (cmr)    \textrangle     = { ,400},
6963 (cmr|pad) \textminus      = {300,300},
6964 (pmn)    \textminus      = {200,200},
6965 (ugm)    \textminus      = {250,300},
6966 (pad|pmn) \textlbrackdbl = {100, },
6967 (pad|pmn) \textrbrackdbl = { ,100},
6968 (pmn)    \textasciigrave = {300,300},
6969 (cmr|pad|pmn) \texttildelow = {200,250},
6970 (pmn)    \textasciibreve = {300,300},
6971 (pmn)    \textasciicaron = {300,300},
6972 (pmn)    \textacute dbl = {200,300},
6973 (pmn)    \textgrave dbl = {150,300},
6974 (cmr)    \textdagger     = {100,100},
6975 (pad)    \textdagger     = {200,100},
6976 (pmn)    \textdagger     = { 80, 50},
6977 (ugm)    \textdagger     = { 80, 80},
6978 (cmr|pad) \textdagger dbl = { 80, 80},
6979 (pmn)    \textdagger dbl = { 80, 50},
6980 (ugm)    \textbar dbl = {150,150},
6981 (cmr)    \textbullet    = {200,100},
6982 (pad)    \textbullet    = {300, },
6983 (pmn)    \textbullet    = { 30, 70},
6984 (ugm)    \textbullet    = { 50,100},
6985 (cmr)    \textcelsius = {100, },
6986 (pad)    \textcelsius = {200, },
6987 (pmn)    \textcelsius = { 50,-50},
6988 (pad)    \textflorin   = {100, },
6989 (pmn)    \textflorin   = { 50,100},
6990 (ugm)    \textflorin   = { ,100},
6991 (cmr)    \textcolonmonetary = {150, },
6992 (pad)    \textcolonmonetary = {100, },
6993 (pmn)    \textcolonmonetary = { 50,-50},
6994 (cmr|pad) \texttrademark = {200, },
6995 (pmn)    \texttrademark = { 50,100},
6996 (ugm)    \texttrademark = {150, 50},
6997 (ugm)    \textcent     = { 50, },
6998 (ugm)    \textsterling = { , 50},
6999 (ugm)    \textbrokenbar = {200,300},
7000 (pmn)    \textasciidieresis = {300,200},
7001 (cmr)    \textcopyright = {100, },
7002 (pad)    \textcopyright = {200,100},
7003 (pmn)    \textcopyright = {100,150},
7004 (ugm)    \textcopyright = {300, },

```

```

7005 (cmr)      \textordfeminine      = {100,100},
7006 (pmn)      \textordfeminine      = {200,200},
7007 (ugm)      \textordfeminine      = {100,200},
7008 (cmr|pad)   \textlnot          = {300,    },
7009 (pmn|ugm)   \textlnot          = {200,    },
7010 (cmr)      \textregistered     = {100,    },
7011 (pad)      \textregistered     = {200,100},
7012 (pmn)      \textregistered     = { 50,150},
7013 (ugm)      \textregistered     = {300,    },
7014 (pmn)      \textasciimacron  = {150,200},
7015 (cmr|pad)   \textdegree        = {500,100},
7016 (pmn)      \textdegree        = {150,150},
7017 (ugm)      \textdegree        = {300,200},
7018 (cmr)      \textpm           = {150,100},
7019 (pad)      \textpm           = {200,150},
7020 (pmn|ugm)   \textpm           = {150,200},
7021 (cmr)      \textonesuperior   = {400,    },
7022 (pad)      \textonesuperior   = {300,100},
7023 (pmn)      \textonesuperior   = {200,100},
7024 (ugm)      \textonesuperior   = {300,300},
7025 (cmr)      \texttwosuperior  = {400,    },
7026 (pad)      \texttwosuperior  = {300,    },
7027 (pmn)      \texttwosuperior  = {200,100},
7028 (ugm)      \texttwosuperior  = {300,200},
7029 (cmr)      \textthreesuperior = {400,    },
7030 (pad)      \textthreesuperior = {300,    },
7031 (pmn)      \textthreesuperior = {200,100},
7032 (ugm)      \textthreesuperior = {300,200},
7033 (ugm)      \textmu           = { ,100},
7034 (pmn)      \textasciacute    = {300,200},
7035 (cmr)      \textparagraph     = {200,    },
7036 (pmn)      \textparagraph     = { ,100},
7037 (cmr)      \textperiodcentered = {500,500},
7038 (pad|pmn|ugm) \textperiodcentered = {300,400},
7039 (cmr)      \textordmasculine  = {100,100},
7040 (pmn)      \textordmasculine  = {200,200},
7041 (ugm)      \textordmasculine  = {300,200},
7042 (cmr)      \texteuro          = {200,    },
7043 (pad)      \texteuro          = {100,    },
7044 (pmn)      \texteuro          = {100,-50},
7045 (cmr)      \texttimes         = {200,200},
7046 (pad)      \texttimes         = {200,100},
7047 (pmn)      \texttimes         = { 70,100},
7048 (ugm)      \texttimes         = {200,300},
7049 (cmr|pad)  \textdiv           = {200,200}
7050 (pmn)      \textdiv           = {150,200}
7051 (ugm)      \textdiv           = {200,300},
7052 (ugm)      \textsection       = { ,200},
7053 (ugm)      \textonehalf      = { 50,100},
7054 (ugm)      \textonequarter   = { 50,100},
7055 (ugm)      \textthreequarters = { 50,100},
7056 (ugm)      \textsurd          = { ,100}
7057 }
7058
7059 (/cmr|pad|pmn|ugm)

```

15.8.6 Computer Modern math

Now to the math symbols for Computer Modern Roman. Definitions have been extracted from `fontmath.ltx`. I did not spend too much time fiddling with these settings, so they can surely be improved.

The math font ‘operators’ (also used for the `\mathrm` and `\mathbf` alphabets) is OT1/cm, which we’ve already set up above. It’s declared as:

```
\DeclareSymbolFont{operators} {OT1}{cmr}{m}{n}
\SetSymbolFont{operators}{bold}{OT1}{cmr}{bx}{n}
```

mathit (OT1/cmr/m/it) is also already set up.

There are (for the moment) no settings for mathsf and \mathtt{mathtt} .

Math font ‘letters’ (also used as $\mathnormal{mathnormal}$) is declared as:

```
\DeclareSymbolFont{letters} {OML}{cmm}{m}{it}
\SetSymbolFont{letters}{bold}{OML}{cmm}{b}{it}
```

```
7060 (*cmr)
7061 \SetProtrusion
7062   [ name      = cmr-math-letters ]
7063   { encoding  = OML,
7064     family    = cmm,
7065     series    = {m,b},
7066     shape     = it    }
7067   {
7068     A = {100, 50}, % \mathnormal
7069     B = { 50,   },
7070     C = { 50,   },
7071     D = { 50, 50},
7072     E = { 50,   },
7073     F = {100, 50},
7074     G = { 50, 50},
7075     H = { 50, 50},
7076     I = { 50, 50},
7077     J = {150, 50},
7078     K = { 50,100},
7079     L = { 50, 50},
7080     M = { 50,   },
7081     N = { 50,   },
7082     O = { 50,   },
7083     P = { 50,   },
7084     Q = { 50, 50},
7085     R = { 50,   },
7086     S = { 50,   },
7087     T = { 50,100},
7088     U = { 50, 50},
7089     V = {100,100},
7090     W = { 50,100},
7091     X = { 50,100},
7092     Y = {100,100},
7093     f = {100,100},
7094     h = { ,100},
7095     i = { , 50},
7096     j = { , 50},
7097     k = { , 50},
7098     r = { , 50},
7099     v = { , 50},
7100     w = { , 50},
7101     x = { , 50},
7102     "OB = { 50,100}, % \alpha
7103     "OC = { 50, 50}, % \beta
7104     "OD = {200,150}, % \gamma
7105     "OE = { 50, 50}, % \delta
7106     "OF = { 50, 50}, % \epsilon
7107     "10 = { 50,150}, % \zeta
7108     "12 = { 50,   }, % \theta
7109     "13 = { ,100}, % \iota
7110     "14 = { ,100}, % \kappa
7111     "15 = {100, 50}, % \lambda
7112     "16 = { , 50}, % \mu
7113     "17 = { , 50}, % \nu
```

```

7114 "18 = { , 50}, % \xi
7115 "19 = { 50,100}, % \pi
7116 "1A = { 50, 50}, % \rho
7117 "1B = { ,150}, % \sigma
7118 "1C = { 50,150}, % \tau
7119 "1D = { 50, 50}, % \upsilon
7120 "1F = { 50,100}, % \chi
7121 "20 = { 50, 50}, % \psi
7122 "21 = { , 50}, % \omega
7123 "22 = { , 50}, % \varepsilon
7124 "23 = { , 50}, % \vartheta
7125 "24 = { , 50}, % \varpi
7126 "25 = {100, }, % \varrho
7127 "26 = {100,100}, % \varsigma
7128 "27 = { 50, 50}, % \varphi
7129 "28 = {100,100}, % \leftharpoonup
7130 "29 = {100,100}, % \leftharpoondown
7131 "2A = {100,100}, % \rightharpoonup
7132 "2B = {100,100}, % \rightharpoondown
7133 "2C = {300,200}, % \lhook
7134 "2D = {200,300}, % \rhook
7135 "2E = { ,100}, % \triangleright
7136 "2F = {100, }, % \triangleleft
7137 "3A = { ,500}, % ., \ldotp
7138 "3B = { ,500}, % ,
7139 "3C = {200,100}, % <
7140 "3D = {300,400}, % /
7141 "3E = {100,200}, % >
7142 "3F = {200,200}, % \star
7143 "5B = { ,100}, % \flat
7144 "5E = {200,200}, % \smile
7145 "5F = {200,200}, % \frown
7146 "7C = {100, }, % \jmath
7147 "7D = { ,100} % \wp

```

Remaining slots in the source file.

```

7148 }
7149

```

Math font ‘symbols’ (also used for the \mathcal alphabet) is declared as:

```

\DeclareSymbolFont{symbols}    {OMS}{cmsy}{m}{n}
\SetSymbolFont{symbols}   {bold}{OMS}{cmsy}{b}{n}

```

```

7150 \SetProtrusion
7151 [ name      = cmr-math-symbols ]
7152 { encoding  = OMS,
7153   family    = cmsy,
7154   series    = {m,b},
7155   shape     = n  }
7156 {
7157   A = {150, 50}, % \mathcal
7158   C = { ,100},
7159   D = { , 50},
7160   F = { 50,150},
7161   I = { ,100},
7162   J = {100,150},
7163   K = { ,100},
7164   L = {100, },
7165   M = { 50, 50},
7166   N = { 50,100},
7167   P = { , 50},
7168   Q = { 50, },
7169   R = { , 50},
7170   T = { 50,150},
7171   V = { 50, 50},

```

```
7172      W = { , 50},
7173      X = {100,100},
7174      Y = {100, },
7175      Z = {100,150},
7176      "00 = {300,300}, % -
7177      "01 = { ,700}, % \cdot, \cdotdotp
7178      "02 = {150,250}, % \times
7179      "03 = {150,250}, % *, \ast
7180      "04 = {200,300}, % \div
7181      "05 = {150,250}, % \diamond
7182      "06 = {200,200}, % \pm
7183      "07 = {200,200}, % \mp
7184      "08 = {100,100}, % \oplus
7185      "09 = {100,100}, % \ominus
7186      "0A = {100,100}, % \otimes
7187      "0B = {100,100}, % \oslash
7188      "0C = {100,100}, % \odot
7189      "0D = {100,100}, % \bigcirc
7190      "0E = {100,100}, % \circ
7191      "0F = {100,100}, % \bullet
7192      "10 = {100,100}, % \asymp
7193      "11 = {100,100}, % \equiv
7194      "12 = {200,100}, % \subseteqq
7195      "13 = {100,200}, % \supseteqq
7196      "14 = {200,100}, % \leq
7197      "15 = {100,200}, % \geq
7198      "16 = {200,100}, % \preceq
7199      "17 = {100,200}, % \succeq
7200      "18 = {200,200}, % \sim
7201      "19 = {150,150}, % \approx
7202      "1A = {200,100}, % \subset
7203      "1B = {100,200}, % \supset
7204      "1C = {200,100}, % \amalg
7205      "1D = {100,200}, % \gg
7206      "1E = {300,100}, % \prec
7207      "1F = {100,300}, % \succ
7208      "20 = {100,200}, % \leftarrow
7209      "21 = {200,100}, % \rightarrow
7210      "22 = {100,100}, % \uparrow
7211      "23 = {100,100}, % \downarrow
7212      "24 = {100,100}, % \leftrightarrow
7213      "25 = {100,100}, % \nearrow
7214      "26 = {100,100}, % \searrow
7215      "27 = {100,100}, % \simeq
7216      "28 = {100,100}, % \Leftarrow
7217      "29 = {100,100}, % \Rightarrow
7218      "2A = {100,100}, % \Uparrow
7219      "2B = {100,100}, % \Downarrow
7220      "2C = {100,100}, % \Leftrightarrow
7221      "2D = {100,100}, % \nwarrow
7222      "2E = {100,100}, % \swarrow
7223      "2F = { ,100}, % \propto
7224      "30 = { ,400}, % \prime
7225      "31 = {100,100}, % \infty
7226      "32 = {150,100}, % \in
7227      "33 = {100,150}, % \ni
7228      "34 = {100,100}, % \triangle, \bigtriangleup
7229      "35 = {100,100}, % \bigtriangledown
7230      "38 = { ,100}, % \forall
7231      "39 = {100, }, % \exists
7232      "3A = {200, }, % \neg
7233      "3E = {200,200}, % \top
7234      "3F = {200,200}, % \bot, \perp
7235      "5E = {100,200}, % \wedge
7236      "5F = {100,200}, % \vee
```

```

7237 "60 = { ,300}, % \vdash
7238 "61 = {300, }, % \dashv
7239 "62 = {100,100}, % \lceil\lfloor
7240 "63 = {100,100}, % \rfloor\lceil
7241 "64 = {100,100}, % \lceil\lceil
7242 "65 = {100,100}, % \rceil\rceil
7243 "66 = {150, }, % \lbrace
7244 "67 = { ,150}, % \rbrace
7245 "68 = {400, }, % \langle
7246 "69 = { ,400}, % \rangle
7247 "6C = {100,100}, % \updownarrow
7248 "6D = {100,100}, % \Updownarrow
7249 "6E = {100,300}, % \backslash, \setminus
7250 "72 = {100,100}, % \nabla
7251 "79 = {200,200}, % \dagger
7252 "7A = {100,100}, % \ddagger
7253 "7B = {100, }, % \mathop{paragraph}
7254 "7C = {100,100}, % \clubsuit
7255 "7D = {100,100}, % \diamondsuit
7256 "7E = {100,100}, % \heartsuit
7257 "7F = {100,100} % \spadesuit

```

Remaining slots in the source file.

```

7258 }
7259

```

We don't bother about 'largesymbols', since it will only be used in display math, where protrusion doesn't work anyway. It's declared as:

```
\DeclareSymbolFont{largesymbols}{OMX}{cmex}{m}{n}
```

```

7260 </cmr>
7261 </cfg-t>

```

15.8.7 AMS symbols

Settings for the AMS math fonts (amssymb).

```
7262 <cfg-u>
```

Symbol font 'a'.

```

7263 <msa>
7264 \SetProtrusion
7265 [ name      = AMS-a ]
7266 { encoding  = U,
7267   family    = msa  }
7268 {
7269   "05  = {150,250}, % \centerdot
7270   "06  = {100,100}, % \lozenge
7271   "07  = { 50, 50}, % \blacklozenge
7272   "08  = { 50, 50}, % \circlearrowright
7273   "09  = { 50, 50}, % \circlearrowleft
7274   "0A  = {100,100}, % \rightleftharpoons
7275   "0B  = {100,100}, % \leftrightharpoons
7276   "0D  = {-50,200}, % \Vdash
7277   "0E  = {-50,200}, % \VvDash
7278   "0F  = {-70,150}, % \vDash
7279   "10  = {100,150}, % \twoheadrightarrow
7280   "11  = {100,150}, % \twoheadleftarrow
7281   "12  = { 50,100}, % \leftleftarrows
7282   "13  = { 50, 80}, % \rightrightarrows
7283   "14  = {120,120}, % \upuparrows
7284   "15  = {120,120}, % \downdownarrows
7285   "16  = {200,200}, % \upharpoonright
7286   "17  = {200,200}, % \downharpoonright

```

```

7287 "18 = {200,200}, % \upharpoonleft
7288 "19 = {200,200}, % \downharpoonleft
7289 "1A = { 80,100}, % \rightarrowtail
7290 "1B = { 80,100}, % \leftarrowtail
7291 "1C = { 50, 50}, % \leftrightsquigarrow
7292 "1D = { 50, 50}, % \rightleftarrows
7293 "1E = {250, }, % \Lsh
7294 "1F = { ,250}, % \Rsh
7295 "20 = {100,100}, % \rightsquigarrow
7296 "21 = {100,100}, % \leftrightsquigarrow
7297 "22 = {100, 50}, % \looparrowleft
7298 "23 = { 50,100}, % \looparrowright
7299 "24 = { 50, 80}, % \circeq
7300 "25 = { ,100}, % \succsim
7301 "26 = { ,100}, % \gtrsim
7302 "27 = { ,100}, % \gtrapprox
7303 "28 = {150, 50}, % \multimap
7304 "2B = {100,150}, % \doteqdot
7305 "2C = {100,150}, % \trianglegtr
7306 "2D = {100, 50}, % \precsim
7307 "2E = {100, 50}, % \lessim
7308 "2F = { 50, 50}, % \lessapprox
7309 "30 = {100, 50}, % \eqslantless
7310 "31 = { 50, 50}, % \eqslantgtr
7311 "32 = {100, 50}, % \curlyeqsucc
7312 "33 = { 50,100}, % \curlyeqsucc
7313 "34 = {100, 50}, % \preccurlyeq
7314 "36 = { 50, }, % \eqslant
7315 "38 = { , 50}, % \backprime
7316 "39 = {250,250}, % \dabar@ : the dash bar in \dash(left,right)arrow
7317 "3C = { 50,100}, % \succcurlyeq
7318 "3E = { , 50}, % \geqslant
7319 "40 = { , 50}, % \sqsubset
7320 "41 = { 50, }, % \sqsupset
7321 "42 = { ,150}, % \vartriangleright, \rhd
7322 "43 = {150, }, % \vartriangleleft, \lhd
7323 "44 = { ,100}, % \trianglerighteq, \unrhd
7324 "45 = {100, }, % \trianglelefteq, \unlhd
7325 "46 = {100,100}, % \bigstar
7326 "48 = { 50, 50}, % \blacktriangledown
7327 "49 = { ,100}, % \blacktriangleright
7328 "4A = {100, }, % \blacktriangleleft
7329 "4B = { ,150}, % \dashrightarrow (the arrow)
7330 "4C = {150, }, % \dashleftarrow
7331 "4D = { 50, 50}, % \vartriangle
7332 "4E = { 50, 50}, % \blacktriangle
7333 "4F = { 50, 50}, % \triangledown
7334 "50 = { 50, 50}, % \eqcirc
7335 "56 = { ,150}, % \Rrightarrow
7336 "57 = {150, }, % \Lleftarrow
7337 "58 = {100,300}, % \checkmark
7338 "5C = { 50, 50}, % \angle
7339 "5D = { 50, 50}, % \measuredangle
7340 "5E = { 50, 50}, % \sphericalangle
7341 "5F = { , 50}, % \varpropto
7342 "60 = {100,100}, % \smallsmile
7343 "61 = {100,100}, % \smallfrown
7344 "62 = { 50, }, % \Subset
7345 "63 = { , 50}, % \Supset
7346 "66 = {150,150}, % \curlywedge
7347 "67 = {150,150}, % \curlyvee
7348 "68 = { 50,150}, % \leftthreetimes
7349 "69 = {100, 50}, % \rightthreetimes
7350 "6C = { 50, 50}, % \bumpeq
7351 "6D = { 50, 50}, % \Bumpeq

```

```

7352 "6E = {100, }, % \lvertvert
7353 "6F = { ,100}, % \ggg
7354 "70 = { 50,100}, % \ulcorner
7355 "71 = {100, 50}, % \urcorner
7356 "75 = {150,200}, % \dotplus
7357 "76 = { 50,100}, % \backsim
7358 "78 = { 50,100}, % \llcorner
7359 "79 = {100, 50}, % \lrcorner
7360 "7C = {100,100}, % \intercal
7361 "7D = { 50, 50}, % \circledcirc
7362 "7E = { 50, 50}, % \circledast
7363 "7F = { 50, 50} % \circledash

```

Remaining slots in the source file.

```

7364 }
7365
7366 (/msa)

```

Symbol font 'b'.

```

7367 (*msb)
7368 \SetProtrusion
7369 [ name      = AMS-b ]
7370 { encoding   = U,
7371   family     = msb }
7372 {
7373   A = { 50, 50}, % \mathbb
7374   C = { 50, 50},
7375   G = { , 50},
7376   L = { , 50},
7377   P = { , 50},
7378   R = { , 50},
7379   T = { , 50},
7380   V = { 50, 50},
7381   X = { 50, 50},
7382   Y = { 50, 50},
7383 "00 = { 50, 50}, % \lvertneqq
7384 "01 = { 50, 50}, % \gvertneqq
7385 "02 = { 50, 50}, % \nleq
7386 "03 = { 50, 50}, % \ngeq
7387 "04 = {100, 50}, % \nless
7388 "05 = { 50,150}, % \ngtr
7389 "06 = {100, 50}, % \nprec
7390 "07 = { 50,150}, % \nsucc
7391 "08 = { 50, 50}, % \lneqq
7392 "09 = { 50, 50}, % \gneqq
7393 "0A = {100,100}, % \nleqslant
7394 "0B = {100,100}, % \ngeqslant
7395 "0C = {100, 50}, % \lneq
7396 "0D = { 50,100}, % \gneq
7397 "0E = {100, 50}, % \npreceq
7398 "0F = { 50,100}, % \nsuccceq
7399 "10 = { 50, }, % \precsim
7400 "11 = { 50, 50}, % \succcsim
7401 "12 = { 50, 50}, % \lnsim
7402 "13 = { 50, 50}, % \gnsim
7403 "14 = { 50, 50}, % \nleqq
7404 "15 = { 50, 50}, % \ngeqq
7405 "16 = { 50, 50}, % \precneqq
7406 "17 = { 50, 50}, % \succneqq
7407 "18 = { 50, 50}, % \precnapprox
7408 "19 = { 50, 50}, % \succcnapprox
7409 "1A = { 50, 50}, % \lnapprox
7410 "1B = { 50, 50}, % \gnapprox
7411 "1C = {150,200}, % \nsim
7412 "1D = { 50, 50}, % \ncong

```

```

7413   "1E  = {100,150}, % \diagup
7414   "1F  = {100,150}, % \diagdown
7415   "20  = {100, 50}, % \varsubsetneq
7416   "21  = { 50,100}, % \varsupsetneq
7417   "22  = {100, 50}, % \nsubseteqqq
7418   "23  = { 50,100}, % \nsupseteqq
7419   "24  = {100, 50}, % \subsetneqq
7420   "25  = { 50,100}, % \supsetneqq
7421   "26  = {100, 50}, % \varsubsetneqqq
7422   "27  = { 50,100}, % \varsupsetneqqq
7423   "28  = {100, 50}, % \subsetneq
7424   "29  = { 50,100}, % \supsetneq
7425   "2A  = {100, 50}, % \nsubseteqq
7426   "2B  = { 50,100}, % \nsupseteqq
7427   "2C  = { 50,100}, % \nparallel
7428   "2D  = {100,150}, % \nmid
7429   "2E  = {150,150}, % \nshortmid
7430   "2F  = {100,100}, % \nshortparallel
7431   "30  = { ,150}, % \nvdash
7432   "31  = { ,150}, % \nVdash
7433   "32  = { ,100}, % \nvDash
7434   "33  = { ,100}, % \nVDash
7435   "34  = { ,100}, % \ntrianglelefteq
7436   "35  = {100, }, % \ntrianglelefteq
7437   "36  = {100, }, % \ntriangleright
7438   "37  = { ,100}, % \ntrianglerighteq
7439   "38  = {100,200}, % \nleftarrow
7440   "39  = {100,200}, % \nrightarrow
7441   "3A  = {100,100}, % \nLeftarrow
7442   "3B  = { 50,100}, % \nRightarrow
7443   "3C  = {100,100}, % \nLeftrightarrow
7444   "3D  = {100,200}, % \nleftrightharpoonup
7445   "3E  = { 50, 50}, % \divideontimes
7446   "3F  = { 50, 50}, % \varnothing
7447   "60  = {200, }, % \Finv
7448   "61  = { , 50}, % \Game
7449   "68  = {100,100}, % \eqsim
7450   "69  = { 50, }, % \beth
7451   "6A  = { 50, }, % \gimel
7452   "6B  = {150, }, % \daleth
7453   "6C  = {200, }, % \lessdot
7454   "6D  = { ,200}, % \gtrdot
7455   "6E  = {100,200}, % \ltimes
7456   "6F  = {150,100}, % \rtimes
7457   "70  = { 50,100}, % \shortmid
7458   "71  = { 50, 50}, % \shortparallel
7459   "72  = {200,300}, % \smallsetminus
7460   "73  = {100,200}, % \thicksim
7461   "74  = { 50,100}, % \thickapprox
7462   "75  = { 50, 50}, % \approxeq
7463   "76  = { 50,100}, % \succapprox
7464   "77  = { 50, 50}, % \precapprox
7465   "78  = {100,100}, % \curvearrowleft
7466   "79  = { 50,150}, % \curvearrowright
7467   "7A  = { 50,200}, % \digamma
7468   "7B  = {100, 50}, % \varkappa
7469   "7F  = {200, } % \backepsilon

```

Remaining slots in the source file.

```

7470   }
7471
7472 </msb>

```

15.8.8 Euler

Euler Roman font (package `euler`).

```

7473 (*eur)
7474 \SetProtrusion
7475 [ name      = euler ]
7476 { encoding  = U,
7477   family    = eur  }
7478 {
7479   "01  = {100,100},
7480   "03  = {100,150},
7481   "06  = { ,100},
7482   "07  = {100,150},
7483   "08  = {100,100},
7484   "0A  = {100,100},
7485   "0B  = { , 50},
7486   "0C  = { ,100},
7487   "0D  = {100,100},
7488   "0E  = { ,100},
7489   "0F  = {100,100},
7490   "10  = {100,100},
7491   "13  = { ,100},
7492   "14  = { ,100},
7493   "15  = { , 50},
7494   "16  = { , 50},
7495   "17  = { 50,100},
7496   "18  = { 50,100},
7497   "1A  = { , 50},
7498   "1B  = { , 50},
7499   "1C  = { 50,100},
7500   "1D  = { 50,100},
7501   "1E  = { 50,100},
7502   "1F  = { 50,100},
7503   "20  = { , 50},
7504   "21  = { , 50},
7505   "22  = { 50,100},
7506   "24  = { , 50},
7507   "27  = { 50,100},
7508   1  = {100,100},
7509   7  = { 50,100},
7510   "3A  = {300,500},
7511   "3B  = {200,400},
7512   "3C  = {200,100},
7513   "3D  = {200,200},
7514   "3E  = {100,200},
7515   A  = { ,100},
7516   D  = { , 50},
7517   J  = { 50, },
7518   K  = { , 50},
7519   L  = { , 50},
7520   Q  = { , 50},
7521   T  = { 50, },
7522   X  = { 50, 50},
7523   Y  = { 50, },
7524   h  = { , 50},
7525   k  = { , 50}
7526 }
7527

```

Extended by the `eulervm` package.

```

7528 \SetProtrusion
7529 [ name      = euler-vm,
7530   load     = euler ]
7531 { encoding  = U,
7532   family    = zeur  }

```

```

7533  {
7534    "28  = {100,200},
7535    "29  = {100,200},
7536    "2A  = {100,150},
7537    "2B  = {100,150},
7538    "2C  = {200,300},
7539    "2D  = {200,300},
7540    "2E  = { ,100},
7541    "2F  = {100, },
7542    "3F  = {150,150},
7543    "5B  = { ,100},
7544    "5E  = {100,100},
7545    "5F  = {100,100},
7546    "80  = { , 50},
7547    "81  = {200,250},
7548    "82  = {100,200}
7549  }
7550
7551 (leur)

```

Euler Script font (eucal).

```

7552 (*eus)
7553 \SetProtrusion
7554 [ name      = euscript ]
7555 { encoding  = U,
7556   family    = eus  }
7557 {
7558   A  = {100,100},
7559   B  = { 50,100},
7560   C  = { 50, 50},
7561   D  = { 50,100},
7562   E  = { 50,100},
7563   F  = { 50, },
7564   G  = { 50, },
7565   H  = { ,100},
7566   K  = { , 50},
7567   L  = { ,150},
7568   M  = { , 50},
7569   N  = { , 50},
7570   O  = { 50, 50},
7571   P  = { 50, 50},
7572   T  = { ,100},
7573   U  = { , 50},
7574   V  = { 50, 50},
7575   W  = { 50, 50},
7576   X  = { 50, 50},
7577   Y  = { 50, },
7578   Z  = { 50,100},
7579   "00  = {250,250},
7580   "18  = {200,200},
7581   "3A  = {200,150},
7582   "40  = { ,100},
7583   "5E  = {100,100},
7584   "5F  = {100,100},
7585   "66  = { 50, },
7586   "67  = { , 50},
7587   "6E  = {200,200}
7588 }
7589
7590 \SetProtrusion
7591 [ name      = euscript-vm,
7592   load     = euscript ]
7593 { encoding  = U,
7594   family    = zeus  }
7595 {

```

```
7596 "01 = {600,600},  
7597 "02 = {200,200},  
7598 "03 = {200,200},  
7599 "04 = {200,200},  
7600 "05 = {150,150},  
7601 "06 = {200,200},  
7602 "07 = {200,200},  
7603 "08 = {100,100},  
7604 "09 = {100,100},  
7605 "0A = {100,100},  
7606 "0B = {100,100},  
7607 "0C = {100,100},  
7608 "0D = {100,100},  
7609 "0E = {150,150},  
7610 "0F = {100,100},  
7611 "10 = {150,150},  
7612 "11 = {100,100},  
7613 "12 = {150,100},  
7614 "13 = {100,150},  
7615 "14 = {150,100},  
7616 "15 = {100,150},  
7617 "16 = {200,100},  
7618 "17 = {100,200},  
7619 "19 = {150,150},  
7620 "1A = {150,100},  
7621 "1B = {100,150},  
7622 "1C = {100,100},  
7623 "1D = {100,100},  
7624 "1E = {250,100},  
7625 "1F = {100,250},  
7626 "20 = {150,200},  
7627 "21 = {150,200},  
7628 "22 = {150,150},  
7629 "23 = {150,150},  
7630 "24 = {100,200},  
7631 "25 = {150,150},  
7632 "26 = {150,150},  
7633 "27 = {100,100},  
7634 "28 = {100,100},  
7635 "29 = {100,150},  
7636 "2A = {100,100},  
7637 "2B = {100,100},  
7638 "2C = {100,100},  
7639 "2D = {150,150},  
7640 "2E = {150,150},  
7641 "2F = {100,100},  
7642 "30 = {100,100},  
7643 "31 = {100,100},  
7644 "32 = {100,100},  
7645 "33 = {100,100},  
7646 "34 = {100,100},  
7647 "35 = {100,100},  
7648 "3E = {150,150},  
7649 "3F = {150,150},  
7650 "60 = {    ,200},  
7651 "61 = {200,    },  
7652 "62 = {100,100},  
7653 "63 = {100,100},  
7654 "64 = {100,100},  
7655 "65 = {100,100},  
7656 "68 = {300,    },  
7657 "69 = {    ,300},  
7658 "6C = {100,100},  
7659 "6D = {100,100},  
7660 "6F = {100,100},
```

```

7661      "72  = {100,100},
7662      "73  = {200,100},
7663      "76  = {    ,100},
7664      "77  = {100,    },
7665      "78  = { 50, 50},
7666      "79  = {100,100},
7667      "7A  = {100,100},
7668      "7D  = {150,150},
7669      "7E  = {100,100},
7670      "A8  = {100,100},
7671      "A9  = {100,100},
7672      "AB  = {200,200},
7673      "BA  = {    ,200},
7674      "BB  = {    ,200},
7675      "BD  = {200,200},
7676      "DE  = {200,200}
7677  }
7678
7679 (/eus)

```

Euler Fraktur font (eufrak).

```

7680 (*euf)
7681 \SetProtrusion
7682 [ name      = mathfrak ]
7683 { encoding  = U,
7684   family    = euf  }
7685 {
7686   A  = {    , 50},
7687   B  = {    , 50},
7688   C  = { 50, 50},
7689   D  = {    , 80},
7690   E  = { 50,    },
7691   G  = {    , 50},
7692   L  = {    , 80},
7693   O  = {    , 50},
7694   T  = {    , 80},
7695   X  = { 80, 50},
7696   Z  = { 80, 50},
7697   b  = {    , 50},
7698   c  = {    , 50},
7699   k  = {    , 50},
7700   p  = {    , 50},
7701   q  = { 50,    },
7702   v  = {    , 50},
7703   w  = {    , 50},
7704   x  = {    , 50},
7705   1  = {100,100},
7706   2  = { 80, 80},
7707   3  = { 80, 50},
7708   4  = { 80, 50},
7709   7  = { 50, 50},
7710   "12 = {500,500},
7711   "13 = {500,500},
7712   !  = {    ,200},
7713   '  = {200,300},
7714   (  = {200,    },
7715   )  = {    ,200},
7716   *  = {200,200},
7717   +  = {200,250},
7718   -  = {200,200},
7719   {,} = {300,300},
7720   .  = {400,400},
7721   {=} = {200,200},
7722   :  = {    ,200},
7723   ;  = {    ,200},

```

```

7724     ] = { ,200}
7725   }
7726
7727 ⟨jeuf⟩
7728 ⟨cfg-u⟩

```

15.8.9 Euro symbols

Settings for various Euro symbols (Adobe Euro fonts (packages eurosans, europs), ITC Euro fonts (package euroitc) and marvosym²³).

```

7729 ⟨cfg-e⟩
7730 \SetProtrusion
7731 ⟨zpeu|euroitc⟩ { encoding = U,
7732 {mvs} { encoding = {OT1,U},
7733 ⟨zpeu⟩ family = zpeu }
7734 ⟨euroitc⟩ family = {euroitc,euroitcs} }
7735 {mvs} family = mvs }
7736 {
7737 ⟨zpeu⟩ E = {50, }
7738 ⟨euroitc⟩ E = {100,50}
7739 {mvs} 164 = {50,50}, % \EUR
7740 {mvs} 068 = {50,-100} % \EURdig
7741 }
7742
7743 ⟨*zpeu|euroitc⟩
7744 \SetProtrusion
7745 { encoding = U,
7746 ⟨zpeu⟩ family = zpeu,
7747 ⟨euroitc⟩ family = {euroitc,euroitcs},
7748 shape = it*
7749 {
7750 ⟨zpeu⟩ E = {100,-50}
7751 ⟨euroitc⟩ E = {100,}
7752 }
7753
7754 ⟨/zpeu|euroitc⟩
7755 ⟨*zpeu⟩
7756 \SetProtrusion
7757 { encoding = U,
7758 family = {zpeus,eurosans} }
7759 {
7760 E = {100,50}
7761 }
7762
7763 \SetProtrusion
7764 { encoding = U,
7765 family = {zpeus,eurosans},
7766 shape = it*
7767 {
7768 E = {200, }
7769 }
7770
7771 ⟨/zpeu⟩
7772 ⟨cfg-e⟩

```

15.9 Interword spacing

Default unit is space.

```


7773 ⟨*m-t|cmr⟩
7774 %% -----

```

23 Of course, there are many more symbols in this font. Feel free to contribute protrusion settings!

Figure 1:

Example of interword spacing (from: M. Siemoneit, *Typographisches Gestalten*, Frankfurt/M. 1989). The numbers indicate the preference for shrinking the interword space.

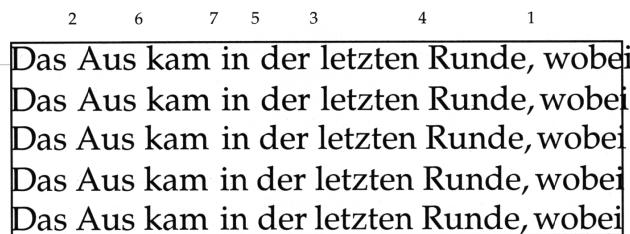

```
7775 %% INTERWORD SPACING
7776
7777 (/m-t|cmr)
7778 (*m-t)
7779 \SetExtraSpacing
7780   [ name = default ]
7781   { encoding = {OT1,T1,LY1,OT4,QX,T5} }
7782 }
```

These settings are only a first approximation. The following reasoning is from a mail from *Ulrich Dirr*, who also provided the sample in figure 1. I do not claim to have coped with the task.

'The idea is – analog to the tables for expansion and protrusion – to have tables for optical reduction/expansion of spaces in dependence of the actual character so that the distance between words is optically equal.

When reducing distances the (weighting) order is:

- after commas

$$7783 \quad \{ , \} = \{ , -500, 500 \},$$

- in front of capitals which have optical more room on their left side, e.g., 'A', 'J', 'T', 'V', 'W', and 'Y' [this is not yet possible – RS]
 - in front of capitals which have circle/oval shapes on their left side, e.g., 'C', 'G', 'O', and 'Q' [ditto – RS]
 - after 'r' (because of the bigger optical room on the righthand side)

$$r = \{-300, 300\}$$

- [before or] after lowercase characters with ascenders

```
7785     b = { , -200, 200},  
7786     d = { , -200, 200},  
7787     f = { , -200, 200},  
7788     h = { , -200, 200},  
7789     k = { , -200, 200},  
7790     l = { , -200, 200},  
7791     t = { , -200, 200},
```

- [before or] after lowercase characters with x-height plus descender with additional optical space, e.g., 'v', or 'w'

```

7792   C = { , -100, 100 },
7793   P = { , -100, 100 },
7794   V = { , -100, 100 },
7795   W = { , -100, 100 },
7796   Z = { , -100, 100 },
7797   X = { , -100, 100 },
7798   Y = { , -100, 100 }

```

- [before or] after lowercase characters with x-height plus descender without additional optical space

```
7799     i = { , 50, -50},
7800     m = { , 50, -50},
7801     n = { , 50, -50},
7802     u = { , 50, -50},
```

- after colon and semicolon

```
7803     : = { ,200,-200},
7804     ; = { ,200,-200},
```

- after punctuation which ends a sentence, e.g., period, exclamation mark, question mark

```
7805     . = { ,250,-250},
7806     ! = { ,250,-250},
7807     ? = { ,250,-250}
```

The order has to be reversed when enlarging is needed.'

```
7808 }
7809
7810 (/m-t)
```

Questions are:

- Is the result really better?
- Is it overdone? (Try with a factor < 1000.)
- Should the first parameter also be used? (Probably.)
- What about quotation marks, parentheses etc.?

Furthermore, there seems to be a pdfTeX bug with spacing in combination with a non-zero \spaceskip (reported by Axel Berger):

```
\parfillskip0pt
\rightskip0pt plus 1em
\spaceskip\fondimen2\font
  test test\par
\pdfadjustinterwordglue2
\stbscode\font`t=-50
  test test
\bye
```

Some more characters in T2A.²⁴

```
7811 (*cmr)
7812 \SetExtraSpacing
7813 [ name      = T2A,
7814   load      = default ]
7815 { encoding = T2A,
7816   family    = cmr }
7817 {
7818   \cyrг = { , -300, 300},
7819   \cyrб = { , -200, 200},
7820   \cyrк = { , -200, 200},
7821   \cyrс = { , -100, 100},
7822   \cyrр = { , -100, 100},
7823   \cyrһ = { , -100, 100},
7824   \cyrү = { , -100, 100},
7825   \cyrт = { , 50, -50},
7826   \cyrр = { , 50, -50},
7827   \cyrі = { , 50, -50},
```

24 Contributed by Karl Karlsson.

```
7828     \cyrishrt = { , 50, -50},
7829 }
7830
```

15.9.1 Nonfrenchspacing

The following settings simulate `\nonfrenchspacing` (since space factors will be ignored when spacing adjustment is in effect). They may be used for English contexts.

From the TeXbook:

'If the space factor f is different from 1000, the interword glue is computed as follows: Take the normal space glue for the current font, and add the extra space if $f \geq 2000$. [...] Then the stretch component is multiplied by $f/1000$, while the shrink component is multiplied by $1000/f$.'

The 'extra space' (`\fontdimen 7`) for Computer Modern Roman is a third of `\fontdimen 2`, i.e., 333.

```
7831 \SetExtraSpacing
7832 [ name      = nonfrench-cmr,
7833   load      = default,
7834   context   = nonfrench ]
7835 { encoding = {OT1,T1,LY1,OT4,QX,T5},
7836   family    = cmr }
7837 {
```

`latex.ltx` has:

```
\def\nonfrenchspacing{
  \sfcode`\. 3000
  \sfcode`\? 3000
  \sfcode`\! 3000
```

```
7838   . = {333,2000,-667},
7839   ? = {333,2000,-667},
7840   ! = {333,2000,-667},
```

```
  \sfcode`\: 2000
```

```
7841   : = {333,1000,-500},
```

```
  \sfcode`\; 1500
```

```
7842   ; = { , 500,-333},
```

```
  \sfcode`\, 1250
```

```
7843   {,}= { , 250,-200}
```

```
}
```

```
7844 }
```

```
7845
```

```
7846 (/cmr)
```

`fontinst`, however, which is also used to create the `psnfss` font metrics, sets `\fontdimen 7` to 240 by default. Therefore, the fallback settings use this value for the first component.

```
7847 (*m-t)
7848 \SetExtraSpacing
```

```

7849 [ name      = nonfrench-default,
7850   load      = default,
7851   context   = nonfrench ]
7852 { encoding = {OT1,T1,LY1,OT4,QX,T5} }
7853 {
7854   . = {240,2000,-667},
7855   ? = {240,2000,-667},
7856   ! = {240,2000,-667},
7857   : = {240,1000,-500},
7858   ; = {    , 500,-333},
7859   {,}= {    , 250,-200}
7860 }
7861

```

15.10 Additional kerning

Default unit is 1em.

```

7862 %% -----
7863 %% ADDITIONAL KERNING
7864

```

A dummy list to be loaded when no context is active.

```

7865 \SetExtraKerning
7866   [ name = empty ]
7867   { encoding = {OT1,T1,T2A,LY1,OT4,QX,T5,TS1} }
7868   { }
7869

```

15.10.1 French

The ratio of `\fontdimen 2` to `\fontdimen 6` varies for different fonts, so that either the kerning of the colon (which should be a space, i.e., `\fontdimen 2`) or that of the other punctuation characters (TeX's `\thinspace`, i.e., one sixth of `\fontdimen 6`) may be inaccurate, depending on which unit we choose (space or 1em). For Times, for example, a thin space would be 665. I don't know whether French typography really wants a thin space, or rather (as it happens to turn out with CMR) half a space. (Wikipedia²⁵ claims it should be a quarter of an em, which seems too much to me; then again, it also says that this *was* a thin space in French typography.)

```

7870 \SetExtraKerning
7871   [ name      = french-default,
7872     context   = french,
7873     unit      = space   ]
7874 { encoding = {OT1,T1,LY1} }
7875 {
7876   : = {1000,}, % = \fontdimen2
7877   ; = {500,}, % ~ \thinspace
7878   ! = {500,},
7879   ? = {500,}
7880 }
7881

```

These settings have the disadvantage that a word following a left guillemet will not be hyphenated. This might be fixed in pdfTeX.

```

7882 \SetExtraKerning
7883   [ name      = french-guillemets,
7884     context   = french-guillemets,
7885     load      = french-default,
7886     unit      = space   ]

```

25 http://fr.wikipedia.org/wiki/Espace_typographique, 5 July 2007.

```
7887 { encoding = {T1,LY1} }
7888 {
7889   \guillemotleft = { ,800}, % = 0.8\fontdimen2
7890   \guillemotright = {800, }
7891 }
7892
7893 \SetExtraKerning
7894 [ name      = french-guillemets-OT1,
7895   context   = french-guillemets,
7896   load      = french-default,
7897   unit      = space   ]
7898 { encoding = OT1      }
7899 { }
7900
```

15.10.2 Turkish

```
7901 \SetExtraKerning
7902 [ name      = turkish,
7903   context   = turkish ]
7904 { encoding = {OT1,T1,LY1} }
7905 {
7906   : = {167, }, % = \thinspace
7907   ! = {167, },
7908   {=} = {167, }
7909 }
7910
7911 </m-t>
7912 </config>
```

16 OpenType configuration files

These are the configuration files for the following OpenType fonts:²⁶

- Latin Modern Roman
 - **Charis SIL²⁷**
 - Palatino Linotype²⁸

The settings are typeset in the respective font.

16.1 Character inheritance

OpenType fonts may differ considerably in how complete their arsenal of glyphs is. Therefore, each font family should have their own inheritance settings.

26 This is file `microtype-utf8.dtx`.

Available at <http://software.sil.org/charis>.

These settings have been contributed by Loren B. Davis.

16.2 Character protrusion

```
8160
8161 %% -----
8162 %% PROTRUSION
8163
8164 (*LatinModernRoman)
8165 \SetProtrusion
8166   [ name      = LMR-default ]
8167   { encoding  = {EU1,EU2,TU},
8168     family    = Latin Modern Roman }
8169   {
8170     A = {50,50},
8171     AE = {50, },
8172     F = { ,50},
8173     J = {50, },
8174     K = { ,50},
8175     L = { ,50},
8176     T = {50,50},
8177     V = {50,50},
8178     W = {50,50},
8179     X = {50,50},
8180     Y = {50,50},
8181     k = { ,50},
8182     r = { ,50},
8183     t = { ,70},
8184     v = {50,50},
8185     w = {50,50},
8186     x = {50,50},
8187     y = {50,70},
8188     O = { ,50},
8189     1 = {100,200},
8190     2 = {50,50},
8191     3 = {50,50},
8192     4 = {70,70},
8193     5 = { ,50},
8194     6 = { ,50},
8195     7 = {50,100},
8196     8 = { ,50},
8197     9 = { ,50},
8198     . = { ,700},
```

```

8199   {,}={ {,500},
8200   := { ,500},
8201   ; = { ,500},
8202   ! = { ,100},
8203   ? = { ,200},
8204   @ = {50,50},
8205   ~ = {200,250},
8206   \% = {50,50},
8207   * = {300,300},
8208   + = {250,250},
8209   - = {400,500}, % /hyphen
8210   – = {400,300}, % /endash
8211   — = {300,200}, % /emdash
8212   _ = {200,200}, % /underscore
8213   / = {200,300},
8214   /backslash = {200,300},
8215   ' = {300,400}, % /quotesingle
8216   ‘ = {500,700}, ‘ = {500,600},
8217   “ = {500,300}, ” = {200,600},
8218   , = {400,400}, „ = {400,400},
8219   ‹ = {400,400}, › = {300,500},
8220   « = {300,200}, » = {100,400},
8221   i = {100, }, i = {100, },
8222   ( = {300, }, ) = { ,300},
8223   < = {200,100}, > = {100,200},
8224   /braceleft = {400,200}, /braceright = {200,400},
8225   /angleleft = {400, }, /angleright = { ,400},
8226   † = {100,100},
8227   ‡ = { 80, 80},
8228   • = {200,200},
8229   · = {400,450}, % / periodcentered
8230   °C = { 80, 50},
8231   ℃ = { , 50},
8232   ° = {400,400},
8233   ™ = {100,200},
8234   ℗ = {100,100},
8235   ® = {100,100},
8236   ℂ = {100,200},
8237   ℄ = {100,200},
8238   ℁ = {200,250},
8239   ℂ = { 50,100},
8240   ℃ = { 50,100},
8241   ℃ = {200, },
8242   ℃ = {300,300},
8243   ℃ = {150,200},
8244   ℃ = {150,250},
8245   ℃ = {150,250},
8246   ℄ = {100, },
8247   /one.oldstyle = {100,100},
8248   /two.oldstyle = { 50, 50},
8249   /three.oldstyle = { 30, 80},
8250   /four.oldstyle = { 50, 50},
8251   /seven.oldstyle = { 50, 80},
8252   Γ = { ,180}, % /Gamma
8253   Δ = {100,100}, % /Delta
8254   Θ = { 50, 50}, % /Theta
8255   Λ = {100,100}, % /Lambda
8256 %   Ξ = {,}, % /Xi
8257 %   Π = {,}, % /Pi
8258   Σ = { 50, 50}, % /Sigma
8259   Υ = {100,100}, % /Upsilon
8260   Φ = { 50, 50}, % /Phi
8261   Ψ = { 50, 50}, % /Psi
8262 %   Ω = {,}, % /Omega
8263   }

```

```
8264
8265 \SetProtrusion
8266   [ name      = LMR-it ]
8267   { encoding  = {EU1,EU2,TU},
8268     family    = Latin Modern Roman,
8269     shape     = {it,s1}           }
8270   {
8271     A = {125,100},
8272     AE = {125,-55},
8273     B = {90,-40},
8274     C = {145,-75},
8275     D = {75, -28},
8276     E = {80,-55},
8277     F = {85,-80},
8278     G = {153,-15},
8279     H = {73,-60},
8280     I = {140,-120},
8281     IJ = {140,-80},
8282     J = {135,-80},
8283     K = {70,-30},
8284     L = {87, 40},
8285     M = {67,-45},
8286     N = {75,-55},
8287     O = {150,-30},
8288     OE = {150,-55},
8289     P = {82,-50},
8290     Q = {150,-30},
8291     R = {75, 15},
8292     S = {90,-65},
8293     $ = {100,-20},
8294     T = {220,-85},
8295     U = {230,-55},
8296     V = {260,-60},
8297     W = {185,-55},
8298     X = {70,-30},
8299     Y = {250,-60},
8300     Z = {90,-60},
8301     a = {150,-10},
8302     b = {170, },
8303     c = {173,-10},
8304     d = {150,-55},
8305     e = {180, },
8306     f = { , -250},
8307     g = {150,-10},
8308     h = {100, },
8309     i = {210, },
8310     ij = {210,-40},
8311     j = { , -40},
8312     k = {110,-50},
8313     l = {240,-110},
8314     m = {80, },
8315     n = {115, },
8316     o = {155, },
8317     q = {170,-40},
8318     r = {155,-40},
8319     s = {130, },
8320     t = {230,-10},
8321     u = {120, },
8322     v = {140,-25},
8323     w = {98,-20},
8324     x = {65,-40},
8325     y = {130,-20},
8326     z = {110,-80},
8327     O = {170,-85},
8328     1 = {230,110},
```

```
8329    2 = {130,-70},
8330    3 = {140,-70},
8331    4 = {130,80},
8332    5 = {160, },
8333    6 = {175,-30},
8334    7 = {250,-150},
8335    8 = {130,-40},
8336    9 = {155,-80},
8337    . = { ,500},
8338    {,} = { ,450},
8339    : = { ,300},
8340    ; = { ,300},
8341    & = {130,30},
8342    \% = {180,50},
8343    * = {380,20},
8344    + = {180,200},
8345    @ = {180,10},
8346    ~ = {200,150},
8347    ( = {300, }, ) = { ,70},
8348    / = {100,100},
8349    - = {500,300}, % /hyphen
8350    – = {500,300}, % /endash
8351    — = {400,170}, % /emdash
8352    _ = {100,200}, % /underscore
8353    ' = {300,400}, % /quotesingle
8354    " = {500,300},
8355    ‘ = {800,200}, ’ = {800,-20},
8356    “ = {540,100}, ” = {500,100},
8357    , = {300,700}, „ = {200,600},
8358    ‹ = {500,300}, › = {400,400},
8359    « = {400,100}, » = {200,300},
8360    i = {200, }, i = {200, },
8361    < = {300,100}, > = {200,100},
8362    /backslash = {300,300},
8363    /braceleft = {400,100}, /braceright = {200,200},
8364    † = {200, 80},
8365    ‡ = {120, 80},
8366    • = {220,100},
8367    · = {550,300}, % / periodcentered
8368    °C = {170, },
8369    °C = {100, 50},
8370    ¶ = {200, },
8371    ° = {500,300},
8372    ™ = {200, 70},
8373    ® = { 50, 70},
8374    ® = { 50, 70},
8375    ª = {140,100},
8376    º = {140,100},
8377    ´ = {400,150},
8378    ¸ = {250, 80},
8379    ¸ = {250, 80},
8380    ¯ = {250, 80},
8381    ¯ = {300,200},
8382    ± = {150,170},
8383    × = {200,200},
8384    ÷ = {200,200},
8385    € = {150, },
8386    /one.oldstyle = {100,100},
8387    /two.oldstyle = {100, 80},
8388    /three.oldstyle = { 80, 50},
8389    /four.oldstyle = { 80, 80},
8390    /five.oldstyle = { 50, },
8391    /six.oldstyle = { 50, },
8392    /seven.oldstyle = { 80, 80},
8393    /eight.oldstyle = { 50, },
```

```
8394   Γ = {100,120}, % /Gamma
8395   Δ = {120,100}, % /Delta
8396   Θ = {120, 50}, % /Theta
8397   Λ = {130,100}, % /Lambda
8398   Ξ = {100,},   % /Xi
8399   Π = {100,},   % /Pi
8400   Σ = {100, 50}, % /Sigma
8401   Υ = {180,100}, % /Upsilon
8402   Φ = {130, 70}, % /Phi
8403   Ψ = {130, 50}, % /Psi
8404   Ω = { 50,},   % /Omega
8405   }
8406 (/LatinModernRoman)
8407 (*CharisSIL)
8408 \SetProtrusion
8409   [ name      = Charis-default ]
8410   { encoding  = {EU1,EU2,TU},
8411     family    = Charis SIL }
8412   {
8413   A = {50,50},
8414   ĀE = {50,50},
8415   C = {50, },
8416   D = { ,50},
8417   F = { ,50},
8418   G = {50, },
8419   J = {100, },
8420   K = { ,50},
8421   L = { ,50},
8422   L̄ = { ,100},
8423   O = {50,50},
8424   Œ = {50, },
8425   P = { ,50},
8426   Q = {50,70},
8427   R = { ,50},
8428   B̄ = { ,40}, % capital sharp s
8429   T = {50,50},
8430   V = {50,50},
8431   W = {50,50},
8432   X = {50,50},
8433   Y = {50,50},
8434   k = { ,50},
8435   l = { ,150},
8436   r = { ,50},
8437   t = { ,50},
8438   v = {50,50},
8439   w = {50,50},
8440   x = {50,50},
8441   y = { ,50},
8442   1 = {150,150},
8443   2 = {50,50},
8444   3 = {50, },
8445   4 = {100,50},
8446   6 = {50, },
8447   7 = {50,80},
8448   9 = {50,50},
8449   . = { ,600},
8450   {,} = { ,500},
8451   : = { ,400},
8452   ; = { ,300},
8453   ! = { ,100},
8454   ? = { ,200},
8455   @ = {50,50},
8456   ~ = {200,250},
8457   \% = { ,50},
8458   * = {300,300},
```

```
8459 + = {200,250},
8460 / = { ,200},
8461 /backslash = {150,200},
8462 | = {200,200},
8463 - = {400,500}, % hyphen
8464 -- = {200,300}, % endash
8465 --- = {150,250}, % emdash
8466 --- = {200,200}, % Horizontal Bar = \texttt{twelveudash}
8467 -- = {150,150}, % Figure Dash = \texttt{threequartersemdash}
8468 _ = {100,100},
8469 {=} = {100,100},
8470 ` = {300,400}, ' = {300,400},
8471 `` = {300,300}, '' = {300,300},
8472 , = {400,400}, ,, = {300,300},
8473 < = {400,300}, > = {300,400},
8474 « = {200,200}, » = {150,300},
8475 i = {100, }, c = {100, },
8476 ( = {200, }, ) = { ,200},
8477 < = {200,150}, > = {100,200},
8478 [ = {100, }, ] = { ,100},
8479 /braceleft = {200, }, /braceright = { ,300},
8480 † = { 80, 80},
8481 ‡ = {100,100},
8482 • = {200,200},
8483 ° = {150,200},
8484 ™ = {150,150},
8485 ¢ = { 50, },
8486 £ = { 50, },
8487 ¦ = {200,200},
8488 © = {100,100},
8489 ® = {100,100},
8490 ª = {100,200},
8491 º = {200,200},
8492 ¬ = {200, 50},
8493 µ = { ,100},
8494 ¶ = { ,100},
8495 · = {300,400},
8496 ¯ = {200,300},
8497 ¯ = {100,200},
8498 ¯ = {100,200},
8499 € = {100, },
8500 ± = {150,200},
8501 × = {200,200},
8502 ÷ = {250,250},
8503 /minus = {200,200},
8504 – = {200,200},
8505 % Cyrillic
8506 Б = { ,50},
8507 Г = { ,130},
8508 Ж = {50,50},
8509 З = {30,50},
8510 Й = {50, },
8511 У = {50,50},
8512 Ф = {50,50},
8513 Ч = {100, },
8514 Ъ = { ,50},
8515 Ь = { ,50},
8516 Э = {50,50},
8517 ЙО = { ,40},
8518 Я = {50, },
8519 В = {50,50},
8520 Е = {50, },
8521 Ъ = {50,100},
8522 Є = {50, },
8523 Ђ = {50,50},
```



```
8589 J = {50, },
8590 L = {50,50},
8591 O = {50, },
8592 œ = {50, },
8593 Q = {50, },
8594 S = {50, },
8595 $ = {50, },
8596 T = {70, },
8597 o = {50,50},
8598 p = { ,50},
8599 q = {50, },
8600 t = { ,50},
8601 w = { ,50},
8602 y = { ,50},
8603 l = {150,100},
8604 3 = {50, },
8605 4 = {100, },
8606 6 = {50, },
8607 7 = {100, },
8608 . = { ,700},
8609 {,} = { ,600},
8610 : = { ,400},
8611 ; = { ,400},
8612 ? = { ,150},
8613 & = { ,80},
8614 \% = {50,50},
8615 * = {300,200},
8616 + = {250,250},
8617 @ = {80,50},
8618 ~ = {150,150},
8619 / = { ,150},
8620 /backslash = {150,150},
8621 - = {300,400}, % hyphen
8622 – = {200,300}, % endash
8623 — = {150,200}, % emdash
8624 _ = { ,100},
8625 {=} = {200,200},
8626 ± = {150,200},
8627 × = {250,250},
8628 ÷ = {250,250},
8629 ° = {150,200},
8630 · = {300,400},
8631 ‘ = {400,200}, ’ = {400,200},
8632 “ = {300,200}, ” = {400,200},
8633 , = {200,500}, „ = {150,500},
8634 ‹ = {300,400}, › = {200,500},
8635 « = {200,300}, » = {150,400},
8636 ( = {200, }, ) = { ,200},
8637 < = {200,200}, > = {200,200},
8638 /braceleft = {300, }, /braceright = { ,200},
8639 % Cyrillic
8640 Ж = {50,30},
8641 І = {50, },
8642 Ү = {50,30},
8643 Ф = {50, },
8644 Ч = {100, },
8645 Ь = { ,50},
8646 Ъ = { ,50},
8647 Ә = {50,50},
8648 Я = {50, },
8649 Վ = {50,50},
8650 Ѓ = {50,50},
8651 Յ = {140,100},
8652 ՞ = {70,50},
8653 Ր = {50,80},
```

```

8654   Hı = { ,80},
8655   G = {50,50},
8656   گ = {50,50},
8657   ڏ = {50,30},
8658   ژ = {50, },
8659   ڙ = {50, },
8660   ڦ = { ,50},
8661   ڦ = { ,50},
8662   ڦ = { ,50},
8663   ڦ = { ,50},
8664   ڦ = {50, },
8665   ڦ = {50,50},
8666   ڦ = { ,50},
8667   ڦ = {50,50},
8668   ڦ = { ,50},
8669   ڦ = {140,100},
8670   ڦ = {70,50},
8671   ڦ = {50,70},
8672   ڦ = { ,70},
8673   % Greek
8674   Γ = { ,130},
8675   Δ = {50,50},
8676   Ψ = {50,50},
8677   γ = {70,70},
8678   λ = {40,70},
8679   π = {40,50},
8680   ρ = { ,50},
8681   σ = { ,50},
8682   χ = {50,50},
8683   }

```

The small caps glyph names in Charis SIL have changed with version 5.0 of the font. We try to get the names right both with LuaTeX (where we can simply query the font version) and with XeTeX (where we check for glyph name).

```

8684
8685 % quick and dirty -- maybe we'll promote this to a
8686 % regular key some time
8687 \define@key{MT@pr@c}{command}{\csname #1\endcsname}
8688
8689 % glyph names have changed with version 5.0 of Charis SIL:
8690 % before: /a.SC, /b.SC, ...
8691 % after: /a.sc, /b.sc, ...
8692 \ifx\MT@lua@\undefined
8693   \gdef\MT@get@CHARIS@SC{
8694     % test whether glyph "a.sc" exists
8695     \ifnum\numexpr\XeTeXglyphindex "a.sc"\relax > 0
8696       \gdef\MT@CHARIS@SC{sc}%
8697     \else
8698       \gdef\MT@CHARIS@SC{SC}%
8699     \fi
8700   }
8701 \else
8702   \gdef\MT@get@CHARIS@SC{
8703     \gdef\MT@CHARIS@SC{\MT@lua{
8704       % check font version
8705 % -- why doesn't this work?:
8706 %     f = font.getfont(font.current());
8707 %     i = fontloader.info(f.filename);
8708 %     if (tonumber(i.version) < 5) then;
8709 %       if (tonumber(fontloader.info(font.getfont(font.current()).filename).version) < 5) then;
8710 %         tex.print("SC");
8711 %       else;
8712 %         tex.print("sc");
8713 %       end

```

```
8714     } }
8715   }
8716 \fi
8717
8718 \SetProtrusion
8719   [ name      = Charis-sc,
8720     load      = Charis-default,
8721     command   = {MT@get@CHARIS@SC} ]
8722   { encoding  = {EU1,EU2,TU},
8723     family    = Charis SIL,
8724     shape     = {sc}  }
8725   {
8726 % A = {100,100}, % etc., doesn't work with \textsc
8727 /a.\MT@CHARIS@SC = {100,100},
8728 /c.\MT@CHARIS@SC = {50, },
8729 /d.\MT@CHARIS@SC = { ,50},
8730 /f.\MT@CHARIS@SC = { ,50},
8731 /g.\MT@CHARIS@SC = {50, },
8732 /j.\MT@CHARIS@SC = {100, },
8733 /k.\MT@CHARIS@SC = { ,50},
8734 /l.\MT@CHARIS@SC = { ,50},
8735 /f_l.\MT@CHARIS@SC = { ,50},
8736 /o.\MT@CHARIS@SC = {50,50},
8737 /oe.\MT@CHARIS@SC = {50, },
8738 /q.\MT@CHARIS@SC = {50,70},
8739 /r.\MT@CHARIS@SC = { ,50},
8740 /t.\MT@CHARIS@SC = {50,100},
8741 /v.\MT@CHARIS@SC = {50,50},
8742 /w.\MT@CHARIS@SC = {50,50},
8743 /x.\MT@CHARIS@SC = {50,50},
8744 /y.\MT@CHARIS@SC = {50,50}
8745   }
8746 (/CharisSIL)
8747 (*PalatinoLinotype)
8748 \SetProtrusion
8749   [ name      = palatino-default ]
8750   { encoding  = {EU1,EU2,TU},
8751     family    = {PalatinoLinotype} }
8752   {
8753   A = {50,50},
8754   D = { ,50},
8755   J = {50, },
8756   K = { ,50},
8757   L = { ,50},
8758   O = {25, },
8759   T = {50,50},
8760   V = {50,50},
8761   W = {50,50},
8762   X = {50,50},
8763   Y = {50,50},
8764   b = { ,25},
8765   d = {25,30},
8766   f = { ,50},
8767   g = { ,100},
8768   k = { ,50},
8769   p = { ,50},
8770   q = {50, },
8771   r = { ,50},
8772   t = { ,50}, ♦ = { ,50}, ♦ = { ,50},
8773   v = {75,50},
8774   w = {50,50},
8775   x = {50,50},
8776   y = {50,70},
8777   l = {100,50},
```

```

8778   2 = {25,50},
8779   4 = {50, },
8780   6 = {50, },
8781   9 = {25, },
8782   ÄE = {100, },
8783   CE = {25, },
8784   . = {,700},  .. = {,350},  ... = {,150},
8785   { } = {,500},
8786   : = {,500},
8787   ; = {,500},
8788   ! = {,100},  !! = {,100},
8789   ? = {,200},  ? = {,200},
8790   @ = {50,50},
8791   ~ = {200,250},
8792   & = {50,100},
8793   \% = {100,100},
8794   * = {200,200},
8795   + = {250,250},
8796   ( = {100, }, ) = {,300},
8797   / = {200,300},
8798   - = {400,500},
8799   \textdash = {300,300}, \textemdash = {200,200},
8800   \textquotleft = {500,700}, \textquotright = {500,700},
8801   \textquotedblleft = {300,400}, \textquotedblright = {300,400},
8802   \textbackslash = {200,300},
8803   \quotesinglbase = {400,400}, \quotedblbase = {400,400},
8804   \guilsinglleft = {400,400}, \guilsinglright = {300,500},
8805   \guillemotleft = {300,300}, \guillemotright = {200,400},
8806   \textexclamdown = {100, }, \textquestiondown = {100, },
8807   \textbraceleft = {400,200}, \textbraceright = {200,400},
8808   \textless = {200,100}, \textgreater = {100,200},
8809   ≤ = {200,100}, ≥ = {100,200},
8810   \textminus = {300,300},
8811   \texttrademark = {200,200},
8812   \textcopyright = {200,200},
8813   \textregistered = {200,200},
8814   \textdegree = {300,300},
8815   | = {450,500},  ¬ = {250,150},
8816   ¬ = {150,250},
8817   . = {850,700},
8818   ¶ = {100,0},
8819   × = {150,300},
8820   ª = {300,300}, º = {300,300},
8821   º = {200,400},
8822   ¹ = {400,350}, ² = {200,300}, ³ = {250,400},
8823   ⁴ = {250,350}, ⁵ = {200,300}, ⁶ = {250,400},
8824   ⁷ = {200,450}, ⁸ = {250,400}, ⁹ = {200,350},
8825   ⁰ = {200,400},
8826   ¹ = {400,250}, ² = {200,300}, ³ = {250,400},
8827   ⁴ = {250,350}, ⁵ = {200,300}, ⁶ = {250,400},
8828   ⁷ = {200,450}, ⁸ = {250,400}, ⁹ = {200,350},
8829   ± = {150,100}, ÷ = {300,300},
8830   þ = {,25},
8831   • = {300,450}, ˙ = {300,450},
8832   ˙ = {300,450}, ˙ = {300,450},
8833   † = {200,250}, ‡ = {200,250},
8834   π = {50, },
8835   f = {,50},
8836   № = {100,150},
8837   \textservicemark = {100,200},
8838   - = {400,500}, ˘ = {400,500}, ˘ = {200,300},
8839   ˘ = {205,305}, ˘ = {200,300}, ˘ = {50,150},
8840   • = {125,200},
8841   % /a.sc = {50,50},
8842   }

```

```
8843
8844 \SetProtrusion
8845   [ name      = palatino-it    ]
8846   { encoding  = {EU1,EU2,TU},
8847     family    = {Palatinolinotype},
8848     shape     = {it,s1}  }
8849   {
8850     A = {50,50},
8851     ÄE = {50, },
8852     B = {50, },
8853     C = {50, },
8854     D = {50,50},
8855     E = {50, },
8856     F = {50, },
8857     G = {50, },
8858     H = {50, },
8859     K = {50, },
8860     L = {50, },
8861     O = {50, },
8862     œ = {50, },
8863     P = {50, },
8864     Q = {50, },
8865     R = {50, },
8866     S = {50, },
8867     $ = {50, },
8868     T = {100, },
8869     U = {50, },
8870     V = {100,50},
8871     W = {50, },
8872     X = {50, },
8873     Y = {100,50},
8874     b = { ,50},
8875     c = {25, },
8876     g = {75, },
8877     i = {25, },
8878     m = { ,50},
8879     n = { ,50},
8880     p = { ,25},
8881     q = {25, },
8882     x = { ,50},
8883     l = {100, },
8884     2 = {50, },
8885     4 = {50, },
8886     7 = {50, },
8887     . = { ,500}, .. = { ,350}, ... = { ,200},
8888     {.} = { ,500},
8889     : = { ,300},
8890     ; = { ,300},
8891     ? = { ,300}, ! = { ,300},
8892     & = {50,50},
8893     \% = {100,100},
8894     * = {200,200},
8895     + = {150,200},
8896     @ = {50,50},
8897     ~ = {200,150},
8898     ( = {200, }, ) = { ,200},
8899     / = {100,200},
8900     - = {300,500},
8901     \textendash = {300,300}, \textemdash = {200,200},
8902     \textquotelleft = {700,400}, \textquoteright = {700,400},
8903     \textquotedblleft = {500,300}, \textquotedblright = {500,300},
8904     _ = {100,100},
8905     \textbackslash = {100,200},
8906     \quotesinglbase = {500,500}, \quotedblbase = {400,400},
8907     \guilsinglleft = {400,400}, \guilsinglright = {300,500},
```

```

8908 \guillemotleft = {300,300}, \guillemotright = {300,300},
8909 \textexclamdown = {100, }, \textquestiondown = {200, },
8910 \textbraceleft = {200,100}, \textbraceright = {200,200},
8911 \textless = {300,100}, \textgreater = {200,100},
8912 ≤ = {200,100}, ≥ = {100,200},
8913 † = {450,500}, ¬ = {250,150},
8914 · = {850, 700},
8915 ¶ = {100,0},
8916 × = {150, 300},
8917 ª = {300,250}, ° = {300,300}, º = {300,250},
8918 º = {300,200},
8919 ´ = {300,150}, ¸ = {350,200}, ¸ = {250,150},
8920 ¸ = {350,100}, ¸ = {300, 50}, ¸ = {400,100},
8921 ¸ = {400, 50}, ¸ = {250, 50}, ¸ = {300, 50},
8922 ¸ = {300,300},
8923 ´ = {300,350}, ¸ = {300,150}, ¸ = {250,250},
8924 ¸ = {400,200}, ¸ = {300,100}, ¸ = {450,200},
8925 ¸ = {450,150}, ¸ = {400,250}, ¸ = {400,200},
8926 ± = {150,100}, ÷ = {300,300},
8927 þ = { 50, },
8928 † = {250,200}, ‡ = {250,200},
8929 ¸ = {300,450}, ¸ = {300,450},
8930 ¸ = {300,450}, ¸ = {300,450},
8931 ¸ = {300,500}, ¸ = {300,500}, ¸ = {100,300},
8932 ¸ = {125,305}, ¸ = {200,300}, ¸ = {125,150},
8933 • = {125,200}
8934 }
8935
8936 \SetProtrusion
8937 [ name      = palatino-sc,
8938     load     = palatino-default ]
8939 { encoding  = {EU1,EU2,TU},
8940     family   = {PalatinoLinotype},
8941     shape    = sc }
8942 {
8943   a = {50,50},
8944   æ = {50, },
8945   b = { 0, 0},
8946   d = { 0, 0},
8947   f = { 0, 0},
8948   g = { 0, 0},
8949   j = {50, },
8950   l = { ,50},
8951   o = { 0, 0},
8952   p = { 0, 0},
8953   q = { 0, },
8954   r = { ,0},
8955   t = {50,50},
8956   y = {50,50},
8957   fl = { 0,50},
8958   ffl = { 0,50},
8959   ♦ = { 0,50},
8960   ♦ = { 0,50}
8961 }
8962 (/PalatinoLinotype)
8963

```

17 Auxiliary file for micro fine tuning

This file can be used to test protrusion and expansion settings.

```

8964 (*test)
8965 \documentclass{article}
8966
8967 %% Here you can specify the font you want to test, using
8968 %% the commands \fontfamily, \fontseries and \fontshape.
8969 %% Make sure to end all lines with a comment character!
8970 \newcommand*\TestFont{%
8971   \fontfamily{ppl}%
8972   \fontseries{b}%
8973   \fontshape{it}%
8974   sc, sl
8975 }
8976 \usepackage{ifthen}
8977 \usepackage[T1]{fontenc}
8978 \usepackage[latin1]{inputenc}
8979 \usepackage[verbose,expansion=alltext,stretch=50]{microtype}
8980
8981 \pagestyle{empty}
8982 \setlength{\parindent}{0pt}
8983 \newcommand*\crulefill{\cleaders\hbox{$\mkern-2mu\smash{\mkern-2mu}$}\hfill}
8984 \newcommand*\testprotrusion[2]{%
8985   \ifthenelse{\equal{\#1}{r}}{\#2}{%
8986     lorem ipsum dolor sit amet,
8987     \ifthenelse{\equal{\#1}{r}}{\crulefill}{\leftarrowfill} #2
8988     \ifthenelse{\equal{\#1}{l}}{\crulefill}{\rightarrowfill}
8989     you know the rest%
8990   \ifthenelse{\equal{\#1}{l}}{\#2}{%
8991     \linebreak
8992     \fontencoding{\encodingdefault}%
8993     \fontseries{\seriesdefault}%
8994     \fontshape{\shapedefault}%
8995     \selectfont
8996     Here is the beginning of a line, \dotfill and here is its end}\linebreak
8997 }
8998 \newcommand*\showTestFont{\expandafter\stripprefix\meaning\TestFont}
8999 \def\stripprefix#1{%
9000 \newcount\charcount
9001 \begin{document}
9002
9003 \microtypesetup{expansion=false}
9004
9005 {\centering The font in this document is called by:\\
9006 \texttt{\showTestFont}\par}\bigskip
9007
9008 \TestFont\selectfont
9009 This line intentionally left empty\linebreak
9010 %% A -- Z
9011 \charcount=65
9012 \loop
9013   \testprotrusion{\char\charcount}
9014   \advance\charcount 1
9015   \ifnum\charcount < 91 \repeat
9016 %% a -- z
9017 \charcount=97
9018 \loop
9019   \testprotrusion{\char\charcount}
9020   \advance\charcount 1
9021   \ifnum\charcount < 123 \repeat
9022 %% 0 -- 9
9023 \charcount=48
9024 \loop

```

```

9025 \testprotrusion{\char\charcount}
9026 \advance\charcount 1
9027 \ifnum\charcount < 58 \repeat
9028 %%
9029 \testprotrusion[r]{,}
9030 \testprotrusion[r]{.}
9031 \testprotrusion[r]{;}
9032 \testprotrusion[r]{:}
9033 \testprotrusion[r]{?}
9034 \testprotrusion[r]{!}
9035 \testprotrusion[]{\textexcldown}
9036 \testprotrusion[]{\textquestiondown}
9037 \testprotrusion[r]{}}
9038 \testprotrusion[1]{}}
9039 \testprotrusion{/}
9040 \testprotrusion{\char`\\}
9041 \testprotrusion{-}
9042 \testprotrusion{\textendash}
9043 \testprotrusion{\textemdash}
9044 \testprotrusion{\textquotelleft}
9045 \testprotrusion{\textquoteright}
9046 \testprotrusion{\textquotedblleft}
9047 \testprotrusion{\textquotedblright}
9048 \testprotrusion{\quotesinglbase}
9049 \testprotrusion{\quotedblbase}
9050 \testprotrusion{\guilsinglleft}
9051 \testprotrusion{\guilsinglright}
9052 \testprotrusion{\guillemotleft}
9053 \testprotrusion{\guillemotright}
9054
9055 \newpage
9056 The following displays the current font stretched by 5%,  

9057 normal, and shrunk by 5%:  

9058
9059 \bigskip
9060 \newlength{\MTln}
9061 \newcommand*\teststring
9062 {ABCDEFGHIJKLMNOPQRSTUVWXYZabcdefghijklmnopqrstuvwxyz0123456789}
9063 \settowidth{\MTln}{\teststring}
9064 \microtypesetup{expansion=true}
9065
9066 \parbox{1.05\MTln}{\teststring\linebreak\
9067 \teststring}\par\bigskip
9068 \parbox{0.95\MTln}{\teststring}
9069
9070 \end{document}
9071 (/test)

```

Needless to say that things may always be improved. For suggestions, mail to
 w.m.1@gmx.net.

A The title logo

This is `microtype-logo.dtx`. You may treat this file in three different ways:

- compile it by itself
- `\input` it in the body of a `dtx` file
- `\input` it in the preamble: it then provides the command `\printlogo`, which will do just that

The first two cases require the style file `microtype-doc.sty`, which can be generated from `microtype.ins` with:

```
\makefile{microtype-doc.sty}{docsty}
```

9072 `{*logo}`

Here's how the logo on the title page was created.²⁹ It has nothing to do with `microtype`, actually, but uses `fontinst`. It is based on an experiment I posted to the `de.comp.text.tex` newsgroup.³⁰ It will show:

- the character
- the `TEX` box
- the bounding box
- kerns

A.1 Macros

To run this file, `TEX` needs to find the `afm` file (either in the `TEXINPUTS` path, or in the current working directory).
First input `fontinst`.

9073 `\input fontinst.sty`

`bbox.sty` is an addition to `fontinst`, which makes dimensions of the bounding boxes available (and was written by H_{an} Th_é Thành, by the way). These dimensions are specified in the `afm` file, but not used by `TEX`, which is why `fontinst` will discard them otherwise.

9074 `\input bbox.sty`

`\tempdim` Allocate some dimen registers.

9075 `\newdimen\tempdim`

`\fboxrulei` Frame width of the box as `TEX` sees it.

9076 `\newdimen\fboxrulei`

9077 `\fboxrulei=0.1pt`

`\fboxruleii` Frame width of the bounding box.

9078 `\newdimen\fboxruleii`

9079 `\fboxruleii=0.1pt`

`\kernboxheight` Height of the box indicating the kern.

9080 `\newdimen\kernboxheight`

9081 `\kernboxheight=5pt`

`\scaletoem` An auxiliary macro. Return a dimension relative to the em-width of the font. Requires e-`TEX`.

9082 `\setcommand\scaletoem#1{\dimexpr #1 sp*\fontdimen6\font/1000\relax}`

`\showlogo` A `fontinst` incantation whose sole purpose is to produce the logo. Its argument is a string (letters only).

9083 `\fontinstcc`

9084 `\def\showlogo#1{%`

Some fonts do not specify the `\fontdimen6` (width of an em) in the `afm` file. In this case, use the font size, which is correct in most cases.

9085 `\ifdim\fontdimen6\font = 0pt`

`\typeout{***Warning:-no-fontdimen-6-specified-***^J%}`

`***setting-it-to-\pdffontsize\font \ifnum\pdftexversion < 130 pt\fi-***}`

`\fontdimen6\font=\pdffontsize\font \ifnum\pdftexversion < 130 pt\fi\relax`

`\fi`

`\installfonts`

29 Note that the `logo` module will not be created when installing `microtype`. Instead, the source file `microtype-logo.dtx` is included as an attachment in the PDF file. If your PDF reader supports this, you can [click here](#) to extract it; alternatively, you may use the `pdftk` tool.

30 Message ID: 42aa3687\$0\$24366\$9b4e6d93@newsread2.arcor-online.net

```

9091   \input_metrics{}{\logofont,\metrics\printbbs{\#1}\relax}
9092   \endinstallfonts
9093 }
9094 \normalcc
    Layers.
9095 \makeatletter
9096 \def\mtl@layer#1#2{\pdfliteral{/OC/#1 BDC}#2\pdfliteral{EMC}}
9097 \ifx\mt@objects\undefined\let\mt@objects\empty\fi
9098 \ifx\mt@order\undefined\let\mt@order\empty\fi
9099 \xdef\mt@order{\mt@order[(Logo)]}
9100 \let\mtl@resources\empty
9101 \def\mtl@register#1%
9102   \immediate\pdfobj{<< /Type/OCG /Name(#1) >>}
9103   \expandafter\xdef\csname mtl@#1\endcsname{\the\pdflastobj\space 0 R }
9104   \xdef\mt@objects{\mt@objects\csname mtl@#1\endcsname}
9105   \xdef\mt@order{\mt@order\csname mtl@#1\endcsname}
9106   \xdef\mtl@resources{\mtl@resources/#1 \csname mtl@#1\endcsname}
9107 \mtl@register{canvas}
9108 \mtl@register{characters}
9109 \mtl@register{bounding-boxes}
9110 \mtl@register{TeX-boxes}
9111 \xdef\mt@order{\mt@order}
9112 \global\let\mtl@objects\mt@objects
9113 \def\togglelayer#1#2{%
9114   \pdfstartlink width \wd\logobox height \ht\logobox depth \dp\logobox
9115     user{/Subtype/Link
9116       /BS << /Type/Border/W 0 >> /H/0
9117       /A << /S/SetOCGState
9118         /State[/Toggle \csname mtl@#1\endcsname] >>
9119 }#2\pdfendlink
9120 }

```

\printbbs Preparation.

```

9121 \setcommand\printbbs#1{%
9122   \setbox0\hbox{\#1}%
9123   \leavevmode
9124   \kern-\fboxrulei

```

The canvas in the natural width of the text minus protrusion, in color `bcolor`.

```

9125 \mtl@layer{canvas}{%
9126   \getboundarychars#1\relax
9127   \tempdim=\dimexpr\wd0 - (\scaletoem{\lpcode\font\firstchar}+
9128                           \scaletoem{\rpcode\font\lastchar})\relax
9129   \kern\dimexpr\scaletoem{\lpcode\font\firstchar}\relax
9130   \lower\dimexpr\dp0+0.05em\relax\vbox{\color{bcolor}%
9131     \hrule width \tempdim
9132     height \dimexpr\dp0+\ht0+0.15em\relax}%
9133   \kern-\tempdim

```

The baseline, in color `bcolor`.

```

9134   \vbox{\color{bcolor}%
9135     \hrule width \tempdim
9136     height \fboxrulei}%
9137 }%
9138 \kern-\dimexpr\wd0 -\scaletoem{\rpcode\font\lastchar}\relax

```

The string.

```

9139 \printbbss #1\relax\relax
9140 }

```

\getboundarychars Get first

```

9141 \def\getboundarychars#1#2\relax{%
9142   \def\firstchar{\`#1}%
9143   \getlastchar#1#2\relax
9144 }

```

\getlastchar ... and last character.

```

9145 \def\getlastchar#1#2{%
9146   \ifx\relax#2\relax
9147     \def\lastchar{"#1}%
9148   \else
9149     \expandafter\getlastchar
9150   \fi #2%
9151 }
\printbbss      Loop over all characters of the string.
9152 \def\printbbss#1#2#3\relax{%
9153   \ifx\relax#1\relax
9154   \else
9155     \ifx\relax#2\relax
9156       \printbb{\#1}{}%
9157     \else
9158       \printbb{\#1}{\#2}%
9159     \fi
9160     \expandafter\printbbss
9161   \fi #2#3\relax
9162 }
\printbb      Record the kern between the current and the following character, then print the character. \kerning is a fontinst command.
9163 \setcommand\printbb#1#2{%
9164   \setbox0\hbox{\kerning{\#1}{\#2}\xdef\thekern{\number\result}}%
9165   \showboxes{\#1}%
This could be another application.
9166 %      \quad
9167 %      w: \the\scaletoem{\width{\#1}},
9168 %      bb: \the\scaletoem{\bbleft{\#1}}/
9169 %      \the\scaletoem{\bbright{\#1}},
9170 %      \the\scaletoem{\number\numexpr\width{\#1}-\bbright{\#1}\relax}
9171 %      h: \height{\#1}/\bbtop{\#1}, \bbbottom{\#1}/\depth{\#1}\par
9172 }

\showboxes      Print the boxes for char <\#1>. This won't work if <\#1> isn't also the PostScript name of the glyph (e.g., 'comma' ≠ ',').
9173 \setcommand\showboxes#1{%
9174   \leavevmode
9175   \color{textcolor}%
We have to record the width of the glyph.
9176 \setbox0\hbox{\color{textcolor}{\#1}}%
9177 \global\tempdim=\wd0\relax
9178 \kern-\fboxrulei
1. The TEX box: Print a frame in color texcolor. This frame shows the glyph as TEX sees it.
9179 \mtl@layer{TeX-boxes}{%
9200   \hbox{%
9201     \lower\dimexpr \dp0 + \fboxrulei\relax
9202     \hbox{%
9203       \vbox{%
9204         \hrule height\fboxrulei
9205         \hbox{%
9206           \vrule width\fboxrulei height \dimexpr\ht0 + 2\fboxrulei\relax
9207           \phantom{\unhcopy0}%
9208           \vrule width\fboxrulei
9209         }%
9210         \hrule height\fboxrulei}}%
9211   }%
2. The character: Now we step back and print the actual glyph. We hold it back until now, so that it will be printed on top of its box.
9192 \kern-\wd0
9193 \mtl@layer{characters}{\hbox{\box0}}%
Step back by the amount that the character's bounding box differs from the TEX box on the left side.
9194 \kern\dimexpr\scaletoem{\bbleft{\#1}}-\tempdim-\fboxrulei\relax

```

3. *The bounding box:* will be printed in color `bbcicolor`.

```

9195 \mtl@layer{bounding-boxes}{%
9196   {\color{bbcicolor}%
9197     \hbox{%
9198       \lower\dimexpr\scaletoem{\bbbottom{\#1}}+\fboxruleii\relax
9199       \hbox{%
9200         \vbox{%
9201           \hrule height\fboxruleii
9202           \hbox to \dimexpr\scaletoem{\numexpr
9203             \bbright{\#1}-\bbleft{\#1}\relax+2\fboxruleii\relax{%
9204               \vrule height \dimexpr\scaletoem{\numexpr
9205                 \bbtop{\#1}-\bbbottom{\#1}\relax\%
9206                 width\fboxruleii
9207                 \hfill
9208                 \vrule width\fboxruleii\%
9209                 \hrule height\fboxruleii\}}\%
9210               }%
9211             \kern-\dimexpr\fboxruleii+\fboxrulei\relax
9212           }%
}

```

4. *The kern:* We also print a small box in color `kerncolor` indicating the kerning between the current and the next character; filled for negative kerns, empty for positive kerns.

```

9213 \kern\scaletoem{\numexpr\width{\#1}-\bbright{\#1}\relax}%
9214 \mtl@layer{TeX-boxes}{%
9215   {\ifnum\thekern<0
9216     \color{kerncolor}%
9217     \kern\scaletoem{\thekern}%
9218     \lower\kernboxheight\hbox{\vrule width -\dimexpr\scaletoem{\thekern}\relax
9219       height \kernboxheight}%
9220     \kern\scaletoem{\thekern}%
9221   \else
9222     \color{textcolor}%
9223     \ifnum\thekern=0 \else
9224       \lower\kernboxheight
9225       \hbox{%
9226         \vbox{%
9227           \hrule height\fboxrulei
9228           \hbox{%
9229             \vrule height \kernboxheight width\fboxrulei
9230             \kern\dimexpr\scaletoem{\thekern}-2\fboxrulei\relax
9231             \vrule width\fboxrulei
9232           }%
9233           \hrule height\fboxrulei\}}%
9234         \fi
9235       \fi
9236     }%
9237   }%
9238   \% \kern-\fboxrulei
9239 }
9240 \newbox\logobox
9241 \def\printlogo{%
9242   \setbox\logobox=\hbox{\vbox{%
9243     \MakePercentComment

```

This is the Kepler MM font used in the logo.

```

9244 \def\logofont{pkpri9e10}
9245 \transformfont{\logofont}{\reencodefont{8r}{\fromafm{pkpmri8a10}}}
9246 \font\thelogofont=\logofont\space at 82pt

```

This would load the italic Palatino font instead.

```

9247 \%def\logofont{pptri}
9248 \%transformfont{\logofont8r}{\reencodefont{8r}{\fromafm{\logofont8a}}}
9249 \%edef\logofont{\logofont8r}
9250 \%font\thelogofont=\logofont\space at 78pt

```

Load the font.

```
9251 \thelogofont
```

Protrusion values (overdone for didactic reasons).

```
9252 \lpcode\font`M=96
9253 \rpcode\font`e=46
```

Now we can generate the logo.

```
9254 \pdfliteral direct{/SXS gs}%
9255 \showlogo{Microtype}%
9256 % \r1ap{\normalfont\normalsize\raisebox{55pt}{\footnotemark[1]}}%
9257 % \kern5pt\[\z\baselineskip]
9258 % \long\def\@makefntext##1{%
9259 % \leftskip Opt
9260 % \parindent Opt
9261 % \everypar{\parindent Opt}%
9262 % \leavevmode\hbox to 15pt{\@thefnmark\hss}##1}
9263 % \footnotetext[1]{This graphic display on a
9264 % \togglelayer{canvas}{canvas} the \togglelayer{characters}{characters},
9265 % their \togglelayer{bounding-boxes}{bounding boxes}
9266 % and \togglelayer{TeX-boxes}{\TeX\ boxes}.}
9267 }%
9268 \edef\logodimens{width \the\wd\logobox height \the\ht\logobox depth \the\dp\logobox}
9269 \immediate\pdfobj{<</Type/ExtGState /CA 0.6 /ca 0.6 /BM/Normal >>}%
9270 \immediate\pdfxform
9271     attr{/Group <</Type/Group /S/Transparency /I true /CS/DeviceRGB >>}
9272     resources{/Properties <<\mtl@resources>>
9273         /ExtGState << /SXS \the\pdflastobj\space 0 R >> }
9274     \logobox
9275 % \vskip-2.5\baselineskip
9276 % \leavevmode
9277 % \togglelayer{characters}{%
9278 % \pdfrefxform\pdflastxform
9279 % }%
9280 \pdfannot\logodimens{%
9281     /Subtype/Widget /FT/Btn /T(Logo)
9282     %/F 4 % why did I say this?
9283     /AP << /N \the\pdflastxform\space 0 R >>
9284     /AA << /E << /S/SetOCGState /State[/Toggle \mtl@characters] >>
9285     /X << /S/SetOCGState /State[/Toggle \mtl@characters] >>
9286     /D << /S/SetOCGState /State[/Toggle \csname mtl@bounding-boxes\endcsname] >>
9287     /U << /S/SetOCGState /State[/Toggle \csname mtl@TeX-boxes\endcsname] >>
9288     >> }%
9289 \vspace{3\baselineskip}
9290 }
```

Our font.

```
9291 \pdfmapline{+pkpmmri8r10 Kep1MM-It_385_575_10_ " TeXBase1Encoding ReEncodeFont " <8r.enc <pkpmmri8a10.pfb}
```

Define colours (thered and thegreen are copied from microtype.dtx).

```
9292 \def\mtdefinecolors{
9293 \definecolor{thered}{rgb}{0.65,0.04,0.07}
9294 \definecolor{thegreen}{rgb}{0.06,0.44,0.08}
9295 \colorlet{texcolor}{thegreen!50} % TeX boxes
9296 \colorlet{kerncolor}{texcolor} % negative kerns
9297 \colorlet{bbcolor}{thered!50} % bounding box
9298 \colorlet{bgcolor}{black!8} % canvas
9299 \colorlet{blcolor}{black!50} % baseline
9300 \colorlet{textcolor}{black!40} % text
9301 }
```

Use with microtype.dtx

```
9302 \ifx\documentclass\@twoclasseserror
9303 \usepackage[xcdraw]{xcolor}
9304 \mtdefinecolors
9305 \else
```

A.2 Document

Now we can start the document.

```

9306 \documentclass[10pt,a4paper]{ltxdoc}
9307 \providecommand\MakePercentComment{\relax}
9308 \expandafter\def\csname ver@\microtype.dtx\endcsname{2999/99/99}
      Re-use the preamble from microtype.dtx.
9309 \usepackage{microtype-doc}
9310 \usepackage{attachfile}
9311 \makeatletter
9312 \pdfcatalog{/OCProperties << /OCGs [\mt@objects] /D << /Order [\mt@order] >> >>}
9313 \makeatother
9314 \begin{document}

      You are currently reading this.
9315 \DocInput{microtype-logo.dtx}
9316 \newpage
9317 And here it is:
9318 \vfill
9319 \begin{center}
9320   \printlogo \null
9321 \end{center}
9322 \vfill
9323 \expandafter\enddocument
9324 \fi

      That's it.
9325 \Logo

```

B The letterspacing illustration

This is `microtype-lssample.dtx`. You may treat this file in three different ways:

- compile it by itself
- `\input` it in the body of a dtx file
- `\input` it in the preamble: it then provides the commands
 - `\lssample`: prints the letterspacing illustration
 - `\anchorarrow`: anchors an arrow for layer `(#1)`
 - `\showarrow`: toggles layer `(#1)` or `(#2)`, and prints `(#2)`

The first two cases require the style file `microtype-doc.sty`, which can be generated from `microtype.ins` with:

```

\makefile{microtype-doc.sty}{docsty}

9326 \ifx\lssample\undefined
9327 {*lssample}

```

Upon popular request, here's how I've created the letterspacing illustration.³¹

B.1 Macros

Rule width and image height and depth.

```

9328 \makeatletter
9329 \newdimen\lsamount
9330 \newdimen\lrule
9331 \lrule=0.2pt
9332 \def\lsheight{8pt}
9333 \def\lsdepth{12pt}

```

³¹ Note that the `lssample` module will not be created when installing `microtype`. Instead, the source file `microtype-lssample.dtx` is included as an attachment in the PDF file. If your PDF reader supports this, you can [click here](#) to extract it; alternatively, you may use the `pdftk` tool.

Our font (Adobe Caslon).

```
9334 \def\lsfont{\fontfamily{paca}\selectfont}
Loop over all letters in {#2}, letterspacing them by {#1}.
9335 \def\dols#1#2{\lsamount=#1\relax \dolss#2\enddols}
9336 \def\dolss#1#2\enddols{%
9337   \ifx\empty#2\empty\divide\lsamount 2\fi
9338   \ls{#1}%
9339   \ifx\empty#2\empty\else \dolss#2\enddols \fi
9340 }
```

One tikz picture for each letter.

```
9341 \def\ls#1{%
9342   \begin{tikzpicture}[remember picture, line width=\lsrule]
9343     \tikzstyle{every node}=[inner sep=0pt]
```

The bounding box.

```
9344   \mts@layer{stuff}{%
9345     \node[draw=thegrey,
9346       fill=theshade,
9347       outer sep=\lsrule,
9348       anchor=base,
9349       font=\lsfont]{\phantom{#1}};
9350 }
```

The letter.

```
9351   \node[anchor=base, font=\lsfont] (#1){#1};
```

Two auxiliary coordinates.

```
9352   \path (#1.south west) ++(+.5\lsrule,-.5\lsrule) coordinate (#1L);
9353   \path (#1.base east) ++(-.5\lsrule,-\lsdepth) coordinate (#1R);
9354   \mts@layer{stuff}{%
```

Now draw the normal character width,

```
9355   \draw[color=thered!75,
9356     fill=thered!30,
9357     outer sep=\lsrule]
9358     (#1L) rectangle (#1R);
9359   \ifdim\lsamount>0pt
9360     \path (#1.base east) ++(+.5\lsamount,-6pt) coordinate (#1_ls);
9361     \path (#1R) ++(\lsamount+\lsrule,+\lsdepth) coordinate (#1E);
```

and the letter space.

```
9362   \draw[color=thered,
9363     fill=thered!50,
9364     outer sep=\lsrule]
9365     (#1R) ++(+\lsrule,+0pt) rectangle (#1E);
9366   \fi
9367 }
9368 \end{tikzpicture}%
9369 \ignorespaces
9370 }
```

Draw the interword space.

```
9371 \def\lssp#1#2#3#4{%
9372   \begin{tikzpicture}[remember picture, line width=\lsrule, inner sep=0pt]
9373     \mts@layer{stuff}{%
9374       \tikzstyle{every draw}=[anchor=bottom]
9375       \coordinate(#1space) at (#2/2,\lsdepth/2);
9376       \coordinate(#1stretch) at (#2+#3/2,+0pt);
9377       \coordinate(#1shrink) at (#2-#4/2,+0pt);
9378       \draw[color=thegreen, fill=thegreen!50, use as bounding box]
9379         (0,0) rectangle ++(#2,+ \lsdepth);
9380       \draw[color=thegreen, fill=thegreen!30]
9381         (+#2,-\lsrule) rectangle ++(#3,-4pt+\lsrule);
9382       \draw[color=thegreen, fill=thegreen!50]
9383         (+#2,-\lsrule) rectangle ++(-#4,-4pt+\lsrule);
9384       \draw[->, line width=0.3pt, shorten <=0.5\lsrule, color=thegreen!50]
```

```

9385           (+#2,-2pt-.5\lsrule) -- ++(+#3,+0pt);
9386           \draw[->,line width=0.3pt,shorten <=0.5\lsrule,color=thegreen!30]
9387             (+#2,-2pt-.5\lsrule) -- ++(-#4,+0pt);
9388         }%
9389     \end{tikzpicture}%
9390   \ignorespaces
9391 }

Layers.
9392 \def\mts@layer#1#2{\pdfliteral page{/OC/#1 BDC}#2\pdfliteral page{EMC}}
9393 \def\mts@layer#1#2{\pdfliteral page{/OC/stuff BDC /OC/#1 BDC}#2\pdfliteral page{EMC EMC}}
9394 \ifx\mt@objects\undefined\let\mt@objects\empty\fi
9395 \ifx\mt@order\undefined\let\mt@order\empty\fi
9396 \xdef\mt@order{\mt@order[(Sheep)}
9397 \let\mts@resources\empty
9398 \def\mts@register#1{%
9399   \immediate\pdfobj{<< /Type/OCG /Name(#1) >>}
9400   \expandafter\xdef\csname mts@#1\endcsname{\the\pdflastobj\space 0 R }
9401   \xdef\mt@objects{\mt@objects\csname mts@#1\endcsname}
9402   \xdef\mt@order{\mt@order\csname mts@#1\endcsname}
9403   \xdef\mts@resources{\mts@resources/#1 \csname mts@#1\endcsname}}
9404 \mts@register{stuff}
9405 \mts@register{tracking}
9406 \mts@register{ispace}
9407 \mts@register{ospace}
9408 \mts@register{istretch}
9409 \mts@register{ishrink}
9410 \mts@register{ostretch}
9411 \mts@register{oshrink}
9412 \mts@register{okern}
9413 \mts@register{ligature}
9414 \mts@register{_compatibility}
9415 \xdef\mt@order{\mt@order}

Anchor point for the arrow in the code.
9416 \newcommand\anchorarrow[1]{%
9417   \tikz[remember picture,overlay]\node(#1_c){};}

Add an arrow from code to image.
9418 \newcommand\addarrow[5][left]{%
9419   \tikz[remember picture,overlay,bend angle=14,looseness=0.75,>=latex]{%
9420     \mts@layer{\#3}{\draw[->,thick,color=the#2](#4) to[bend #1] (#5);}}%
9421 }

Toggle layer.
9422 \def\toggle@layer#1#2#3{%
9423   \pdfstartlink
9424     user{/Subtype/Link
9425       /BS << /Type/Border/W 0 >> /H/0
9426 %       /BS << /Type/Border/W 1 /S/D /D[4 1] >>
9427 %       /C[0.7 0.7 0.7] /H/0
9428       /Contents(Click to Toggle!)
9429       /A << /S/SetOCGState
9430       /State[/Toggle \csname mts@#1\endcsname] >> }%
9431   \rlap{\#2}%
9432   {\fboxsep=0pt\fboxrule=0pt
9433     \mts@layer{stuff}{%
9434       \rlap{\fcolorbox{white}{white}{\vphantom{kg}\color{the#3}\#2}}%
9435     \mts@layer{\#1}{%
9436       \fcolorbox{white}{the#3!50}{\vphantom{kg}\color{white}\#2}}%
9437     }%
9438   \pdfendlink
9439 }
9440 \newcommand\showarrow[2][]{%
9441   \ifx\relax#1\relax\def\@tempa{\#2}\else\def\@tempa{\#1}\fi
9442   \toggle@layer{\@tempa}{\itshape \#2}}}

```

The environment for our illustration.

```

9443 \def\ls@sample#1{%
9444   \parskip 4pt \parindent 0pt
9445   \par
9446   \vskip4pt
9447   {\leftskip 15pt
9448     \mt@pseudo@marg{\color{theblue}Click on the image to show the kerns
9449       and spacings involved. Click on emphasised words in the text below
9450       to reveal the relation of image and code.\strut}
9451     \mt@layer{_compatibility}{%
9452       \mt@place{\rlap{\hskip-\marginparwidth \color{white}%
9453         \vrule width\dimexpr\hsize+\marginparwidth\relax height\mt@unvdimen}}
9454       \mt@pseudo@marg{\color{thered}{%
9455         If you had a \acronym{PDF} viewer that understands
9456         \acronym{PDF}\,\{\smaller1.5\}, you could hide the arrows selectively.}}}
9457     \vskip-\mt@unvdimen}%
9458   \vskip-4pt
9459   \setlength\fboxsep{4pt}%
9460   \leavevmode
9461   \pdfstartlink
9462     user{/Subtype/Link
9463       /BS << /Type/Border/W 0 >> /H/0
9464       /A << /S/SetOCGState
9465         /State[/Toggle \mts@stuff] >> }%
9466     \fcolorbox{theframe}{theshade}{%
9467       {\fontsize{34}{38}\selectfont #1}%
9468   \pdfendlink
9469   \par\medskip
9470 }%
9471 \edef\x{\pdfpageresources{/Properties <<\mts@resources>>}}\x
9472 }
```

Now define the illustration to be used in the document.

```

9473 \def\lssample{%
9474   \ls@sample{%
9475     \dols{Opt}{Stop}
9476     \lssp{o}{0.45em}{0.25em}{0.15em}
9477     \dols{0.16em}{\stealing}\hskip-\dimexpr 0.08em+\lsrule\relax
9478     \lssp{i}{13.82pt}{4.65pt}{2.08pt}
9479     \dols{0.16em}{sheep}
9480     \dols{Opt}{!}
9481 }%
```

Don't forget to add the arrows.

```

9482 \vspace{-\baselineskip}
9483 \addarrow{red} {tracking}{\lsamount_c.east}{a_ls}
9484 \addarrow{red} {okern} {okernend_c.east}{p_ls}
9485 \addarrow{green} {ospace} {ospace_c.east} {ospace}
9486 \addarrow{green} {ispace} {ispace_c.center} {ispace}
9487 \addarrow{green!75} {istretch} {istretch_c.east}{istretch.north}
9488 \addarrow{green!75} {ishrink} {ishrink_c.west} {ishrink.north}
9489 \addarrow{green!75} {ostretch} {ostretch_c.east}{ostretch.north}
9490 \addarrow{green!75} {oshrink} {oshrink_c.east} {oshrink.north}
9491 \addarrow[right]{grey}{ligature}{nolig_c.east}{st.center}
9492 }
9493 \fi
```

This is for use with microtype.dtx

```

9494 \ifx\documentclass\@twoclasseserror
9495   \usepackage{tikz}
9496 \else
```

B.2 Document

```

9497 \documentclass[10pt,a4paper]{ltxdoc}
9498 \expandafter\def\csname ver@\microtype.dtx\endcsname{2999/99/99}
```

Re-use the preamble from `microtype.dtx`.

```

9499 \usepackage{microtype-doc}
9500 \usepackage{attachfile}
9501 \usepackage{tikz}
9502 \makeatletter
9503 \pdfcatalog{/OCProperties << /OCGs [\mt@objects]
9504                               /D << /Order [\mt@order] /BaseState/OFF >> >> }
9505 \makeatother
9506 \begin{document}

    You are currently reading this.

9507 \DocInput{microtype-lssample.dtx}

    Now show what we are able to do.

9508 \noindent
9509 Since a picture is worth a thousand words, probably even more if, in our
9510 case, it depicts a couple of letterspaced words, let's bring one to sum up
9511 these somewhat confusing options. Suppose you had the following settings
9512 (which I would in no way recommend; they are only for illustrative purposes):
9513 \begin{verbatim}
9514 \SetTracking
9515   [ no ligatures = {"\anchorarrow{nolig}"f},
9516     spacing      = {60"\anchorarrow{ispace}"0*, "%"
9517                      "-1"\anchorarrow{istretch}"00*, "\anchorarrow{ishrink}"},
9518     outer spacing = {4"\anchorarrow{ospace}"50,"%"
9519                      "2"\anchorarrow{ostretch}"50,1"\anchorarrow{oshrink}"50},
9520     outer kerning = {"\anchorarrow{okernbegin}"*, "%"
9521                      \anchorarrow{okernend}"*} ]
9522 { encoding = * }
9523 { 1"\anchorarrow{lamount}"60 }
9524 \end{verbatim}
9525 and then write:
9526 \begin{verbatim}
9527 Stop \textis{stealing sheep}!
9528 \end{verbatim}
9529 this is the (typographically dubious) outcome:
9530
9531 \lssample
9532
9533 \noindent
9534 While the word 'Stop' is not letterspaced, the space between the letters in
9535 the other two words is expanded by the \showarrow[tracking]{tracking-amount}{red}
9536 of 160/1000\,em\,=\allowbreak\,0.16\,em.
9537 The \showarrow{ispace}{inner-space}{green} within the letterspaced text is
9538 increased by 60\%, while its \showarrow{istretch}{stretch}{green} amount is
9539 decreased by 10\% and the \showarrow{ishrink}{shrink}{green} amount is left
9540 untouched.
9541 The \showarrow{ospace}{outer-space}{green} (of 0.45\,em) immediately before the
9542 piece of text may \showarrow{ostretch}{stretch}{green} by 0.25\,em and
9543 \showarrow{oshrink}{shrink}{green} by 0.15\,em.
9544 Note that there is no outer space after the text, since the exclamation mark
9545 immediately follows; instead, the default \showarrow{okern}{outer-kern}{red}
9546 of half the letterspace amount (0.08\,em) is added.
9547 Furthermore, one \showarrow{ligature}{grey} wasn't broken up, because we
9548 neglected to specify the '|s|' in the |no ligatures| key.
9549
9550 \expandafter\enddocument
9551 \fi
9552 \lssample

```

C Change history

2004/09/11 **Version 1.0**

General: Initial version 1

2004/09/21 **Version 1.1**

General: configuration file names in lowercase (suggested by *Harald Harders*) 87
 remove 8-bit characters from the configuration files (suggested by *Harald Harders*) 145
 Protrusion: add factors for some more characters settings for Adobe Minion (contributed by *Harald Harders*) 152 153
`\DeclareCharacterInheritance`: new command: possibility to specify character inheritance 118
`\MT@declare@sets`: remove spaces around set name 104
`\MT@find@file`: fix: also check whether the file for the base font family has already been loaded 87
`\MT@get@basefamily`: only remove suffixes ‘x’ or ‘j’ 88
`\MT@get@listname@`: don’t check for empty attributes

list 88
`\MT@ifempty`: fix: use category code 12 for the percent character (reported by *Tom Kink*) 45
`\MT@is@number`: numbers may also be specified in hexadecimal or octal (suggested by *Harald Harders*) 94
`\MT@pdftex@no`: fix: version check (reported by *Harald Harders*) 40
`\MT@permute`: don’t use sets for empty encoding 120
`\MT@setup@expansion`: issue an error instead of a warning, when pdfTeX version is too old for autoexpand 135
`\MT@split@codes`: fix: allow zero and negative values 63
`\MT@use@set`: remove spaces around set name 109

2004/10/03 **Version 1.2**

Font aliases: declare cmor as an alias of cmr 143
 Font sets: new: `allmath` and `basicmath` 142
 Protrusion: add settings for Computer Modern Roman and Adobe Garamond in TS1 encoding 177
 add settings for Computer Modern Roman math symbols 181
`\MT@familyalias`: define alias font name as an alternative, not as a replacement 59
`\MT@get@basefamily`: also remove ‘w’ (swash capitals) 88
`\MT@get@highlevel`: check whether defaults have changed 105

`\MT@get@inh@list`: fix: set inheritance list \globally to `\empty` 90
`\MT@get@listname@`: alternatively check for alias font name 88
`\MT@get@size`: additional magic to catch some errors hijack `\set@fontsize` instead of `\setfontsize` 107
`\MT@loop`: fix: new macro, used instead of `\loop` 49
`\MT@maybe@do`: also check for alias font name 59
`\MT@permute@{@}{@}{@}{@}`: more sanity checks for `\SetProtrusion` and `\SetExpansion` 121
`\MT@setupfont`: also search for alias font file 56
 fix: call `\@enc@update` if necessary 57

2004/10/27 **Version 1.3**

General: fix: specifying `load` option does no longer require to give a name, too 115
 Font aliases: declare aer, zer and hfor as aliases of cmr 143

`\MT@fix@catcode`: check some category codes (compatibility with german) 35
`\MT@load@list`: check whether list exists 86

2004/11/12 **Version 1.4**

General: check for `pdfcprot` 54
 don’t use scratch registers in global definitions 90
 use `\pickup@font` instead of `\define@newfont` as the hook for `\MT@setupfont` 99
 use one instead of five counters 50
 Protrusion: tweak quote characters for cmr variants

(OT1, T1, lmr) 158
`\microtypesetup`: fix: set the correct levels, and remember them; warning when enabling an option disabled in package options 129
`\SetExpansion`: fix: specifying extra options does no longer require to give a name, too 112

2004/11/17 **Version 1.4a**

General: new option: `final` 126
`\MT@cfg@catcodes`: fix: reset some more catcodes

when reading files (reported by *Michael Hoppe*) 87

2004/11/26

Version 1.4b

| | |
|--|-----|
| General: fix: set catcodes before reading global configuration file (reported by <i>Christoph Bier</i>) | 128 |
| optimisation: use less \expandafters and \csnames | 44 |
| Protrusion: harmonise dashes in upshape and italic (cmr, pad, ppl) | 152 |
| slanted like italics | 161 |
| \MT@checklist@family: fix: don't try alias family name if encoding failed | 60 |
| \MT@get@basefamily: fix: failed for font names of the form abczz (reported by <i>Georg Verwegen</i>) | 88 |
| \MT@get@slot: don't define \MT@char globally (save stack problem) | 90 |
| \MT@ifdimen: don't set \MT@count globally (save stack problem) | 46 |
| \MT@setup@PDF: new message if \pdfoutput is changed | 133 |
| \MT@use@set: don't use undeclared font sets | 109 |

2004/12/15

Version 1.5

| | |
|---|-----|
| General: defaults: step: 4 (suggested by <i>Hàn Thành</i>) | 127 |
| new option: selected, by default false (suggested by <i>Hàn Thành</i>) | 125 |
| Documentation: add 'Short history' | 30 |
| add note about DVIVoutput option | 8 |
| Inheritance: remove \ss from T1 list, add \DJ | 146 |
| Protrusion: settings for Bitstream Charter | 153 |
| \DeclareMicrotypeAlias: remove spaces around arguments | 110 |
| \MT@cfg@catcodes: reset catcode of '=' (compatibility with Turkish babel) | 87 |
| \MT@fix@catcode: reset catcode of '^' (compatibility with chemsym) | 35 |

2005/01/24

Version 1.6

| | |
|---|-----|
| General: defaults: turn off expansion for old pdfTeX versions | 128 |
| load a font if none is selected | 56 |
| new option: factor, by default 1000 | 127 |
| restructure dtx file | 142 |
| test whether \pickup@font has changed | 101 |
| test whether numeric options receive a number | 127 |
| use e-TeX's \ifcsname and \ifdefinable if defined | 44 |
| Protrusion: add italic uppercase Greek letters | 161 |
| improve settings for numbers (pointed out by <i>Peter Muthesius</i>) | 155 |

2005/02/02

Version 1.6a

| | |
|--|----|
| Documentation: add table of fonts with tailored protrusion settings | 21 |
| \MT@get@slot: completely redone, hopefully more robust (compatible with frenchpro; problem reported by <i>Bernard Gaulle</i>) | 90 |

| | |
|--|-----|
| \MT@get@charwd: use e-TeX's \fontcharwd, if available | 64 |
| \MT@get@inh@list: correct message if selected is false | 90 |
| \MT@set@ex@codes: introduce factor option | 69 |
| \MT@set@pr@codes: introduce factor option | 62 |
| \MT@setup@expansion: disable automatic expansion for old pdfTeX versions | 135 |
| \MT@use@set: retain current set if new set is undeclared | 109 |
| \MT@vinfo: new macro instead of \ifMT@verbose | 36 |

2005/03/23

Version 1.7

| | |
|--|-----|
| General: allow specification of size ranges (suggested by <i>Andreas Bühmann</i>) | 106 |
| disallow automatic expansion if pdfTeX too old | 118 |
| fix: remove space after autoexpand | 118 |
| new value for verbose option: errors | 126 |
| shorter command names | 50 |
| warning when running in draft mode | 132 |
| Documentation: add hint about compatibility | 26 |
| remove table of match order (now table 4 on page 89) | 12 |

| | |
|--|-----|
| Protrusion: fix: remove \ from OT1, add \textbackslash to T1 encoding | 156 |
| \LoadMicrotypeFile: new command (suggested by <i>Andreas Bühmann</i>) | 110 |
| \Microtype@Hook: new command for font package authors | 129 |
| \microtypesetup: fix: warning also when setting to (no)compatibility | 129 |
| \MT@begin@catcodes: also use inside configuration commands | 88 |

| | | | |
|--|-----|--|-----|
| \MT@cfg@catcodes: reset catcode of `:' (compatibility with french* packages) | 87 | for composite character; no uncontrolled expansion | 96 |
| \MT@DeclareMicrotypeAlias: may also be used inside configuration files | 110 | \MT@scale: new macro: use e-TeX's \numexpr if available | 50 |
| \MT@get@listname@: use \ot for (Andreas Bühmann's idea) | 88 | \MT@set@ex@codes: two versions of this macro | 69 |
| \MT@get@slot: remove backslash hack | 90 | \MT@split@name: don't define \MT@encoding &c. globally | 59 |
| test for \chardefed commands | 91 | \MT@test@ast: make it simpler | 105 |
| test whether \⟨encoding⟩\⟨...⟩ is defined | 91 | \MT@try@order: always check for size, too (suggested by Andreas Bühmann) | 88 |
| \MT@if@list@exists: don't define \MT@#1@c@name globally, here and elsewhere | 89 | fix: also check for //⟨series⟩//⟨shape⟩// (reported by Andreas Bühmann) | 88 |
| \MT@ifdimen: comparison with 1 to allow size smaller than 1 (suggested by Andreas Bühmann) | 46 | \MT@warn@code@too@large: new macro: type out maximum protrusion factor | 66 |
| \MT@increment: use e-TeX's \numexpr if available | 50 | \MT@warn@err: new macro: for verbose=errors | 36 |
| \MT@is@composite: new macro: construct command | | \showhyphens: modify \showhyphens | 136 |

2005/06/23

Version 1.8

| | | | |
|---|-----|---|-----|
| General: \SetProtrusion: new key: unit | 117 | \MT@find@file: no longer wrap names in commands | 87 |
| if font substitution has occurred, set up the substitute font, not the selected one | 99 | \MT@get@charwd: warning for missing (resp. zero-width) characters | 64 |
| new option: config to load a different main configuration file | 128 | \MT@get@font@dimen@six: new macro: test whether \fontdimen6 is defined | 62 |
| new option: unit, by default character | 127 | \MT@get@listname@: made recursive | 88 |
| Documentation: add example for factor option | 13 | \MT@get@slot: fix: expand active characters | 91 |
| add example of how to get rid of a widow (suggested by Adam Kucharczyk) | 15 | test whether \⟨encoding⟩\⟨...⟩ is defined made more robust | 91 |
| add hint about error messages | 27 | \MT@get@unit: new macro: get unit for codes | 67 |
| Font aliases: declare pxr and txr as aliases of pp1 resp. ptm | 143 | \MT@in@rlist: made recursive | 48 |
| Font sets: add U encoding to allmath | 142 | \MT@is@active: new macro: translate inputenc-defined characters | 94 |
| Inheritance: remove \DJ from T1 list (it's the same as \DH) | 146 | \MT@is@letter: warning for non-ASCII characters | 93 |
| Protrusion: add LY1 characters for Times | 161 | \MT@ledmac@setup: character protrusion with ledmac | 52 |
| settings for AMS math fonts | 185 | \MT@map@clist@n: new macro: used instead of \otfor | 47 |
| verified settings for slanted Computer Modern Roman | 170 | \MT@map@tlist@n: new macro: used instead of \otfor | 48 |
| \add@accent: fix: disable micro-typographic setup inside \add@accent (reported by Stephan Hennig) | 101 | \MT@old@cmd: renamed commands from \..MicroType.. to \..Microtype.. | 36 |
| \DeclareMicrotypeAlias: warning when overriding an alias font | 110 | \MT@pdfTeX@no: case 5: pdfTeX 1.30 | 39 |
| \DeclareMicrotypeSetDefault: new command: set default font set | 109 | \MT@permute@0@0@0@0: add ranges to the beginning of the lists | 121 |
| \MT@cfg@catcodes: reset catcodes of the remaining ASCII characters | 87 | \MT@scale: fix: remove spaces in e-TeX variant (reported by Mark Rossi) | 50 |
| \MT@check@rlist: made recursive | 122 | \MT@setupfont@hook: restore \% and \# when hyperref is loaded | 54 |
| \MT@curr@list@name: new macro: current list type and name | 97 | restore csquotes's active characters | 54 |
| \MT@declare@sets: warning when redefining a set | 104 | restore percent character if Spanish babel is loaded | 54 |
| \MT@define@set@key@: use comma lists instead of token lists | 105 | \MT@split@codes: get character width once only | 63 |
| | | \MT@use@set: fix: remove braces in first line | 109 |
| | | \MT@xadd: simplified | 47 |

2005/10/28

Version 1.9

| | | | |
|---|-----|--|-----|
| General: \DeclareMicrotypeSet: new key: font | 107 | option unit: rename value relative to character | 127 |
| \SetProtrusion: value 'relative' renamed to 'character' for key unit | 117 | Documentation: add hint about verbatim environment | 25 |
| allow context-specific font setup | 99 | add remark about Type 1 fonts required for automatic font expansion | 8 |
| compatibility with TeX Live hack (reported by Herbert Voß) | 38 | Font aliases: declare qpl and qtm (qfonts, TeX Gyre) as aliases of pp1 resp. ptm | 143 |
| disable microtype setup inside hyperref's \pdfstringdef (reported by Hàn Thế Thành) | 55 | Font sets: add OT4 encoding to text sets | 142 |
| fix: use true as the default value | 124 | add T5 encoding to text sets | 142 |

| | | | |
|---|-----|--|-----|
| Inheritance: add list for OT4 | 147 | \MT@exp@two@n: new macros: less \expandafters .. | 44 |
| add list for T5 (requested by <i>Hàn Thành</i>) .. | 148 | \MT@get@opt: new key ‘preset’ to set all characters to the specified value before loading the lists | 67 |
| Protrusion: fix: remove uppercase Greek letters from T1 encoded CMR | 156 | \MT@is@active: redone: use \set@display@protect .. | 94 |
| settings for OT4 encoding (Computer Modern Ro- man, Palatino, Times) | 152 | \MT@is@letter: using \catcode should be more effi- cient than inspecting the \meaning | 93 |
| settings for T5 encoded Computer Modern Roman .. | 152 | \MT@maybe@do: redone | 59 |
| \DisableLigatures: new command: disable ligatures (requires pdfTeX 1.30) | 111 | \MT@rem@from@clist: new macro: remove an item from a comma list | 48 |
| \microtypecontext: new command: change setup context in the document | 102 | \MT@scale@factor: generalised | 65 |
| \MT@checklist@family: fix: add two missing \expandafters | 60 | \MT@setup@expansion: disable expansion if both step and shrink are zero | 135 |
| \MT@detokenize@c: fix the <i>f</i> -TeX version | 45 | warning if user requested zero step | 134 |
| | | \MT@toks: use instead of \toks@ | 41 |
| | | \SetProtrusion: (et al.) new key: font | 112 |

2005/12/05

Version 1.9a

| | | | |
|--|-----|---|-----|
| General: ‘ <i>file name</i> ’/‘ <i>line number</i> ’ as default list name | 115 | diately (requested by <i>Georg Verwegen</i>) | 105 |
| new option: defersetup, by default true | 125 | \MT@get@highlevel: no longer check whether defaults have changed | 105 |
| remove superfluous test whether \pickup@font has changed | 101 | \MT@ifdefined@c@T: new macros: true case only .. | 44 |
| Documentation: add explanation for error message in DVI mode | 27 | \MT@ifint: use \pdfmatch if available | 45 |
| add explanation for error message with non-Type 1 fonts | 28 | \MT@ifstreq: use \pdfstrcmp if available | 46 |
| Font aliases: declare mdbch (mathdesign) as an alias of bch | 144 | \MT@in@clist: fix | 48 |
| Protrusion: fix: remove ‘_’ from OT1 encoding | 157 | \MT@info@missing@char: info instead of warning (after <i>Michael Hoppe</i> reported that the ‘fl’ ligature is missing in Palatino SC) | 65 |
| settings for T5 encoded Charter | 152 | \MT@is@feature: new macro: check for pdfTeX fea- ture | 51 |
| \microtypesetup: inside the preamble, accepts all package options | 129 | \MT@map@clist@n: following <i>LATeX3</i> | 47 |
| \MT@check@font@cx: optimise context-sensitive setup | 101 | \MT@permute@0@0@0: don’t define permutations for unused encodings | 121 |
| \MT@define@set@key@: don’t expand variables imme- diately (requested by <i>Georg Verwegen</i>) | 101 | \MT@rem@from@clist: fix | 48 |
| | | \MT@setup@: defer setup until the end of the preamble | 51 |

2006/01/20

Version 1.9b

| | | | |
|--|----|--|----|
| General: compatibility with listings: sanitise more catcodes (reported by <i>Holger Uhr</i>) | 55 | add samples of micro-typographic features | 4 |
| compatibility with the extendedchar option of the listings package | 55 | \MT@features: use throughout the package to adjust to beta-ness | 51 |
| Documentation: activate expansion in the distributed PDF | 1 | \MT@ifdimen: use \pdfmatch if available | 46 |
| | | \MT@warn@code@too@large: fix calculation with present factor | 66 |

2006/02/02

Version 1.9c

| | | | |
|---|-----|--|-----|
| Documentation: add example of how to increase pro- trusion of footnote markers (suggested by <i>Georg Verwegen</i>) | 22 | \MT@define@code@key@font: fix: context was ignored .. | 114 |
| Protrusion: settings for URW Garamond | 153 | \MT@define@code@key@size: fix: embrace \MT@tempsize in \csname (bug introduced in v1.9b) | 114 |

2006/05/05

Version 1.9d

| | | | |
|---|-----|--|-----|
| Font sets: md* instead of m series in basic sets | 142 | tweak AMS settings | 185 |
| add QX encoding to text sets | 142 | \DeclareCharacterInheritance: fix: empty context .. | 118 |
| Inheritance: add list for QX encoding (contributed by <i>Maciej Eder</i>) | 148 | \MT@detokenize@n: new macro: use \detokenize if available | 45 |
| Protrusion: settings for QX encoding (contributed by <i>Maciej Eder</i>) | 159 | \MT@get@ex@opt: fix: evaluate preset | 71 |
| settings for Euro symbols (Adobe, ITC, marvosym) .. | 193 | \MT@get@font@dimen: warning for zero fontdimen .. | 65 |
| | | \MT@get@opt: optimise: don’t reset when preset op- | |

| | | | |
|---|----|--|-----|
| tion is set | 67 | \SetProtrusion: (et al.) optimise: unify keys for mandatory argument | 112 |
| set list name before presetting | 67 | | |
| \MT@is@active: support for Unicode (inputenc/utf8) | 94 | | |
| \MT@setupfont@hook: restore \% and \# when tex4ht is loaded (reported by Peter Dybulla) | 54 | (et al.) split keys of optional and mandatory argument | 112 |

2006/07/28

Version 1.9e

| | | | |
|---|-----|---|-----|
| General: fix: default value for activate: true | 124 | settings for Euler Roman font | 189 |
| Documentation: add hint about unknown encodings include LPPL | 26 | \DeclareCharacterInheritance: new key ‘inputenc’ to set the input encoding | 118 |
| Font aliases: declare zeur and zeus (eulervm) as aliases of eur resp. eus (euler) | 144 | \MT@rem@from@clist: model after \@removeelement | 48 |
| Inheritance: adapt to marvosym’s changed encoding | 150 | \MT@setup@: empty \MT@setup@ after use (compatibility with the combine class) | 51 |
| Protrusion: complete settings for Euler Fraktur and Script fonts | 192 | \pickup@font: no tracing with trace package | 100 |
| fix: forgotten comma in mt-mvs.cfg; adapt to marvosym’s changed encoding | 193 | \SetExpansion: new key: inputenc | 112 |
| | | \SetProtrusion: (et al.) new key: inputenc | 112 |

2006/09/09

Version 1.9f

| | | | |
|--|-----|--|-----|
| Protrusion: fix: euler-vm did not load euler settings | 189 | \MT@reset@context: only reset context if it has actually been changed | 103 |
| \MT@curr@list@name: fix: \MessageBreak must not be expanded | 97 | \MT@set@inh@list: fix: forgotten comma in the features list | 119 |
| \MT@gdef@n: new macros: global variants | 44 | \MT@set@named@keys: new macro: set name first, simplify parsing of optional argument | 113 |
| \MT@get@inh@list: fix: input encoding must be set after the inheritance list has been parsed | 90 | \SetProtrusion: (et al.) set catcodes before parsing optional argument | 112 |
| \MT@glet: new macro | 43 | | |

2007/01/14

Version 2.0

| | | | |
|--|-----|--|-----|
| General: compatibility with listings: set catcode of backslash to zero (reported by Steven Bath) | 55 | new: smallcaps | 142 |
| compatibility with soul: register \textls and \lssstyle | 55 | \DeclareMicrotypeBabelHook: new command: interaction with babel | 111 |
| new option: babel, by default false (language-dependent setup suggested by Ulrich Dirr) | 125 | \lssstyle: fix: font switches don’t pose a problem anymore | 78 |
| new option: letterspace, by default 100 | 127 | fix: letterspacing commands may be nested | 78 |
| new package letterspace: a stripped-down version, containing the letterspacing commands only | 1 | new command: letterspacing | 78 |
| option ‘babel’: fix: switch off French babel’s short-hands properly (reported by Daniel Flipo) | 140 | totally redone, using the new \letterspacefont | 78 |
| option ‘babel’: switch off Turkish babel’s short-hands | 140 | \MT@declare@sets: fix: empty size list when redefining set | 104 |
| option ‘unit’, \SetProtrusion: deprecate value ‘relative’ completely | 117 | \MT@is@symbol: made even more robust | 95 |
| Documentation: add hint about how to increase font_max and font_mem_size | 28 | \MT@load@inputenc: sanitise catcodes before loading input encoding (problem with listings) | 68 |
| add hint about warning when tracking and expansion is applied to a font | 28 | \MT@setup@noligatures: maybe disable \MT@noligatures after the preamble | 139 |
| add remark about ‘draft’ option disabling microtype (noted by Michalis Miatidis) | 9 | \MT@split@name: adjust to possible letterspacing | 59 |
| qualify hint about web documents with regard to older pdfTeX versions | 25 | \SetExtraKerning: new command: additional kerning | 113 |
| qualify hints about expansion error messages with regard to older pdfTeX versions | 27 | \SetExtraSpacing: new command: adjustment of interword spacing | 113 |
| Font sets: new: footnotesize and scriptsize | 142 | \SetTracking: new command: tracking | 112 |
| | | \textls: new command: letterspacing | 83 |
| | | starred version: remove spaces around text | 83 |
| | | \tracingmicrotypeinpdf: new debug method: mark all fonts with PDF annotations | 37 |

2007/01/21 **Version 2.1**

| | | | |
|--|----|--|----|
| General: compatibility with pinyin: disable microtype in \py@macron (reported by <i>Sven Naumann</i>) | 56 | \MT@get@ls@basefont: redone: use \pdfmatch to make it bullet-proof | 79 |
| fix: letterspace package forgot to load keyval . | 41 | \MT@orig@pickupfont: compatibility with CJK: also check for its definition | 99 |
| \lslig: new command: protect ligatures in letter-spaced text | 79 | \textls: fix: use \hmode@bgroup | 83 |

2007/07/14 **Version 2.2**

| | | | |
|---|-----|--|-----|
| General: disable microtype if wordcount is loaded (reported by <i>Ross Hetherington</i>) | 51 | \MT@is@composite: more robust: expand exactly once | 96 |
| new option: copyfonts | 126 | \MT@is@symbol: expand once more (for frenchpro) | 95 |
| simplify key declarations | 115 | \MT@lsfont: use \font@name, not \MT@font | 75 |
| use catcode trickery for e-TeX test | 38 | \MT@lua: (basic) support for LuaTeX | 41 |
| Documentation: add hint about error message with pdfTeX 1.40 | 27 | \MT@pdftex@no: case 7: pdfTeX 1.40.4 | 40 |
| add hint about extra TOC leader dot (first discovered by <i>Morten Høgholm</i>) | 25 | \MT@preset@aux@space: generalised | 68 |
| add overview | 5 | \MT@set@all@pr: (et al.) allow empty values | 63 |
| logo transparency and amusement | 1 | \MT@set@inputenc@: only load inputenc files if necessary | 67 |
| Font aliases: declare chr (chmath) as an alias of bch (reported by <i>Geoff Vallis</i>) | 144 | \MT@set@tr@codes: disable ligatures in letterspaced fonts manually (due to change in pdfTeX 1.40.4) | 75 |
| declare fp9x, fp9j (FPL Neu) as aliases of ppl[xj] | 144 | possibility to customise interword spacing | 75 |
| Font sets: default set for tracking: smallcaps | 143 | \MT@setup@expansion: warning if stretch or shrink aren't multiples of step | 136 |
| Inheritance: remove '-' → '127' | 146 | \MT@setupfont: don't call \@@enc@update anymore | 57 |
| Protrusion: settings for Bitstream Letter Gothic .. | 153 | only add features that are available with the respective pdfTeX | 57 |
| Spacing: add sample | 194 | \MT@setupfont@hook: restore percent character if Galician babel is loaded | 54 |
| Tracking: add ligatures that are to be disabled | 150 | \MT@the@pr@code@tr: adjust protrusion of letterspaced fonts | 63 |
| \DeclareMicrotypeVariants: new command | 110 | \MT@tracking: remember fonts that shouldn't be letterspaced | 74 |
| \DisableLigatures: new optional argument: disable selected ligatures only | 111 | \MT@tracking@: fix: tracking couldn't be re-enabled | 74 |
| \lslig: always defined | 79 | \MT@warn@tracking@DVI: warning when letterspacing in DVI mode | 138 |
| \MT@checklist@font: fix: construct font name from characteristics | 61 | \MT@with@babel@and@T: also inspect class options | 52 |
| \MT@copy@font: optionally work on copies of fonts .. | 57 | \pickup@font: letterspace: setup inside group | 100 |
| \MT@get@basefamily: redone, working on font names and suffixes of arbitrary length | 88 | \SetTracking: new key 'no ligatures' to disable ligatures of letterspaced fonts | 112 |
| \MT@get@charwd: subtract letterspacing amount from width | 64 | new keys 'spacing' and 'outer spacing' to adjust interword spacing (suggested by <i>Steven E. Harris</i>) | 112 |
| \MT@get@ls@basefont: fix again: remember base font in a macro | 79 | third argument may be empty | 112 |
| \MT@ifdimen: employ LuaTeX features if available .. | 46 | \textmicrotypecontext: new command: wrapper around \microtypecontext | 103 |
| \MT@ifint: employ LuaTeX features if available .. | 45 | | |
| \MT@ifstreq: employ LuaTeX features if available .. | 46 | | |
| fix: e-TeX version shouldn't use \x and \y (found by <i>Wiebke Petersen</i>) | 46 | | |

2007/12/23 **Version 2.3**

| | | | |
|---|-----|---|-----|
| General: disable \microtypecontext in hyperref's \pdfstringdef | 55 | \microtypecontext: made robust (reported by <i>Stephan Hennig</i>) | 102 |
| fix: really switch off Turkish shorthands | 140 | \MT@begin@catcodes: fix: don't disable \KV@sp@def | 88 |
| new value for verbose option: silent (suggested by <i>Karl Berry</i>) | 126 | \MT@define@set@key@font: font: single asterisk means normal font | 107 |
| turned some warnings into errors | 126 | \MT@in@c@list: don't use \x (reported by <i>Peter Meier</i>) | 48 |
| Documentation: add kerning sample | 18 | \MT@is@active: support for extended Unicode (inputenc/utf8x resp. ucs) – experimental | 94 |
| add letterspacing illustration | 17 | \MT@noligatures: fix: set evaluation didn't work (bug introduced in v2.2) | 85 |
| \do@subst@correction: remember substitute font for all times (reported by <i>Stephan Hennig</i>) | 101 | \MT@plain: letterspace: support for eplain/miniltx | 38 |
| \lslig: redone: extract outer kerns from current letterspacing amount | 79 | \MT@set@curr@os: adjusting spaces made more reliable | 76 |

| | | | |
|--|----|---|-----|
| \MT@set@tr@codes: also adjust tracking if protrusion is not enabled, and even for letterspace (reported by Stephan Hennig) | 76 | \MT@SetTracking: sanity check for value | 113 |
| possibility to customise outer kerning (suggested by Stephan Hennig) | 76 | \MT@setup@tracking: enable protrusion when tracking is enabled | 137 |
| | | \MT@tr@outer@l: only change pre outer space if it contains shrink | 81 |

2008/02/29

Version 2.3a

| | | | |
|---|-----|---|-----|
| General: fix test for soul under plain TeX | 55 | too old for extensions | 138 |
| Documentation: add hint about babel having to be loaded first | 26 | \MT@fix@catcode: fix catcodes earlier, and also for the letterspace package | 35 |
| add table of available and enabled features | 7 | \MT@getkey: fix: key=val in class options list | 132 |
| mention soulutf8 | 30 | \MT@set@codes: generalised | 63 |
| Protrusion: adjust LMR quotation marks again | 158 | \MT@setupfont@hook: restore percent character if Mexican babel is loaded | 54 |
| \MT@error@doesnt@work: error messages if pdfTeX is | | | |

2008/06/04

Version 2.3b

| | | | |
|--|-----|---|----|
| \MT@exp@gcs: new macro: reduce save stack size | 43 | also check for its definition | 99 |
| \MT@font@copy: enable font copies also with protrusion contexts (reported by Nathan Rosenblum) | 58 | \MT@requires@latex: new macro | 38 |
| \MT@get@size: grouping | 107 | \MT@set@tr@codes: fix: protrusion adjustment only for new fonts (reported by Wolfram Schaalo) | 76 |
| \MT@noligatures@: fix: warning messages for unknown slots | 85 | \MT@tr@outer@l: fix: only in horizontal mode | 81 |
| \MT@orig@pickupfont: compatibility with CJKutf8: | | make \spaceskip-aware (ragged2e) | 81 |
| | | \MT@tr@outer@r@: additional test for horizontal mode | 81 |

2008/11/11

Version 2.3c

| | | | |
|--|----|--|-----|
| General: LuaTeX supported by default | 40 | coding (reported by Vasile Gaburici) | 148 |
| Documentation: add hint about spacing being experimental | 26 | \MT@detokenize@c: fix: remove last space only (reported by Ulrich Dirr) | 45 |
| add hint about partial incompatibility with CJK | 27 | \MT@tr@outer@r@: additional test for horizontal mode (reported by Steinung Heggen) | 82 |
| Inheritance: add \textcommabelow[STst] to QX en- | | | |

2009/03/27

Version 2.3d

| | | | |
|--|-----|--|-----|
| General: fix pinyin compatibility check (reported by Silas S. Brown) | 56 | (reported by Ulrich Dirr) | 79 |
| move setup to the very end (for Colin Rourke) | 140 | \MT@setup@expansion: default step: 1 for pdfTeX versions ≥ 1.40 | 134 |
| \ifMT@inannot: use pdftexcmds for debugging | 37 | \MT@tr@outer@r@: don't use \x (reported by Ulrich Dirr) | 82 |
| \lsstyle: disable for LuaTeX | 78 | fix: don't adjust in math mode (reported by Christoph Bier) | 81 |
| make invalid in math mode | 78 | fix: don't adjust inside discretionary (reported by Maverick Woo) | 81 |
| \microtypesetup: select font after setup | 129 | \MT@tr@set@okern: allow empty value for outer kerning | 84 |
| \MT@check@active@set: warning for missing default sets | 129 | \textls: make math mode aware | 83 |
| \MT@lua: update for LuaTeX 0.36 | 41 | | |
| \MT@set@tr@codes: allow zero tracking | 75 | | |
| \MT@set@tr@zero: fix: allow switching off tracking | | | |

2009/11/09

Version 2.3e

| | | | |
|--|-----|---|-----|
| Documentation: suggest to patch \verb@ instead of \verb@ instead of \verb@ | 26 | Karl Karlsson) | 195 |
| Expansion: settings for T2A encoding (contributed by Karl Karlsson) | 151 | \MT@get@font@dimen@six: fix: gobbling settings with tracking failed (reported by Leo) | 62 |
| Font sets: sc* instead of sc in smallcaps set | 142 | \MT@setup@: make space-unaware (requested by Marcin Borkowski) | 51 |
| add T2A encoding | 142 | \MT@tikz@setup: compatibility with tikz (first reported by Christian Stark) | 53 |
| Protrusion: settings for T2A encoding (contributed by Karl Karlsson) | 159 | \MT@tr@outer@r@: fix: set current kerning and spacing again (found by Lars Rönnbäck) | 82 |
| Spacing: settings for T2A encoding (contributed by | | | |

2010/01/10 **Version 2.4**

| | | | |
|---|----|--|-----|
| General: new file <code>microtype.lua</code> containing the <code>lua</code> functions (contributed by <i>Élie Roux</i>) | 43 | Protrusion: settings for T2A encoded Minion (contributed by <i>Karl Karlsson</i>) | 159 |
|---|----|--|-----|

2013/03/13 **Version 2.5**

| | | | |
|--|-----|---|-----|
| General: allow contexts for LuaTeX | 116 | \microtypecontext: fix: ensure to set up math fonts (reported by <i>RazorXsr</i>) | 102 |
| disable ‘DVoutput’ option for XeTeX | 125 | \MT@define@code@key@family: compatibility with fontspec: remove its internal counter (reported by <i>Till A. Heilmann</i>) | 114 |
| fix: check whether ‘ <code>{file}/⟨line⟩</code> ’ list name already exists (reported by <i>Till A. Heilmann</i>) | 115 | \MT@define@code@key@font: scrub fontspec feature count (found by <i>Meho R</i>) | 114 |
| letterspacing with LuaTeX 0.62 | 74 | \MT@do@font: adapt for LuaTeX | 49 |
| new files: <code>microtype-pdftex.def</code> , <code>microtype-xetex.def</code> , <code>microtype-luatex.def</code> , containing engine-specific definitions | 38 | adapt for XeTeX | 50 |
| protrusion with XeTeX | 40 | \MT@get@slot@: adapt for LuaTeX (requested by <i>Georg Duffner</i>) | 91 |
| restore <code>\space</code> inside listings (reported by <i>Rolf Dieterich</i>) | 55 | adapt for XeTeX | 91 |
| Documentation: add hint about LuaTeX compatibility | 27 | \MT@if@outer@next: fix: conflict with amsmath (reported by <i>Scott Pakin</i>) | 81 |
| add hint about spacing and ragged2e | 26 | \MT@info@missing@char: fix error message for XeTeX (reported by <i>Juan Acevedo</i>) | 65 |
| add hint about dtx source code | 28 | \MT@is@charx: compatibility with xunicode | 96 |
| include <code>microtype-logo.dtx</code> and <code>microtype-lssample.dtx</code> | 218 | \MT@ledmac@setup: fix to work with XeTeX (reported by <i>Maieul Rouquette</i>) | 52 |
| Font aliases: declare <code>lmsy</code> and <code>lmm</code> as aliases of <code>cmsy</code> resp. <code>cmm</code> (reported by <i>Jonas Hogstrom</i>) | 143 | \MT@ls@set@ls: allow formulas in optional argument to <code>\textls</code> (fix by <i>Heiko Oberdiek</i>) | 83 |
| declare <code>zgmx</code> etc. (<code>garamondx</code>) as aliases of <code>ugm</code> | 144 | \MT@register@subst@font: only register substituted font if it isn’t registered already (reported by <i>George Grätzer</i> and <i>Josep Maria Font</i>) | 101 |
| declare Latin Modern Roman (OpenType version) as alias of <code>lmr</code> when fontspec is loaded | 143 | \MT@register@subst@font@cx: only register if it isn’t registered already | 102 |
| declare TeX Gyre Pagella, Asana Math, Palatino LT Std, and Palatino as aliases of Palatino Linotype (OpenType version) | 144 | \MT@scrubfeatures: compatibility with fontspec: remove its internal counter | 59 |
| Font sets: add EU1 and EU2 encodings | 142 | \MT@set@all@pr: fix: remove space (found by <i>Meho R</i>) | 63 |
| Inheritance: add rudimentary list for EU1 and EU2 | 149 | \MT@set@pr@codes: make info about generic settings encoding-specific (reported by <i>Sebastian Schubert</i>) | 62 |
| Protrusion: add default lists for EU1 and EU2 | 157 | \MT@setup@spacing: warning with ragged2e (reported by <i>Steffen Hoffmann</i>) | 137 |
| improvements to Computer Modern Roman italics (contributed by <i>Hendrik Vogt</i>) | 162 | \MT@setupfont: select font with fontspec (found by <i>Georg Duffner</i>) | 56 |
| Tracking: add EU2 encoding to default list | 150 | \MT@setupfont@hook: restore <code>\%</code> and <code>\#</code> when <code>mathastext</code> is loaded (found by <i>Seamus Bradley</i>) | 54 |
| \DeclareCharacterInheritance: allow more than one encoding | 118 | | |
| \DeclareMicrotypeAlias: ignore spaces | 110 | | |
| \ifMT@nofamily: info if settings are not family-specific (suggested by <i>Hàn Thế Thành</i>) | 62 | | |
| \LoadMicrotypeFile: remove all spaces in font name | 110 | | |
| \lssstyle: fix: ensure to set up math fonts (reported by <i>RazorXsr</i>) | 78 | | |

2013/05/23 **Version 2.5a**

| | | | |
|---|-----|---|----|
| General: use <code>luatexbase</code> instead of <code>luatextra</code> (contributed by <i>Élie Roux</i>) | 43 | uted by <i>Élie Roux</i>) | 93 |
| Documentation: add notes on typesetting the documentation | 28 | \MT@led@unhbox@line: simplified | 52 |
| include OpenType configuration files | 199 | \MT@ledmac@setup: support for elemac | 52 |
| \MT@afteraftergroup: fix: get outer kerning and spacing of nested letterspacing right | 77 | \MT@ls@outer@k: add marker for tightly nested letter-spacing | 84 |
| \MT@get@slot@: adapt to <code>luatfload v2.2</code> (contributed by <i>Élie Roux</i>) | | \MT@set@tr@codes: fix: load font for fontspec | 76 |
| | | \MT@xspace: fix outer spacing problem with <code>xspace</code> (reported by <i>Dave</i>) | 82 |

2016/05/01 **Version 2.6**

| | | | |
|--|----|---|-----|
| General: load <code>luatfload</code> with LuaTeX | 43 | Documentation: add hint about partial incompatibility with <code>xeCJK</code> and <code>luatexja</code> | 27 |
| redefine <code>\MT@setupfont@hook</code> globally for problem with <code>tikzposter</code> (reported by <i>Sam Mason</i>) | 54 | missing characters printed with Charis SIL | 199 |

| | | | |
|---|-----|--|-----|
| suggest to use etoolbox to patch \verb+at+ | 26 | \MT@get@slot@: fix: could fail with X _E T _E X (reported by Christopher Schramm) | 92 |
| Font sets: add TU encoding (notified by Will Robertson) | 142 | \MT@is@xchar: update for fontspec's TU encoding | 96 |
| add si and scit to smallcaps set (reported by uli) | 142 | \MT@ledmac@setup: support for reledmac | 52 |
| new: allmath-nott and alltext-nott (requested by Karl Berry) | 142 | \MT@luatex@no: update for LuaT _E X 0.85 (renamed primitives) | 41 |
| Inheritance: add TU encoding | 149 | \MT@noligatures@: use luatfload function to keep/ inhibit ligatures | 85 |
| Protrusion: add TU encoding to lists | 157 | \MT@orig@pickupfont: (in)compatibility with luatexja: disable unknown slots warnings (reported by Max) | 99 |
| Tracking: add TU encoding to default list | 150 | (in)compatibility with xeCJK: disable unknown slots warnings (reported by HcN) | 99 |
| \DeclareMicrotypeSet: ignore spaces | 104 | compatibility with xeCJK: pretend that CJK wasn't loaded | 99 |
| \DeclareMicrotypeSetDefault: ignore spaces | 109 | \MT@set@tr@codes: use luatfload's kernfactor feature if available | 75 |
| \DeclareMicrotypeVariants: ignore spaces | 110 | \MT@xspace: fix outer spacing problem with (not only) algorithm (reported by Henning and Ronnie Marksch) | 82 |
| \lsstyle: fix: ensure to set up math fonts (reported by kleenstar) | 78 | \UseMicrotypeSet: ignore spaces | 108 |
| \microtypecontext: allow activate shortcut (reported by Karl Berry) | 102 | | |
| \MT@declare@sets: fix: undefine lists for redefining | 104 | | |
| \MT@do@font: speed up for LuaT _E X | 49 | | |
| \MT@engine: fix test with LuaT _E X 0.85 | 39 | | |
| \MT@fontspec@setup: fix \MT@if@fontspec@font ABD | 53 | | |

2016/05/14

Version 2.6a

| | | | |
|---|----|---|----|
| General: fixes for letterspace package with LuaT _E X | 49 | Voß) | 49 |
| \MT@do@font: fix lua function (reported by Herbert | | \MT@ls@fontspec@font: fix for value of ± 1000 | 77 |

2017/07/07

Version 2.7

| | | | |
|---|-----|---|-----|
| General: drop luatexbase with recent L _A T _E X warning with minimal class | 43 | \MT@check@range@: don't warn for override if conflicting list is loaded | 122 |
| Documentation: add remark about automatic font expansion with dvilualatex | 51 | \MT@is@composite: compatibility with L _A T _E X 2017/01/01 (\DeclareUnicodeComposite) (reported by Ulrike Fischer and jcr) | 97 |
| mention that additional kerning does not work in math mode (discovered by 'Daniel') | 8 | \MT@ls@fontspec@font: fix for 'file:(font)' spec (reported by Reinhard Kotucha) | 77 |
| Font aliases: declare aliases for newpx | 18 | \MT@permute@00000: don't warn for override if conflicting list is loaded | 121 |
| declare aliases for newtx | 144 | \MT@reset@ef@codes: only reset \fcodes for older LuaT _E X versions | 70 |
| declare aliases for tempora | 144 | \MT@setup@expansion: don't disable automatic expansion for DVI output with LuaT _E X | 135 |
| declare aliases for XCharter | 144 | \MT@tikz@setup: compatibility with tikz (again) . . | 53 |
| declare Latin Modern Roman as alias of lmr with new L _A T _E X format (reported by Ulrike Fischer) | 143 | \MT@warn@tracking@DVI: don't warn for letterspacing in DVI mode with LuaT _E X | 138 |
| Protrusion: automatically choose correct names for Charis SIL small caps (reported by 'ltcomdata') | 211 | | |
| \lsstyle: fix: prevent infinite loop with psnfss and exscale packages (reported by user11126, solution by Ulrike Fischer) | 78 | | |

2018/01/14

Version 2.7a

| | | | |
|---|-----|---|-----|
| General: disallow non-automatic expansion with LuaT _E X | 118 | \MT@get@highlevel: test whether \...default is defined | 105 |
| \MT@auto: remove 'autoexpand' for LuaT _E X 1.0.6 (reported by Ulrike Fischer) | 134 | \MT@get@slot: expand active characters earlier | 91 |
| with LuaT _E X, non-automatic font expansion is no longer possible (as confirmed by Hans Hagen) | 134 | \MT@info@notracking@: defer 'No tracking' message | 60 |
| | | \MT@is@active: compatibility with newunicodechar (reported by Nils Anders Danielsson) | 95 |

2019/02/28

Version 2.7b

| | | | |
|---|----|--|-----|
| General: update lua function microtype.info after changes in luatfload (reported by Moritz Wemheuer and Ulrike Fischer) | 43 | ters (notified by Frank Mittelbach) | 26 |
| Documentation: update hint about non-7-bit charac- | | Inheritance: add textquotedblleft ligature to OT4 (reported by Franz Wexler) | 147 |
| | | \MT@info@missing@char: fix message for glyphs spe- | |

| | | | |
|--|-----------|---|-----------|
| cified as names in \TeX (reported by <i>Paolo Ney</i>) | 65 | and LuaTeX (reported by <i>Paolo Ney</i> , solution by <i>Ulrike Fischer</i>) | 56 |
| \MT@setupfont : always select current font with \TeX | | | |

2019/10/10 **Version 2.7c**

| | | | |
|--|-----------|--|------------|
| General: turn warning into info when overwriting the <i>keepligature</i> function (reported by <i>Andy N</i>) | 85 | \MT@is@symbol : take care of \remove@tlig | 95 |
| \MT@is@active : compatibility with LATEX 2019/10/01 | 95 | \showhyphens : compatibility with LATEX 2019/10/01 (reported by <i>Phelype Oleinik</i> and <i>Falk Hanisch</i>) | 136 |

2019/11/18 **Version 2.7d**

| | | | |
|---|-----------|---|------------|
| \MT@copy@font@ : in LuaTeX , don't use the \copyfont primitive, but load the font anew (reported by <i>Paolo Polesana</i> and <i>Oliver Kopp</i>) | 58 | $\text{\MT@register@subst@font}$: remove substitute font from list (reported by <i>Markus Kohm</i>) | 101 |
| \MT@expandfont : use LuaTeX function <i>font</i> . <i>setexpansion</i> if available | 69 | $\text{\MT@register@subst@font@cx}$: remove substitute font from lists | 102 |

D Index

Numbers in upright shape refer to the page where the corresponding entry is described (bold face) resp. occurs.
Numbers in italics refer to the code line where the corresponding entry is defined (underlined) resp. used.

| | | | | |
|-----------------|---|-------------------------------------|---|-------------------------------------|
| Options | DVIoutput | 8 | letterspace | 8 |
| | activate | 6 | protrusion | 6 |
| | auto | 7 | selected | 8 |
| | babel | 9 | shrink | 8 |
| | config | 9 | spacing | 6 |
| | draft | 9 | step | 8 |
| | expansion | 6 | stretch | 8 |
| | factor | 7 | tracking | 6 |
| | final | 9 | unit | 7 |
| | kerning | 6 | verbose | 9 |
| Commands | $\text{\DeclareCharacterInheritance}$ | 20 | \SetExtraSpacing | 19 |
| | $\text{\DeclareMicrotypeAlias}$ | 21 | \SetProtrusion | 13 |
| | $\text{\DeclareMicrotypeBabelHook}$ | 23 | \SetTracking | 15 |
| | $\text{\DeclareMicrotypeSet*}$ | 10 | \UseMicrotypeSet | 12 |
| | $\text{\DeclareMicrotypeSet}$ | 10 | \lslig | 24 |
| | $\text{\DeclareMicrotypeSetDefault}$ | 12 | \lsstyle | 23 |
| | $\text{\DeclareMicrotypeVariants*}$ | 20 | \microtypecontext | 22 |
| | $\text{\DeclareMicrotypeVariants}$ | 20 | \microtypesetup | 9 |
| | \DisableLigatures | 24 | \textls* | 23 |
| | $\text{\LoadMicrotypeFile}$ | 22 | \textls | 23 |
| | \SetExpansion | 14 | $\text{\textmicrotypecontext}$ | 22 |
| | \SetExtraKerning | 18 | | |
| A | a0poster (package) | 107 | algorithm (package) | 236 |
| | activate (option) | 6, 124, 232 | amsmath (package) | 235 |
| | \add@accent | 2937 | amssymb (package) | 185 |
| | \adjustspacing | 4314 | article (package) | 22 |
| | ae (package) | 21, 143 | auto (option) | 7, 125 |
| B | babel (option) | 9, 23, 27, 31, 125, 232 | | |
| | babel (package) | 2, 3, 5, 17, 23, 24, 27, 53, | 54, 87, 111, 139, 140, 145, 229, 230, 232–234 | |
| C | chemsym (package) | 229 | config (option) | 9, 20, 32, 128, 230 |
| | chmath (package) | 21, 144, 233 | contour (package) | 133 |
| | CJK (package) | 27, 56, 99, 233, 234, 236 | copyfonts (option) | 57, 125, 126, 233 |
| | CJKutf8 (package) | 99, 234 | crop (package) | 133 |
| | cm-super (package) | 8 | csquotes (package) | 29, 53, 54, 156, 230 |
| | color (package) | 9, 133 | \curr@fontshape | 2881, 2883, 2885, 2892, 2935 |
| | combine (package) | 140, 232 | | |

- D** \DeclareCharacterInheritance 20, 41, 3759
\DeclareMicrotypeAlias 21, 43, 71, 3347
\DeclareMicrotypeBabelHook 23, 45, 64, 3413
\DeclareMicrotypeSet 10, 32, 57, 59, 72, 3061
\DeclareMicrotypeSet* 10, 3061
\DeclareMicrotypeSetDefault 12, 34, 61, 3302
\DeclareMicrotypeVariants 20, 42, 58, 63, 3332
\DeclareMicrotypeVariants* 20
- E** eco (package) 21, 143
\efcode 1554, 1580, 1581, 1621, 1623
eledmac (package) 52, 235
eplain (package) 24, 31, 34, 38, 52, 132, 233
e-TeX (engine) 32,
38, 40, 44, 45, 50, 64, 81, 218, 229–231, 233
etoolbox (package) 26, 236
euclid (package) 190
eufrak (package) 192
- F** \f@family 2888, 2889
\f@size 1921, 2881, 2883, 2885, 2892, 2935
factor (option) 7, 13, 32, 127, 229
fancyvrb (package) 26
final (option) 9, 33, 125, 126, 228
fix-cm (package) 59
\font 968, 1045, 1823, 1968
\font@name 111, 1016, 1018, 1020, 1022,
1023, 1033, 1035, 1813, 1821, 1825, 1829,
1867, 1873, 1878, 1881, 1954, 1968, 1980,
1982, 1987, 1989, 1992, 1995, 1998, 2033,
2088, 2225, 2227, 2874, 2882, 2891, 2896,
2916, 2918, 2920, 2936, 2950, 2952, 2972, 2977
- G** garamondx (package) 21, 144, 235
german (package) 35, 228
\glb@currsize 3005
- H** hfoldsty (package) 21, 143
- I** IEEEtran (package) 99
\iffontchar 1326, 2810, 2822, 2823
\ifMT@auto 297, 4507, 4564
\ifMT@babel 297, 4650, 4778
\ifMT@do 1069, 1136, 1789, 2272
\ifMT@document 338, 3870
\ifMT@draft 297, 4411
\ifMT@expansion 297, 4469, 4561, 4607
\ifMT@fontspec 830, 843, 1050, 3132, 3537, 3563
\ifMT@if@ 296,
858, 865, 892, 924, 2968, 3977, 4798, 4801
\ifMT@inannot 99
\ifMT@inlist@ 615, 660, 757, 787, 988, 1103,
1120, 1129, 1147, 1165, 1787, 2376, 2387,
2436, 2485, 2951, 2962, 2974, 3031, 3043, 3369
\ifMT@kerning 297, 4664, 4791
\ifMT@nofamily 1175, 1182
- J** jurabib (package) 99
- K** kerning (option) 6, 11, 31, 124
keyval (package) 41, 63, 145, 233
\knaccode 1738, 1739, 1749, 1752, 1758
- L** ledmac (package) 29, 32, 52, 99, 230
ledpar (package) 29
\leftmarginkern 800
letterspace (option) 8, 17, 23, 24, 31, 45, 74, 127, 232
letterspace (package) 1,
24, 31, 34, 36, 38, 53, 75–78, 232–234, 236
- defersetup (option) 54, 125, 129, 231
\define@newfont 2874, 2882, 2886, 2896
\DisableLigatures 24, 40, 62, 3386
\do@subst@correction 2934
docstrip (package) 34
draft (option) 9, 125, 126, 232
dsfont (package) 62
DVIoutput (option) 8, 9, 125, 229, 235
- euler (package) 97, 189, 232
eulervm (package) 21, 144, 189, 232
euroitc (package) 193
europs (package) 193
eurosans (package) 193
\expandglyphsinfont 1540
expansion (option) 6, 11, 124, 134
exscale (package) 236
- \fontcharwd 1280, 1284, 1290
\fontdimen 1203,
1210, 1315, 1320, 1420, 1423, 1842, 1843,
1873, 1980, 2026, 2027, 2034, 2035, 2041,
2045, 2052, 2062, 2066, 2069, 2088, 2238, 2241
fontinst (package) 196, 218, 220
fontinstallationguide (package) 175
\fontname 1821, 1825
fontspec (package) 6, 25, 27, 30, 43,
49, 53, 59, 77, 96, 105, 114, 143, 149, 235, 236
fourier (package) 62
french (package) 230
frenchpro (package) 95, 229, 233
- \glb@settings 1957
graphics (package) 9, 133
- hyperref (package) 9, 54, 55, 99, 133, 230, 233
- \ifMT@noligatures 297, 4744
\ifMT@nonselected 1514, 2498, 2506
\ifMT@norest 2567, 2584, 2597, 2611, 2672
\ifMT@opt@auto 3988, 4511, 4541
\ifMT@opt@DVI 3988, 4436
\ifMT@opt@expansion 3988, 4465, 4608
\ifMT@protrusion 297, 794, 817, 4448, 4623
\ifMT@selected 297, 4547, 4567
\ifMT@spacing 297, 4632, 4649
\ifMT@tracking 297, 4619, 4679
\ifMT@unicode 830, 2762, 2814
ifpdf (package) 9, 99, 133
\iftracingmicrotypeinpdffall 105
\ignoreligaturesinfont 2276
inputenc (package) 14,
26, 32, 55, 67, 68, 91, 94, 97, 230, 232, 233
- \knbccode 1731, 1732, 1748, 1751, 1757
\knbscode 1652, 1653, 1676, 1680, 1686
- \letterspacefont 1829
lineno (package) 52
listings (package) 26, 55, 68, 87, 231, 232, 235
lmodern (package) 8, 158
\LoadMicrotypeFile 22, 44, 74, 3365, 4416
\lpcode 1217, 1253, 1254, 1458, 1461, 1856

- \lslig 24, 54, 1973, 1976
 \lssstyle 23, 51, 915, 940, 945, 1955, 2164, 2170, 2175, 2178, 2188, 2192, 4419
 luatofloat (package) 27, 30, 43, 49, 53, 75, 85, 93, 235, 236
 LuaTeX (engine) 1, 4, 6–8, 12–
M marvosym (package) 21, 32, 34, 150, 193, 231, 232
 mathastext (package) 54, 235
 mathdesign (package) 21, 144, 231
 memoir (package) 22, 99
 \Microtype@Hook 129, 4245
 \microtypecontext 22, 47, 913, 3000, 3011, 4418, 4761, 4764
 microtypecontext (environment) 22
 \microtypesetup 9, 46, 4249, 4417
 MiKTeX (distribution) 28
 miniltx (package) 24, 31, 34, 38, 52, 233
 minimal (package) 51, 56, 236
 MinionPro (package) 106
 \MT@font 398, 991, 1014, 1205, 1316, 1330, 1801, 2439, 2511, 2921
 \MT@abbr@ex 733
 \MT@abbr@ex@c 733
 \MT@abbr@ex@inh 733
 \MT@abbr@kn 733
 \MT@abbr@kn@c 733
 \MT@abbr@kn@inh 733
 \MT@abbr@nl 733
 \MT@abbr@pr 733
 \MT@abbr@pr@c 733
 \MT@abbr@pr@inh 733
 \MT@abbr@sp 733
 \MT@abbr@sp@c 733
 \MT@abbr@sp@inh 733
 \MT@abbr@tr 733
 \MT@abbr@tr@c 733
 \MT@active@features 1025, 2956, 2959, 2971, 2984, 3020, 3030, 3394, 4449, 4562, 4620, 4633, 4665, 4753, 4754
 \MT@addto@annot 99
 \MT@addto@setup 778, 779, 869, 1433, 2865, 3000, 3001, 3624, 3642, 4102, 4250, 4410, 4710, 4752, 4777, 4810
 \MT@adjustspacing 4310, 4311, 4563
 \MT@afteraftergroup 1885, 1893, 1902
 \MT@auto 1524, 4505, 4521, 4531, 4537
 \MT@auto@ 1524, 1543, 1594, 4505
 \MT@autofalse 299, 4519, 4530
 \MT@autotrue 299, 4204, 4207
 \MT@babelfalse 306
 \MT@babeltrue 306
 \MT@begin@catcodes 2377, 2378, 2418, 3062, 3272, 3303, 3334, 3348, 3373, 3389, 3423, 3439, 3461, 3482, 3496, 3765, 4220, 4221
 \MT@cat 1429, 2856, 2858
 \MT@cfg@catcodes 926, 1451, 2403, 2420
 \MT@char 1242, 1243, 1253, 1254, 1259, 1260, 1263, 1265, 1280, 1281, 1284, 1458–1462, 1580, 1581, 1583, 1584, 1621–1623, 1652, 1653, 1659, 1660, 1666, 1667, 1670, 1671, 1676–1681, 1731, 1732, 1738, 1739, 1742, 1743, 1748–1752, 2284, 2285, 2287, 2540, 2556, 2564, 2566, 2576, 2578, 2586, 2587, 2592, 2596, 2597, 2602, 2604, 2610, 2612, 2615, 2619, 2623, 16, 20, 23–25, 27–31, 34, 37–41, 43, 45, 49, 53, 56, 58, 69, 70, 74, 76, 83, 85, 91, 116, 126, 131, 134, 138, 143, 145, 149, 157, 233–237
 luatexbase (package) 43, 235, 236
 luatexja (package) 27, 99, 235, 236
 luatextra (package) 235
 \MT@charstring 2553, 2746, 2754, 2781
 \MT@charxstring 2784, 2817
 \MT@check@active@set 4231, 4455, 4580, 4622, 4642, 4669
 \MT@check@font 987, 2947, 3022
 \MT@check@font@cx 2957, 3022
 \MT@check@range 3948, 3950
 \MT@check@orange@ 3950, 3951
 \MT@check@rlist 3897, 3941
 \MT@check@rlist@ 3941, 3942
 \MT@check@step 4568
 \MT@checklist@ 1077, 1096, 2269
 \MT@checklist@family 1114
 \MT@checklist@font 1158
 \MT@checklist@size 1142
 \MT@checksetup 4261, 4272, 4279, 4298, 4334
 \MT@clear@options 161, 289, 768, 4193, 4403
 \MT@clist@break 587, 1109, 1137, 1153, 1167
 \MT@clist@function 587
 \MT@cnt@encoding 3836, 3844, 3845
 \MT@cnt@family 3842, 3851, 3852
 \MT@cnt@series 3849, 3858, 3859
 \MT@cnt@shape 3856, 3864, 3865
 \MT@config@file 4209, 4218, 4219, 4223, 4224, 4227
 \MT@context 2461, 2473, 2492, 2519
 \MT@copy@font 974, 1010, 3620, 3626, 3638, 3645, 4111, 4113, 4439
 \MT@copy@font@ 1010, 3620, 3626, 3638, 3645, 4111
 \MT@count 504, 505, 717, 1272, 1280, 1282, 1284, 1288, 1290, 1293, 1299, 1304, 1305, 1309, 1320, 1352, 1414
 \MT@curr@file 2381, 2382, 2391, 2392, 3375, 3376, 3594, 3596, 3599, 3787, 4223, 4812
 \MT@curr@list@name 1318, 1355, 1445, 1590, 2281, 2362, 2530, 2825, 2833, 2838, 2846, 2852
 \MT@curr@ls 1864, 1977, 1980
 \MT@curr@set@name 3086, 3088–3090, 3092, 3095, 3096, 3101, 3106, 3110, 3111, 3120, 3145, 3149, 3178, 3208, 3214, 3220, 3224, 3225, 3476, 3552, 3573, 3588, 3607, 3679, 3683, 3690, 3693, 3695, 3701, 3704, 3707, 3719, 3733, 3741, 3754, 3788, 3790
 \MT@declare@char@inh 3770, 3775, 3785
 \MT@declare@sets 3069, 3074, 3087, 3396
 \MT@DeclareMicrotypeAlias 3349, 3351
 \MT@DeclareMicrotypeSetDefault 3304, 3306
 \MT@DeclareSet 3065, 3067, 3083
 \MT@DeclareSetAndUseIt 3064, 3082
 \MT@DeclareVariants 3336, 3337, 3339
 \MT@def@bool@opt 4065, 4078, 4079, 4083, 4097, 4109, 4119, 4131
 \MT@def@n 385, 3057, 3058

\MT@default@ex@set 3321
 \MT@default@kn@set 3321
 \MT@default@pr@set 3321
 \MT@default@sp@set 3321
 \MT@default@tr@set 3321
 \MT@define@code@key
 ... 3520, 3580, 3582, 3583, 3797, 3799, 3800
 \MT@define@code@key@family 3531, 3581, 3798
 \MT@define@code@key@font 3557, 3585, 3802
 \MT@define@code@key@size 3545, 3584, 3801
 \MT@define@opt@key 3586, 3609–3612, 3750–3752
 \MT@define@optionX 4249, 4307, 4310
 \MT@define@optionX@ 4324, 4353, 4355, 4356
 \MT@define@set@key@ 3099, 3264–3267
 \MT@define@set@key@font 3212, 3269
 \MT@define@set@key@size 3138, 3268
 \MT@detokenize@c 428, 2548, 2744
 \MT@detokenize@n 428, 2807
 \MT@dimen@six
 ... 1202, 1273, 1309, 1352, 2061, 2064, 2234
 \MT@dinfo 87
 \MT@dinfo@list
 1094, 1104, 1107, 1112, 1121, 1124, 1130,
 1132, 1140, 1148, 1151, 1156, 1166, 1169, 1173
 \MT@dinfo@nl 87
 \MT@DisableLigatures 3386
 \MT@do@font 678, 1219, 1554, 1689, 1759, 1856
 \MT@documentfalse 338
 \MT@documenttrue 338, 4756
 \MT@ofalse 1069, 1081, 1108, 1125, 1152, 1170
 \MT@ofont@function 682, 699
 \MT@otrue 1069, 1072, 1105, 1122, 1131, 1149, 2264
 \MT@draftfalse 302, 4133
 \MT@drafttrue 302, 4135
 \MT@edef@n 387, 2497, 2523, 3047,
 3526, 3540, 3596, 3599, 3602, 3786, 3928, 4165
 \MT@encoding 1047, 1162, 1183, 1185, 1188,
 2456, 2468, 2548, 2744, 2806, 2837, 2844, 2852
 \MT@end@catcodes 2379,
 2422, 3080, 3288, 3319, 3345, 3363, 3381,
 3398, 3434, 3458, 3477, 3493, 3507, 3780, 4222
 \MT@endinput 165, 4188, 4197
 \MT@engine 173,
 270, 274, 280, 286, 2165, 2169, 4189, 4195
 \MT@engine@toold 173, 271
 \MT@error 76, 760, 872,
 2165, 2176, 2354, 2367, 3176, 3297, 3326,
 3404, 3629, 3655, 3662, 4121, 4284, 4302,
 4342, 4512, 4524, 4542, 4609, 4680, 4693, 4773
 \MT@error@doesnt@work 4676
 \MT@ex@c@name 1506,
 1508, 1596, 1597, 1607, 1613, 1614, 1626, 3442
 \MT@ex@context 1014, 3014, 3056
 \MT@ex@doc@contexts 3056
 \MT@ex@factor 307, 1525, 1600
 \MT@ex@factor@ 1525, 1556, 1561, 1570, 1571, 1594
 \MT@ex@inh@name 1582–1584
 \MT@ex@level 307, 4563, 4565
 \MT@ex@max 319, 1573, 1574
 \MT@ex@min 319, 1576, 1577
 \MT@ex@setname 3290
 \MT@ex@split@val 1568
 \MT@exp@cs 382, 385, 388, 391, 396, 1026,
 1028, 1038, 1146, 1264, 1339, 1342, 1372,
 1376, 1386, 1389, 1392, 1584, 1671, 1743,
 1905–1907, 2484, 2975, 2985, 2986, 2990,
 3033, 3044, 3144, 3551, 3571, 3824, 3899, 3946
 \MT@exp@gcs 382, 386, 390, 392, 397
 \MT@exp@one@n 399, 433, 594, 978,
 980, 1039, 1100, 1163, 1786, 2386, 2947,
 2950, 2960, 2972, 2978, 2996, 3030, 3041,
 3056, 3074, 3263, 3282, 3313, 3368, 3775, 4761
 \MT@exp@two@c 401, 419, 424, 434, 629, 977, 1018,
 1020, 1022, 1023, 1032, 1034, 1824, 1954,
 1989, 1992, 1995, 2545, 2552, 2745, 2815, 2816
 \MT@exp@two@n 403, 1118, 1127, 3105, 3219
 \MT@expandfont 1510, 1528, 1532
 \MT@expansion 994, 1497, 4600
 \MT@expansionfalse 298, 4466, 4557
 \MT@expansiontrue 298, 4203
 \MT@extra@context 3056, 3426, 3442, 3465,
 3485, 3499, 3566, 3569, 3570, 3572, 3613,
 3621, 3627, 3639, 3644, 3761, 3896, 3900,
 3903, 3906, 3907, 3912, 3917, 3918, 3920, 3947
 \MT@extra@inputenc 3759, 3784, 3789, 3790
 \MT@factor@default 331, 4172, 4452
 \MT@family 978, 1047,
 1119, 1162, 1183, 1185, 1188, 2457, 3359, 3360
 \MT@familyalias
 979, 980, 1058, 1126, 1128, 2467, 2469, 3361
 \MT@feat 1069, 1207, 1245, 1334, 1336,
 1338, 1339, 1341, 1342, 1348, 1350, 1353,
 1361–1365, 1367, 1369–1373, 1376, 1377,
 1382, 1386, 1389, 1392, 1395–1397, 1406,
 1407, 1412, 1430, 1958, 2352, 2354, 2357,
 2358, 2362, 2364, 2367, 2493, 2495, 2497,
 2501, 2505, 2509, 2510, 2513, 2521, 2523,
 2524, 2526, 2533, 2537, 2826, 2827, 2856, 2858
 \MT@features
 753, 3056, 3069, 3263, 3277, 3308, 3591, 3770
 \MT@features@long 753, 756, 761, 3027, 3782
 \MT@file@list 2373,
 2375, 2383, 2386, 2388, 2393, 2396, 3368, 3372
 \MT@find@file 978, 980, 2373
 \MT@fix@catcode 5
 \MT@fix@font@set 3128, 4423
 \MT@font 398, 713, 971, 977, 1032,
 1040, 1203, 1210, 1217, 1218, 1253, 1254,
 1259, 1260, 1280, 1281, 1284, 1287, 1290,
 1315, 1320, 1326, 1420, 1423, 1458, 1459,
 1461, 1462, 1543, 1554, 1580, 1581, 1621,
 1623, 1652, 1653, 1659, 1660, 1666, 1667,
 1676–1678, 1680, 1681, 1686–1688, 1731,
 1732, 1738, 1739, 1748, 1749, 1751, 1752,
 1757, 1758, 1786, 1790, 1862, 1863, 2273,
 2563, 2618, 2860, 2916–2918, 2920, 2935,
 2936, 2947, 2948, 2953, 2960, 2978, 2988, 2997
 \MT@font@copy
 ... 1014, 1022, 1024, 1032, 1033, 1035, 1045
 \MT@font@list
 ... 2860, 2947, 2948, 2950, 2952, 2953, 3021
 \MT@font@orig 1016
 \MT@font@sets 3109, 3128, 3223, 4423
 \MT@fontspec@setup 837, 884
 \MT@fontspecfalse 833, 836
 \MT@fontspectrue 833, 835, 884
 \MT@gdef@n 385, 3417, 3433,
 3457, 3492, 3506, 3695, 3719, 3733, 3792, 4239
 \MT@get@axis 3237–3240, 3250
 \MT@get@basefamily 2385, 2423

\MT@get@basefamily@ 2429, 2432
\MT@get@char@unit 1244, 1384, 1410, 1502
\MT@get@charwd 1278, 1309, 1387, 1410
\MT@get@config 4209
\MT@get@ex@opt 1501, 1519, 1594
\MT@get@ex@opt@ 1602–1604, 1606, 1612
\MT@get@font 3218, 3228
\MT@get@font@ 3229, 3234, 3578
\MT@get@font@and@size 3562, 3577
\MT@get@font@dimen 1313, 1390
\MT@get@font@dimen@six 1191, 1202, 1636, 1715, 1802
\MT@get@highlevel 3104, 3114, 3252, 3525, 3536
\MT@get@inh@list 1194, 1504, 1639, 1718, 2519
\MT@get@listname 2438, 2495, 2521
\MT@get@listname@ 2438
\MT@get@ls@basefont 1817, 1979, 1986
\MT@get@opt 1192, 1359, 1637, 1716
\MT@get@orange 3142, 3152, 3549
\MT@get@size 3159, 3164, 3173, 3192, 3248
\MT@get@slot 1241, 2283, 2540, 3814, 3821
\MT@get@slot@ 2557, 2561
\MT@get@space@unit
.. 1384, 1486, 1650, 1657, 1664, 1729, 1736
\MT@get@tr@opt 1804, 1924
\MT@get@tr@opt@ 1942–1945, 1947
\MT@get@unit 1392, 1400, 1935
\MT@get@unit@ 1400
\MT@getkey 4390, 4405
\MT@glet 380, 392, 887, 1018, 1906, 1989, 2020,
2170, 2178, 2914, 3005, 3022–3025, 3361,
3620, 3638, 3839, 4111, 4113, 4724, 4730, 4816
\MT@glet@nc 391, 1188, 2033, 2225, 2533,
2936, 3021, 3092, 3095, 3101, 3214, 3450,
3679, 3683, 3690, 3693, 3701, 3704, 3707, 3741
\MT@glet@nn 396, 3040, 4236
\MT@if@false 296,
854, 861, 888, 905, 2965, 3945, 4792, 4799
\MT@if@fontspec@font
.. 681, 837, 1819, 1854, 1863, 2286, 2299
\MT@if@list@exists
.. 1181, 1500, 1518, 1635, 1714, 1803, 2492
\MT@if@outer@next
.. 2104, 2119, 2123, 2126, 2131, 2136–2139
\MT@if@true 296,
855–857, 862–864, 889–891, 918, 922, 923,
2958, 3954, 3958, 3966, 3971, 4793–4797, 4800
\MT@ifdefined@c@T 407, 858,
894, 1262, 1298, 1582, 1669, 1741, 1848,
2731, 3130, 3359, 3789, 3886, 4245, 4248, 4819
\MT@ifdefined@c@TF
.. 407, 795, 1807, 1832, 1835, 1846,
1977, 2058, 2231, 2278, 2279, 2496, 2522, 3895
\MT@ifdefined@n@T
. 407, 784, 1097, 1115, 1143, 1159, 1263,
1395, 1431, 1583, 1607, 1670, 1742, 1927,
1929, 1948, 2475, 2855, 3089, 3354, 3445,
3603, 3845, 3852, 3859, 3865, 3896, 3906, 4390
\MT@ifdefined@n@TF 407,
1058, 1075, 1098, 1116, 1144, 1160, 1183,
1361, 1369, 1596, 1613, 1904, 2267, 2357,
2463, 2548, 3117, 3291, 3294, 3322, 3594,
3872, 3927, 3936, 4006, 4232, 4235, 4581, 4759
\MT@ifdim 527, 649, 650, 654, 655, 3175, 3184,
3952–3954, 3956, 3957, 3964–3966, 3969, 3970
\MT@ifdimen 489, 3203, 3682, 3692, 3706, 4181
\MT@ifempty 440, 1217, 1218, 1251, 1257,
1475, 1476, 1649, 1656, 1663, 1686–1688,
1700–1702, 1704–1706, 1728, 1735, 1757,
1758, 1774, 1775, 2039, 2040, 2050, 2068,
2200, 2223, 2224, 2236, 3032, 3068, 3072,
3116, 3126, 3153, 3154, 3167, 3168, 3242,
3253, 3276, 3280, 3307, 3311, 3393, 3472,
3587, 3593, 3613, 3619, 3627, 3637, 3644,
3717, 3769, 3774, 4019, 4050, 4212, 4258, 4331
\MT@ifint 453, 2707, 3473, 3718, 4164, 4174
\MT@ifstreq 536, 1087, 1437,
2353, 2494, 2509, 2770, 2773, 2781, 2790,
2995, 3217, 3561, 3681, 3703, 3705, 3887,
3907, 3978, 4022, 4024, 4027, 4030, 4052,
4054, 4068, 4069, 4141, 4142, 4147, 4151,
4180, 4260, 4267, 4271, 4278, 4333, 4339, 4652
\MT@in@clist 615,
756, 785, 1100, 1118, 1127, 1163, 1786,
2375, 2386, 2947, 2950, 2960, 2972, 3030, 3368
\MT@in@rlist 643, 1146, 2484
\MT@in@rlist@ 643
\MT@in@rlist@0 643
\MT@in@tlist 631, 2435, 3041
\MT@in@tlist@ 631
\MT@inannotfalse 100
\MT@inannottrue 100
\MT@increment 717, 3844, 3851, 3858, 3864
\MT@info 76, 91, 96, 4148, 4374, 4378
\MT@info@missing@char 1293, 1323, 2614
\MT@info@nl 76, 92, 93, 97, 796, 1184,
1324, 4139, 4149, 4219, 4233, 4237, 4435,
4439, 4451, 4458, 4564, 4601, 4621, 4626,
4635, 4645, 4668, 4672, 4685, 4700, 4769, 4780
\MT@info@notracking 992, 1088, 1092
\MT@info@notracking@ 1088, 1092
\MT@inh@do 2532, 3803
\MT@inh@feat 3759, 3769, 3772, 3783
\MT@inh@split 3805, 3809
\MT@inlist@false 615, 619, 632, 644, 2968
\MT@inlist@true 615, 621, 639, 651, 656, 2968
\MT@is@active 2545, 2720
\MT@is@char 2552, 2745, 2754
\MT@is@charx 2763, 2784, 2816
\MT@is@composite 2550, 2803
\MT@is@feature 755, 3073, 3281, 3312
\MT@is@letter 2546, 2664, 2750, 2812
\MT@is@number 2690, 2695, 2800
\MT@is@symbol 2549, 2742
\MT@is@tilig 2748, 2798
\MT@is@uni@comp 2810, 2822
\MT@is@uchar 2774, 2780
\MT@iterate 665
\MT@kerning 998, 1711, 4671
\MT@kerningfalse 304
\MT@kerningtrue 304
\MT@kn@c@name 1720, 1722, 1765, 3499
\MT@kn@context 3015, 3056
\MT@kn@doc@contexts 3056
\MT@kn@factor 307
\MT@kn@factor@ 1361
\MT@kn@inh@name 1741–1743
\MT@kn@max 319
\MT@kn@min 319
\MT@kn@setname 3290
\MT@kn@split@val 1726

| | | | |
|--|---|--|--|
| \MT@kn@unit | 313 | \MT@MT | 2, 76, 79, 82, 84, |
| \MT@kn@unit@ | 1369, 1768 | | 86, 91, 92, 94, 95, 285, 767, 873, 875, 3629, |
| \MT@led@unhbox@line | 796 | | 4191, 4213, 4374, 4378, 4436, 4656, 4773, 4774 |
| \MT@ledmac@setup | 790, 878–880 | \MT@MT@pickupfont | 957, 962, 2931, 2941 |
| \MT@let@cn | 393, 396, 397, 840, 1059, 1198, 1508, | \MT@next@listname | 2445, 2454 |
| 1597, 1643, 1722, 1928, 1930, 1934, 2352, | | \MT@next@listname@ | 2464, 2476, 2482 |
| 2364, 2489, 2493, 2526, 2916, 3196, 3607, 3788 | | \MT@nl@ligatures | 2273, 3386 |
| \MT@let@nc | 391, 1397, 2145, 2505, 2537, 2963, | \MT@nl@setname | 2265, 3386 |
| 3929, 3934, 4028, 4031, 4274, 4281, 4683, 4698 | | \MT@nofamilyfalse | 1175, 1180 |
| \MT@let@nn | 396, 1362, 1367, 1370, 1382, 1614, 1617, 1949 | \MT@nofamilytrue | 1175, 2455 |
| \MT@letterspace | 334, 1807, 1928, 1938, 4733, 4734, 4736 | \MT@noligatures | 1002, 2261, 4745 |
| \MT@letterspace@ | 1228, 1298, | \MT@noligatures@ | 2009, 2011, 2273, 2276 |
| 1299, 1807, 1808, 1811, 1814, 1822, 1829, | | \MT@noligaturesfalse | 301 |
| 1834, 1842, 1855–1857, 1864, 1873, 1917– | | \MT@noligaturestrue | 301, 3395 |
| 1920, 2064, 2068, 2186, 2201–2204, 2237, 2240 | | \MT@nonselectedfalse | 1514, 1529 |
| \MT@letterspace@default | 334, 4734 | \MT@nonselectedtrue | 1514, 1517 |
| \MT@listname | 2438, | \MT@norestfalse | |
| 2486, 2489, 2496, 2497, 2499, 2501, 2522, | | 2673, 2680, 2689, 2710, 2770, 2782, 2790 | |
| 2523, 2525, 2526, 2530, 2533, 3824, 3829 | | \MT@noresttrue | 2543, 2673, 2698 |
| \MT@listname@count | 3590, 3595, 3597 | \MT@old@cmd | 66, 71–74 |
| \MT@load@inputenc | 1438, 1441, 1450 | \MT@opt@autofalse | 3989 |
| \MT@load@list | 1196, 1506, 1641, 1720, 2349 | \MT@opt@autottrue | 3989, 4079 |
| \MT@loop | 665, 673, 711, 3933 | \MT@opt@def@set | 4005, 4033, 4058 |
| \MT@lower | 3146, 3152, 3552 | \MT@opt@DVIfalse | 3990 |
| \MT@ls@adjust | 1871, 2197 | \MT@opt@DVIttrue | 3990, 4086, 4089 |
| \MT@ls@adjust@ | 2181, 2205 | \MT@opt@expansionfalse | 3988 |
| \MT@ls@adjust@empty | 2183, 2197 | \MT@opt@expansiontrue | 3988 |
| \MT@ls@adjust@relax | 2184, 2197 | \MT@options | 3510 |
| \MT@ls@basefont | 1986, 1995, 1998, 1999 | \MT@optwarn@admissible | 3991, 4070, 4151 |
| \MT@ls@fontspec@colon | 1913 | \MT@optwarn@nan | 3995, 4166, 4176 |
| \MT@ls@fontspec@font | 1824, 1913 | \MT@orig@add@accent | 2937 |
| \MT@ls@outer@k | 1874, | \MT@orig@foreign@language | 4786, 4788 |
| 1879, 1887, 2081, 2095, 2142, 2160, 2245 | | \MT@orig@pickufont | 2866, 2933 |
| \MT@ls@set@ls | 2188, 2191, 2197 | \MT@orig@py@macron | 952, 956, 961 |
| \MT@ls@too@large | 2204, 2207, 4736 | \MT@orig@select@language | 4781, 4783 |
| \MT@ls@font | 1813, 1823, 1829, | \MT@outer@kern 1873, 1877, 1879, 1880, 1884, 1892, | |
| 1842, 1843, 1852, 1856, 1857, 1862, 1954, | | 1890, 1981, 1983, 2142, 2143, 2160, 2218, 2257 | |
| 1964, 2009, 2011, 2026, 2027, 2034, 2035, | | \MT@outer@space | 1867, |
| 2041, 2045, 2052, 2062, 2066, 2069, 2238, 2241 | | 1868, 2024, 2077, 2079, 2080, 2093, 2094, | |
| \MT@ltx@pickupfont | 911, 955, 960, 2931, 2939 | 2111, 2112, 2127, 2128, 2132, 2133, 2158 | |
| \MT@lua 251, 357, 477, 514, 559, 683, 2287, 2300, 2568 | | \MT@pdf@annot | 99 |
| \MT@lua@copy@font | 1044 | \MT@pdf@cor@lua | 178, 186, 283, 456, 4717 |
| \MT@lua@copyfont | 1023, 1044 | \MT@pdftex@no | 208, 346 |
| \MT@luatex@no | 249, 347 | \MT@permute 3432, 3456, 3470, 3491, 3505, 3795, 3834 | |
| \MT@map@clist@ | 587 | \MT@permute@ | 3834 |
| \MT@map@clist@c | 587, | \MT@permute@@ | 3834 |
| 1025, 2282, 2959, 2971, 2984, 3020, 3027, | | \MT@permute@@@ | 3834 |
| 3069, 3277, 3308, 3591, 3770, 3772, 3782, 4388 | | \MT@permute@000 | 3834 |
| \MT@map@clist@n | 587, 1074, 2266, 3056, 3071, 3091, 3102, | \MT@permute@0000 | 3863, 3868 |
| 3140, 3215, 3263, 3279, 3310, 3340, 3415, | | \MT@permute@00000 | 3876, 3878 |
| 3523, 3534, 3547, 3559, 3699, 3715, 3818, | | \MT@permute@define | 3869, 3879–3881, 3925 |
| 4014, 4017, 4046, 4048, 4077, 4159, 4256, 4329 | | \MT@permute@reset | 3838, 3931 |
| \MT@map@list@ | 605 | \MT@permute@list | 3426, 3442, |
| \MT@map@list@c | 605, 634, 645, 1028, 1264, | 3468, 3485, 3499, 3566, 3567, 3572, 3793, | |
| 1584, 1671, 1743, 2442, 2990, 3897, 3946, 4423 | | 3891, 3892, 3896, 3900, 3903, 3906–3908, | |
| \MT@map@list@n | 605, 2414, 2756, 3838 | 3910–3912, 3920, 3921, 3947, 3979, 3981, 3982 | |
| \MT@max@char | 2664, 2687 | \MT@pickupfont | 2931 |
| \MT@max@slot | 2664, 2713 | \MT@plain | 125, 146 |
| \MT@maybe@do | 1069, 1178, 1498, 1633, 1712, 1788 | \MT@pr@c@name | 1196, 1198, 1466, 3426 |
| \MT@maybe@gobble@with@tikz | 844, 1903, 1957 | \MT@pr@context | 1014, 3014, 3056 |
| \MT@maybe@rem@from@list | 2990, 2994 | \MT@pr@doc@contexts | 3056 |
| \MT@minus | 1822, 1917–1920 | \MT@pr@factor | 307, 4175, 4452, 4453 |
| | | \MT@pr@factor@ | 1361 |
| | | \MT@pr@inh@name | 1262, 1263, 1265 |
| | | \MT@pr@level | 307, 4450, 4451 |

| | | | |
|--|--|--|--|
| \MT@pr@max | 319 | \MT@selectedfalse | 300 |
| \MT@pr@min | 319 | \MT@selectedtrue | 300 |
| \MT@pr@setname | 3290 | \MT@series | 1047, 1162, 2458, 2470 |
| \MT@pr@split@val | 1249 | \MT@set@all@ex | 1552, 1628 |
| \MT@pr@unit | 313, 4182, 4454 | \MT@set@all@kn | 1754, 1776 |
| \MT@pr@unit@ | 1369, 1469 | \MT@set@all@pr | 1214, 1221, 1477 |
| \MT@preset@aux | 1471, | \MT@set@all@sp | 1683, 1708 |
| 1473, 1475, 1476, 1479, 1770, 1772, 1774, 1775 | | \MT@set@babel@context | 4758, 4784, 4789, 4803 |
| \MT@preset@aux@factor | 1471, 1479, 1700–1702, 1770 | \MT@set@codes | 1199, 1232, 1509, 1644, 1723, 2365 |
| \MT@preset@aux@space | 1473, 1479, 1704–1706, 1772 | \MT@set@curr@ls | 1864 |
| \MT@preset@ex | 1608, 1625 | \MT@set@curr@ok | 1884, 1886, 1892, 1895, 2116, 2120 |
| \MT@preset@kn | 1763 | \MT@set@curr@os | 1866, 1894, 2116, 2120 |
| \MT@preset@kn@ | 1763 | \MT@set@default@set | 3308, 3313, 3321 |
| \MT@preset@pr | 1464 | \MT@set@ex@codes | 1531, 4548, 4550 |
| \MT@preset@pr@ | 1464 | \MT@set@ex@codes@n | 1514, 1531, 4550 |
| \MT@preset@sp | 1693 | \MT@set@ex@codes@s | 1499, 4548 |
| \MT@preset@sp@ | 1693 | \MT@set@ex@heirs | 1584, 1620 |
| \MT@ProcessOptionsWithKV | 4382, 4406 | \MT@set@inh@list | 3766, 3768 |
| \MT@protrudechars | 4307, 4311, 4450, 4623 | \MT@set@inputenc | 1195, 1428, 1505, 1640, 1719, 2531 |
| \MT@protrusion | 993, 1177, 4457 | \MT@set@inputenc@ | 1431, 1433 |
| \MT@protrusionfalse | 297 | \MT@set@kn@codes | 1713 |
| \MT@protrusiontrue | 297, 4198 | \MT@set@kn@heirs | 1743, 1747 |
| \MT@rbba@expansion | 748 | \MT@set@listname | 1197, |
| \MT@rbba@kerning | 748 | 1360, 1507, 1595, 1642, 1721, 1926, 2825 | |
| \MT@rbba@protrusion | 748 | \MT@set@lsbasefont | 1995 |
| \MT@rbba@spacing | 748 | \MT@set@lsfont | 1861, 1952, 1964 |
| \MT@rbba@tracking | 748 | \MT@set@named@keys | 3428, 3444, 3466, 3487, 3501, 3510 |
| \MT@register@font | 1006, 2948, 3023 | \MT@set@pr@codes | 1179 |
| \MT@register@font@cx | 2983, 3023 | \MT@set@pr@heirs | 1266, 1456 |
| \MT@register@subst@font | 2922, 2949, 3024 | \MT@set@sp@codes | 1634 |
| \MT@register@subst@font@cx | 2970, 3024 | \MT@set@sp@heirs | 1671, 1675 |
| \MT@rem@from@clist | 626, 1039, 2953, 2978, 2996, 3515 | \MT@set@tr@codes | 1798, 1959, 1969 |
| \MT@rem@from@list | 1028, 1037 | \MT@set@tr@zero | 1809, 1995, 4353 |
| \MT@rem@last@space | 428 | \MT@SetExpansion | 3440, 3442 |
| \MT@repeat | 665, 675, 713, 3939 | \MT@SetExtraKerning | 3497, 3499 |
| \MT@requires@latex | 145, 162, 776, 834, 883, 907, 938, 1953, 2864, 3997, 4158, 4383, 4387, 4815 | \MT@SetExtraSpacing | 3483, 3485 |
| \MT@requires@luatex | 341, 984, 1226, 1540, 1558, 1782, 2276, 4082, 4312, 4326, 4617 | \MT@SetProtrusion | 3424, 3426 |
| \MT@requires@pdftex | 341, 455, 490, 537, 791, 973, 983, 997, 1001, 1012, 1225, 1270, 1296, 1557, 1632, 1711, 1781, 2006, 2262, 3387, 3617, 3732, 3740, 4108, 4202, 4325, 4477, 4509, 4536, 4616, 4743 | \MT@SetTracking | 3462, 3464 |
| \MT@res@a | 549, 551, 617, 624, 627, 629, 633, 638 | \MT@setup@ | 774, 778, 4100, 4101, 4816 |
| \MT@res@b | 550, 551, 627–629, 637, 638 | \MT@setup@contexts | 3003, 3019 |
| \MT@reset@context | 3004, 3008, 3012, 3039 | \MT@setup@copies | 4422, 4438 |
| \MT@reset@context@ | 3012, 3039 | \MT@setup@expansion | 4425, 4462 |
| \MT@reset@ef@codes | 1503, 1527, 1557, 1609 | \MT@setup@kerning | 4429, 4663, 4706 |
| \MT@reset@ef@codes@ | 1552, 1562, 1566 | \MT@setup@noligatures | 4430, 4741 |
| \MT@reset@kn@codes | 1717, 1724, 1754 | \MT@setup@PDF | 4421, 4433, 4443 |
| \MT@reset@kn@codes@ | 1754 | \MT@setup@protrusion | 4424, 4446 |
| \MT@reset@pr@codes | 1193, 1200, 1221 | \MT@setup@spacing | 4428, 4630, 4707 |
| \MT@reset@pr@codes@ | 1221 | \MT@setup@spacing@check | 4648, 4819, 4820 |
| \MT@reset@sp@codes | 1638, 1645, 1683 | \MT@setup@tracking | 4426, 4615, 4678, 4705 |
| \MT@reset@sp@codes@ | 1683 | \MT@setup@warntracking | 4427, 4710 |
| \MT@restore@catcodes | 5, 7, 8, 163, 4821 | \MT@setupfont | 969, 2925, 4372, 4375, 4379, 4415 |
| \MT@restore@p@h | 827, 865, 924 | \MT@setupfont@hook | 853, 887, 893, 898, 924, 931, 972 |
| \MT@saved@setupfont | 4371, 4379 | \MT@shape | 1047, 1162, 2459, 2471 |
| \MT@scale | 724, 1273, 1335, 1349, 1352, 1571 | \MT@shorthandoff | 4767, 4798, 4801 |
| \MT@scale@factor | 1275, 1306, 1333, 1481, 1627 | \MT@show@pdfannot | 106 |
| \MT@scale@to@em | 1252, 1258, 1270, 1303, 1487, 1651, 1658, 1665, 1730, 1737, 1937, 2059, 2232 | \MT@shrink | 316, 1522, 4473, 4474, 4481, 4482, 4485, 4489, 4553, 4566 |
| \MT@scrubfeature | 1051, 1062, 3538 | \MT@shrink@ | 1522, 1543, 1548, 1594 |
| \MT@scrubfeatures | 1062, 3133, 3564 | \MT@shrink@default | 332 |
| | | \MT@size | 650, 654, 655, 1047, 1162 |
| | | \MT@size@name | 643, 2486 |
| | | \MT@sp@c@name | 1641, 1643, 1695, 3485 |
| | | \MT@sp@context | 3015, 3056, 4652 |
| | | \MT@sp@doc@contexts | 3056 |
| | | \MT@sp@factor | 307 |

\MT@sp@factor@ 1361
 \MT@sp@inh@name 1669–1671
 \MT@sp@max 319
 \MT@sp@min 319
 \MT@sp@setname 3290
 \MT@sp@split@val 1647
 \MT@sp@unit 313
 \MT@sp@unit@ 1369, 1698
 \MT@spacing 998, 1631, 4644
 \MT@spacingfalse 303
 \MT@spacingtrue 303
 \MT@split@codes 1234, 1238
 \MT@split@name 977, 1047
 \MT@step 316, 1523, 4476,
 4478, 4496, 4500, 4503, 4567, 4570, 4571, 4575
 \MT@step@ 1523, 1543, 1548, 1594
 \MT@stretch 316, 1521, 4470,
 4471, 4474, 4481, 4483, 4488, 4491, 4552, 4566
 \MT@stretch@ 1521, 1543, 1548, 1594
 \MT@stretch@default 332, 4471
 \MT@strip@prefix 2763, 2784, 2815
 \MT@temp 1216–1219, 1685–1689, 1756–1759, 2029,
 2033, 2036, 2041, 2044, 2049, 2108, 2111,
 2117, 2121, 2124, 2127, 2132, 2140, 2142,
 2148, 2222, 2225, 2242, 3236, 3261, 4386,
 4391, 4396, 4397, 4399, 4402, 4582, 4586, 4590
 \MT@tempencoding 3871, 3872, 3882, 3888
 \MT@tempfamily 3883
 \MT@tempseries 3884
 \MT@tempshape 3885
 \MT@tempsize 3839, 3886, 3895, 3897, 3901
 \MT@test@ast 2057, 2230, 3115, 3124
 \MT@textls 49, 2183, 2184, 2186
 \MT@the@pr@code 1223, 1253, 1259, 1858
 \MT@the@pr@code@tr 1223, 1858
 \MT@tikz@setup 844, 866, 950
 \MT@tlist@break 605, 640, 662, 2447, 3985
 \MT@toks 295, 1324, 1355, 1590, 2544, 2579, 2606,
 2678, 2685, 2735, 2776, 2791, 2830, 2842, 2850
 \MT@tr@c@name
 1927–1930, 1934, 1948, 1949, 3467, 3474
 \MT@tr@context 3015, 3056
 \MT@tr@doc@contexts 3056
 \MT@tr@factor@ 1936
 \MT@tr@font@list 1784
 \MT@tr@inspace 1832, 1833, 1942
 \MT@tr@ligatures 1848, 1945, 2008, 2011
 \MT@tr@max 319, 2208–2210
 \MT@tr@min 319, 2212–2214
 \MT@tr@noligatures 1848, 2005
 \MT@tr@okern 1846, 1944
 \MT@tr@ospace 1835, 1836, 1942
 \MT@tr@outer@icr 2121, 2150
 \MT@tr@outer@icr@ 2150
 \MT@tr@outer@l 1869, 2073
 \MT@tr@outer@next 2101, 2105, 2152
 \MT@tr@outer@r 1896, 2101, 2117, 2124, 2150
 \MT@tr@outer@r@ 2102, 2107
 \MT@tr@set@okern 1847, 2218
 \MT@tr@set@okern@ 2223, 2224, 2229
 \MT@tr@set@space 1838, 2025
 \MT@tr@set@space@ 2030–2032, 2038
 \MT@tr@set@space@@ 2043, 2048, 2051, 2056
 \MT@tr@setname 3290
 \MT@tr@unit@ 1929, 2058, 2231
 \MT@tracking 985, 1784, 1959, 2927, 4353, 4354, 4625
 \MT@tracking@ 1784, 4354
 \MT@trackingfalse 305, 4682
 \MT@trackingtrue 305
 \MT@try@order 2442, 2450
 \MT@undefined@char 2725, 2730, 2741
 \MT@upper 3146, 3152, 3552
 \MT@use@set 3277, 3282, 3290
 \MT@UseMicrotypeSet 3273, 3275
 \MT@val 3032–3034, 3036, 3042, 3044,
 3047, 3103, 3107, 3115, 3118, 3121, 3141–
 3143, 3155, 3158, 3160, 3163, 3165, 3166,
 3172, 3174, 3175, 3177, 3180, 3182, 3193,
 3196, 3200, 3203–3205, 3207, 3209, 3216–
 3218, 3221, 3223–3223, 3244, 3246, 3251,
 3253, 3255, 3257, 3524, 3526, 3535, 3538,
 3540, 3548–3550, 3560–3562, 3568, 3573,
 3817, 3824, 3828, 3829, 4006, 4007, 4010,
 4018, 4019, 4022, 4024, 4027, 4030, 4049,
 4050, 4052, 4054, 4257, 4258, 4260, 4267,
 4271, 4278, 4284, 4330, 4331, 4333, 4339, 4342
 \MT@variants 2435, 3332, 3343
 \MT@vinfo 76, 93, 991, 1089, 1093, 1364,
 1373, 1377, 1412, 1598, 1615, 1801, 1811,
 2290, 2301, 2358, 2382, 2392, 2395, 2499,
 2501, 2507, 3013, 3036, 3370, 3376, 4139,
 4146, 4263, 4269, 4275, 4282, 4336, 4341, 4760
 \MT@warn@ascii 2687, 2829
 \MT@warn@axis@empty 3243, 3254, 3259
 \MT@warn@code@too@large 1339, 1342, 1346
 \MT@warn@err 76, 4143, 4144
 \MT@warn@ex@too@large 1574, 1577, 1588
 \MT@warn@maybe@inputenc 2280, 2843, 2851, 2854
 \MT@warn@nodim 3671, 3684, 3694, 3708
 \MT@warn@number@too@large 2714, 2835
 \MT@warn@preset@towidth 1470, 1490, 1699, 1769
 \MT@warn@rest 2585, 2622, 2840
 \MT@warn@tracking@DVI 1812, 4712
 \MT@warn@unknown 2575, 2591, 2601, 2626, 2848
 \MT@warn@unknown@once 2866, 2867
 \MT@warning 67, 76, 94, 2209, 2213, 2293, 2510,
 3090, 3119, 3207, 3260, 3355, 3378, 3475,
 3604, 3673, 3721, 3735, 3745, 3889, 3910,
 3981, 4143, 4148, 4245, 4322, 4361, 4363, 4364
 \MT@warning@nl 76, 88, 95, 272, 766,
 770, 806, 818, 900, 1204, 1316, 1353, 1405,
 1445, 1491, 1589, 2017, 2830, 2836, 2841,
 2849, 2898, 3447, 3646, 3992, 3999, 4010,
 4092, 4144, 4149, 4183, 4190, 4226, 4240,
 4412, 4501, 4554, 4573, 4637, 4653, 4718, 4805
 \MT@while@num 671, 678, 684, 927–929
 \MT@with@babel@and@T
 783, 855–857, 889–891, 4793–4797, 4800
 \MT@with@package@T 780, 831, 835, 859, 862–
 864, 866, 871, 878–881, 884, 896, 908, 922,
 923, 925, 939, 950, 951, 2866, 2867, 2909, 4636
 \MT@xadd 104, 571, 2383, 2388, 2393,
 2396, 2975, 2986, 3044, 3144, 3372, 3551, 3824
 \MT@xadb 579, 3571, 3899
 \MT@xdef@n 387, 3292, 3295, 3324, 3329, 3358,
 3474, 3566, 3588, 3754, 3790, 3920, 4007, 4009
 \MT@xetex@no 240
 \MT@xspace 2140, 2155
 \MT@xspace@ 2155
 \MT@xunicodefalse 830
 \MT@xunicodetrue 830, 831, 881

- N** newpx (package) 21, 144, 236
 newtx (package) 21, 144, 236
 newunicodechar (package) 95, 236
- O** \outputmode 191, 4082
- P** \pdfadjustinterwordglue 4355, 4634
 \pdfadjustspacing 4314, 4318, 4595
 \pdfappendkern 4357, 4667
 \pdfcopyfont 1022
 pdfcprot (package) 26, 30, 54, 64, 98, 228
 \pdffontexpand 1540, 1543
 \pdfnoligatures 2276, 2292, 2298
 \pdfprependkern 4356, 4666
 \pdfprotrudechars 192, 4313, 4317, 4729
 pdfTEX (engine) . 1, 4, 6–9, 13–19, 23–28, 30–32,
 34, 35, 37–40, 42, 43, 45, 46, 52, 57, 58,
- Q** qfonts (package) 21, 143, 230
- R** ragged2e (package) 26, 81, 137, 234, 235
 reledmac (package) 52, 236
 relsize (package) 107
- S** selected (option) 8, 14, 33, 69, 90, 125, 229
 \selectfont 1960, 3007, 3017, 4250, 4811
 \set@fontsize 3200
 \SetExpansion 14, 36, 3437
 \SetExtraKerning 18, 38, 3495
 \SetExtraSpacing 19, 39, 3480
 \SetProtrusion 13, 35, 3421
 \SetTracking 15, 37, 3460
 \sfcode 4651
 shapepar (package) 29, 53
 \shbscode 1666, 1667, 1678, 1681, 1688
- T** \tagcode 1852, 2279, 2285
 tempora (package) 21, 144, 236
 tex4ht (package) 54, 232
 TeX Live (distribution) 28, 38, 39, 230
 \textls 23,
 52, 53, 916, 941, 946, 1872, 1956, 1972, 2181
 \textls* 23
 \textmicrotypecontext 22, 48, 912, 3011
 tikz (package) 53, 224, 234, 236
- U** ucs (package) 95, 233
 ulgothic (package) 21
 \UnicodeEncodingName 2808
 unit (option) 7, 32, 230, 232
- V** verbose (option) 9, 31, 32, 126, 229, 230, 233
- W** wordcount (package) 51, 233
- X** XCharter (package) 21, 144, 236
 xeCJK (package) 27, 99, 235, 236
 XeTeX (engine) 1, 4, 6–8, 12,
 13, 20, 28–30, 34, 38, 40, 50, 52, 53, 56, 83,
 92, 131, 136, 138, 143, 145, 149, 157, 235–237
 \XeTeXcharglyph 2612
 \XeTeXcountglyphs 713
 \XeTeXfonttype 2563
 \XeTeXglyph 1287
- Y** yfonts (package) 24
- \normalfont 968, 4593, 4597
 \nullfont 968
- 64, 70, 71, 73–75, 79, 83, 85, 111, 114, 116,
 118, 128, 131, 133–135, 138, 195, 197, 228–234
 pdftexcmds (package) 37, 234
 \pdftracingfonts 351
 \pickup@font 2897, 2899, 2908, 2931–2933
 pifont (package) 99
 pinyin (package) 56, 233, 234
 \protrudechars 192, 4313
 protrusion (option) 6, 11, 124
 psnfss (package) 78, 196, 236
 pstricks (package) 9, 133
 pxfonts (package) 21, 143, 144
- \remove@tlig 2799
 \rightmargin kern 802
 \rppcode 1218, 1259, 1260, 1459, 1462, 1857
- \showhyphens 4581
 shrink (option) . 8, 15, 33, 127, 134, 136, 231, 233
 slantsc (package) 175
 soul (package) 4, 30, 55, 81, 232, 234
 soulutf8 (package) 30, 234
 \spacefactor 2084
 \spaceskip 2085, 2088
 spacing (option) 6, 11, 26, 31, 124, 234, 235
 \stbscode 1659, 1660, 1677, 1681, 1687
 step (option) 8, 31, 33, 127, 134, 136, 229, 231, 233
 stretch (option) . 8, 15, 25, 33, 127, 134, 136, 233
- tikzposter (package) 235
 tipa (package) 99
 trace (package) 100, 232
 \tracingmicrotype 87
 \tracingmicrotypeinpdf 98
 \tracingmicrotypeinpdffalse 105
 \tracingmicrotypeinpdftrue 105
 tracking (option) 6, 11, 23, 31, 124
 txfonts (package) 21, 143, 144
- \UseMicrotypeSet 12, 33, 60, 73, 3084, 3271
 \UTF@four@octets@noexpand 2728
 \UTF@three@octets@noexpand 2727
 \UTF@two@octets@noexpand 2726
- \XeTeXglyphindex 2599
 \XeTeXglyphname 2618
 \XeTeXprotrudechars 4321
 \xspace 2139, 2140
 xspace (package) 82, 235
 \xspaceskip 2087, 2090
 xunicode (package) 96, 97, 235
 xunicode-addon (package) 99

| | | |
|---|------------------------------------|---------|
| z | <i>zefonts</i> (package) | 21, 143 |
|---|------------------------------------|---------|

E The LATEX Project Public License

LPPL Version 1.3c 2008-05-04

Copyright 1999, 2002–2008 LATEX3 Project

Preamble

The LATEX Project Public License (LPPL) is the primary license under which the LATEX kernel and the base LATEX packages are distributed.

You may use this license for any work of which you hold the copyright and which you wish to distribute. This license may be particularly suitable if your work is T_EX-related (such as a LATEX package), but it is written in such a way that you can use it even if your work is unrelated to T_EX.

The section ‘WHETHER AND HOW TO DISTRIBUTE WORKS UNDER THIS LICENSE’, below, gives instructions, examples, and recommendations for authors who are considering distributing their works under this license.

Everyone is allowed to distribute verbatim copies of this license document, but modification of it is not allowed.

This license gives conditions under which a work may be distributed and modified, as well as conditions under which modified versions of that work may be distributed.

We, the LATEX3 Project, believe that the conditions below give you the freedom to make and distribute modified versions of your work that conform with whatever technical specifications you wish while maintaining the availability, integrity, and reliability of that work. If you do not see how to achieve your goal while meeting these conditions, then read the document ‘cfgguide.tex’ and ‘modguide.tex’ in the base LATEX distribution for suggestions.

Definitions

In this license document the following terms are used:

Work: Any work being distributed under this License.

Derived Work: Any work that under any applicable law is derived from the Work.

Modification: Any procedure that produces a Derived Work under any applicable law – for example, the production of a file containing an original file associated with the Work or a significant portion of such a file, either verbatim or with modifications and/or translated into another language.

Modify: To apply any procedure that produces a Derived Work under any applicable law.

Distribution: Making copies of the Work available from one person to another, in whole or in part. Distribution includes (but is not limited to) making any electronic components of the Work accessible by file transfer protocols such as FTP or HTTP or by shared file systems such as Sun’s Network File System (NFS).

Compiled Work: A version of the Work that has been processed into a form where it is directly usable on a

computer system. This processing may include using installation facilities provided by the Work, transformations of the Work, copying of components of the Work, or other activities. Note that modification of any installation facilities provided by the Work constitutes modification of the Work.

Current Maintainer: A person or persons nominated as such within the Work. If there is no such explicit nomination then it is the ‘Copyright Holder’ under any applicable law.

Base Interpreter: A program or process that is normally needed for running or interpreting a part or the whole of the Work.

A Base Interpreter may depend on external components but these are not considered part of the Base Interpreter provided that each external component clearly identifies itself whenever it is used interactively. Unless explicitly specified when applying the license to the Work, the only applicable Base Interpreter is a ‘LATEX-Format’ or in the case of files belonging to the ‘LATEX-format’ a program implementing the ‘T_EX language’.

Conditions on Distribution and Modification

- Activities other than distribution and/or modification of the Work are not covered by this license; they are outside its scope. In particular, the act of running the Work is not restricted and no requirements are made concerning any offers of support for the Work.
- You may distribute a complete, unmodified copy of the Work as you received it. Distribution of only part of the Work is considered modification of the Work, and no right to distribute such a Derived Work may be assumed under the terms of this clause.
- You may distribute a Compiled Work that has been generated from a complete, unmodified copy of the Work as distributed under Clause 2 above, as long as that Compiled Work is distributed in such a way that

- the recipients may install the Compiled Work on their system exactly as it would have been installed if they generated a Compiled Work directly from the Work.
4. If you are the Current Maintainer of the Work, you may, without restriction, modify the Work, thus creating a Derived Work. You may also distribute the Derived Work without restriction, including Compiled Works generated from the Derived Work. Derived Works distributed in this manner by the Current Maintainer are considered to be updated versions of the Work.
 5. If you are not the Current Maintainer of the Work, you may modify your copy of the Work, thus creating a Derived Work based on the Work, and compile this Derived Work, thus creating a Compiled Work based on the Derived Work.
 6. If you are not the Current Maintainer of the Work, you may distribute a Derived Work provided the following conditions are met for every component of the Work unless that component clearly states in the copyright notice that it is exempt from that condition. Only the Current Maintainer is allowed to add such statements of exemption to a component of the Work.
 - (a) If a component of this Derived Work can be a direct replacement for a component of the Work when that component is used with the Base Interpreter, then, wherever this component of the Work identifies itself to the user when used interactively with that Base Interpreter, the replacement component of this Derived Work clearly and unambiguously identifies itself as a modified version of this component to the user when used interactively with that Base Interpreter.
 - (b) Every component of the Derived Work contains prominent notices detailing the nature of the changes to that component, or a prominent reference to another file that is distributed as part of the Derived Work and that contains a complete and accurate log of the changes.
 - (c) No information in the Derived Work implies that any persons, including (but not limited to) the authors of the original version of the Work, provide any support, including (but not limited to) the reporting and handling of errors, to recipients of the Derived Work unless those persons have stated explicitly that they do provide such support for the Derived Work.
 - (d) You distribute at least one of the following with the Derived Work:
 - i. A complete, unmodified copy of the Work; if your distribution of a modified component is made by offering access to copy the modified component from a designated place, then offering equivalent access to copy the Work from the same or some similar place meets this condition, even though third parties are not compelled to copy the Work along with the modified component;
 - ii. Information that is sufficient to obtain a complete, unmodified copy of the Work.
 7. If you are not the Current Maintainer of the Work, you may distribute a Compiled Work generated from a Derived Work, as long as the Derived Work is distributed to all recipients of the Compiled Work, and as long as the conditions of Clause 6, above, are met with regard to the Derived Work.
 8. The conditions above are not intended to prohibit, and hence do not apply to, the modification, by any method, of any component so that it becomes identical to an updated version of that component of the Work as it is distributed by the Current Maintainer under Clause 4, above.
 9. Distribution of the Work or any Derived Work in an alternative format, where the Work or that Derived Work (in whole or in part) is then produced by applying some process to that format, does not relax or nullify any sections of this license as they pertain to the results of applying that process.
 10. (a) A Derived Work may be distributed under a different license provided that license itself honors the conditions listed in Clause 6 above, in regard to the Work, though it does not have to honor the rest of the conditions in this license.
 - (b) If a Derived Work is distributed under a different license, that Derived Work must provide sufficient documentation as part of itself to allow each recipient of that Derived Work to honor the restrictions in Clause 6 above, concerning changes from the Work.
 11. This license places no restrictions on works that are unrelated to the Work, nor does this license place any restrictions on aggregating such works with the Work by any means.
 12. Nothing in this license is intended to, or may be used to, prevent complete compliance by all parties with all applicable laws.

No Warranty

There is no warranty for the Work. Except when otherwise stated in writing, the Copyright Holder provides the Work ‘as is’, without warranty of any kind, either expressed or implied, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose. The entire risk as to the quality and performance of the Work is with you. Should the Work prove defective, you assume the cost of all necessary servicing, repair, or correction.

In no event unless required by applicable law or agreed to in writing will The Copyright Holder, or any au-

thor named in the components of the Work, or any other party who may distribute and/or modify the Work as permitted above, be liable to you for damages, including any general, special, incidental or consequential damages arising out of any use of the Work or out of inability to use the Work (including, but not limited to, loss of data, data being rendered inaccurate, or losses sustained by anyone as a result of any failure of the Work to operate with any other programs), even if the Copyright Holder or said author or said other party has been advised of the possibility of such damages.

Maintenance of The Work

The Work has the status ‘author-maintained’ if the Copyright Holder explicitly and prominently states near the primary copyright notice in the Work that the Work can only be maintained by the Copyright Holder or simply that it is ‘author-maintained’.

The Work has the status ‘maintained’ if there is a Current Maintainer who has indicated in the Work that they are willing to receive error reports for the Work (for example, by supplying a valid e-mail address). It is not required for the Current Maintainer to acknowledge or act upon these error reports.

The Work changes from status ‘maintained’ to ‘unmaintained’ if there is no Current Maintainer, or the person stated to be Current Maintainer of the work cannot be reached through the indicated means of communication for a period of six months, and there are no other significant signs of active maintenance.

You can become the Current Maintainer of the Work by agreement with any existing Current Maintainer to take over this role.

If the Work is unmaintained, you can become the Current Maintainer of the Work through the following steps:

1. Make a reasonable attempt to trace the Current Maintainer (and the Copyright Holder, if the two differ) through the means of an Internet or similar search.
2. If this search is successful, then enquire whether the Work is still maintained.
 - (a) If it is being maintained, then ask the Current Maintainer to update their communication data within one month.
 - (b) If the search is unsuccessful or no action to resume active maintenance is taken by the Current

Maintainer, then announce within the pertinent community your intention to take over maintenance. (If the Work is a LATEX work, this could be done, for example, by posting to `comp.text.tex`.)

3. (a) If the Current Maintainer is reachable and agrees to pass maintenance of the Work to you, then this takes effect immediately upon announcement.
- (b) If the Current Maintainer is not reachable and the Copyright Holder agrees that maintenance of the Work be passed to you, then this takes effect immediately upon announcement.
4. If you make an ‘intention announcement’ as described in 2b above and after three months your intention is challenged neither by the Current Maintainer nor by the Copyright Holder nor by other people, then you may arrange for the Work to be changed so as to name you as the (new) Current Maintainer.
5. If the previously unreachable Current Maintainer becomes reachable once more within three months of a change completed under the terms of 3b or 4, then that Current Maintainer must become or remain the Current Maintainer upon request provided they then update their communication data within one month.

A change in the Current Maintainer does not, of itself, alter the fact that the Work is distributed under the LPPL license.

If you become the Current Maintainer of the Work, you should immediately provide, within the Work, a prominent and unambiguous statement of your status as Current Maintainer. You should also announce your new status to the same pertinent community as in 2b above.

Whether and How to Distribute Works under This License

This section contains important instructions, examples, and recommendations for authors who are considering distributing their works under this license. These authors are addressed as ‘you’ in this section.

Choosing This License or Another License

If for any part of your work you want or need to use *distribution* conditions that differ significantly from those in this license, then do not refer to this license anywhere in your work but, instead, distribute your work under a different license. You may use the text of this license as a model for your own license, but your license should not refer to the LPPL or otherwise give the impression that your work is distributed under the LPPL.

The document ‘modguide.tex’ in the base LATEX distribution explains the motivation behind the conditions of this license. It explains, for example, why distributing LATEX under the GNU General Public License (GPL) was considered inappropriate. Even if your work is unrelated to LATEX, the discussion in ‘modguide.tex’ may still be relevant, and authors intending to distribute their works under any license are encouraged to read it.

A Recommendation on Modification Without Distribution

It is wise never to modify a component of the Work, even for your own personal use, without also meeting the above conditions for distributing the modified component. While you might intend that such modifications will never be distributed, often this will happen by accident – you may forget that you have modified that component; or it may not occur to you when allowing others to access the modified version that you are thus distributing it and violating the conditions of this license in ways that could have legal implications and, worse, cause problems for the community. It is therefore usually in your best interest to keep your copy of the Work identical with the public one. Many works provide ways to control the behavior of that work without altering any of its licensed components.

How to Use This License

To use this license, place in each of the components of your work both an explicit copyright notice including your name and the year the work was authored and/or last substantially modified. Include also a statement that the distribution and/or modification of that component is

constrained by the conditions in this license.

Here is an example of such a notice and statement:

```
%% pig.dtx
%% Copyright 2005 M. Y. Name
%
% This work may be distributed and/or modified under the
% conditions of the LaTeX Project Public License, either version 1.3
% of this license or (at your option) any later version.
% The latest version of this license is in
% https://www.latex-project.org/lppl.txt
% and version 1.3 or later is part of all distributions of LaTeX
% version 2005/12/01 or later.
%
% This work has the LPPL maintenance status 'maintained'.
%
% The Current Maintainer of this work is M. Y. Name.
%
% This work consists of the files pig.dtx and pig.ins
% and the derived file pig.sty.
```

Given such a notice and statement in a file, the conditions given in this license document would apply, with the ‘Work’ referring to the three files ‘pig.dtx’, ‘pig.ins’, and ‘pig.sty’ (the last being generated from ‘pig.dtx’ using ‘pig.ins’), the ‘Base Interpreter’ referring to any ‘LATEX-Format’, and both ‘Copyright Holder’ and ‘Current Maintainer’ referring to the person ‘M. Y. Name’.

If you do not want the Maintenance section of LPPL to apply to your Work, change ‘maintained’ above into ‘author-maintained’. However, we recommend that you use ‘maintained’ as the Maintenance section was added in order to ensure that your Work remains useful to the community even when you can no longer maintain and support it yourself.

Derived Works That Are Not Replacements

Several clauses of the LPPL specify means to provide reliability and stability for the user community. They therefore concern themselves with the case that a Derived Work is intended to be used as a (compatible or incompatible) replacement of the original Work. If this is not the case (e.g., if a few lines of code are reused for a completely different task), then clauses 6b and 6d shall not apply.

Important Recommendations

Defining What Constitutes the Work

The LPPL requires that distributions of the Work contain all the files of the Work. It is therefore important that you provide a way for the licensee to determine which files constitute the Work. This could, for example, be achieved by explicitly listing all the files of the Work near the copyright notice of each file or by using a line such as:

```
% This work consists of all files listed in manifest.txt.
```

in that place. In the absence of an unequivocal list it might be impossible for the licensee to determine what is considered by you to comprise the Work and, in such a case, the licensee would be entitled to make reasonable conjectures as to which files comprise the Work.