

# Ocgtools demo

**Ocgtools  
demo**

by

**Robert Mařík**

**Robert Mařík**

Copyright © 2010  
Last Revision Date: March 31, 2010



# Table of Contents

1. Introduction
2. Options of the package
3. A taste of mathematics
4. Few more tests

**Ocgtools  
demo**

by

Robert Mařík




◀ Doc

Doc ▶

Back

Close

## 1. Introduction



This is test file for `ocgtools` package. You can (using `pdflatex`) insert hidden  $\text{T}_\text{E}\text{X}$  material into PDF files and open/close by clicking active links. The active links in this document are pictures (like the picture in this paragraph) or blue text. There are two kinds of behavior

**Ocgtools  
demo**

by

Robert Mařík

- OCG spans over almost whole PDF pages (with black or transparent boundary) and can be hidden by clicking anywhere in the page – [Try it here!](#)
- OCG is small and can be hidden either with the same link which opens this text or with red mark on the right top corner – [Try it here!](#)

Note that the pictures may look darker in Adobe Reader on Linux if you use package option `transparent` (means transparent boundary of the OCG's, used for example in demos for Beamer class and `pdfscreen.sty` package). For comparison you can look at the original picture [here](#)) or at the demos which use `web.sty` package. [PDF viewer](#) uses another rendering when transparency is called and this seems to be system dependent. So be careful when combining `transparent` option and bitmap pictures.

◀◀	▶▶
◀	▶
◀ Doc	Doc ▶
Back	Close

Ocgtools  
demo

by

Robert Mařík

$$\nabla \cdot D = \rho \quad (1)$$

$$\nabla \cdot B = 0 \quad (2)$$

$$\nabla \times E = -\frac{\partial B}{\partial t} \quad (3)$$

$$\nabla \times H = J + \frac{\partial D}{\partial t} \quad (4)$$



Here we test [ocg's](#) which are inside group (Maxwell's equation in minipage) and which are taller than wide (little golf player).

## 2. Options of the package

This is some [random text](#) to see that [wrapfig](#) works and wide pictures are scaled properly. Several options are available for the package `ocgtools`: [transparent](#), [insertvisible](#), [nobutton](#), [noocg](#), [noprogessmsg](#), [minimouseover](#), [mouseover](#), [nopageclose](#) (each option has an associated minilayer with an explanation). Examples distributed with the package are in the form of demo files based on three packages (`beamer`, `web`, `pdfscreen`). Each example has three variants with no panel, with panel on the right and on the left and each example is compiled with different options. The current document is compiled with the following options: **`minimouseover`**,



**Ocgtools  
demo**

by

Robert Mařík

◀◀	▶▶
◀	▶
◀ Doc	Doc ▶
Back	Close

Ocgtools  
demo

by

Robert Mařík

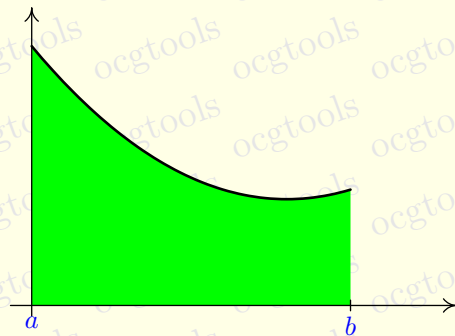


Figure 1: Floating figure

### 3. A taste of mathematics

Mfipic pictures can be scaled easily (see the floating figure).

We can add explanation to some computations easily (Note the text why? inserted automatically by redefining macro `\ocgtextend`).

$$\int \ln x \, dx \stackrel{\text{Why?}}{=} x \ln x - \int x \frac{1}{x} \, dx \quad (5)$$

$$\stackrel{\text{Why?}}{=} x \ln x - x + C \quad (6)$$

◀◀	▶▶
◀	▶
◀ Doc	Doc ▶
Back	Close

#### 4. Few more tests

Package `ocgtools.sty` redefines output routine via `atbegshi.sty` package. From this reason it may be incompatible with some other packages dealing with output routine. However, the package `eso-pic.sty` works fine.

Test for placing OCG's:

**Ocgtools  
demo**

lb  
rb  
lt  
rt

lb  
rb  
lt  
rt

We inserted equation (5) and Figure 1 in this document.

by The reference to Maxwell equations (1) works only if compiled on Linux via `ocgtools-preview.sh` (called from `ocgtools-test.sh` automatically with correct parameter).

Robert Mařík

[New page.](#)

Second line

[New page.](#)

Second line

**Ocgtools  
demo**

by

Robert Mařík

◀◀	▶▶
◀	▶
◀ Doc	Doc ▶
Back	Close



Plain page.

**Ocgtools  
demo**

by

Robert Mařík

◀◀	▶▶
◀	▶
◀ Doc	Doc ▶
Back	Close

[Last page](#)

Second line on last page.

**Ocgtools  
demo**

by

Robert Mařík

