

The $\text{\LaTeX}$ package `showexpl`

Examples

1	The <code>overhang</code> parameter	1
2	The <code>wide</code> parameter	1
3	The <code>overhang</code> parameter again	2
4	The <code>wide</code> parameter again	2
5	Floating Example	3
6	The <code>graphic</code> parameter	4
7	Fix width of the result (side-by-side default: <code>0.5\linewidth</code>) .	5
8	The <code>varwidth</code> parameter	5
9	Fix width of the result (default: <code>\linewidth</code>)	5
10	The <code>justification</code> parameter	5

The listings parameters still works

$\text{\LaTeX}$ $\text{\LaTeX}$ $\text{\LaTeX}$ $\text{\LaTeX}$

```
\Large\LaTeX{} \LaTeX{}
\LaTeX{} \LaTeX{}

```

half text area

half text area

margin area

The `pos`, `overhang`, and `caption` parameters

Example 1: The `overhang` parameter

```
1 \Large\LaTeX{} \LaTeX{}
2 \LaTeX{} \LaTeX{}

```

$\text{\LaTeX}$ $\text{\LaTeX}$ $\text{\LaTeX}$ $\text{\LaTeX}$

half text area

half text area

margin area

$\text{\LaTeX}$ $\text{\LaTeX}$ $\text{\LaTeX}$ $\text{\LaTeX}$

```
1 \Large\LaTeX{} \LaTeX{}
2 \LaTeX{} \LaTeX{}

```

half text area

half text area

margin area

The `wide` parameter with inner and outer position

Example 2: The `wide` parameter

```
1 \Large\LaTeX{} \LaTeX{}
2 \LaTeX{} \LaTeX{}

```

$\text{\LaTeX}$ $\text{\LaTeX}$ $\text{\LaTeX}$ $\text{\LaTeX}$

half text area

half text area

margin area

$\text{\LaTeX}$ $\text{\LaTeX}$ $\text{\LaTeX}$ $\text{\LaTeX}$

```
1 \Large\LaTeX{} \LaTeX{}
2 \LaTeX{} \LaTeX{}

```

More examples on an even (left) page

L^AT_EX L^AT_EX L^AT_EX L^AT_EX

```
1 \Large\LaTeX{} \LaTeX{}
2 \LaTeX{} \LaTeX{}

```

| margin area | | half text area | | half text area |

```
1 \Large\LaTeX{} \LaTeX{}
2 \LaTeX{} \LaTeX{}

```

L^AT_EX L^AT_EX L^AT_EX L^AT_EX

Example 3: The overhang parameter again

| margin area | | half text area | | half text area |

L^AT_EX L^AT_EX L^AT_EX L^AT_EX

```
1 \Large\LaTeX{} \LaTeX{}
2 \LaTeX{} \LaTeX{}

```

| margin area | | half text area | | half text area |

L^AT_EX L^AT_EX L^AT_EX L^AT_EX

```
1 \Large\LaTeX{} \LaTeX{}
2 \LaTeX{} \LaTeX{}

```

Example 4: The wide parameter again

| margin area | | half text area | | half text area |

```
1 \Large\LaTeX{} \LaTeX{}
2 \LaTeX{} \LaTeX{}

```

L^AT_EX L^AT_EX L^AT_EX L^AT_EX

Example 5: This is a floating Example (parameter `rangeaccept=true`)

```
1 Line 3 \par
2 Line 4 \par
3 Line 5 \par
4 Line 6 \par
5 Line 8 \par
6 Line 9 \par
7 Line 10 \par
```

```
Line 3
Line 4
Line 5
Line 6
Line 8
Line 9
Line 10
```

Whole $\text{\LaTeX}$ documents as example code and the parameters `preset`, `rframe`, and `rangeaccept`


```
1 \documentclass[a4paper,twoside]{article}
2 \begin{document}
3   \begin{equation}
4     \sigma(t)=\frac{1}{\sqrt{2\pi}}
5     \int_0^t e^{-x^2/2} dx
6   \end{equation}
7 \end{document}
```

$$\sigma(t) = \frac{1}{\sqrt{2\pi}} \int_0^t e^{-x^2/2} dx \quad (1)$$

_____ half text area _____ | _____ half text area _____ | _____ margin area _____

$$H_c = \frac{1}{2n} \sum_{l=0}^n (-1)^l (n-l)^{p-2} \sum_{l_1+\dots+l_p=l} \prod_{i=1}^p \binom{n_i}{l_i} \cdot [(n-l) - (n_i - l_i)]^{n_i - l_i} \cdot \left[(n-l)^2 - \sum_{j=1}^p (n_i - l_i)^2 \right]. \quad (2)$$

```
1 \documentclass[a4paper,twoside]{article}
2 \usepackage{amsmath}
3 % enhancements for mathematical formulas
4 \begin{document}
5 \begin{equation}\label{eq:barwq}
6 \begin{split}
7   H_c&=\frac{1}{2n}
8   \sum_{n_1=0}^n (-1)^{n_1} (n-n_1)^{p-2}
9   \sum_{n_1+\dots+n_p=n} \prod_{i=1}^p \binom{n_i}{n_i} \\
10  &\quad \cdot [(n-n_1) - (n_i - n_{i1})]^{n_i - n_{i1}} \cdot
11  \quad \cdot \left[ (n-n_1)^2 - \sum_{j=1}^p (n_i - n_{ij})^2 \right].
12 \end{split}
13 \end{equation}
14 \end{document}
```



Using a graphic as the result

```

1 \Large\LaTeX{} \LaTeX{}
2 \LaTeX{} \LaTeX{}

```



```

1 \Large\LaTeX{} \LaTeX{}
2 \LaTeX{} \LaTeX{}

```



```

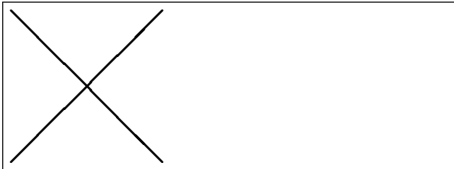
1 \Large\LaTeX{} \LaTeX{}
2 \LaTeX{} \LaTeX{}

```




Example 6: The `graphic` parameter


The parameter **varwidth**

half text area	half text area
	<pre> 1 \setlength{\unitlength}{1cm} 2 \begin{picture}(2,2) \thicklines 3 \thicklines 4 \put(0,0){\line(1,1){2}} 5 \put(0,2){\line(1,-1){2}} 6 \end{picture> </pre>


Example 7: Fix width of the result (side-by-side default: `0.5\linewidth`)

	<pre> 1 \setlength{\unitlength}{1cm} 2 \begin{picture}(2,2) \thicklines 3 \put(0,0){\line(1,1){2}} 4 \put(0,2){\line(1,-1){2}} 5 \end{picture> </pre>
---	--

Example 8: Width of the result reduced to the “natural” width (`varwidth=true`)

	<pre> 1 \setlength{\unitlength}{1cm} 2 \begin{picture}(2,2) \thicklines 3 \put(0,0){\line(1,1){2}} 4 \put(0,2){\line(1,-1){2}} 5 \end{picture> </pre>
--	--

Example 9: Fix width of the result (default: `\linewidth`)

	<pre> 1 \setlength{\unitlength}{1cm} 2 \begin{picture}(2,2) 3 \thicklines 4 \put(0,0){\line(1,1){2}} 5 \put(0,2){\line(1,-1){2}} 6 \end{picture> </pre>
---	--

Example 10: Result is centered (`varwidth=true`)