


# tcolorbox



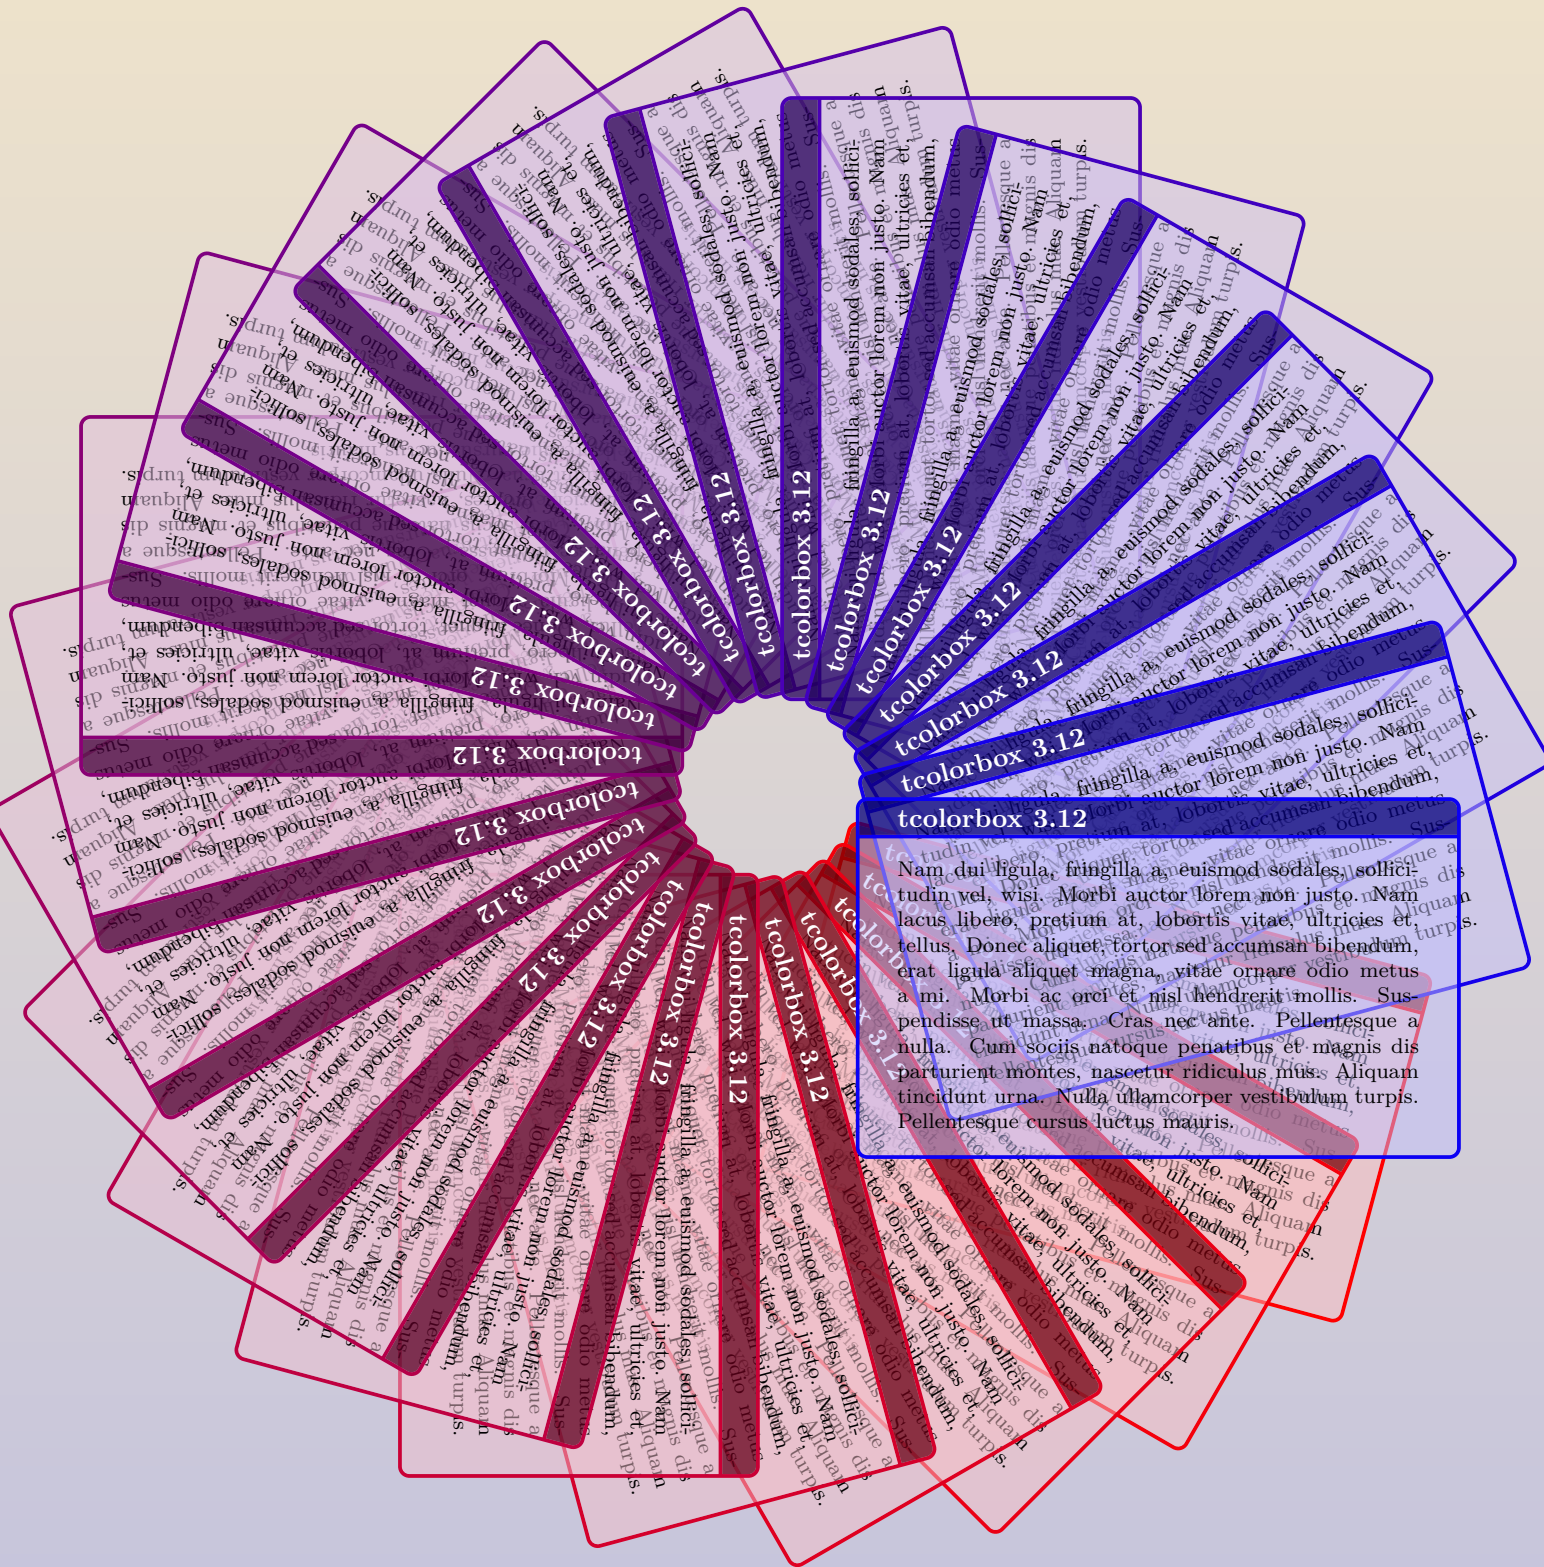

### Cover code

```
% \usepackage{incgraph}
\begin{inctext}
\begin{tikzpicture}
\definecolorseries{boxcol}{rgb}{last}{red}{blue}
\resetcolorseries[24]{boxcol}
\coordinate (A) at (0,0); \coordinate (B) at (21,29.7);
\path[use as bounding box,top color=Goldenrod!25!white,bottom color=Navy!25!white]
(A) rectangle coordinate (C) (B);
\foreach \w in {-15,-30,...,-360}
{\node[below right,rotate around={\w:(C)}] at ([xshift=1cm]C) {%
\begin{tcolorbox}[width=8cm,title=tcolorbox \version,
fontupper=\scriptsize,fonttitle=\small\bfseries,
colback=boxcol!25!white,colbacktitle=boxcol!+!50!black,colframe=boxcol,
enhanced jigsaw,opacityback=0.5,opacitybacktitle=0.75]
\lipsum[2]
\end{tcolorbox}};
}
\node[font=\Huge\bfseries] at ([yshift=12cm]C) {|tcolorbox|};
\node[font=\large\bfseries] at ([yshift=-12cm]C)
{Manual for version \version\ (\datum)};
\end{tikzpicture}
\end{inctext}
```

If you have trouble printing this document, the reason is quite likely the cover page. Printing the pages starting with page 2 or page 3 should work.



# The tcolorbox package

Manual for version 3.12 (2014/07/29)

Thomas F. Sturm<sup>1</sup>

## Abstract

`tcolorbox` provides an environment for colored and framed text boxes with a heading line. Optionally, such a box can be split in an upper and a lower part. The package `tcolorbox` can be used for the setting of L<sup>A</sup>T<sub>E</sub>X examples where one part of the box displays the source code and the other part shows the output. Another common use case is the setting of theorems. The package supports saving and reuse of source code and text parts.

## Contents

<b>1</b>	<b>Introduction</b>	<b>6</b>
1.1	Installation . . . . .	6
1.2	Loading the Package . . . . .	6
1.3	Libraries . . . . .	7
<b>2</b>	<b>Macros for Box Creation</b>	<b>9</b>
<b>3</b>	<b>Option Keys</b>	<b>14</b>
3.1	Title . . . . .	14
3.2	Lower Part . . . . .	16
3.3	Colors and Fonts . . . . .	19
3.4	Geometry . . . . .	22
3.5	Corners . . . . .	33
3.6	Transparency . . . . .	36
3.7	Height Control . . . . .	38
3.8	Box Content Additions . . . . .	44
3.9	Overlays . . . . .	53
3.10	Floating Objects . . . . .	58
3.11	Side by Side . . . . .	59
3.12	Embedding into the Surroundings . . . . .	62
3.13	Bounding Box . . . . .	63
3.14	Layered Boxes and Every Box Settings . . . . .	69
3.15	Capture Mode . . . . .	72
3.16	Text Characteristics . . . . .	73
3.17	Files . . . . .	74
3.18	<code>\tcbox</code> Specials . . . . .	74
3.19	Counters, Labels and References . . . . .	75
3.20	Externalization . . . . .	77
3.21	Miscellaneous . . . . .	77

<sup>1</sup>Prof. Dr. Dr. Thomas F. Sturm, Institut für Mathematik und Informatik, Universität der Bundeswehr München, D-85577 Neubiberg, Germany; email: [thomas.sturm@unibw.de](mailto:thomas.sturm@unibw.de)



<b>4</b>	<b>Initialization Option Keys</b>	<b>78</b>
4.1	Numbered Boxes . . . . .	78
4.2	Lists of <code>tcolorboxes</code> . . . . .	82
<b>5</b>	<b>Saving and Loading of Verbatim Texts</b>	<b>83</b>
<b>6</b>	<b>Technical Overview and Customization</b>	<b>84</b>
6.1	Skins and Drawing Engines . . . . .	84
6.2	Code Option Keys . . . . .	88
6.3	Subskins . . . . .	91
6.4	Drawing Scheme . . . . .	92
<b>7</b>	<b>Library <code>libskins</code></b>	<b>96</b>
7.1	Style Option Keys . . . . .	96
7.2	Boxed Title Option Keys . . . . .	102
7.3	Watermark Option Keys . . . . .	109
7.4	Clip Environments . . . . .	116
7.5	Border Line Option Keys . . . . .	121
7.6	Shadow Option Keys . . . . .	124
7.7	<code>TikZ</code> Picture Option Keys . . . . .	133
7.8	Underlay Option Keys . . . . .	136
7.9	Finish Option Keys . . . . .	138
7.10	Jigsaw Skin Variants . . . . .	140
7.11	Draft Mode . . . . .	142
7.12	Skin Family 'standard' . . . . .	143
7.13	Skin Family 'enhanced' . . . . .	145
7.14	Skin Family 'bicolor' . . . . .	158
7.15	Skin Family 'beamer' . . . . .	163
7.16	Skin Family 'widget' . . . . .	168
7.17	Skin Family 'empty' . . . . .	172
7.18	Skin 'spartan' . . . . .	181
7.19	Skin 'draft' . . . . .	182
7.20	Skin Family 'freelance' . . . . .	184
<b>8</b>	<b><code>TikZ</code> Image and Picture Fill Extensions</b>	<b>185</b>
8.1	Fill Plain . . . . .	185
8.2	Fill Stretch . . . . .	186
8.3	Fill Overzoom . . . . .	187
8.4	Fill Zoom . . . . .	188
8.5	Fill Shrink . . . . .	189
8.6	Fill Tile . . . . .	190
8.7	Filling Options . . . . .	191
<b>9</b>	<b>Libraries <code>liblistings</code>, <code>liblistingsutf8</code>, and <code>libminted</code></b>	<b>193</b>
9.1	Loading the Libraries . . . . .	193
9.1.1	Loading <code>liblistings</code> . . . . .	193
9.1.2	Loading <code>liblistingsutf8</code> . . . . .	193
9.1.3	Loading <code>libminted</code> . . . . .	194
9.2	Common Macros of the Libraries . . . . .	194
9.3	Option Keys of the <code>liblistings</code> Library . . . . .	200
9.4	Option Keys of the <code>liblistingsutf8</code> Library . . . . .	202



9.5	Option Keys of the <b>LIB minted</b> Library . . . . .	203
9.6	Common Option Keys of all Libraries . . . . .	205
9.7	Creation of L <sup>A</sup> T <sub>E</sub> X Tutorials . . . . .	212
9.8	Creation of L <sup>A</sup> T <sub>E</sub> X Exercises . . . . .	219
9.9	List of Exercises . . . . .	222
9.10	Solutions for the given L <sup>A</sup> T <sub>E</sub> X Exercises . . . . .	223
<b>10</b>	<b>Library <b>LIB theorems</b></b> . . . . .	<b>225</b>
10.1	Macros of the Library . . . . .	225
10.2	Option Keys of the Library . . . . .	229
10.3	Examples for Definitions and Theorems . . . . .	242
<b>11</b>	<b>Library <b>LIB breakable</b></b> . . . . .	<b>247</b>
11.1	Technical Overview . . . . .	247
11.2	Limitations and Known Bugs . . . . .	248
11.3	Main Option Keys . . . . .	249
11.4	Option Keys for the Break Appearance . . . . .	253
11.5	Breakable boxes and the multicols package . . . . .	255
11.6	Break Sequence for the Skins . . . . .	258
11.7	Break by Hand (Faked Break) . . . . .	266
<b>12</b>	<b>Library <b>LIB fitting</b></b> . . . . .	<b>267</b>
12.1	Macros of the Library . . . . .	267
12.2	Option Keys of the Library . . . . .	269
<b>13</b>	<b>Library <b>LIB hooks</b></b> . . . . .	<b>277</b>
13.1	Concept of Hooks . . . . .	277
13.2	Box Content Additions . . . . .	278
13.3	Embedding into the Surroundings . . . . .	279
13.4	Overlays . . . . .	280
13.5	Watermarks . . . . .	282
13.6	Underlays . . . . .	284
13.7	Finishes . . . . .	285
13.8	Skin Code . . . . .	285
<b>14</b>	<b>Library <b>LIB xparse</b></b> . . . . .	<b>287</b>
14.1	Option Keys . . . . .	287
14.2	Producing tcolorbox Environments and Commands . . . . .	289
14.3	Producing tcbox Commands . . . . .	292
14.4	Producing tcblisting Environments . . . . .	295
14.5	Producing tcbinputlisting Commands . . . . .	297
14.6	Producing tboxfit Commands . . . . .	298
<b>15</b>	<b>Library <b>LIB documentation</b></b> . . . . .	<b>300</b>
15.1	Macros of the Library . . . . .	300
15.2	Option Keys of the Library . . . . .	308
15.3	Predefined Colors of the Library . . . . .	313
<b>A</b>	<b>Picture Credits</b> . . . . .	<b>314</b>
	<b>References</b> . . . . .	<b>315</b>
	<b>Index</b> . . . . .	<b>317</b>




# 1 Introduction

The package originates from the first edition of my book «*L<sup>A</sup>T<sub>E</sub>X – Einführung in das Textsatzsystem*» [19] in about 2006. For the L<sup>A</sup>T<sub>E</sub>X examples and tutorials given there, I wanted to have accentuated and colored boxes to display source code and compiled text in combination. Since, in my opinion, this type of boxes is also quite useful to highlight definitions and theorems, I applied them for my lecture notes in mathematics [16–18] as well. With this package, you are invited to apply these boxes for similar projects.

Starting with version 2.00, for all internal calculations  $\epsilon$ -T<sub>E</sub>X [2] expressions are used in replacement of the package `calc` [21]. The breaking news for version 2.00 is the support for breakable boxes. This new feature allows new applications of the package without affecting the core package too much if you do not need boxes to break automatically. With version 2.20, the often requested 'side by side' mode for listings has been added. With version 3.00, boxed titles are introduced together with improved customization options for overlays, underlays, finishes, and own code extensions.

Since the first public release in 2011, I received a lot of feedback from all over the world. I want to thank all who wrote me for supporting this package by sending bug reports and ideas for new or better features.



## 1.1 Installation

Typically, `tcolorbox` will be installed as part of a major L<sup>A</sup>T<sub>E</sub>X distribution and there is nothing special to do for a user.

If you intend to make a local installation *by hand*, see the `README` file of the `tcolorbox` package for some hints. The short story is: you have to install not only `tcolorbox.sty`, but also all `*.code.tex` files in the local `texmf` tree.

## 1.2 Loading the Package

The base package `tcolorbox` loads the packages `pgf` [20], `verbatim` [15], `etoolbox` [7], and `environ` [13]. `tcolorbox` itself is loaded in the usual manner in the preamble:

```
\usepackage{tcolorbox}
```

The package takes option keys in the key-value syntax. Alternatively, you may use these keys later in the preamble with `\tcboxuselibrary`<sup>P.7</sup> (see there). For example, the key to typeset listings is:

```
\usepackage[listings]{tcolorbox}
```



### 1.3 Libraries

The base package `tcolorbox` is extendable by program libraries. This is done by using option keys while loading the package or inside the preamble by applying the following macro with the same set of keys.

```
\tcbuselibrary{<key list>}
```

Loads the libraries given by the `<key list>`.

```
\tcbuselibrary{listings,theorems}
```

The following keys are used inside `\tcbuselibrary` respectively `\usepackage` without the key tree path `/tcb/library/`.

`/tcb/library/skins`

(LIB skins)

Loads the package `tikz` [20] and provides additional styles (skins) for the appearance of the colored boxes; see Section 7 from page 96.

`/tcb/library/listings`

(LIB listings)

Loads the package `listings` [6] and provides additional macros for typesetting listings which are described in Section 9 from page 193.

`/tcb/library/listingsutf8`

(LIB listingsutf8)

Loads the packages `listings` [6] and `listingsutf8` [10] for UTF-8 support. This is a variant of the library (LIB listings) and is described in Section 9 from page 193.

`/tcb/library/minted`

(LIB minted)

Loads the package `minted` [14] to typeset listings with the `Pygments` [12] tool, also see Section 9 on page 193.

`/tcb/library/theorems`

(LIB theorems)

Provides additional macros for typesetting theorems which are described in Section 10 from page 225.

`/tcb/library/breakable`

(LIB breakable)

Provides support for automatic box breaking from one page to another; see Section 11 from page 247.

`/tcb/library/fitting`

(LIB fitting)

Provides support for font size adaption of the box content to the box dimensions; see Section 12 from page 267.

`/tcb/library/hooks`

(LIB hooks)

Extends several option keys to 'hookable' keys; see Section 13 from page 277.

`/tcb/library/xparse`

(LIB xparse)

Provides document command production with `xparse` for `tcolorbox`; see Section 14 from page 287.

`/tcb/library/documentation`

(LIB documentation)

Provides additional macros for typesetting  $\text{\LaTeX}$  documentations which are described in Section 15 from page 300.



**/tcb/library/many** (style, no value)


Loads the libraries `skins`, `breakable`, `hooks`, `theorems`, `fitting`, and `xparse`. Use this shortcut, if you want to use all features of `tcolorbox` with exception of typesetting listings and using the specialized `documentation` library.

**/tcb/library/most** (style, no value)

Loads all libraries except `minted` and `documentation`. Use this shortcut, if you want to use all features of `tcolorbox` with exception of using the `minted` package and using the specialized `documentation` library.

**/tcb/library/all** (style, no value)

Loads all libraries. Use this shortcut only, if you intend to use the `documentation` library.

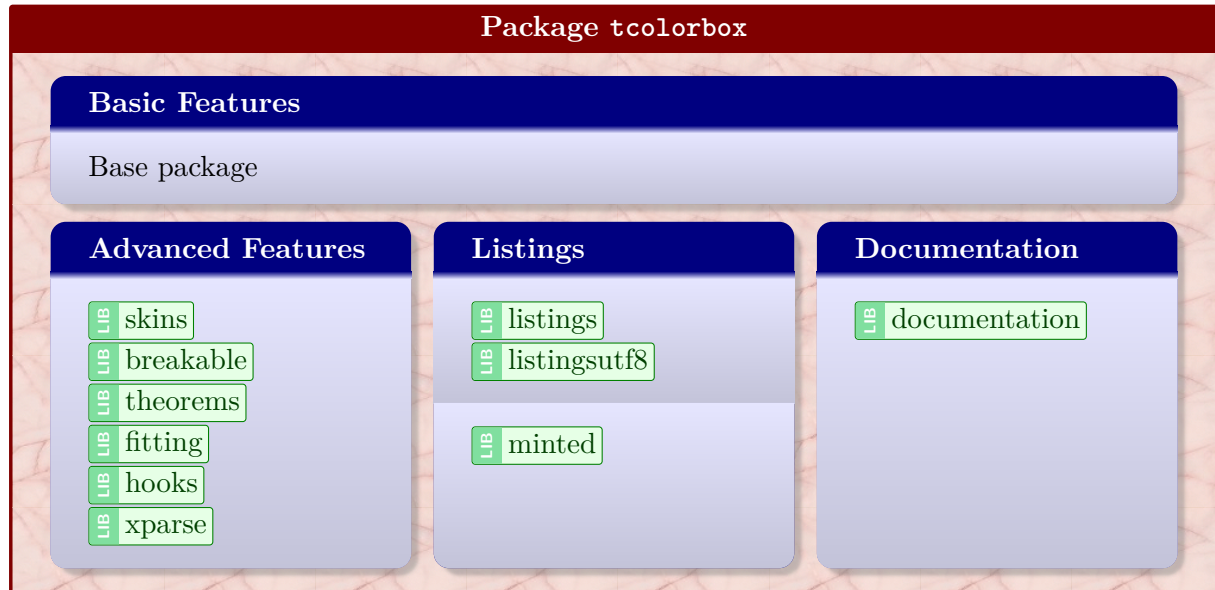



## 2 Macros for Box Creation

```
\begin{tcolorbox}[\langle options \rangle]  
  \langle environment content \rangle  
\end{tcolorbox}
```

This is the main environment to create an accentuated colored text box with rounded corners and, optionally, two parts. The appearance of this box is controlled by numerous options. In the most simple case the source code

```
\begin{tcolorbox}  
  This is a \textbf{tcolorbox}.  
\end{tcolorbox}
```

creates the following compiled text box:

This is a **tcolorbox**.

The text content of the box can be divided in an upper and a lower part by the command `\tcblower`. Visually, both parts are separated by a line. For example:

```
\begin{tcolorbox}  
  This is another \textbf{tcolorbox}.  
  \tcblower  
  Here, you see the lower part of the box.  
\end{tcolorbox}
```

This code gives the following box:

This is another **tcolorbox**.

---

Here, you see the lower part of the box.

The `\langle options \rangle` control the appearance and several functions of the boxes, see Section 3 on page 14 for the complete list. A quick example is given here:

```
\begin{tcolorbox}[colback=red!5!white,colframe=red!75!black,title=My nice heading]  
  This is another \textbf{tcolorbox}.  
  \tcblower  
  Here, you see the lower part of the box.  
\end{tcolorbox}
```

My nice heading

This is another **tcolorbox**.

---

Here, you see the lower part of the box.

### `\tcblower`

Used inside `tcolorbox` to separate the upper box part from the optional lower box part. The upper and the lower part are treated as separate functional units. If you only want to draw a line, see `\tcblines` <sup>→ P. 148</sup>.



`\tcbset{⟨options⟩}`

Sets options for every following `tcolorbox`<sup>→P.9</sup> inside the current  $\text{\TeX}$  group. By default, this does not apply to nested boxes, see Section 3.14 on page 69.

For example, the colors of the boxes may be defined for the whole document by this:

```
\tcbset{colback=red!5!white,colframe=red!75!black}
```

`\tcbsetforeverylayer{⟨options⟩}`

Sets options for every following `tcolorbox`<sup>→P.9</sup> inside the current  $\text{\TeX}$  group. In contrast to `\tcbset`, this does also apply to nested boxes, see Section 3.14 on page 69. Technically, the `⟨options⟩` are appended to the default values for every `tcolorbox` which are applied by `/tcb/reset`<sup>→P.77</sup>.

You should not use this macro, if you are not completely sure that you want to have the `⟨options⟩` also for boxes in boxes (in boxes in boxes ...).

```
\tcbset{colback=green!10!white}
\tcbsetforeverylayer{colframe=red!75!black}

\begin{tcolorbox}[title=All options for this box]
  This is a tcolorbox.\par\medskip
  \begin{tcolorbox}[title=Nested box]
    Note that this nested box has a red frame but no green background.
  \end{tcolorbox}
\end{tcolorbox}
\bigskip

\begin{tcolorbox}[reset]
  Options given with |\tcbsetforeverylayer| survive a |reset|.
\end{tcolorbox}
```

All options for this box

This is a tcolorbox.

Nested box

Note that this nested box has a red frame but no green background.

Options given with `\tcbsetforeverylayer` survive a `reset`.



`\tcbox[<options>]{<box content>}`

Creates a colored box which is fitted to the width of the given *<box content>*. In principal, most *<options>* for a `tcolorbox` <sup>P.9</sup> can be used for `\tcbox` with some restrictions. A `\tcbox` cannot have a lower part and cannot be broken.

```
\tcbset{colframe=blue!50!black,colback=white,colupper=red!50!black,
fonttitle=\bfseries,nobeforeafter,center title}

Text \tcbox[tcbbox raise base]{Hello World}\hfill
%
\tcbbox[left=0mm,right=0mm,top=0mm,bottom=0mm,boxsep=0mm,
toptitle=0.5mm,bottomtitle=0.5mm,title=My table]{%
\arrayrulecolor{blue!50!black}\renewcommand{\arraystretch}{1.2}%
\begin{tabular}{r|c|l}
One & Two & Three \\\hline\hline
Men & Mice & Lions \\\hline
Upper & Middle & Lower
\end{tabular}}\hfill
%
\tcbbox[colback=blue!85!black,
left=0mm,right=0mm,top=0mm,bottom=0mm,boxsep=1mm,arc=0mm,boxrule=0.5pt,
title=My picture]{%
\includegraphics[width=5cm]{Basilica_5.png}}
```


Text

Hello World

My table

One	Two	Three
Men	Mice	Lions
Upper	Middle	Lower

My picture

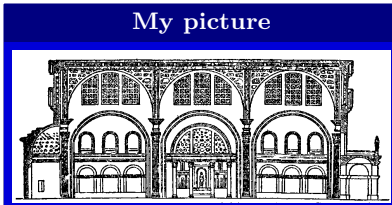

```
% \usepackage{tikz}
\tcbset{colframe=blue!50!black,colback=white,colupper=red!50!black,
fonttitle=\bfseries,center title}

% Fixed width box
\begin{tcolorbox}Hello\\World!\end{tcolorbox}

% Fitted width box (like hbox or makebox)
\tcbbox{Hello\\World!}

% Fitted width box (using a \tikzname\ node)
\tcbbox[tikznode]{Hello\\World!}
```

Hello  
World!

HelloWorld!

Hello  
World!



See Section 14.2 on page 289 and Section 14.3 on page 292 for more elaborate methods to create new environments and commands.

**`\newtcolorbox`** $\langle\textit{init options}\rangle\{\langle\textit{name}\rangle\}[\langle\textit{number}\rangle][\langle\textit{default}\rangle]\{\langle\textit{options}\rangle\}$

Creates a new environment  $\langle\textit{name}\rangle$  based on `tcolorbox`<sup>→ P.9</sup>. Basically, `\newtcolorbox` operates like `\newenvironment`. This means, the new environment  $\langle\textit{name}\rangle$  optionally takes  $\langle\textit{number}\rangle$  arguments, where  $\langle\textit{default}\rangle$  is the default value for the optional first argument. The  $\langle\textit{options}\rangle$  are given to the underlying `tcolorbox`. Note that `/tcb/savedelimiter`<sup>→ P.18</sup> is set to the given  $\langle\textit{name}\rangle$  automatically. The  $\langle\textit{init options}\rangle$  allow setting up automatic numbering, see Section 4 from page 78.

```
\newtcolorbox{mybox}{colback=red!5!white,
colframe=red!75!black}
```

```
\begin{mybox}
This is my own box.
\end{mybox}
```

This is my own box.

```
\newtcolorbox{mybox}[1]{colback=red!5!white,
colframe=red!75!black,fonttitle=\bfseries,
title=#1}
```

```
\begin{mybox}{Hello there}
This is my own box with a mandatory title.
\end{mybox}
```

**Hello there**

This is my own box with a mandatory title.

```
\newtcolorbox{mybox}[2][\colback=red!5!white,
colframe=red!75!black,fonttitle=\bfseries,
colbacktitle=red!85!black,enhanced,
attach boxed title to top center={yshift=-2mm},
title=#2,#1}
```

```
\begin{mybox}[colback=yellow]{Hello there}
This is my own box with a mandatory title
and options.
\end{mybox}
```

**Hello there**

This is my own box with a mandatory title and options.

*Definition in the preamble:*

```
\newtcolorbox[auto counter,number within=section]{pabox}[2][\colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries,
title=Examp.~\thetcbcounter: #2,#1}
```

```
\begin{pabox}[colback=yellow]{Hello there}
This is my own box with a mandatory
numbered title and options.
\end{pabox}
```

**Examp. 2.1: Hello there**

This is my own box with a mandatory numbered title and options.

**`\renewtcolorbox`** $\langle\textit{init options}\rangle\{\langle\textit{name}\rangle\}[\langle\textit{number}\rangle][\langle\textit{default}\rangle]\{\langle\textit{options}\rangle\}$

Operates like `\newtcolorbox`, but based on `\renewenvironment` instead of `\newenvironment`. An existing environment is redefined.



**\newtcbox**[*<init options>*]{*<name>*}[*<number>*][*<default>*]{*<options>*}

Creates a new macro *<name>* based on *\tcbox*<sup>P.11</sup>. Basically, *\newtcbox* operates like *\newcommand*. The new macro *<name>* optionally takes *<number>*+1 arguments, where *<default>* is the default value for the optional first argument. The *<options>* are given to the underlying *tcbox*. The *<init options>* allow setting up automatic numbering, see Section 4 from page 78.

```
\newtcbox{\mybox}{colback=red!5!white,
colframe=red!75!black}

\mybox{This is my own box.}
```

This is my own box.

```
\newtcbox{\mybox}[1]{colback=red!5!white,
colframe=red!75!black,fonttitle=\bfseries,
title=#1}

\mybox{Hello there}{This is my own box.}
```

Hello there

This is my own box.

```
\newtcbox{\mybox}[2][ ]{colback=red!5!white,
colframe=red!75!black,fonttitle=\bfseries,
title=#2,#1}

\mybox[colback=yellow]{Hello there}%
{This is my own box.}
```

Hello there

This is my own box.

*Definition in the preamble:*

```
% counter from previous example
\newtcbox[use counter from=pabox]{\pbbbox}[2][ ]{%
colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries,
title=(\thetcbcounter) #2,#1}
```

```
\pbbbox[colback=yellow]{Hello there}%
{This is my own box.}
```

(2.2) Hello there

This is my own box.

```
\newtcbox{\mybox}[1][red]{on line,
arc=0pt,outer arc=0pt,colback=#1!10!white,colframe=#1!50!black,
boxsep=0pt,left=1pt,right=1pt,top=2pt,bottom=2pt,
boxrule=0pt,bottomrule=1pt,toprule=1pt}
\newtcbox{\xmybox}[1][red]{on line,
arc=7pt,colback=#1!10!white,colframe=#1!50!black,
before upper={\rule[-3pt]{0pt}{10pt}},boxrule=1pt,
boxsep=0pt,left=6pt,right=6pt,top=2pt,bottom=2pt}
```

The *\mybox*[green]{quick} brown *\mybox*{fox} *\mybox*[blue]{jumps} over the  
*\mybox*[green]{lazy} *\mybox*{dog}. *\par*  
The *\xmybox*[green]{quick} brown *\xmybox*{fox} *\xmybox*[blue]{jumps} over the  
*\xmybox*[green]{lazy} *\xmybox*{dog}.

The quick brown fox jumps over the lazy dog.  
The quick brown fox jumps over the lazy dog.

**\renewtcbox**[*<init options>*]{*<name>*}[*<number>*][*<default>*]{*<options>*}

Operates like *\newtcbox*, but based on *\renewcommand* instead of *\newcommand*. An existing macro is redefined.



### 3 Option Keys

For the  $\langle options \rangle$  in `tcolorbox`<sup>→P.9</sup> respectively `\tcbset`<sup>→P.10</sup> the following pgf keys can be applied. The key tree path `/tcb/` is not to be used inside these macros. It is easy to add your own style keys using the syntax for pgf keys, see [19, 20] or the examples starting from page 212.

#### 3.1 Title

`/tcb/title= $\langle text \rangle$`  (no default, initially empty)  
Creates a heading line with  $\langle text \rangle$  as content.

```
\begin{tcolorbox}[title=My heading line]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

My heading line

This is a **tcolorbox**.

`/tcb/notitle` (no value, initially set)  
Removes the title line if set before.

`/tcb/adjusted title= $\langle text \rangle$`  (style, no default, initially unset)  
Creates a heading line with  $\langle text \rangle$  as content. The minimal height of this line is adjusted to fit the text given by `/tcb/adjust text`. This option makes sense for single line headings if boxes are set side by side with equal height. Note that it is very easy to trick this adjustment.

```
\tcbset{colback=White,arc=0mm,width=(\linewidth-4pt)/4,
equal height group=AT,before=,after=\hfill,fonttitle=\bfseries}
```

```
The following titles are not adjusted:\\
\foreach \n in {xxx,ggg,AAA,\"Ägypten}
{\begin{tcolorbox}[title=\n,colframe=red!75!black]
Some content.\end{tcolorbox}}
Now, we try again with adjusted titles:\\
\foreach \n in {xxx,ggg,AAA,\"Ägypten}
{\begin{tcolorbox}[adjusted title=\n,colframe=blue!75!black]
Some content.\end{tcolorbox}}
```

The following titles are not adjusted:

xxx	ggg	AAA	Ägypten
Some content.	Some content.	Some content.	Some content.

Now, we try again with adjusted titles:

xxx	ggg	AAA	Ägypten
Some content.	Some content.	Some content.	Some content.

`/tcb/adjust text= $\langle text \rangle$`  (no default, initially `Äpgjy`)  
This sets the reference text for `/tcb/adjusted title`. If your texts never exceed 'Äpgjy' in depth and height you don't need to care about this option.




`/tcb/detach title` (no value)

Detaches the title from its normal position. The text of the title is stored into `\tcbtitletext` and the formatted title is available by `\tcbtitle`. The main application is to move the title from its usual place to another one.

```
\newtcolorbox{mybox}[2][\colbacktitle=red!10!white,
colback=blue!10!white,coltitle=red!70!black,
title={#2},fonttitle=\bfseries,#1]

\begin{mybox}{My title}
  This is a \textbf{tcolorbox}.
\end{mybox}
\begin{mybox}[detach title,before upper={\tcbtitle\quad}]{My title}
  This is a \textbf{tcolorbox}.
\end{mybox}
\begin{mybox}[detach title,after upper={\par\hfill\tcbtitle}]{My title}
  This is a \textbf{tcolorbox}.
\end{mybox}
```

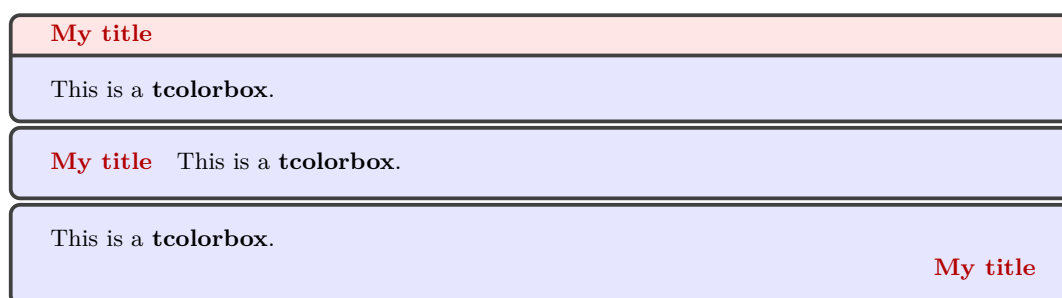

`/tcb/attach title` (no value)


Attaches the title to its normal position. This option is used to reverse `/tcb/detach title`.

`/tcb/attach title to upper=<text>` (style, default empty, initially unset)

Attaches the title to the begin of the upper part of the box content. The optional `<text>` is set between the formatted title and the box content.

```
\newtcolorbox{mybox}[2][\colbacktitle=red!10!white,
colback=blue!10!white,coltitle=red!70!black,
title={#2},fonttitle=\bfseries,#1]

\begin{mybox}[attach title to upper={\ ---\ }]{My title}
  This is a \textbf{tcolorbox}.
\end{mybox}
\begin{mybox}[attach title to upper,after title={:\ }]{My title}
  This is a \textbf{tcolorbox}.
\end{mybox}
```

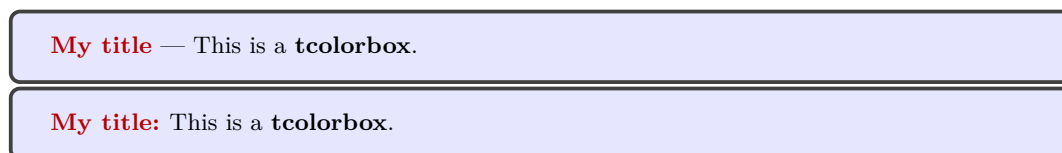

More title options are documented in Section 3.8 on page 44 and Section 7.2 on page 102.



## 3.2 Lower Part

`/tcb/lowerbox=<mode>` (no default, initially **visible**)

Controls the treatment of the lower part of the box. Feasible values for  $\langle mode \rangle$  are:

- **visible**: usual type setting of the lower part,
- **invisible**: empty space instead of the lower part contents,
- **ignored**: the lower part is not used (here).

The last two values are usually applied in connection with `savelowerto`.

```
\begin{tcolorbox}[lowerbox=invisible,colback=white]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part (but invisible).
\end{tcolorbox}

\begin{tcolorbox}[lowerbox=ignored,colback=white]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part (but ignored).
\end{tcolorbox}
```

This is a **tcolorbox**.

This is a **tcolorbox**.

`/tcb/savelowerto=<file name>` (no default, initially empty)

Saves the content of the lower part in a file for an optional later usage.

```
\begin{tcolorbox}[lowerbox=invisible,savelowerto=\jobname_bsp save.tex,colback=white]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part which may be quite complex:

$$f(x)=\frac{1+x^2}{1-x^2}$$

\end{tcolorbox}

Now, we load the saved text:\\
\input{\jobname_bsp save.tex}
```

This is a **tcolorbox**.

Now, we load the saved text:

This is the lower part which may be quite complex:  $f(x) = \frac{1+x^2}{1-x^2}$ .



`/tcb/lower separated=true|false` (default `true`, initially `true`)

If set to `true`, the lower part is visually separated from the upper part. It depends on the chosen skin how the visualization of the separation is done.

```
% \tcbuselibrary{skins}
\tcbset{colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries,nobeforeafter,
width=(\linewidth-4mm)/2,fontlower=\itshape}

\begin{tcolorbox}[title=Lower separated]
This is the upper part.
\tcblower
This is the lower part.
\end{tcolorbox}\hfill
\begin{tcolorbox}[title=Lower not separated,lower separated=false]
This is the upper part.
\tcblower
This is the lower part.
\end{tcolorbox}
\par\bigskip\par
\begin{tcolorbox}[sidebyside,title=Lower separated]
This is the upper part.
\tcblower
This is the lower part.
\end{tcolorbox}\hfill
\begin{tcolorbox}[sidebyside,title=Lower not separated,lower separated=false]
This is the upper part.
\tcblower
This is the lower part.
\end{tcolorbox}
\par\bigskip\par
\begin{tcolorbox}[beamer,title=Lower separated]
This is the upper part.
\tcblower
This is the lower part.
\end{tcolorbox}\hfill
\begin{tcolorbox}[beamer,title=Lower not separated,lower separated=false]
This is the upper part.
\tcblower
This is the lower part.
\end{tcolorbox}
```

#### Lower separated

This is the upper part.

*This is the lower part.*

#### Lower not separated

This is the upper part.

*This is the lower part.*

#### Lower separated

This is the upper  
part.

*This is the lower  
part.*

#### Lower not separated

This is the upper  
part.

*This is the lower  
part.*

#### Lower separated

This is the upper part.

*This is the lower part.*

#### Lower not separated

This is the upper part.

*This is the lower part.*



`/tcb/savedelimiter=<name>` (no default, initially `tcolorbox`)

Used in connection with new environment definitions which extend `tcolorbox` and use or allow the option `savelowerto`. To catch the end of the new box environment `<name>` has to be the name of this environment. Additionally, the environment definition has to use `\tcolorbox` instead of `\begin{tcolorbox}` and `\end{tcolorbox}` instead of `\end{tcolorbox}`.

```
\newenvironment{mybox}[1]{%
  \tcolorbox[savedelimiter=mybox,
    savelowerto=\jobname_bspsave2.tex,lowerbox=ignored,
    colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries,
    title=#1]{}%
  {\end{tcolorbox}}

\begin{mybox}{My Example}
Upper part.
\tcblower
Saved lower part!
\end{mybox}

Now, the saved part is used:
\begin{tcolorbox}[colback=green!5]
\input{\jobname_bspsave2.tex}
\end{tcolorbox}
```

My Example

Upper part.

Now, the saved part is used:

Saved lower part!

The `savedelimiter` is used implicitly with `\newtcolorbox`<sup>P.12</sup> which allows a more convenient usage:

```
\newtcolorbox{mybox}[1]{%
  savelowerto=\jobname_bspsave2.tex,lowerbox=ignored,
  colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries,
  title=#1}%

\begin{mybox}{My Example}
Upper part.
\tcblower
Saved lower part!
\end{mybox}

Now, the saved part is used:
\begin{tcolorbox}[colback=green!5]
\input{\jobname_bspsave2.tex}
\end{tcolorbox}
```

My Example

Upper part.

Now, the saved part is used:

Saved lower part!



### 3.3 Colors and Fonts

**/tcb/colframe**= $\langle color \rangle$  (no default, initially black!75!white)

Sets the frame  $\langle color \rangle$  of the box.

```
\begin{tcolorbox}[colframe=red!50!white]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

This is a **tcolorbox**.

**/tcb/colback**= $\langle color \rangle$  (no default, initially black!5!white)

Sets the background  $\langle color \rangle$  of the box.

```
\begin{tcolorbox}[colback=red!50!white]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

This is a **tcolorbox**.

**/tcb/title filled**=true|false (default true, initially false)

Switches the drawing of the title background according to the given value. This option is set to true automatically by **/tcb/colbacktitle**, **/tcb/opacitybacktitle**<sup>→P.36</sup>, and **/tcb/title style**<sup>→P.99</sup>, and **/tcb/title code**<sup>→P.90</sup>.

```
\begin{tcolorbox}[title=My title,title filled]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
\begin{tcolorbox}[title=My title,
title filled=false]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

My title

This is a **tcolorbox**.

My title

This is a **tcolorbox**.

**/tcb/colbacktitle**= $\langle color \rangle$  (no default, initially black!50!white)

Sets the background  $\langle color \rangle$  of the title area of the box.

```
\begin{tcolorbox}[colbacktitle=red!50!white,
title=My title,coltitle=black,
fonttitle=\bfseries]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

**My title**

This is a **tcolorbox**.



**/tcb/colupper**= $\langle color \rangle$  (no default, initially black)

Sets the text  $\langle color \rangle$  of the upper part.

```
\begin{tcolorbox}[colupper=red!75!black]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```

This is a **tcolorbox**.

-----  
This is the lower part.

**/tcb/collower**= $\langle color \rangle$  (no default, initially black)

Sets the text  $\langle color \rangle$  of the lower part.

```
\begin{tcolorbox}[collower=red!75!black]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```

This is a **tcolorbox**.

-----  
This is the lower part.

**/tcb/coltext**= $\langle color \rangle$  (style, no default, initially black)

Sets the text  $\langle color \rangle$  of the box. This is an abbreviation for setting **colupper** and **collower** to the same value.

```
\begin{tcolorbox}[coltext=red!75!black]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```

This is a **tcolorbox**.

-----  
This is the lower part.

**/tcb/coltitle**= $\langle color \rangle$  (no default, initially white)

Sets the title text  $\langle color \rangle$  of the box.

```
\begin{tcolorbox}[coltitle=red!75!black,
colbacktitle=black!10!white,title=Test]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

Test

-----  
This is a **tcolorbox**.



`/tcb/fontupper=<text>` (no default, initially empty)

Sets `<text>` before the content of the upper part (e.g. font settings).

```
\begin{tcolorbox}[fontupper=Hello!\sffamily]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

Hello! This is a **tcolorbox**.

`/tcb/fontlower=<text>` (no default, initially empty)

Sets `<text>` before the content of the lower part (e.g. font settings).

```
\begin{tcolorbox}[fontlower=\sffamily\bfseries]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```

This is a **tcolorbox**.

-----  
**This is the lower part.**

`/tcb/fonttitle=<text>` (no default, initially empty)

Sets `<text>` before the content of the title text (e.g. font settings).

```
\begin{tcolorbox}[fonttitle=\sffamily\bfseries\large,title=Hello]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

**Hello**

This is a **tcolorbox**.

More color options are provided by using skins documented in Section 7 from page 96.



### 3.4 Geometry

**/tcb/width= $\langle length \rangle$**  (no default, initially `\linewidth`)

Sets the total width of the colored box to  $\langle length \rangle$ . See also `/tcb/height`<sup>P. 38</sup>.

```
\tcbset{colback=red!5!white,colframe=red!75!black}

\begin{tcolorbox}[width=\linewidth/2]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

This is a **tcolorbox**.

**/tcb/toprule= $\langle length \rangle$**  (no default, initially 0.5mm)

Sets the line width of the top rule to  $\langle length \rangle$ .

```
\tcbset{colback=red!5!white,colframe=red!75!black}

\begin{tcolorbox}[toprule=3mm]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

This is a **tcolorbox**.

**/tcb/bottomrule= $\langle length \rangle$**  (no default, initially 0.5mm)

Sets the line width of the bottom rule to  $\langle length \rangle$ .

```
\tcbset{colback=red!5!white,colframe=red!75!black}

\begin{tcolorbox}[bottomrule=3mm]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

This is a **tcolorbox**.

**/tcb/leftrule= $\langle length \rangle$**  (no default, initially 0.5mm)

Sets the line width of the left rule to  $\langle length \rangle$ .

```
\tcbset{colback=red!5!white,colframe=red!75!black}

\begin{tcolorbox}[leftrule=3mm]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

This is a **tcolorbox**.



`/tcb/rightrule=<length>` (no default, initially 0.5mm)

Sets the line width of the right rule to  $\langle length \rangle$ .

```
\tcbset{colback=red!5!white,colframe=red!75!black}

\begin{tcolorbox}[rightrule=3mm]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

This is a **tcolorbox**.

`/tcb/titlerule=<length>` (no default, initially 0.5mm)

Sets the line width of the rule below the title to  $\langle length \rangle$ .

```
\tcbset{enhanced,colback=red!5!white,colframe=red!75!black,
colbacktitle=red!90!black}

\begin{tcolorbox}[titlerule=3mm,title=This is the title]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

This is the title

This is a **tcolorbox**.

`/tcb/boxrule=<length>` (style, no default, initially 0.5mm)

Sets all rules of the frame to  $\langle length \rangle$ , i.e. `/tcb/toprule`<sup>→ P. 22</sup>, `/tcb/bottomrule`<sup>→ P. 22</sup>, `/tcb/leftrule`<sup>→ P. 22</sup>, `/tcb/rightrule`, and `/tcb/titlerule`.

```
\tcbset{colback=red!5!white,colframe=red!75!black}

\begin{tcolorbox}[boxrule=3mm]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

This is a **tcolorbox**.

More options for drawing a `/tcb/borderline`<sup>→ P. 121</sup> are provided by using skins documented in Section 7 from page 96.



`/tcb/arc=<length>` (no default, initially 1mm)

Sets the inner radius of the four frame arcs to  $\langle length \rangle$ .

```
\tcbset{colback=red!5!white,colframe=red!75!black}

\begin{tcolorbox}[arc=0mm]
This is a \textbf{tcolorbox}.
\end{tcolorbox}

\begin{tcolorbox}[arc=4mm]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

This is a **tcolorbox**.

This is a **tcolorbox**.

`/tcb/outer arc=<length>` (no default, initially unset)

Sets the outer radius of the four frame arcs to  $\langle length \rangle$ .

```
\tcbset{colback=red!5!white,colframe=red!75!black}

\begin{tcolorbox}[arc=4mm,outer arc=1mm]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

This is a **tcolorbox**.

`/tcb/auto outer arc` (no value, initially set)

Sets the outer radius of the four frame arcs automatically in dependency of the inner radius given by `/tcb/arc`.

`/tcb/boxsep=<length>` (no default, initially 1mm)

Sets a common padding of  $\langle length \rangle$  between the text content and the frame of the box. This value is added to the key values of `left`, `right`, `top`, `bottom`, and `middle` at the appropriate places.

```
\tcbset{colback=red!5!white,colframe=red!75!black,width=(\linewidth-4mm)/2,
before=,after=\hfill}

\begin{tcolorbox}[boxsep=5mm]
This is a \textbf{tcolorbox}.
\end{tcolorbox}

\begin{tcolorbox}[boxsep=5mm,draft]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

This is a **tcolorbox**.

frame: w=195.33255pt, h=48.97505pt

upper: w=115.2724pt, h=6.296pt

interior: w=192.4873pt, h=46.1298pt



`/tcb/left=<length>` (style, no default, initially 4mm)

Sets the left space between all text parts and frame (additional to `boxsep`). This is an abbreviation for setting `lefttitle`, `leftupper`, and `leftlower` to the same value.

```
\tcbset{colback=red!5!white,colframe=red!75!black}

\begin{tcolorbox}[left=0mm]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

This is a **tcolorbox**.

`/tcb/lefttitle=<length>` (no default, initially 4mm)

Sets the left space between title text and frame (additional to `boxsep`).

```
\tcbset{colback=red!5!white,colframe=red!75!black}

\begin{tcolorbox}[lefttitle=3cm,title=My Title]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

My Title

This is a **tcolorbox**.

`/tcb/leftupper=<length>` (no default, initially 4mm)

Sets the left space between upper text and frame (additional to `boxsep`).

```
\tcbset{colback=red!5!white,colframe=red!75!black}

\begin{tcolorbox}[leftupper=3cm,title=My Title]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

My Title

This is a **tcolorbox**.

`/tcb/leftlower=<length>` (no default, initially 4mm)

Sets the left space between lower text and frame (additional to `boxsep`).

```
\tcbset{colback=red!5!white,colframe=red!75!black}

\begin{tcolorbox}[leftlower=3cm]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```

This is a **tcolorbox**.

This is the lower part.



**/tcb/right=*<length>*** (style, no default, initially 4mm)

Sets the right space between all text parts and frame (additional to **boxsep**). This is an abbreviation for setting **righttitle**, **rightupper**, and **rightlower** to the same value.

```
\tcbset{colback=red!5!white,colframe=red!75!black}

\begin{tcolorbox}[width=5cm,right=2cm]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

This is a **tcolorbox**.

**/tcb/righttitle=*<length>*** (no default, initially 4mm)

Sets the right space between title text and frame (additional to **boxsep**).

```
\tcbset{colback=red!5!white,colframe=red!75!black}

\begin{tcolorbox}[width=5cm,righttitle=2cm,title=My very long title text]
This is a \textbf{tcolorbox} with standard upper box dimensions.
\end{tcolorbox}
```

My very long title text

This is a **tcolorbox** with standard upper box dimensions.

**/tcb/rightupper=*<length>*** (no default, initially 4mm)

Sets the right space between upper text and frame (additional to **boxsep**).

```
\tcbset{colback=red!5!white,colframe=red!75!black}

\begin{tcolorbox}[width=5cm,rightupper=2cm,title=My very long title text]
This is a \textbf{tcolorbox} with compressed upper box dimensions.
\end{tcolorbox}
```

My very long title text

This is a **tcolorbox** with compressed upper box dimensions.



**/tcb/rightlower**= $\langle length \rangle$  (no default, initially 4mm)

Sets the right space between lower text and frame (additional to **boxsep**).

```
\tcbset{colback=red!5!white,colframe=red!75!black}

\begin{tcolorbox}[width=5cm,rightlower=2cm]
This is a \textbf{tcolorbox} with standard upper box dimensions.
\tcblower
This is the lower part with large space at right.
\end{tcolorbox}
```

This is a **tcolorbox** with standard upper box dimensions.

This is the lower part with large space at right.

**/tcb/top**= $\langle length \rangle$  (no default, initially 2mm)

Sets the top space between text and frame (additional to **boxsep**).

```
\tcbset{colback=red!5!white,colframe=red!75!black}

\begin{tcolorbox}[top=0mm]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```

This is a **tcolorbox**.

This is the lower part.

**/tcb/toptitle**= $\langle length \rangle$  (no default, initially 0mm)

Sets the top space between title and frame (additional to **boxsep**).

```
\tcbset{colback=red!5!white,colframe=red!75!black}

\begin{tcolorbox}[toptitle=3mm,title=My title]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

My title

This is a **tcolorbox**.



`/tcb/bottom=<length>` (no default, initially 2mm)

Sets the bottom space between text and frame (additional to `boxsep`).

```
\tcbset{colback=red!5!white,colframe=red!75!black}

\begin{tcolorbox}[bottom=0mm]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```

This is a **tcolorbox**.

-----  
This is the lower part.

`/tcb/bottomtitle=<length>` (no default, initially 0mm)

Sets the bottom space between title and frame (additional to `boxsep`).

```
\tcbset{colback=red!5!white,colframe=red!75!black}

\begin{tcolorbox}[bottomtitle=3mm,title=My title]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

My title

This is a **tcolorbox**.

`/tcb/middle=<length>` (no default, initially 2mm)

Sets the space between upper and lower text to the separation line (additional to `boxsep`).

```
\tcbset{colback=red!5!white,colframe=red!75!black}

\begin{tcolorbox}[middle=0mm,boxsep=0mm]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```

-----  
This is a **tcolorbox**.  
-----  
This is the lower part.



`/tcb/size=<name>` (no default, initially `normal`)

Sets all geometry keys with exception of `/tcb/width` <sup>P.22</sup> to predefined length values. For `<name>`, the following values are feasible:


- `normal`: normal sized boxes e.g. of width `\linewidth`.
- `title`: title line sized boxes.
- `small`: small boxes e.g. for keyword highlighting.
- `fbox`: identical to the standard `\fbox`.
- `tight`: no padding space at all.
- `minimal`: no padding space, no box rules.

```
\tcbset{colback=red!5!white,colframe=red!75!black}

\foreach \s in {minimal,tight,fbox,small,title,normal} {
  \tcbbox[size=\s,on line]{\s} }

\foreach \s in {minimal,tight,fbox,small,title,normal} {
  \tcbbox[size=\s,on line,title=Test]{\s} }

\foreach \s in {minimal,tight,fbox,small,title,normal} {
  \begin{tcolorbox}[size=\s,on line,title=Test,width=2.2cm]
    \s \tcblower lower\end{tcolorbox} }
```

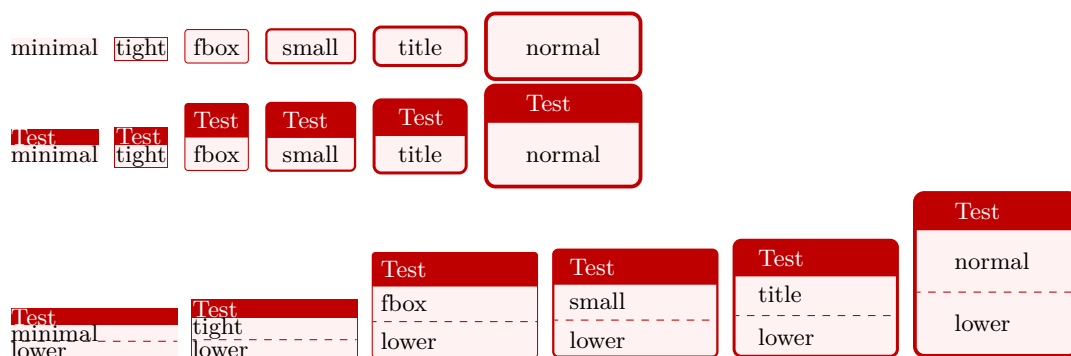

Predefined values						
	normal	title	small	fbox	tight	minimal
boxrule	0.5mm	0.4mm	0.3mm	0.4pt	0.4pt	0.0pt
boxsep	1.0mm	1.0mm	1.0mm	3.0pt	0.0pt	0.0pt
left	4.0mm	2.0mm	1.0mm	0.0pt	0.0pt	0.0pt
right	4.0mm	2.0mm	1.0mm	0.0pt	0.0pt	0.0pt
top	2.0mm	0.25mm	0.0mm	0.0pt	0.0pt	0.0pt
bottom	2.0mm	0.25mm	0.0mm	0.0pt	0.0pt	0.0pt
toptitle	0.0mm	0.0mm	0.0mm	0.0pt	0.0pt	0.0pt
bottomtitle	0.0mm	0.0mm	0.0mm	0.0pt	0.0pt	0.0pt
middle	2.0mm	0.75mm	0.5mm	1.0pt	0.2pt	0.0pt
arc	1.0mm	0.75mm	0.5mm	1.0pt	0.0pt	0.0pt
outer arc	auto	auto	auto	auto	0.0pt	0.0pt



`/tcb/oversize=<length>` (style, default 0pt)

Sets the text width of the upper part to the current line width plus an optional `<length>`. This is achieved by changing the keys `/tcb/width`<sup>P.22</sup> `/tcb/enlarge left by`<sup>P.64</sup>, and `/tcb/enlarge right by`<sup>P.64</sup> appropriately. The resulting box is overlapping into the left and right margin of the page. Note that this style option has to be given *after* all other geometry keys!

```
\tcbset{colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries}

\textit{Normal text for comparison:}\
\lipsum[2]

\begin{tcolorbox}[oversize,title=Oversized box]
\lipsum[2]
\end{tcolorbox}

\begin{tcolorbox}[title=Normal box]
\lipsum[2]
\end{tcolorbox}
```

*Normal text for comparison:*

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

### Oversized box

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

### Normal box

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.



`/tcb/toggle left and right=<toggle preset>` (default `evenpage`, initially `none`)

According to the `<toggle preset>`, the left and the right settings of the `tcolorbox` are switched or not. Feasible values are:

- **none**: no switching.
- **forced**: the values of the left and right rules and spaces are switched.
- **evenpage**: if the page is an even page, the values of the left and right rules and spaces are switched. It is recommended that one use this setting in conjunction with `/tcb/check odd page`<sup>→ P. 76</sup>.

```
% \usepackage{changepage} for 'check odd page'
% \usepackage{lipsum}
% \usetikzlibrary{patterns}
% \tcbuselibrary{skins,breakable}
\begin{tcolorbox}[skin=enhancedmiddle,breakable,
  check odd page,toggle left and right,
  boxrule=0mm,top=0mm,bottom=0mm,left=1mm,right=1mm,
  rightrule=1cm,colupper=blue!25!black,
  interior style={fill overzoom image=lichtspiel.jpg,fill image opacity=0.25},
  frame style={pattern=crosshatch dots light steel blue},
  overlay={%
    \ifoddpage\coordinate (X) at ([xshift=-5mm]frame.east);
    \else\coordinate (X) at ([xshift=5mm]frame.west);\fi
    \fill[shading=ball,ball color=blue!50!white,opacity=0.5] (X) circle (4mm);}]
\lipsum[1-6]
\end{tcolorbox}
```

This example switches a 1cm thick rule from the left to the right side depending on the page number. Thereby, the rule is always on the outer side of the double-sided paper. Additionally, a ball is drawn on the outer side with help of an overlay.

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc





eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec et mi. Nam vulputate metus eu enim. Vestibulum pellentesque felis eu massa. Quisque ullamcorper placerat ipsum. Cras nibh. Morbi vel justo vitae lacus tincidunt ultrices. Lorem ipsum dolor sit amet, consectetur adipiscing elit. In hac habitasse platea dictumst. Integer tempus convallis augue. Etiam facilisis. Nunc elementum fermentum wisi. Aenean placerat. Ut imperdiet, enim sed gravida sollicitudin, felis odio placerat quam, ac pulvinar elit purus eget enim. Nunc vitae tortor. Proin tempus nibh sit amet nisl. Vivamus quis tortor vitae risus porta vehicula.

Fusce mauris. Vestibulum luctus nibh at lectus. Sed bibendum, nulla a faucibus semper, leo velit ultricies tellus, ac venenatis arcu wisi vel nisl. Vestibulum diam. Aliquam pellentesque, augue quis sagittis posuere, turpis lacus congue quam, in hendrerit risus eros eget felis. Maecenas eget erat in sapien mattis porttitor. Vestibulum porttitor. Nulla facilisi. Sed a turpis eu lacus commodo facilisis. Morbi fringilla, wisi in dignissim interdum, justo lectus sagittis dui, et vehicula libero dui cursus dui. Mauris tempor ligula sed lacus. Duis cursus enim ut augue. Cras ac magna. Cras nulla. Nulla egestas. Curabitur a leo. Quisque egestas wisi eget nunc. Nam feugiat lacus vel est. Curabitur consectetur.

Suspendisse vel felis. Ut lorem lorem, interdum eu, tincidunt sit amet, laoreet vitae, arcu. Aenean faucibus pede eu ante. Praesent enim elit, rutrum at, molestie non, nonummy vel, nisl. Ut lectus eros, malesuada sit amet, fermentum eu, sodales cursus, magna. Donec eu purus. Quisque vehicula, urna sed ultricies auctor, pede lorem egestas dui, et convallis elit erat sed nulla. Donec luctus. Curabitur et nunc. Aliquam dolor odio, commodo pretium, ultricies non, pharetra in, velit. Integer arcu est, nonummy in, fermentum faucibus, egestas vel, odio.



### 3.5 Corners

The four corners of any `tcolorbox` can be set individually as `/tcb/sharp corners` or as `/tcb/rounded corners`<sup>→P.34</sup>. These settings are also reflected in the behavior of `/tcb/borderline`<sup>→P.121</sup> and `/tcb/shadow`<sup>→P.124</sup> as one would expect.

By default, all four corners are *rounded*. So, only the `/tcb/sharp corners` option will be necessary for most use cases. The `/tcb/rounded corners`<sup>→P.34</sup> option can be used to revert a `/tcb/sharp corners` setting.

`/tcb/sharp corners=<position>` (default `all`, initially unset)

The `<position>` denotes one or more of the four box corners to be set as *sharp* corners. The not assigned corners will retain their mode. Feasible values for `<position>` are:

- `northwest`
- `northeast`
- `southwest`
- `southeast`
- `north`
- `south`
- `east`
- `west`
- `downhill`
- `uphill`
- `all`

```
\begin{tcolorbox}[colback=red!5!white,
  colframe=red!75!black,
  sharp corners=northwest ]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

This is a `tcolorbox`.

```
\begin{tcolorbox}[colback=red!5!white,
  colframe=red!75!black,
  sharp corners ]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

This is a `tcolorbox`.



`/tcb/rounded corners=<position>` (default `all`, initially `all`)

The `/tcb/rounded corners` can be used to revert a `/tcb/sharp corners`<sup>→P.33</sup> setting. The `<position>` denotes one or more of the four box corners to be set as *rounded* corners. The not assigned corners will retain their mode. Feasible values for `<position>` are<sup>2</sup>:

- `northwest`
- `northeast`
- `southwest`
- `southeast`
- `north`
- `south`
- `east`
- `west`
- `downhill`
- `uphill`
- `all`

```
\begin{tcolorbox}[colback=red!5!white,
  colframe=red!75!black,sharp corners,
  rounded corners=northwest ]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

This is a **tcolorbox**.

`/tcb/sharpish corners` (style, no value)

Shortcut for setting `/tcb/arc`<sup>→P.24</sup> and `/tcb/outer arc`<sup>→P.24</sup> to `0pt`. With this setting, rounded corners will appear als quasi-sharp, but e. g. the shadow will be somewhat rounder than the shadow of really sharp corners.

Corners are still of type *rounded* with this option, but appear *sharp*. To switch back to rounded corners, one has to adapt `/tcb/arc`<sup>→P.24</sup> and `/tcb/outer arc`<sup>→P.24</sup>.

```
\begin{tcolorbox}[colback=red!5!white,
  colframe=red!75!black,
  sharpish corners ]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

This is a **tcolorbox**.

<sup>2</sup>The graphical examples assume that the boxes were set to have sharp corners before.




The following examples will show the differences between `/tcb/rounded corners`<sup>→P.34</sup>, `/tcb/sharpish corners`<sup>→P.34</sup>, and `/tcb/sharp corners`<sup>→P.33</sup>. The later two give the same core box, but `/tcb/borderline`<sup>→P.121</sup> and `/tcb/shadow`<sup>→P.124</sup> settings are slightly different. The following examples use `/tcb/drop fuzzy shadow`<sup>→P.126</sup>.

**My title**

This is a **tcolorbox**.


**rounded corners**

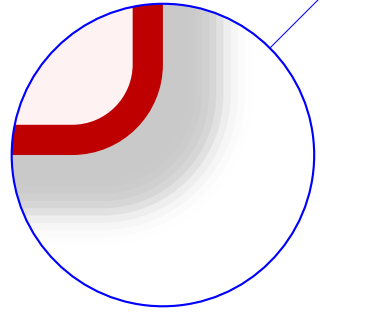

**My title**

This is a **tcolorbox**.


**sharpish corners**

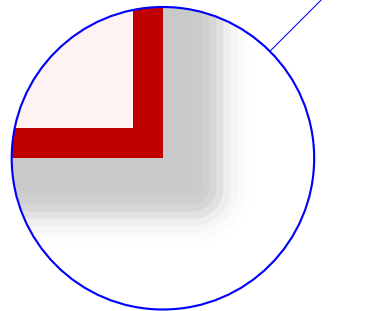

**My title**

This is a **tcolorbox**.

**sharp corners**

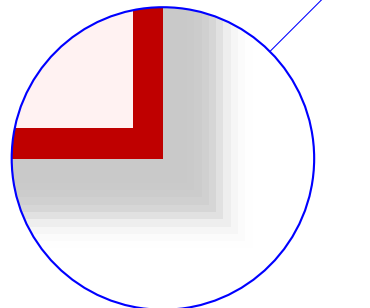



### 3.6 Transparency

Transparency effects are likely to be used in conjunction with *jigsaw* skin variants, see Section 7.10 on page 140.

**/tcb/opacityframe**= $\langle fraction \rangle$  (no default, initially 1.0)

Sets the frame opacity of the box to the given  $\langle fraction \rangle$ .

```
\begin{tcolorbox}[opacityframe=0.25]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

This is a **tcolorbox**.

**/tcb/opacityback**= $\langle fraction \rangle$  (no default, initially 1.0)

Sets the background opacity of the box to the given  $\langle fraction \rangle$ .

```
\begin{tcolorbox}[standard jigsaw,
opacityframe=0.5, opacityback=0.5]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

This is a **tcolorbox**.

**/tcb/opacitybacktitle**= $\langle fraction \rangle$  (no default, initially 1.0)

Sets the title background opacity of the box to the given  $\langle fraction \rangle$ .

```
\begin{tcolorbox}[standard jigsaw,
opacityframe=0.5, opacitybacktitle=0.5,
title filled, title=This is a title]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

This is a title

This is a **tcolorbox**.

**/tcb/opacityfill**= $\langle fraction \rangle$  (style, no default, initially 1.0)

Sets the fill opacity for frame, interior and optionally the title background to the given  $\langle fraction \rangle$ .

```
\begin{tcolorbox}[standard jigsaw,
opacityfill=0.7, title=This is a title]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

This is a title

This is a **tcolorbox**.



**/tcb/opacityupper**= $\langle fraction \rangle$  (no default, initially 1.0)

Sets the text opacity of the upper box part to the given  $\langle fraction \rangle$ .

```
\begin{tcolorbox}[enhanced,opacityupper=0.5,
  interior style={pattern=crosshatch dots }
  (light steel blue)]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```




This is a **tcolorbox**.

**/tcb/opacitylower**= $\langle fraction \rangle$  (no default, initially 1.0)

Sets the text opacity of the lower box part to the given  $\langle fraction \rangle$ .

```
\begin{tcolorbox}[enhanced,opacitylower=0.5,
  interior style={pattern=crosshatch dots }
  (light steel blue)]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```

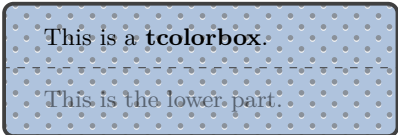

This is a **tcolorbox**.

This is the lower part.

**/tcb/opacitytext**= $\langle fraction \rangle$  (no default, initially 1.0)

Sets the text opacity of the upper and the lower box part to the given  $\langle fraction \rangle$ .

```
\begin{tcolorbox}[enhanced,opacitytext=0.5,
  interior style={pattern=crosshatch dots }
  (light steel blue)]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```



This is a **tcolorbox**.

This is the lower part.

**/tcb/opacitytitle**= $\langle fraction \rangle$  (no default, initially 1.0)

Sets the text opacity of the box title to the given  $\langle fraction \rangle$ .

```
\begin{tcolorbox}[enhanced,opacitytitle=0.7,
  fonttitle=\bfseries,title=This is a title,
  title style={pattern=crosshatch dots light }
  (steel blue)]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```



This is a title

This is a **tcolorbox**.

```
\begin{tcolorbox}[enhanced jigsaw,fonttitle=\bfseries,title=This is a title,
  opacityframe=0.5,opacityback=0.25,opacitybacktitle=0.25,opacitytext=0.8,
  colback=red!5!white,colframe=red!75!black,colbacktitle=yellow!20!red]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```



This is a title

This is a **tcolorbox**.



### 3.7 Height Control

In a typical usage scenario, the height of a `tcolorbox` is computed automatically to fit the content. Nevertheless, the height can be set to a fixed value or to fit commonly for several boxes, e.g. if boxes are set side by side.

The height control keys are only applicable to unbreakable boxes. If a box is set to be `/tcb/breakable`<sup>→ P. 249</sup>, the height is always computed according to the *natural height*.

**`/tcb/natural height`** (no value, initially set)


Sets the total height of the colored box to its natural height depending on the box content.

**`/tcb/height=<length>`** (no default)

Sets the total height of the colored box to `<length>` independent of the box content. `<length>` is the minimum height of the box, if `/tcb/height plus` is larger than zero.

```
\tcbset{width=(\linewidth-2mm)/3,before=,after=\hfill,
colframe=blue!75!black,colback=white}

\begin{tcolorbox}[height=1cm,valign=center]
  This box has a height of 1cm.
\end{tcolorbox}
\begin{tcolorbox}[height=2cm,valign=center]
  This box has a height of 2cm.
\end{tcolorbox}
\begin{tcolorbox}[height=3cm,split=0.5,valign=center,valign lower=center]
  This box has a height of 3cm.
  \tcblower
  Lower part.
\end{tcolorbox}
```

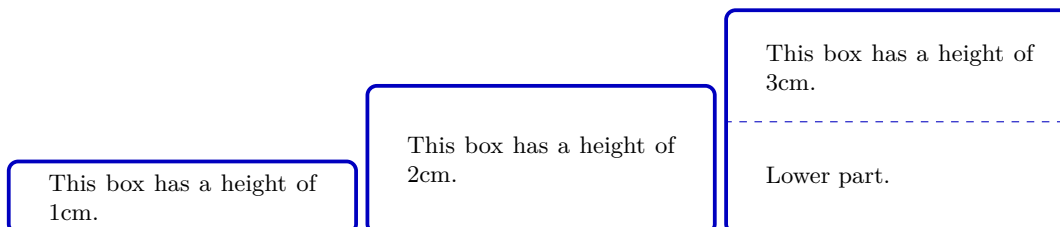


**`/tcb/height plus=<length>`** (no default, initially 0pt)

The box may extend a given fixed `/tcb/height` up to the given `<length>`.

```
\tcbset{colback=red!5!white,colframe=red!75!black,left=1mm,top=1mm,bottom=1mm,
right=1mm,boxsep=0mm,width=3cm,nobeforeafter}

\begin{tcolorbox}[height=1cm]
  This is a tcolorbox.
\end{tcolorbox}
\begin{tcolorbox}[height=1cm,height plus=1cm]
  This is a tcolorbox.
\end{tcolorbox}
\begin{tcolorbox}[height=1cm,height plus=1cm]
  This is a tcolorbox. This is a tcolorbox. This is a tcolorbox.
\end{tcolorbox}
```

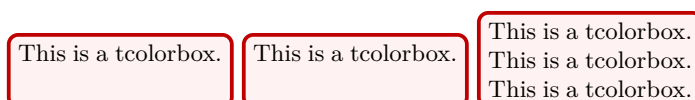



`/tcb/height from= $\langle min \rangle$  to  $\langle max \rangle$`  (style, no default)

Sets the box height to a dimension between  $\langle min \rangle$  and  $\langle max \rangle$ .

```
% \usepackage{lipsum}
\newtcolorbox{mybox}{colback=red!5!white,colframe=red!75!black,left=1mm,top=1mm,
  bottom=1mm,right=1mm,boxsep=0mm,width=4.5cm,nobeforeafter,
  height from=2cm to 8cm}

\begin{mybox}
This is a tcolorbox.
\end{mybox}
\begin{mybox}
This is a tcolorbox. This is a tcolorbox. This is a tcolorbox.
\end{mybox}
\begin{mybox}
\lipsum[2]
\end{mybox}
```

This is a tcolorbox.

This is a tcolorbox. This is a tcolorbox. This is a tcolorbox.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.




`/tcb/space= $\langle fraction \rangle$`  (no default, initially 0)

If the height of a `tcolorbox` is not the natural height, the space difference between the forced and the natural size is distributed between the upper and the lower part of the box. This space could also be negative.  $\langle fraction \rangle$  with a value between 0 and 1 is the amount of space which is added to the upper part, the rest is added to the lower part. If there is no lower part, then all of the space is added to the upper part always.

```
\tcbset{width=(\linewidth-2mm)/3,before=,after=\hfill,
colframe=blue!75!black,colback=white,height=3cm}

\foreach \f in {0.2,0.4,0.7}
{\begin{tcolorbox}[space=\f]
  This is the upper part.
  \tcblower
  This is the lower part.
\end{tcolorbox}}
```

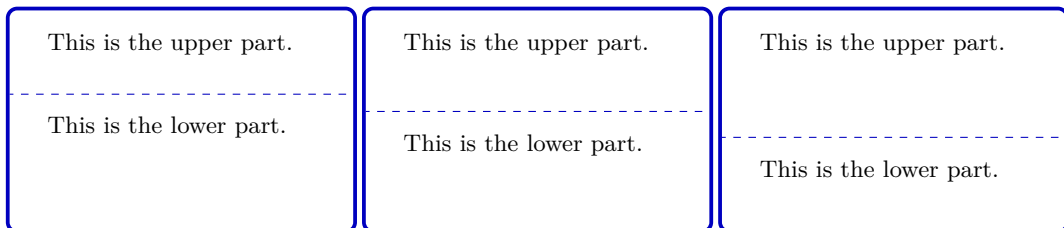

`/tcb/space to upper` (style)

This is an abbreviation for `space=1`, i. e. all extra space is added to the upper part.

`/tcb/space to lower` (style, initially set)


This is an abbreviation for `space=0`, i. e. all extra space is added to the lower part (if there is any).

`/tcb/space to both` (style)

This is an abbreviation for `space=0.5`, i. e. the extra space equally distributed between the upper and the lower part.

```
\tcbset{width=(\linewidth-2mm)/3,before=,after=\hfill,
colframe=blue!75!black,colback=white,height=3cm}

\foreach \myspace in {space to upper,space to both,space to lower}
{\begin{tcolorbox}[\myspace]
  This is the upper part.
  \tcblower
  This is the lower part.
\end{tcolorbox}}
```

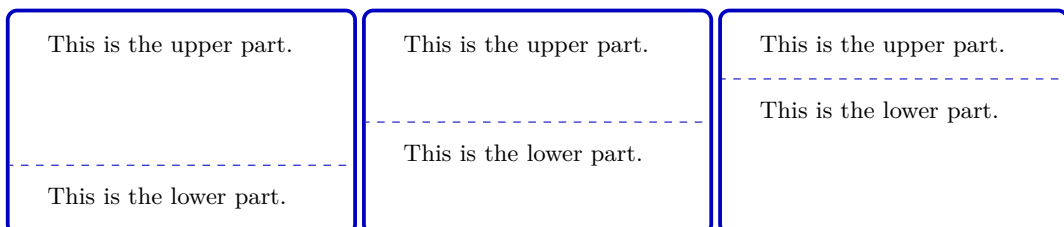




`/tcb/split=<fraction>` (no default)

If the height of a `tcolorbox` is not the natural height, the `<fraction>` with a value between 0 and 1 determines the positioning of the segmentation between the upper and the lower part. Here, 0 stands for top and 1 for bottom. Note that the box is split regardless of the actual dimensions of the text parts!

```
\tcbset{width=(\linewidth-2mm)/3,before=,after=\hfill,height=3cm,
colback=white,colframe=blue!75!black,valign=center,valign lower=center}

\foreach \f in {0.1,0.5,0.8}
{\begin{tcolorbox}[split=\f]
This is the upper part.
\tcblower
This is the lower part with a lot of text in several lines.
\end{tcolorbox}}
```

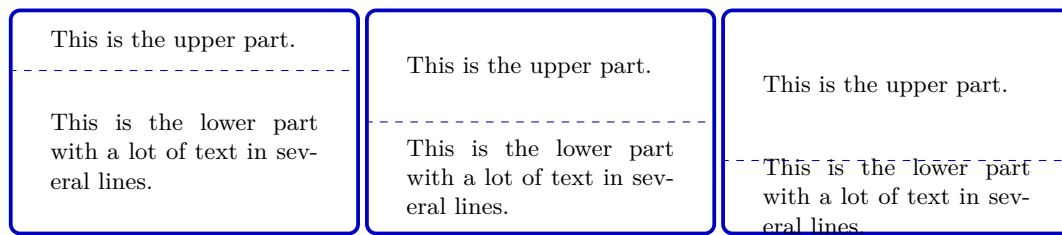


`/tcb/valign=<alignment>` (no default, initially top)

If the height of a `tcolorbox` is not the natural height, `valign` determines the vertical `<alignment>` of the upper part. Feasible values are `top`, `center`, and `bottom`. For a box with natural height, these values are meaningless.

```
\tcbset{width=(\linewidth-2mm)/3,before=,after=\hfill,
colframe=blue!75!black,colback=white,height=2cm}

\foreach \myalign in {top,center,bottom}
{\begin{tcolorbox}[valign=\myalign]
This is a \textbf{tcolorbox}.
\end{tcolorbox}}
```

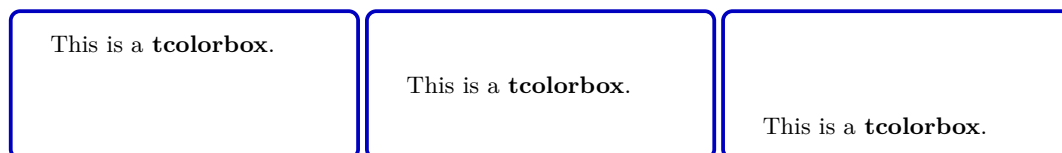

`/tcb/valign lower=<alignment>` (no default, initially top)

This key has the same meaning for the lower part as `valign` for the upper part, i. e. it determines the vertical `<alignment>` of the lower part with feasible values `top`, `center`, and `bottom`.



`/tcb/equal height group=<id>` (no default)

Boxes which are members of an `equal height group` will all get the same height, i.e. the maximum of all their natural heights. The `<id>` serves to distinguish between different height groups. This `<id>` should contain only characters which are feasible for  $\text{\TeX}$  macro names, typically alphabetic characters but no numerals and spaces. Note that you have to compile twice to see changes and that height groups are global definitions.

```
\tcbset{width=(\linewidth-2mm)/3,before=,after=\hfill,arc=0mm,
colframe=blue!75!black,colback=white,fonttitle=\bfseries}

\begin{tcolorbox}[equal height group=A,adjusted title={One}]
  My smallest box.
\end{tcolorbox}%
\begin{tcolorbox}[equal height group=A,adjusted title={Two}]
  This box is also small.
  \tcblower
  But with a lower part.
\end{tcolorbox}%
\begin{tcolorbox}[equal height group=A,adjusted title={Three}]
  This box contains a lot of text just to fill the space
  with word flowing and flowing and flowing until the box
  is filled with all of it.
\end{tcolorbox}\linebreak
%
\tcbset{width=(\linewidth-1mm)/2,before=,after=\hfill,arc=0mm,
colframe=red!75!black,colback=white}
%
\begin{tcolorbox}[equal height group=B]
  Now, we use another equal height group.
\end{tcolorbox}%
\begin{tcolorbox}[equal height group=B]
  \begin{equation*}
    \int\limits_0^1 x^2 = \frac{1}{3}.
  \end{equation*}
\end{tcolorbox}
```

One	Two	Three
My smallest box.	This box is also small. ----- But with a lower part.	This box contains a lot of text just to fill the space with word flowing and flowing and flowing until the box is filled with all of it.
Now, we use another equal height group.	$\int_0^1 x^2 = \frac{1}{3}.$	



`/tcb/minimum for equal height group=<id>:<length>` (no default, initially unset)

Plants a  $\langle length \rangle$  into the equal height group with the given  $\langle id \rangle$ . This ensures that the height will not drop below  $\langle length \rangle$ . Note that you cannot reduce a computed height value by using this key with a small value. The difference to applying `/tcb/height`<sup>P. 38</sup> directly is that the boxes are never too small for their content.

```
\tcbset{colframe=blue!75!black,colback=white,arc=0mm,
  before=,after=\hfill,fonttitle=\bfseries,left=2mm,right=2mm,
  width=3.5cm,
  equal height group=C,
  minimum for equal height group=C:3.5cm}

\begin{tcolorbox}
  My first box. All boxes will get 3.5cm times 3.5cm
  if the content height is not too large.
\end{tcolorbox}%
\begin{tcolorbox}
  My second box.
  \tcblower
  This is the lower part.
\end{tcolorbox}%
\begin{tcblisting}{\textbf{Mixed}}
  with a listing.
\end{tcblisting}
\begin{tcolorbox}[title={Fourth box}]
  My final box.
\end{tcolorbox}%
```

My first box. All boxes will get 3.5cm times 3.5cm if the content height is not too large.

My second box.  
-----  
This is the lower part.

**Mixed** with a listing.  
-----  
**Mixed** with a listing.

**Fourth box**

My final box.



### 3.8 Box Content Additions

The following options introduce some arbitrary *<code>* to the content of a `tcolorbox`. These additions can be given at the beginning or at the ending of the title, the upper part, or the lower part.

`/tcb/before title=<code>` (no default, initially unset)

The given *<code>* is placed *after* the color and font settings and *before* the content of the title.

```
\tcbset{before title={\textcolor{yellow}{\large Important:}~},
  colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries}

\begin{tcolorbox}[title=My title]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

**Important:** My title

This is a **tcolorbox**.

`/tcb/after title=<code>` (no default, initially unset)

The given *<code>* is placed *after* the content of the title.

```
\tcbset{after title={\hfill\colorbox{Navy}{approved}}},
  colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries}

\begin{tcolorbox}[title=My title]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

My title

approved

This is a **tcolorbox**.

`/tcb/before upper=<code>` (no default, initially unset)

The given *<code>* is placed *after* the color and font settings and *before* the content of the upper part.

```
\tcbset{before upper={\textit{The story:}\par},
  colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries}

\begin{tcolorbox}[title=My title]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

My title

*The story:*

This is a **tcolorbox**.



`/tcb/after upper=<code>` (no default, initially unset)

The given `<code>` is placed *after* the content of the upper part.

```
\tcbset{after upper={\par\hfill\textit{Read more next week}},
  colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries}

\begin{tcolorbox}[title=My title]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

My title

This is a **tcolorbox**.

*Read more next week*

`/tcb/before lower=<code>` (no default, initially unset)

The given `<code>` is placed *after* the color and font settings and *before* the content of the lower part.

```
\tcbset{before lower=\textit{Behold:~},colback=red!5!white,colframe=red!75!black}

\begin{tcolorbox}
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```

This is a **tcolorbox**.

*Behold:* This is the lower part.

`/tcb/after lower=<code>` (no default, initially unset)

The given `<code>` is placed *after* the content of the lower part.

```
\tcbset{after lower=\ \textit{This is the end.},
  colback=red!5!white,colframe=red!75!black}

\begin{tcolorbox}
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```

This is a **tcolorbox**.

This is the lower part. *This is the end.*




`/tcb/center title` (style, no value, initially unset)

This style sets `/tcb/before title`<sup>→ P. 44</sup> to `\centering`.

```
\tcbset{center title,colback=red!5!white,colframe=red!75!black,fonttttitle=\bfseries}

\begin{tcolorbox}[title=My title]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

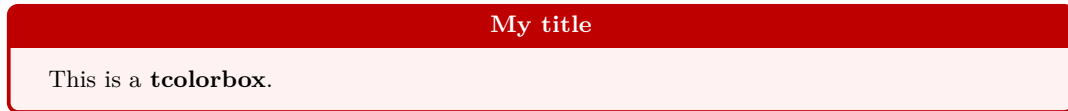


`/tcb/center upper` (style, no value, initially unset)

This style sets `/tcb/before upper`<sup>→ P. 44</sup> to `\centering`.

```
\tcbset{center upper,colback=red!5!white,colframe=red!75!black,fonttttitle=\bfseries}

\begin{tcolorbox}[title=My title]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

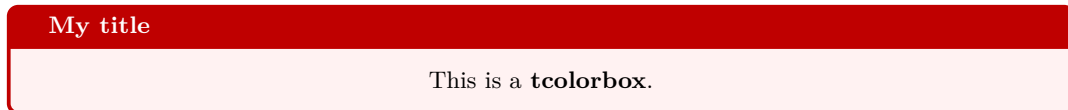


`/tcb/center lower` (style, no value, initially unset)

This style sets `/tcb/before lower`<sup>→ P. 45</sup> to `\centering`.

```
\tcbset{center lower,colback=red!5!white,colframe=red!75!black,fonttttitle=\bfseries}

\begin{tcolorbox}[title=My title]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```

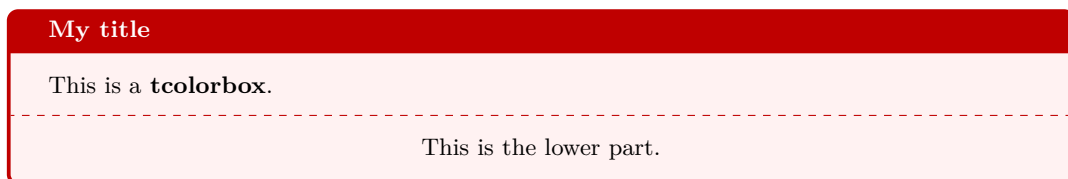



`/tcb/flushleft title` (style, no value, initially unset)

This style sets `/tcb/before title`<sup>→P. 44</sup> to `\raggedright`.

```
\tcbset{flushleft title,colback=red!5!white,
colframe=red!75!black,fonttitle=\bfseries}

\begin{tcolorbox}[title=My title which is
quite long but always flushed left]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

My title which is quite  
long but always flushed  
left

This is a **tcolorbox**.

`/tcb/flushleft upper` (style, no value, initially unset)

This style sets `/tcb/before upper`<sup>→P. 44</sup> to `\raggedright`.

```
\tcbset{flushleft upper,colback=red!5!white,
colframe=red!75!black,fonttitle=\bfseries}

\begin{tcolorbox}[title=My title]
This is a \textbf{tcolorbox}. Here, the
content is flushed left.
You see the effect on the right hand side.
\end{tcolorbox}
```

My title

This is a **tcolorbox**. Here,  
the content is flushed left.  
You see the effect on the  
right hand side.

`/tcb/flushleft lower` (style, no value, initially unset)

This style sets `/tcb/before lower`<sup>→P. 45</sup> to `\raggedright`.

```
\tcbset{flushleft lower,colback=red!5!white,
colframe=red!75!black,fonttitle=\bfseries}

\begin{tcolorbox}[title=My title]
This is a \textbf{tcolorbox}. The upper part
is not flushed left or right. This could be
unpleasant for small boxes.
\tcblower
This is the lower part. Here, the
content is flushed left.
You see the effect on the right hand side.
\end{tcolorbox}
```

My title

This is a **tcolorbox**. The up-  
per part is not flushed left or  
right. This could be unpleas-  
ant for small boxes.

This is the lower part. Here,  
the content is flushed left.  
You see the effect on the  
right hand side.



`/tcb/flushright title` (style, no value, initially unset)

This style sets `/tcb/before title` <sup>→ P. 44</sup> to `\raggedleft`.

```
\tcbset{flushright title,colback=red!5!white,
colframe=red!75!black,fonttitle=\bfseries}

\begin{tcolorbox}[title=My title]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

My title

This is a **tcolorbox**.

`/tcb/flushright upper` (style, no value, initially unset)

This style sets `/tcb/before upper` <sup>→ P. 44</sup> to `\raggedleft`.

```
\tcbset{flushright upper,colback=red!5!white,
colframe=red!75!black,fonttitle=\bfseries}

\begin{tcolorbox}[title=My title]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

My title

This is a **tcolorbox**.

`/tcb/flushright lower` (style, no value, initially unset)

This style sets `/tcb/before lower` <sup>→ P. 45</sup> to `\raggedleft`.

```
\tcbset{flushright lower,colback=red!5!white,
colframe=red!75!black,fonttitle=\bfseries}

\begin{tcolorbox}[title=My title]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```

My title

This is a **tcolorbox**.

---

This is the lower part.



If `/tcb/tabularx` or `/tcb/tabularx*` are used, one cannot have a lower part.

`/tcb/tabularx=<preamble>` (style)

This style sets `/tcb/before upper`<sup>→P.44</sup> and `/tcb/after upper`<sup>→P.45</sup> and several geometry keys to support a `tabularx` with the given `<preamble>`. The packages `tabularx` [4], `array`, and `colortbl` have to be loaded separately.

```
% \usepackage{array,tabularx}
% \usepackage{colortbl} - or - \usepackage[table]{xcolor}
\newcolumntype{Y}{>{\raggedleft\arraybackslash}X}% see tabularx
\tcbset{enhanced,fonttitle=\bfseries\large,fontupper=\normalsize\sffamily,
  colback=yellow!10!white,colframe=red!50!black,colbacktitle=Salmon!30!white,
  coltitle=black,center title}

\begin{tcolorbox}[tabularx={X|Y|Y|Y|Y|Y},title=My table]
Group & One & Two & Three & Four & Sum\\ \hline
Red & 1000.00 & 2000.00 & 3000.00 & 4000.00 & 10000.00\\ \hline
Green & 2000.00 & 3000.00 & 4000.00 & 5000.00 & 14000.00\\ \hline
Blue & 3000.00 & 4000.00 & 5000.00 & 6000.00 & 18000.00\\ \hline
Sum & 6000.00 & 9000.00 & 12000.00 & 15000.00 & 42000.00
\end{tcolorbox}
```

My table					
Group	One	Two	Three	Four	Sum
Red	1000.00	2000.00	3000.00	4000.00	10000.00
Green	2000.00	3000.00	4000.00	5000.00	14000.00
Blue	3000.00	4000.00	5000.00	6000.00	18000.00
Sum	6000.00	9000.00	12000.00	15000.00	42000.00

`/tcb/tabularx*={<code>}{<preamble>}` (style)

This is a variant of `/tcb/tabularx` which adds some `<code>` before the table starts.

```
% \usepackage{array,tabularx}
% \usepackage{colortbl} - or - \usepackage[table]{xcolor}
\tcbset{enhanced,fonttitle=\bfseries\large,fontupper=\normalsize\sffamily,
  colback=yellow!10!white,colframe=red!50!black,colbacktitle=Salmon!30!white,
  coltitle=black,center title}

\begin{tcolorbox}[tabularx*={\arrayrulewidth0.5mm}{X|X|X},title=My table]
One & Two & Three \\ \hline
1000.00 & 2000.00 & 3000.00\\ \hline
2000.00 & 3000.00 & 4000.00
\end{tcolorbox}
```

My table		
One	Two	Three
1000.00	2000.00	3000.00
2000.00	3000.00	4000.00



`/tcb/tikz upper=<options>` (style)

This style adds a centered `tikzpicture` environment to the start and end of the upper part. The `<options>` may be given as TikZ picture options.

```
% \usepackage{tikz}

\begin{tcolorbox}[tikz upper,fonttitle=\bfseries,colback=white,colframe=black,
                 title=\tikzname\ drawing]
  \path[fill=yellow,draw=yellow!75!red] (0,0) circle (1cm);
  \fill[red] (45:5mm) circle (1mm);
  \fill[red] (135:5mm) circle (1mm);
  \draw[line width=1mm,red] (215:5mm) arc (215:325:5mm);
\end{tcolorbox}
```

**TikZ drawing**



`/tcb/tikz lower=<options>` (style)

This style adds a centered `tikzpicture` environment to the start and end of the lower part. The `<options>` may be given as TikZ picture options.

```
% \usepackage{tikz}
% \usetikzlibrary{skins,listings}
\tcbset{tikz lower,listing side text,fonttitle=\bfseries,
        bicolor,colback=LightBlue!50!white,colbacklower=white,colframe=black,
        righthand width=3cm}

\begin{tcblisting}{title=\tikzname\ drawing}
\path[fill=yellow,draw=yellow!75!red]
  (0,0) circle (1cm);
\fill[red] (45:5mm) circle (1mm);
\fill[red] (135:5mm) circle (1mm);
\draw[line width=1mm,red]
  (215:5mm) arc (215:325:5mm);
\end{tcblisting}
```

**TikZ drawing**

```
\path[fill=yellow,draw=yellow!75!red]
  (0,0) circle (1cm);
\fill[red] (45:5mm) circle (1mm);
\fill[red] (135:5mm) circle (1mm);
\draw[line width=1mm,red]
  (215:5mm) arc (215:325:5mm);
```





`/tcb/tikznode upper=<options>` (style)

This style places the upper part content into a centered TikZ node. The `<options>` may be given as TikZ node options. This style is especially useful for boxes with multiline texts which are fitted to the text width.

```
% \usepackage{tikz}
\newtcbbox{\headline}[1][\enhanced,before=\begin{center},after=\end{center},
fontupper=\Large\bfseries,colframe=red!50!black,colback=red!10!white,
drop fuzzy shadow=yellow,tikznode upper,#1}

\headline{Important\Headline}
```

Important  
Headline

`/tcb/tikznode lower=<options>` (style)

This style places the lower part content into a centered TikZ node. The `<options>` may be given as TikZ node options.

```
% \usepackage{tikz}
\begin{tcolorbox}[bicolor,colback=LightBlue!50!white,colbacklower=white,
colframe=black,tikznode lower={inner sep=2pt,draw=red,fill=yellow}]
Upper part.
\tcblower
Lower part.
\end{tcolorbox}
```

Upper part.

Lower part.

`/tcb/tikznode=<options>` (style)

Shortcut for setting `/tcb/tikznode upper` and `/tcb/tikznode lower` the same time.

`/tcb/varwidth upper=<length>` (style, default `/tcb/width`<sup>P. 22</sup>)

This style places the upper part content into a `varwidth` environment. This style needs the `varwidth` package [1] to be loaded manually. The resulting box has a maximal width of `<length>`. This option is only senseful for a `\tcbbox`<sup>P. 11</sup>.

```
% \usepackage{varwidth}
\newtcbbox{\varbox}{colframe=red!50!black,
colback=red!10!white,varwidth upper}

\varbox{Short text.}
\varbox{This box contains is a longer text
which is broken.}
```

Short text.

This box contains is a longer  
text which is broken.



`/tcb/code=<code>` (no default, initially unset)

The given `<code>` is executed immediately. This option is useful to place some arbitrary code into an option list.

```
\tcbset{colback=red!5!white,colframe=red!75!black,
  code={Useless at this spot but functional.},
  fonttitle=\bfseries}

\begin{tcolorbox}[code={\newcommand{\mycommand}{\textit{working}}},
  title=My \mycommand\ title]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

Useless at this spot but functional.

***My working title***

This is a **tcolorbox**.



### 3.9 Overlays

With an overlay, arbitrary *graphical code* can be added to a `tcolorbox`. This code is executed *after* the frame and interior are drawn and *before* the text content is drawn. Therefore, you can decorate the `tcolorbox` with your own extensions. Common special cases are *watermarks* which are implemented using overlays. See Subsection 7.3 from page 109 if you want to add *watermarks*.

If you use the core package only, the *graphical code* has to be `pgf` code and there is not much assistance for positioning. Therefore, the usage of the `/tcb/enhanced`<sup>P.145</sup> mode from the library skins is recommended which allows `tikz` code and gives access to `/tcb/geometry nodes`<sup>P.87</sup> for positioning.

`/tcb/overlay=<graphical code>` (no default, initially unset)

Adds *graphical code* to the box drawing process. This *graphical code* is drawn *after* the frame and interior and *before* the text content.


```
% \tcbuselibrary{skins} % preamble
\tcbset{frogbox/.style={enhanced,colback=green!10,colframe=green!65!black,
  enlarge top by=5.5mm,
  overlay={foreach \x in {2cm,3.5cm} {
    \begin{scope}[shift={([xshift=\x]frame.north west)}]
      \path[draw=green!65!black,fill=green!10,line width=1mm] (0,0) arc (0:180:5mm);
      \path[fill=black] (-0.2,0) arc (0:180:1mm);
    \end{scope}}}}}

\begin{tcolorbox}[frogbox,title=My title]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```



```
% \usetikzlibrary{patterns} % preamble
% \tcbuselibrary{skins} % preamble
\tcbset{ribbonbox/.style={enhanced,colback=red!5!white,colframe=red!75!black,
  fonttitle=\bfseries,
  overlay={\path[fill=blue!75!white,draw=blue,double=white!85!blue,
    preaction={opacity=0.6,fill=blue!75!white},
    line width=0.1mm,double distance=0.2mm,
    pattern=fivepointed stars,pattern color=white!75!blue]
    ([xshift=-0.2mm,yshift=-1.02cm]frame.north east)
    -- ++(-1,1) -- ++(-0.5,0) -- ++(1.5,-1.5) -- cycle;}}}

\begin{tcolorbox}[ribbonbox,title=My title]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```

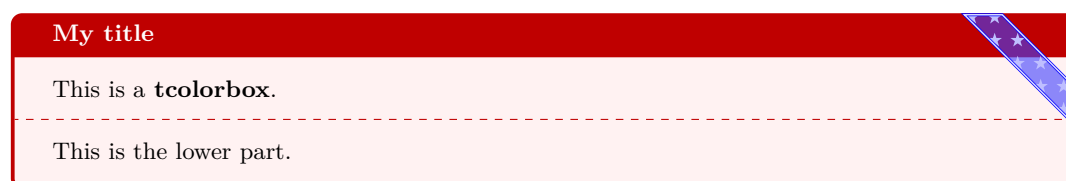



- /tcb/no overlay** (style, no default, initially set)  
Removes the overlay if set before.
- /tcb/overlay broken**= $\langle graphical\ code \rangle$  (no default, initially unset)  
If the box is set to be **/tcb/breakable**<sup>→P. 249</sup> and *is* broken actually, then the  $\langle graphical\ code \rangle$  is added to the box drawing process. **/tcb/overlay**<sup>→P. 53</sup> overwrites this key.
- /tcb/overlay unbroken**= $\langle graphical\ code \rangle$  (no default, initially unset)  
If the box is set to be **/tcb/breakable**<sup>→P. 249</sup> but *is not* broken actually or if the box is set to be **/tcb/unbreakable**<sup>→P. 250</sup>, then the  $\langle graphical\ code \rangle$  is added to the box drawing process. **/tcb/overlay**<sup>→P. 53</sup> overwrites this key.
- /tcb/overlay first**= $\langle graphical\ code \rangle$  (no default, initially unset)  
If the box is set to be **/tcb/breakable**<sup>→P. 249</sup> and *is* broken actually, then the  $\langle graphical\ code \rangle$  is added to the box drawing process for the *first* part of the break sequence. **/tcb/overlay**<sup>→P. 53</sup> overwrites this key.
- /tcb/overlay middle**= $\langle graphical\ code \rangle$  (no default, initially unset)  
If the box is set to be **/tcb/breakable**<sup>→P. 249</sup> and *is* broken actually, then the  $\langle graphical\ code \rangle$  is added to the box drawing process for the *middle* parts (if any) of the break sequence. **/tcb/overlay**<sup>→P. 53</sup> overwrites this key.
- /tcb/overlay last**= $\langle graphical\ code \rangle$  (no default, initially unset)  
If the box is set to be **/tcb/breakable**<sup>→P. 249</sup> and *is* broken actually, then the  $\langle graphical\ code \rangle$  is added to the box drawing process for the *last* part of the break sequence. **/tcb/overlay**<sup>→P. 53</sup> overwrites this key.
- /tcb/overlay unbroken and first**= $\langle graphical\ code \rangle$  (no default, initially unset)  
This is an optimized abbreviation for setting **/tcb/overlay unbroken** and **/tcb/overlay first** together. **/tcb/overlay**<sup>→P. 53</sup> overwrites this key.
- /tcb/overlay middle and last**= $\langle graphical\ code \rangle$  (no default, initially unset)  
This is an optimized abbreviation for setting **/tcb/overlay middle** and **/tcb/overlay last** together. **/tcb/overlay**<sup>→P. 53</sup> overwrites this key.
- /tcb/overlay unbroken and last**= $\langle graphical\ code \rangle$  (no default, initially unset)  
This is an optimized abbreviation for setting **/tcb/overlay unbroken** and **/tcb/overlay last** together. **/tcb/overlay**<sup>→P. 53</sup> overwrites this key.

This example demonstrates the application of break sequence specific overlay options. Here, we define an environment **myexample** based on **tcolorbox** where the visible drawing is done totally by overlay keys.

Here, the first application of **myexample** produces an unbroken **tcolorbox**. The frame is drawn by the code given with **/tcb/overlay unbroken**.

The second application of **myexample** is broken into several parts which are drawn by the codes given with **/tcb/overlay first**, **/tcb/overlay middle**, and **/tcb/overlay last**.

```
% Preamble:
%\usepackage{tikz,lipsum}
%\tcbuselibrary{skins,breakable}
%\newcounter{example}
\colorlet{colexam}{red!75!black}

\newtcolorbox[use counter=example]{myexample}{%
  empty,title={Example \thetcbcounter},attach boxed title to top left,
  boxed title style={empty,size=minimal,toprule=2pt,top=4pt,
```



```

overlay={\draw[colexam,line width=2pt]
([yshift=-1pt]frame.north west)--([yshift=-1pt]frame.north east);}},
coltitle=colexam,fonttitle=\Large\bfseries,
before=\par\medskip\noindent,parbox=false,boxsep=0pt,left=0pt,right=3mm,top=4pt,
breakable,pad at break=0mm,
overlay unbroken={\draw[colexam,line width=1pt]
([yshift=-1pt]title.north east)--([xshift=-0.5pt,yshift=-1pt]title.north-|frame.east)
--([xshift=-0.5pt]frame.south east)--(frame.south west); },
overlay first={\draw[colexam,line width=1pt]
([yshift=-1pt]title.north east)--([xshift=-0.5pt,yshift=-1pt]title.north-|frame.east)
--([xshift=-0.5pt]frame.south east); },
overlay middle={\draw[colexam,line width=1pt] ([xshift=-0.5pt]frame.north east)
--([xshift=-0.5pt]frame.south east); },
overlay last={\draw[colexam,line width=1pt] ([xshift=-0.5pt]frame.north east)
--([xshift=-0.5pt]frame.south east)--(frame.south west);},%
}

\begin{myexample}
\lipsum[1]
\end{myexample}

\begin{myexample}
\lipsum[2-11]
\end{myexample}

\lipsum[12]% following text

```

## Example 1

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

## Example 2

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec et mi. Nam vulputate metus eu enim. Vestibulum pellentesque felis eu massa.



Quisque ullamcorper placerat ipsum. Cras nibh. Morbi vel justo vitae lacus tincidunt ultrices. Lorem ipsum dolor sit amet, consectetur adipiscing elit. In hac habitasse platea dictumst. Integer tempus convallis augue. Etiam facilisis. Nunc elementum fermentum wisi. Aenean placerat. Ut imperdiet, enim sed gravida sollicitudin, felis odio placerat quam, ac pulvinar elit purus eget enim. Nunc vitae tortor. Proin tempus nibh sit amet nisl. Vivamus quis tortor vitae risus porta vehicula.

Fusce mauris. Vestibulum luctus nibh at lectus. Sed bibendum, nulla a faucibus semper, leo velit ultricies tellus, ac venenatis arcu wisi vel nisl. Vestibulum diam. Aliquam pellentesque, augue quis sagittis posuere, turpis lacus congue quam, in hendrerit risus eros eget felis. Maecenas eget erat in sapien mattis porttitor. Vestibulum porttitor. Nulla facilisi. Sed a turpis eu lacus commodo facilisis. Morbi fringilla, wisi in dignissim interdum, justo lectus sagittis dui, et vehicula libero dui cursus dui. Mauris tempor ligula sed lacus. Duis cursus enim ut augue. Cras ac magna. Cras nulla. Nulla egestas. Curabitur a leo. Quisque egestas wisi eget nunc. Nam feugiat lacus vel est. Curabitur consectetur.

Suspendisse vel felis. Ut lorem lorem, interdum eu, tincidunt sit amet, laoreet vitae, arcu. Aenean faucibus pede eu ante. Praesent enim elit, rutrum at, molestie non, nonummy vel, nisl. Ut lectus eros, malesuada sit amet, fermentum eu, sodales cursus, magna. Donec eu purus. Quisque vehicula, urna sed ultricies auctor, pede lorem egestas dui, et convallis elit erat sed nulla. Donec luctus. Curabitur et nunc. Aliquam dolor odio, commodo pretium, ultricies non, pharetra in, velit. Integer arcu est, nonummy in, fermentum faucibus, egestas vel, odio.

Sed commodo posuere pede. Mauris ut est. Ut quis purus. Sed ac odio. Sed vehicula hendrerit sem. Duis non odio. Morbi ut dui. Sed accumsan risus eget odio. In hac habitasse platea dictumst. Pellentesque non elit. Fusce sed justo eu urna porta tincidunt. Mauris felis odio, sollicitudin sed, volutpat a, ornare ac, erat. Morbi quis dolor. Donec pellentesque, erat ac sagittis semper, nunc dui lobortis purus, quis congue purus metus ultricies tellus. Proin et quam. Class aptent taciti sociosqu ad litora torquent per conubia nostra, per inceptos hymenaeos. Praesent sapien turpis, fermentum vel, eleifend faucibus, vehicula eu, lacus.

Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Donec odio elit, dictum in, hendrerit sit amet, egestas sed, leo. Praesent feugiat sapien aliquet odio. Integer vitae justo. Aliquam vestibulum fringilla lorem. Sed neque lectus, consectetur at, consectetur sed, eleifend ac, lectus. Nulla facilisi. Pellentesque eget lectus. Proin eu metus. Sed porttitor. In hac habitasse platea dictumst. Suspendisse eu lectus. Ut mi mi, lacinia sit amet, placerat et, mollis vitae, dui. Sed ante tellus, tristique ut, iaculis eu, malesuada ac, dui. Mauris nibh leo, facilisis non, adipiscing quis, ultrices a, dui.

Morbi luctus, wisi viverra faucibus pretium, nibh est placerat odio, nec commodo wisi enim eget quam. Quisque libero justo, consectetur a, feugiat vitae, porttitor eu, libero. Suspendisse sed mauris vitae elit sollicitudin malesuada. Maecenas ultricies eros sit amet ante. Ut venenatis velit. Maecenas sed mi eget dui varius euismod. Phasellus aliquet volutpat odio. Vestibulum ante ipsum primis in faucibus orci luctus et ultrices posuere cubilia Curae; Pellentesque sit amet pede ac sem eleifend consectetur. Nullam elementum, urna vel imperdiet sodales, elit ipsum pharetra ligula, ac pretium ante justo a nulla. Curabitur tristique arcu eu metus. Vestibulum lectus. Proin mauris. Proin eu nunc eu urna hendrerit faucibus. Aliquam auctor, pede consequat laoreet varius, eros tellus scelerisque quam, pellentesque hendrerit ipsum dolor sed augue. Nulla nec lacus.

Suspendisse vitae elit. Aliquam arcu neque, ornare in, ullamcorper quis, commodo eu, libero. Fusce sagittis erat at erat tristique mollis. Maecenas sapien libero, molestie et, lobortis in, sodales eget, dui. Morbi ultrices rutrum lorem. Nam elementum ullamcorper leo. Morbi dui. Aliquam sagittis. Nunc placerat. Pellentesque tristique sodales est. Maecenas imperdiet lacinia velit. Cras non urna. Morbi eros pede, suscipit ac, varius vel, egestas non, eros.



Praesent malesuada, diam id pretium elementum, eros sem dictum tortor, vel consectetur odio sem sed wisi.

Sed feugiat. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Ut pellentesque augue sed urna. Vestibulum diam eros, fringilla et, consectetur eu, nonummy id, sapien. Nullam at lectus. In sagittis ultrices mauris. Curabitur malesuada erat sit amet massa. Fusce blandit. Aliquam erat volutpat. Aliquam euismod. Aenean vel lectus. Nunc imperdiet justo nec dolor.

Etiam euismod. Fusce facilisis lacinia dui. Suspendisse potenti. In mi erat, cursus id, nonummy sed, ullamcorper eget, sapien. Praesent pretium, magna in eleifend egestas, pede pede pretium lorem, quis consectetur tortor sapien facilisis magna. Mauris quis magna varius nulla scelerisque imperdiet. Aliquam non quam. Aliquam porttitor quam a lacus. Praesent vel arcu ut tortor cursus volutpat. In vitae pede quis diam bibendum placerat. Fusce elementum convallis neque. Sed dolor orci, scelerisque ac, dapibus nec, ultricies ut, mi. Duis nec dui quis leo sagittis commodo.



### Floating box from `floatplacement`

This floating box is placed at the top of a page.

## 3.10 Floating Objects

`/tcb/floatplacement=<values>` (no default, initially `htb`)

Sets `<values>` as default values for the usage of `/tcb/float` and `/tcb/float*`. Feasible are the usual parameters for floating objects.

```
\tcbset{enhanced,colback=red!5!white,colframe=red!75!black,
  watermark color=red!15!white}

\begin{tcolorbox}[floatplacement=t,float,
  title=Floating box from |floatplacement|,
  watermark text={I am floating}]
  This floating box is placed at the top of a page.
\end{tcolorbox}
```

`/tcb/float=<values>` (default from `floatplacement`)

Turns the box to a floating object where `<values>` are the usual parameters for such floating objects. If they are not used, the placement uses the default values given by `floatplacement`.

```
\begin{tcolorbox}[float, title=Floating box from |float|,
  enhanced,watermark text={I'm also floating}]
  This box floats to a feasible place automatically. You do not have to
  use a numbering for this floating object.
\end{tcolorbox}
```

### Floating box from `float`

This box floats to a feasible place automatically. You do not have to use a numbering for this floating object.

`/tcb/float*=<values>` (default from `floatplacement`)

Identical to `/tcb/float`, but for wide boxes spanning the whole page width of two column documents or in conjunction with the packages `multicol` or `paracol`. Note that you have to set `width=\textwidth` additionally, if the box should span the whole page width in these cases!

```
\begin{tcolorbox}[float*=b, title=Floating box from |float*|,width=\textwidth,
  enhanced,watermark text={I'm also floating}]
  In this single column document, you will see no difference to |float|.
\end{tcolorbox}
```

`/tcb/nofloat` (style, initially set)

Turns the floating behavior off.

### Floating box from `float*`

In this single column document, you will see no difference to `float`.



### 3.11 Side by Side

Further side by side options for code examples are `/tcb/listing side text`<sup>→P.208</sup>, `/tcb/text side listing`<sup>→P.208</sup>, `/tcb/listing outside text`<sup>→P.208</sup>, and `/tcb/text outside listing`<sup>→P.208</sup>.

`/tcb/sidebyside=true|false` (default `true`, initially `false`)

Normally, the upper part and the lower part of the box have their positions as their names suggest. If `sidebyside` is set to `true`, the upper part is drawn *left-handed* and the lower part is drawn *right-handed*. Both parts are drawn together with the geometry settings of the upper part but the space is divided horizontally according to the following options. Colors, fonts, and box content additions are used individually. The resulting box is unbreakable.

```
\tcbset{colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries}

\begin{tcolorbox}[title=My title,sidebyside]
This is the upper (\textit{left-handed}) part.
\tcblower
This is the lower (\textit{right-handed}) part.
\end{tcolorbox}
```

**My title**

This is the upper (*left-handed*) part.

This is the lower (*right-handed*) part.

`/tcb/sidebyside align=<alignment value>` (no default, initially `center`)

Sets the vertical alignment for the left-handed and right-handed part. Feasible values are `center`, `top`, and `bottom`.

```
\tcbset{colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries,nobeforeafter,
left=2mm,right=2mm,sidebyside,sidebyside gap=6mm,width=(\linewidth-2mm)/3}

\begin{tcolorbox}[adjusted title=center,sidebyside align=center]
This is a text which is too long for one line.
\tcblower
This is a short text.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=top,sidebyside align=top]
This is a text which is too long for one line.
\tcblower
This is a short text.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=bottom,sidebyside align=bottom]
This is a text which is too long for one line.
\tcblower
This is a short text.
\end{tcolorbox}
```

**center**

This is a text which is too long for one line.

This is a short text.

**top**

This is a text which is too long for one line.

This is a short text.

**bottom**

This is a text which is too long for one line.

This is a short text.




`/tcb/sidebyside gap=<length>` (no default, initially 10mm)

Sets the horizontal distance between the left-handed and right-handed part to  $\langle length \rangle$ .

```
\tcbset{colback=red!5!white,colframe=red!75!black,fonttttitle=\bfseries,nobeforeafter,
sidebyside,width=(\linewidth-2mm)/2}

\begin{tcolorbox}[adjusted title=Wide gap,sidebyside gap=30mm]
This is a text which is too long for one line.
\tcblower
This is a short text.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=Narrow gap,sidebyside gap=1mm]
This is a text which is too long for one line.
\tcblower
This is a short text.
\end{tcolorbox}
```

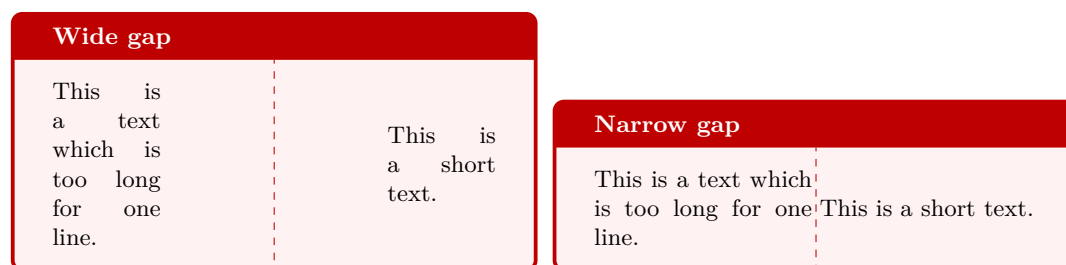


`/tcb/lefthand width=<length>` (no default, initially unset)

Sets the width of the left-handed part to the given  $\langle length \rangle$ .

```
\tcbset{colback=red!5!white,colframe=red!75!black,fonttttitle=\bfseries}

\begin{tcolorbox}[title=My title,sidebyside,lefthand width=3cm]
This is the upper (\textit{left-handed}) part.
\tcblower
This is the lower (\textit{right-handed}) part.
\end{tcolorbox}
```

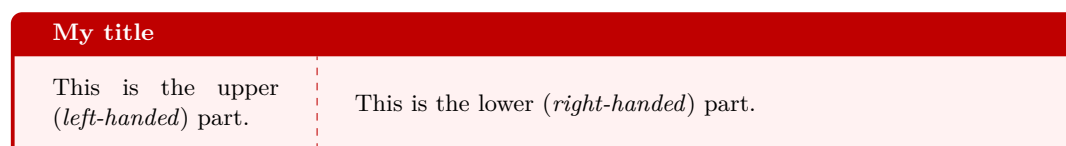

`/tcb/righthand width=<length>` (no default, initially unset)

Sets the width of the right-handed part to the given  $\langle length \rangle$ .

```
\tcbset{colback=red!5!white,colframe=red!75!black,fonttttitle=\bfseries}

\begin{tcolorbox}[title=My title,sidebyside,righthand width=3cm]
This is the upper (\textit{left-handed}) part.
\tcblower
This is the lower (\textit{right-handed}) part.
\end{tcolorbox}
```






`/tcb/lefthand ratio=<fraction>` (no default, initially 0.5)

Sets the width of the left-handed part to the given  $\langle fraction \rangle$  of the available space.  $\langle fraction \rangle$  is a value between 0 and 1.

```
\tcbset{colback=red!5!white,colframe=red!75!black,fonttttitle=\bfseries}

\begin{tcolorbox}[title=My title,sidebyside,lefthand ratio=0.25]
This is the upper (\textit{left-handed}) part.
\tcblower
This is the lower (\textit{right-handed}) part.
\end{tcolorbox}
```

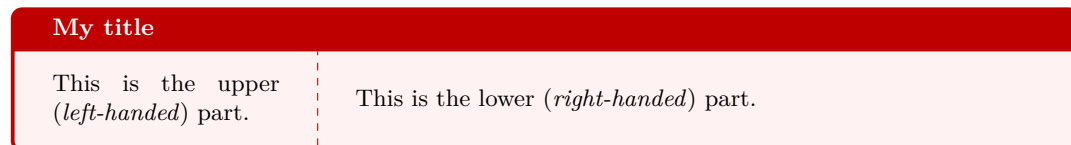

`/tcb/righthand ratio=<fraction>` (no default, initially 0.5)

Sets the width of the right-handed part to the given  $\langle fraction \rangle$  of the available space.  $\langle fraction \rangle$  is a value between 0 and 1.

```
\tcbset{colback=red!5!white,colframe=red!75!black,fonttttitle=\bfseries}

\begin{tcolorbox}[title=My title,sidebyside,righthand ratio=0.25]
This is the upper (\textit{left-handed}) part.
\tcblower
This is the lower (\textit{right-handed}) part.
\end{tcolorbox}
```





### 3.12 Embedding into the Surroundings

Typically, but not necessarily, a `tcolorbox` is put inside a separate paragraph and has some vertical space before and after it. This behavior is controlled by the keys `before` and `after`.

**`/tcb/before=<code>`** (no default, initially see `/tcb/autoparskip`)  
Sets the `<code>` which is executed before the colored box. It is not used for floating boxes.

**`/tcb/after=<code>`** (no default, initially see `/tcb/autoparskip`)  
Sets the `<code>` which is executed after the colored box. It is not used for floating boxes.

**`/tcb/parskip`** (style, no value)  
Sets the keys `before` and `after` to values which are recommended, if the package `parskip` is used and there is no better idea for `before` and `after`.

```
\tcbset{parskip/.style={before={\par\pagebreak[0]\parindent=0pt},
after={\par}}}
```

**`/tcb/noparskip`** (style, no value)  
Sets the keys `before` and `after` to values which are recommended, if the package `parskip` is *not* used and there is no better idea for `before` and `after`.

```
\tcbset{noparskip/.style={before={\par\smallskip\pagebreak[0]\parindent=0pt},
after={\par\smallskip}}}
```

**`/tcb/autoparskip`** (style, no value, initially set)  
Tries to detect the usage of the package `parskip` and sets the keys `before` and `after` accordingly. Actually, the following is done:

- If the length of `\parskip` is greater than `0pt` at the beginning of the document, `/tcb/parskip` is executed. Here, the usage of package `parskip` is *assumed*.
- Otherwise, if the length of `\parskip` is not greater than `0pt` at the beginning of the document, `/tcb/noparskip` is executed. Here, the absence of package `parskip` is *assumed*.

`autoparskip` is the default for the package `tcolorbox`, if `before` or `after` are not changed otherwise.

**`/tcb/nobeforeafter`** (style, no value)  
Abbreviation for clearing the keys `before` and `after`. The colored box is not put into a paragraph and there is no space before or after the box.

```
\tcbset{myone/.style={colback=LightGreen,colframe=DarkGreen,
equal height group=nobefaf,width=\linewidth/4,nobeforeafter}}
\begin{tcolorbox}[myone,title=Box 1]Box 1\end{tcolorbox}%
\begin{tcolorbox}[myone,title=Box 2]Box 2\end{tcolorbox}%
\begin{tcolorbox}[myone,title=Box 3]Box 3\end{tcolorbox}%
\begin{tcolorbox}[myone,title=Box 4]Box 4\end{tcolorbox}
```

Box 1	Box 2	Box 3	Box 4
Box 1	Box 2	Box 3	Box 4

**`/tcb/baseline=<length>`** (no default, initially `0pt`)  
Used to set the `\pgfsetbaseline` value of the resulting `tcolorbox`.



### 3.13 Bounding Box

Normally, every `tcolorbox` has a bounding box which fits exactly to the dimensions of the outer frame. Therefore,  $\text{\LaTeX}$  reserves exactly the space needed for the box. This behavior can be changed by enlarging (or shrinking) the bounding box. If the bounding box is enlarged, the `tcolorbox` will get some clearance around it. If the bounding box is shrunk, i.e. enlarged with negative values, the `tcolorbox` will overlap to other parts of the page. For example, the `tcolorbox` could be stretched into the page margin.

The following examples use `/tcb/show bounding box`<sup>→P.123</sup> to display the actual bounding box. For this, the library `\usepackage{skins}` has to be included and `/tcb/enhanced`<sup>→P.145</sup> has to be set.

`/tcb/enlarge top initially by=<length>` (no default, initially 0mm)

Enlarges the bounding box distance to the top of the box by `<length>`. If the box is *breakable*, only the first box of the break sequence gets enlarged. `/tcb/enlarge top by`<sup>→P.64</sup> overwrites this key.

```
\tcbset{colframe=blue!75!black,colback=white}

\begin{tcolorbox}[enlarge top initially by=-5mm]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
\begin{tcolorbox}[enlarge top initially by=5mm,enhanced,show bounding box]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

This is a **tcolorbox**.

This is a **tcolorbox**.

`/tcb/enlarge bottom finally by=<length>` (no default, initially 0mm)

Enlarges the bounding box distance to the bottom of the box by `<length>`. If the box is *breakable*, only the last box of the break sequence gets enlarged. `/tcb/enlarge bottom by`<sup>→P.64</sup> overwrites this key.

```
\tcbset{colframe=blue!75!black,colback=white}

\begin{tcolorbox}[enlarge bottom finally by=5mm]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
\begin{tcolorbox}[enlarge bottom finally by=-5mm,enhanced,show bounding box]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

This is a **tcolorbox**.

This is a **tcolorbox**.



`/tcb/enlarge top at break by=<length>` (no default, initially 0mm)

Enlarges the bounding box distance to the top of the box by  $\langle length \rangle$ , if the box is `/tcb/breakable`<sup>→P.249</sup>. In this case, it is applied to *middle* and *last* parts in a break sequence. `/tcb/enlarge top by` overwrites this key.

`/tcb/enlarge bottom at break by=<length>` (no default, initially 0mm)

Enlarges the bounding box distance to the bottom of the box by  $\langle length \rangle$ , if the box is `/tcb/breakable`<sup>→P.249</sup>. In this case, it is applied to *first* and *middle* parts in a break sequence. `/tcb/enlarge bottom by` overwrites this key.

`/tcb/enlarge top by=<length>` (no default, initially 0mm)

Enlarges the bounding box distance to the top of the box by  $\langle length \rangle$ . `/tcb/enlarge top initially by`<sup>→P.63</sup> and `/tcb/enlarge top at break by` are set to  $\langle length \rangle$ .

`/tcb/enlarge bottom by=<length>` (no default, initially 0mm)



Enlarges the bounding box distance to the bottom of the box by  $\langle length \rangle$ . `/tcb/enlarge bottom finally by`<sup>→P.63</sup> and `/tcb/enlarge bottom at break by` are set to  $\langle length \rangle$ .

`/tcb/enlarge left by=<length>` (no default, initially 0mm)

Enlarges the bounding box distance to the left side of the box by  $\langle length \rangle$ .

```
\tcbset{colframe=blue!75!black,colback=white}

\begin{tcolorbox}[enlarge left by=2cm,width=5cm,enhanced,show bounding box]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
\begin{tcolorbox}[enlarge left by=-2cm,width=\linewidth+2cm]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```



`/tcb/enlarge right by=<length>` (no default, initially 0mm)

Enlarges the bounding box distance to the right side of the box by  $\langle length \rangle$ .

```
\tcbset{colframe=blue!75!black,colback=white}

\begin{tcolorbox}[enlarge right by=-2cm,width=\linewidth+2cm,
enhanced,show bounding box]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
\begin{tcolorbox}[enlarge right by=2cm,width=\linewidth-2cm]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```






`/tcb/enlarge by=<length>` (no default, initially 0mm)

Enlarges the bounding box distance to all sides of the box by  $\langle length \rangle$ .

```
\tcbset{colframe=blue!75!black,colback=white,width=5cm,nobeforeafter}

\begin{tcolorbox}
This is a \textbf{tcolorbox}.
\end{tcolorbox}

\begin{tcolorbox}[enlarge by=5mm,enhanced,show bounding box]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

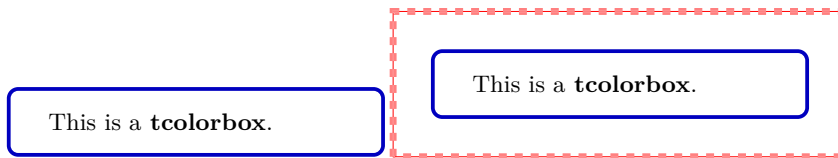


`/tcb/grow to left by=<length>` (no default, initially 0mm)

Enlarges the current box size by  $\langle length \rangle$  and enlarges (shrinks) the bounding box distance to the left side of the box by  $-\langle length \rangle$ .

```
\tcbset{colframe=blue!75!black,colback=white}

\begin{tcolorbox}[width=5cm,grow to left by=2cm,enhanced,show bounding box]
This is a \textbf{tcolorbox} with a width of 7cm.
\end{tcolorbox}
```



This is a **tcolorbox** with a width of 7cm.

`/tcb/grow to right by=<length>` (no default, initially 0mm)


Enlarges the current box size by  $\langle length \rangle$  and enlarges (shrinks) the bounding box distance to the right side of the box by  $-\langle length \rangle$ .

```
\tcbset{colframe=blue!75!black,colback=white}

\begin{tcolorbox}[grow to right by=2cm,enhanced,show bounding box]
This is a \textbf{tcolorbox}.
\end{tcolorbox}

\bigskip

\begin{tcolorbox}[grow to right by=2cm,grow to left by=1cm,
enhanced,show bounding box]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

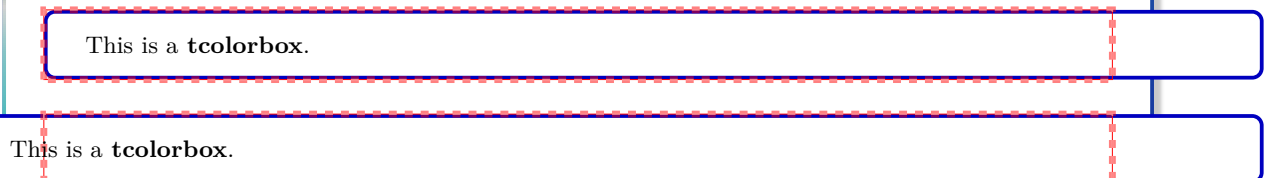



## Floating box from `toggle enlargement`

This page is an even page. Therefore, the left and right enlargements are toggled (with some luck; otherwise use `forced`). This box stretches to the right margin on odd pages and to the left margin on even pages. The current document is one-sided – this feature makes sense for two-sided documents only.

`/tcb/toggle enlargement=<toggle preset>` (default `evenpage`, initially `none`)

According to the `<toggle preset>`, the left and the right enlargements of the bounding box are switched or not. Feasible values are:

- **none**: no switching.
- **forced**: the values of the left and right enlargement are switched.
- **evenpage**: if the page is an even page, the values of the left and right enlargement are switched. It is recommended that one use this setting in conjunction with `/tcb/check odd page`<sup>→ P. 76</sup>.

```
% \usepackage{changepage} for 'check odd page'
\tcbset{colframe=blue!75!black,colback=white,
grow to left by=20mm,grow to right by=-5mm}

\begin{tcolorbox}[toggle enlargement=none,enhanced,show bounding box]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
\begin{tcolorbox}[toggle enlargement=forced]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
\begin{tcolorbox}[toggle enlargement=evenpage,check odd page]
This page is an \ifthenelse{\isodd{\thepage}}{odd}{even} page.
Therefore, the left and right enlargements
\ifthenelse{\isodd{\thepage}}{are not}{are} toggled.
\end{tcolorbox}
```

This is a **tcolorbox**.

This is a **tcolorbox**.

This page is an even page. Therefore, the left and right enlargements are toggled.

```
% \usepackage{changepage} for 'check odd page'
\begin{tcolorbox}[colframe=red!60!black,colback=red!15!white,check odd page,
fonttitle=\bfseries,title=Floating box from \texttt{toggle enlargement},
width=\textwidth,grow to right by=2cm,toggle enlargement=evenpage,float=t]
This page is an \ifthenelse{\isodd{\thepage}}{odd}{even} page.
Therefore, the left and right enlargements
\ifthenelse{\isodd{\thepage}}{are not}{are} toggled (with some luck; otherwise
use |forced|). This box stretches to the right margin on odd pages and to the left
margin on even pages. The current document is one-sided -- this feature makes
sense for two-sided documents only.
\end{tcolorbox}
```



**/tcb/shrink tight** (style, no value, initially unset)

The total colored box is shrunk to the dimensions of the upper part. There should be no lower part and no title. This style sets the `/tcb/boxsep`<sup>→ P. 24</sup> to 0pt and other geometry keys to fitting values. This option is likely to be used with the following extrusion keys.

```
\tcbset{colframe=blue!75!black,colback=white,arc=0mm,boxrule=0.4pt,
nbeforeafter,tcbbox raise base,shrink tight}
```

```
\begin{tcolorbox}
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

Lorem `\tcbbox`{ipsum} dolor sit amet, consectetur adipiscing elit.

This is a **tcolorbox**.

Lorem ipsum dolor sit amet, consectetur adipiscing elit.

**/tcb/extrude left by=<length>** (style, no default, initially unset)

The (upper part of the) colored box is extruded by the given *<length>* to the left side. The inner width and the bounding box is kept unchanged and the operation is additive!

```
\tcbset{enhanced,colframe=red,colback=yellow!25!white,
frame style={opacity=0.25},interior style={opacity=0.5},
nbeforeafter,tcbbox raise base,shrink tight,extrude by=2mm}
```

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis.

`\tcbbox`[extrude left by=1cm]{Curabitur} dictum gravida mauris.

Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna.

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna.

**/tcb/extrude right by=<length>** (style, no default, initially unset)

The (upper part of the) colored box is extruded by the given *<length>* to the right side. The inner width and the bounding box is kept unchanged and the operation is additive!

```
\tcbset{enhanced,colframe=red,colback=yellow!25!white,
frame style={opacity=0.25},interior style={opacity=0.5},
nbeforeafter,tcbbox raise base,shrink tight,extrude by=2mm}
```

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis.

`\tcbbox`[extrude right by=1cm]{Curabitur} dictum gravida mauris.

Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna.

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna.



`/tcb/extrude top by=<length>` (style, no default, initially unset)

The (upper part of the) colored box is extruded by the given *<length>* to the top side. The inner width and the bounding box is kept unchanged and the operation is additiv!

```
\tcbset{enhanced,colframe=red,colback=yellow!25!white,
  frame style={opacity=0.25},interior style={opacity=0.5},
  nobeforeafter,tcbbox raise base,shrink tight,extrude by=2mm}
```

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis.

`\tcbbox[extrude top by=1cm]{Curabitur}` dictum gravida mauris.

Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna.

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna.

`/tcb/extrude bottom by=<length>` (style, no default, initially unset)

The (upper part of the) colored box is extruded by the given *<length>* to the bottom side. The inner width and the bounding box is kept unchanged and the operation is additiv!

```
\tcbset{enhanced,colframe=red,colback=yellow!25!white,
  frame style={opacity=0.25},interior style={opacity=0.5},
  nobeforeafter,tcbbox raise base,shrink tight,extrude by=2mm}
```

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis.

`\tcbbox[extrude bottom by=1cm]{Curabitur}` dictum gravida mauris.

Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna.

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna.

`/tcb/extrude by=<length>` (style, no default, initially unset)

The (upper part of the) colored box is extruded by the given *<length>* to all sides. The inner width and the bounding box is kept unchanged and the operation is additiv!

```
\tcbset{enhanced,colframe=red,colback=yellow!25!white,
  frame style={opacity=0.25},interior style={opacity=0.5},
  nobeforeafter,tcbbox raise base,shrink tight,extrude by=2mm}
```

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. `\tcbbox{Curabitur}` dictum gravida mauris. `\tcbbox[colframe=Green,interior style={opacity=0.0}]{Nam}` arcu libero, nonummy eget, consectetur id, `\tcbbox{vulputate}` a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. `\tcbbox{Mauris ut leo.}`

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo.



### 3.14 Layered Boxes and Every Box Settings

A `tcolorbox` may contain another `tcolorbox` and so on. The package takes track of the nesting level using a counter `tcblayer`. Counter values may be used for doing some fancy things, but you should never change the counter value yourself.

The package takes special care for the first four layers or nesting levels, called managed layers. Here, footnote texts are administrated to find their intended place and specific layer dependent options may be set by changing `/tcb/every box on layer n`<sup>→P.70</sup>. If needed, the number of managed layers can be increased by setting `\tcbsetmanagedlayer`<sup>→P.70</sup> to a higher value than 4.

The following styles have a considerable influence on how layered boxes are processed. Note especially that nested boxes are getting a `/tcb/reset`<sup>→P.77</sup> by default. You can change this, but be prepared for surprises if you do.

If the defaults are *not changed*, a `tcolorbox` gets its options in the following order. Following options overwrite preceding options.

1. On package load, all options are set to default values.
2. Every `\tcbset`<sup>→P.10</sup> command adds or changes options for the following boxes inside the current  $\TeX$  group.
3. While entering a `tcolorbox`, a `/tcb/every box on layer n`<sup>→P.70</sup> or `/tcb/every box on higher layers`<sup>→P.70</sup> option list is applied. With default settings this means:
  - For layer 1 (lowest layer), the `/tcb/every box` option list is applied. Not overwritten options given by a preceding `\tcbset`<sup>→P.10</sup> survive.
  - For layer 2 and above (nested boxes), a `/tcb/reset`<sup>→P.77</sup> followed by `/tcb/every box` option list is applied. Every resettable options given by a preceding `\tcbset`<sup>→P.10</sup> and by the surrounding box(es) are reset.
4. The `\options` given to the `tcolorbox` are applied. Or, if the box was generated by `\newtcolorbox`<sup>→P.12</sup> or friends, the `\options` given there are applied.
5. If the box was generated by `\newtcolorbox`<sup>→P.12</sup> or friends, some automated options are applied.

`/tcb/every box` (style)

By default, this style is empty.

```
% default setting:
\tcbset{every box/.style={}}
```

It may be changed by redefining this style.

```
% setting all boxes to be enhanced:
\tcbset{every box/.style={enhanced}}
```

The alternative for setting something for every box (on every layer) is `\tcbsetforeverylayer`<sup>→P.10</sup>:

```
% setting all boxes to be enhanced:
\tcbsetforeverylayer{enhanced}
```



## `/tcb/every box on layer n` (style)

Here,  $n$  has to be replaced by a number ranging from 1 to the highest managed layer number (4 by default).

```
% default settings:
\tcbset{
  every box on layer 1/.style={every box},
  every box on layer 2/.style={reset,every box},
  every box on layer 3/.style={reset,every box},
  every box on layer 4/.style={reset,every box},
}
```

## `/tcb/every box on higher layers` (style)

Higher layers are layers above the highest managed layer number (4 by default).

```
\tcbset{every box on higher layers/.style={reset,every box}}
```

## `\tcbsetmanagedlayer{<number>}`

Replaces the highest managed layer number by  $\langle number \rangle$  where 4 is the default. This macro can only be used inside the preamble. Using a  $\langle number \rangle$  lower than 4 typically makes no sense, but is not forbidden.

```
% \usepackage{lipsum}
% \tcbuselibrary{skins,breakable}
\tcbset{enhanced jigsaw,breakable,colframe=red!75!black,fonttitle=\bfseries,
  colback=red!5!white,
  every box/.style={enhanced,watermark text=\thetcbbox,
    before=\par\smallskip,after=\par\smallskip},
  every box on layer 2/.style={reset,every box,colback=yellow!10!white,
    drop fuzzy shadow}}
\begin{tcolorbox}[title=Layer 1 Box]
Here comes a footnote\footnote{Footnote from layer 1 box}.
\lipsum[2]
\begin{tcolorbox}[title=Layer 2 Box]
abc\footnote{The footnote of abc}
\end{tcolorbox}
\begin{tcolorbox}[title=Another Box,ams equation]
\tcbhighmath{\sum\limits_{n=1}^{\infty} \frac{1}{n}} = \infty.
\end{tcolorbox}
Some text\footnote{Footnote from some text}.
\begin{tcolorbox}[title=Yet Another Box]
\tcbboxfit[height=2cm]{\lipsum[1]}
My text.
\begin{tcolorbox}
Another lipsum text\footnote{A lipsum text}. \lipsum[3]
\begin{tcolorbox}[title=Layer 4,colframe=blue,colback=white]
Layer 4\footnote{Layer 4 footnote}
\end{tcolorbox}
The End\footnote{Last footnote}.
\end{tcolorbox}
\end{tcolorbox}
\end{tcolorbox}
```

## Layer 1 Box

Here comes a footnote<sup>a</sup>. Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies



et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

#### Layer 2 Box

abc<sup>a</sup>

<sup>a</sup>The footnote of abc

2

#### Another Box

$$\sum_{n=1}^{\infty} \frac{1}{n} = \infty.$$

= ∞.

(1)

Some text<sup>b</sup>.

#### Yet Another Box

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

My text.

Another lipsum text<sup>a</sup>. Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec et mi. Nam vulputate metus eu enim. Vestibulum pellentesque felis eu massa.

#### Layer 4

Layer 4<sup>a</sup>

<sup>a</sup>Layer 4 footnote

4

The End<sup>b</sup>.

<sup>a</sup>A lipsum text

<sup>b</sup>Last footnote

<sup>a</sup>Footnote from layer 1 box

<sup>b</sup>Footnote from some text



### 3.15 Capture Mode

`/tcb/capture=<mode>` (no default, initially minipage)

The capture  $\langle mode \rangle$  defines how the box content is processed.

Feasible values for  $\langle mode \rangle$  are:

- **minipage:**  
This is the default  $\langle mode \rangle$  for `tcolorbox`<sup>P.9</sup>. The content may have an upper and a lower part. Optionally, the box can be `/tcb/breakable`<sup>P.249</sup>. The box content is put into a minipage or into something similar to a minipage.
- **hbox:**  
This is the default  $\langle mode \rangle$  for `\tcbox`<sup>P.11</sup>. The content cannot have a lower part and cannot be broken. The colored box is sized according to the dimensions of the content. A shortcut to set this mode is `/tcb/hbox`.
- **fitbox:** (needs the `fitting` library)  
This is the default  $\langle mode \rangle$  for `\tcboxfit`<sup>P.267</sup>. The content cannot have a lower part and cannot be broken. The content is sized according to the dimensions of the colored box. A shortcut to set this mode is `/tcb/fit`<sup>P.269</sup>.

```
\tcbset{colframe=blue!75!black,colback=white}

\begin{tcolorbox}[capture=minipage]
This is a tcolorbox.
\end{tcolorbox}

\begin{tcolorbox}[capture=hbox]
This is a tcolorbox.
\end{tcolorbox}

\begin{tcolorbox}[capture=fitbox,height=9mm]% needs the 'fitting' library
This is a tcolorbox.
\end{tcolorbox}
```

This is a tcolorbox.

This is a tcolorbox.

This is a tcolorbox.

`/tcb/hbox` (style, no default)

Shortcut for `capture=hbox`.

```
\tcbset{colframe=blue!75!black,colback=white}

\begin{tcolorbox}[hbox]
This is a tcolorbox.
\end{tcolorbox}
```

This is a tcolorbox.

`/tcb/minipage` (style, no default)

Shortcut for `capture=minipage`.



### 3.16 Text Characteristics

`/tcb/parbox=true|false` (default `true`, initially `true`)

The text inside a `tcolorbox` is formatted using a L<sup>A</sup>T<sub>E</sub>X `minipage` if the box is unbreakable. If breakable, the box tries a mimicry of a `minipage`. In a `minipage` or `parbox`, paragraphs are formatted slightly different as the main text. If the key value is set to `false`, the normal main text behavior is restored. In some situations, this has some unwanted side effects. It is recommended that one use this experimental setting only where you really want to have this feature.

```
% \usepackage{lipsum} % preamble
\tcbset{width=(\linewidth-2mm)/2,nobeforeafter,arc=1mm,
  colframe=blue!75!black,colback=white,fonttitle=\bfseries,fontupper=\small,
  left=2mm,right=2mm,top=1mm,bottom=1mm,equal height group=parbox}

\begin{tcolorbox}[parbox,adjusted title={parbox=true (normal)}]
  \lipsum[1-2]
\end{tcolorbox}\hfill%
\begin{tcolorbox}[parbox=false,adjusted title={parbox=false}]
  \lipsum[1-2]
\end{tcolorbox}%
```

#### parbox=true (normal)

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum. Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

#### parbox=false

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.



**/tcb/hyphenationfix**=*true|false* (default *true*, initially *false*)

Long words at the beginning of paragraphs in very narrow boxes will not be hyphenated using pdf<sub>l</sub>at<sub>ex</sub>. This problem is circumvented by applying the **hyphenationfix** option.

```
\tcbset{colframe=blue!75!black,
fontupper=\normalsize,
colback=blue!5!white,width=4cm}

\begin{tcolorbox}
Rechnungsadjunktentochter.\par
Statthaltereikonzipist.
\end{tcolorbox}

\begin{tcolorbox}[hyphenationfix]
Rechnungsadjunktentochter.\par
Statthaltereikonzipist.
\end{tcolorbox}
```

Rechnungsadjunktentochter.  
Statthaltereikonzipist.

Rechnungsad-  
junktentochter.  
Statthal-  
tereikonzipist.

**parbox=false** and **hyphenationfix** should not be used together. They are targeting different box types and they do not blend very well.

### 3.17 Files

**/tcb/tempfile**=*<file name>* (no default, initially *\jobname.tcbtemp*)

Sets *<file name>* as name for the temporary file which is used inside **tcbwritetemp**<sup>→ P. 83</sup> and **\tcbusetemp**<sup>→ P. 83</sup> implicitly.

### 3.18 \tcbox Specials

The following options are applicable for **\tcbox**<sup>→ P. 11</sup> and **\tcboxmath**<sup>→ P. 227</sup> only.

**/tcb/tcbox raise**=*<length>* (no default, initially *0pt*)

Raises the **\tcbox**<sup>→ P. 11</sup> by the given *<length>*.

```
\tcbset{colframe=blue!50!black,colback=white,colupper=red!50!black,
fonttitle=\bfseries,nobeforeafter,center title}

Test\dotfill
\tcbox[tcbox raise base]{Hello World 1}\dotfill
\tcbox{Hello World 2}\dotfill
\tcbox[tcbox raise=5mm]{Hello World 3}
```

Test ..... Hello World 1 ..... Hello World 2 ..... Hello World 3

**/tcb/tcbox raise base** (style, no value, initially *unset*)

Raises the **\tcbox**<sup>→ P. 11</sup> such that the base of its content matches the base of the environmental line; see example above.

**/tcb/on line** (style, no value, initially *unset*)

Combines **/tcb/tcbox raise base** with **/tcb/nobeforeafter**<sup>→ P. 62</sup>. The resulting box behaves analogue to **\fbox**.



### 3.19 Counters, Labels and References

**/tcb/phantom=*<code>*** (no default, initially unset)

The *<code>* is put in a box at the upper left corner of the `tcolorbox`. If the `tcolorbox` is breakable, the *<code>* is executed for the first box of the break sequence only. If there already was some phantom code given, the new *<code>* is appended.

The *<code>* is intended to be used for counter stepping, labelling, and related operations which do not produce visible text.

- The *<code>* is executed before the title and box content, i. e. counter values are ensured to be increased before usage.
- Labels are ensured to reference the correct page number.
- The *<code>* is executed only once even during fitting operations for title and box content.
- In combination with the `hyperref` package, the hyper anchor is set to the upper left corner of the `tcolorbox`, i. e. links inside the pdf document will jump to the box pleasantly.
- Since the *<code>* is executed inside a  $\text{\TeX}$  group, only global operations can survive this group.

Examples for the `phantom` usage are given in Section 9.8 from page 219, e. g. Example 9.1 on page 220.

**/tcb/nophantom** (no value, initially set)

Removes the phantom code if set before.

**/tcb/label=*<marker>*** (no default, initially unset)

The *<marker>* is set as label text for a reference with the `\ref` macro. Typically, this option is used for numbered boxes, see Subsection 4.1 from page 78, e. g. `/tcb/new/automaticcounter`<sup>→ P. 78</sup>.

**/tcb/label type=*<type>*** (no default, initially unset)

This option key can be used only in conjunction with the `cleveref` package [5] which has to be loaded separately. *<type>* has to be a cross-reference type *known* to `cleveref` like `theorem`, `algorithm`, `result`, etc. References made with `cleveref` will use this type. Note that using `label type` will result in compilation errors, if `cleveref` is not loaded. For an example, see Theorem 10.3.5 on page 244.

**/tcb/no label type** (no value, initially set)

Removes a `/tcb/label type`, if set before.

**/tcb/step=*<counter>*** (no default, initially unset)

Shortcut for `phantom={\refstepcounter{#1}}`. The given *<counter>* is increased and ready for labelling. This option is not needed when using the convenient automated numbering introduced with version 2.40, see Subsection 4.1 from page 78.

**/tcb/step and label={*<counter>*}{*<marker>*}** (no default, initially unset)

Shortcut for using `/tcb/step` and `/tcb/label`. This option is not needed when using the convenient automated numbering introduced with version 2.40, see Subsection 4.1 from page 78.



`/tcb/list entry=<text>` (no default, initially unset)

If the «list of tcolorbox(es)» feature described in Subsection 4.2 from page 82 is used, this key describes the `<text>` for an entry into the generated list, e.g.

```
list entry={\protect\numberline{\thetcbcounter}My beautiful Example}
```

See Section 9.8 from page 219 for a complete example.

`/tcb/add to list={<list>}{<type>}` (no default, initially unset)

If the «list of tcolorbox(es)» feature described in Subsection 4.2 from page 82 is used, list entries are generated automatically. With this key, you can enforce an entry to the given `<list>` with the given `<type>`. This issues:

```
\addcontentsline{<list>}{<type>}{<entry text>}
```

`/tcb/check odd page=true|false` (default `true`, initially `false`)

If set to `true`, the even/odd page testing from the package `changepage` is applied. The `/tcb/toggle enlargement`<sup>→ P. 66</sup> check and the `/tcb/toggle left and right`<sup>→ P. 31</sup> check will use the `\ifoddpaper` macro from this package. This options is independent from `/tcb/phantom`<sup>→ P. 75</sup>. Note that you have to include the package `changepage` by hand<sup>3</sup>:

```
\usepackage{changepage}
\strictpagecheck
```

The macro `\ifoddpaper` can be used inside overlay or watermark code to test if the box is on an odd page. This will work also for boxes in a break sequence. Note that you cannot use the test inside the normal box content.

```
% \usepackage{changepage}
\tcbset{colframe=blue!75!black,colback=white}

\begin{tcolorbox}[enhanced,check odd page,
  watermark text={\ifoddpaper Odd\else Even\fi\ page!}]
\lipsum[1]
\end{tcolorbox}
```

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

<sup>3</sup>If `changepage` is not included, a compilation error will arise.



### 3.20 Externalization

If the *externalization* library of the *tikz* package is used and `/tcb/graphical environment`<sup>→P.84</sup> is set to `tikzpicture`, a `tcolorbox` could trigger the externalization process which will arise a compilation error.

To avoid this, there are two possible strategies:

- Ensure, that `\tikzexternaldisable` is set before a `tcolorbox` is used. If you typically use the pattern `\tikzexternalenable some picture \tikzexternaldisable`, there is nothing to care about.
- If *externalization* is enabled globally, use `/tcb/shield externalize` to shield any `tcolorbox`. The preamble code could look like this:

```
\usetikzlibrary{external}  
\tikzexternalize  
\tcbset{shield externalize}
```

`/tcb/shield externalize=true|false` (default `true`, initially `false`)

If set to `true`, the drawing part of the `tcolorbox` is not being externalized which is a good thing at the current state of art. Nevertheless, if the `tcolorbox` contains a `tikzpicture`, this picture is still externalized. Pictures drawn with help of `/tcb/tikz upper`<sup>→P.50</sup> or alike are *not* externalized.

If a `tcolorbox` is used inside a node of an encircling `tikzpicture` which is externalized, do *not* use `\tikzexternaldisable` in front of the `tcolorbox`. `/tcb/shield externalize` is deactivated automatically inside a `tikzpicture`.

`/tcb/external=<file name>` (no default, initially unset)

Convenience option which calls `\tikzsetnextfilename{<file name>}`. Typically, it may be used inside the option list of a `tcolorbox` to set the externalization `<file name>` for the first `tikzpicture` which is discovered *inside* the box content. The package `tikz` [20] or the library `skins` has to be loaded to use this option. Additionally, `\usetikzlibrary{external}` has to be used.

`/tcb/remake=true|false` (default `true`, initially `false`)

Convenience option which calls `/tikz/external/remake next`. Typically, it may be used inside the option list of a `tcolorbox` to force the remake of the first `tikzpicture` which is discovered *inside* the box content. The package `tikz` [20] or the library `skins` has to be loaded to use this option. Additionally, `\usetikzlibrary{external}` has to be used.

### 3.21 Miscellaneous

`/tcb/reset` (no value, initially set)

Sets (nearly) all `tcolorbox` settings (including loaded libraries) back to their default values *plus* any settings given by `\tcbsetforeverylayer`<sup>→P.10</sup>. `/tcb/savedelimiter`<sup>→P.18</sup> and `/tcb/capture`<sup>→P.72</sup> keep their values. This option is useful for boxes in boxes where the inner box should not inherit the settings of the outer box. Note that for boxes inside boxes the `reset` is done automatically, if the standard settings of the package are used (v2.40 and above), see Section 3.14 from page 69.



## 4 Initialization Option Keys

The *initialization* options are only applicable for the generation of new environments and commands based on `tcolorbox` and friends. Particularly, they can be used for

- `\newtcolorbox`<sup>→ P. 12</sup>,
- `\newtcbox`<sup>→ P. 13</sup>,
- `\newtcblisting`<sup>→ P. 197</sup>,
- `\newtcbinputlisting`<sup>→ P. 199</sup>,
- `\newtcbtheorem`<sup>→ P. 225</sup>, and
- `\newtcbboxfit`<sup>→ P. 268</sup>.

Typically, these options may generate counters and alike. It is **strongly** recommended that one use initialization options inside the preamble only. Otherwise, you may get trouble when using L<sup>A</sup>T<sub>E</sub>X's `\include` features.

### 4.1 Numbered Boxes

Counters assigned using the initialization options are administrated automatically. Especially, they are increased for each new box. Independent from the real counter name, the counter value can be referenced by `\thetcbcounter`, e.g. inside the title of the box. The real counter name is stored inside `\tcbcounter`.

`/tcb/new/auto counter` (no value, initially unset)

Creates a new counter automatically. With `/tcb/new/number format`<sup>→ P. 80</sup> and `/tcb/new/number within`<sup>→ P. 80</sup>, the appearance and behavior of the counter can be changed. The counter value is referenced by `\thetcbcounter`.

*Definition in the preamble:*

```
\newtcolorbox[auto counter,number within=section]{pabox}[2][]{%
  colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries,
  title=Examp.~\thetcbcounter: #2,#1}
```

```
\begin{pabox}[label={myautocounter}]{Title with number}
This box is automatically numbered with \ref{myautocounter} on page
\pageref{myautocounter}. Inside the box, the \thetcbcounter\ can
also be referenced by |\thetcbcounter|.
The real counter name is \texttt{\tcbcounter}.
\end{pabox}
```

#### Examp. 4.1: Title with number

This box is automatically numbered with 4.1 on page 78. Inside the box, the 4.1 can also be referenced by `\thetcbcounter`. The real counter name is `tcb@cnt@pabox`.



`/tcb/new/use counter from=<tclobox>` (no default, initially unset)

Here, a counter from another `<tclobox>` is reused. Note that the setting for `/tcb/new/number format`<sup>→ P.80</sup> and `/tcb/new/number within`<sup>→ P.80</sup> are inherited and cannot be changed. The counter value is referenced by `\thetcbcounter`.

```
\newtcolorbox[use counter from=pabox]{mybox}[2][]{%
colback=blue!5!white,colframe=blue!75!black,fonttitle=\bfseries,
title=Some Box \thetcbcounter: #2,#1}

\begin{mybox}[label={myusecounterfrom}]{Title with continued number}
This box is automatically numbered with \ref{myusecounterfrom} on page
\pageref{myusecounterfrom}. Inside the box, the \thetcbcounter\ can
also be referenced by |\thetcbcounter|.
The real counter name is \texttt{\tcbcounter}.
\end{mybox}
```

#### Some Box 4.2: Title with continued number

This box is automatically numbered with 4.2 on page 79. Inside the box, the 4.2 can also be referenced by `\thetcbcounter`. The real counter name is `tcb@cnt@pabox`.

`/tcb/new/use counter=<counter>` (no default, initially unset)

Here, an ordinary existing L<sup>A</sup>T<sub>E</sub>X counter is used for numbering. With `/tcb/new/number format`<sup>→ P.80</sup> and `/tcb/new/number within`<sup>→ P.80</sup>, the appearance and behavior of the counter can be changed. The counter value is referenced by `\thetcbcounter`.

```
% \newcounter{myexample}% preamble
\newtcolorbox[use counter=myexample,number format=\Alph]{mybox}[2][]{%
colback=green!5!white,colframe=green!55!black,fonttitle=\bfseries,
title=Some Box \thetcbcounter: #2,#1}

\begin{mybox}[label={myusecounter}]{Title with \LaTeX\ number}
This box is automatically numbered with \ref{myusecounter} on page
\pageref{myusecounter}. Inside the box, the \thetcbcounter\ can
also be referenced by |\thetcbcounter|.
The real counter name is \texttt{\tcbcounter}.
\end{mybox}
```

#### Some Box A: Title with L<sup>A</sup>T<sub>E</sub>X number

This box is automatically numbered with A on page 79. Inside the box, the A can also be referenced by `\thetcbcounter`. The real counter name is `myexample`.

`/tcb/new/no counter` (no value, initially set)

The created boxes are not numbered. This is the default. The option may be used to overrule a previous option.



`/tcb/new/number within=<counter>` (no default, initially unset)

The automatic counter is set to zero, if  $\langle counter \rangle$  is increased. Additionally, during output, the value of  $\langle counter \rangle$  is prepended to the value of the automatic counter.

To prepend the automatic counter with the chapter number and to reset it with every new chapter, use:

```
number within=chapter
```

See `/tcb/new/use counter`<sup>→ P. 79</sup> for a complete example.

`/tcb/new/number format=<format macro>` (no default, initially `\arabic`)

Declares the format of the automatic counter. The  $\langle format macro \rangle$  can be any valid L<sup>A</sup>T<sub>E</sub>X number formatting macro like `\arabic`, `\roman`, etc.

To display the counter value in large roman numbers, use:

```
number format=\Roman
```

See `/tcb/new/auto counter`<sup>→ P. 78</sup> for a complete example.

`/tcb/new/number freestyle=<code>` (no default, initially unset)

Allows advanced control over the complete number format. This option overrules the format given by `/tcb/new/number within` and `/tcb/new/number format`. Nevertheless, you can combine it with `/tcb/new/number within` to get the desired reset property.

The  $\langle code \rangle$  is some formatting code which should contain `\tcbcounter` to reference the automated counter. Since this  $\langle code \rangle$  is expanded, you have to secure each macro with `\noexpand` with exception of `\tcbcounter`.

*Definition in the preamble:*

```
\newcolorbox[auto counter,number within=section,
  number freestyle={{(Q/\noexpand\thesection/\noexpand\Alph{\tcbcounter})}},
  ]{phbox}[2][]{%
  colback=yellow!15!white,colframe=blue!75!black,fonttitle=\bfseries,
  title=Question~\thetcbcounter: #2,#1}
```

```
\begin{phbox}[label={myfreestyle}]{Title with freestyle number}
This box is automatically numbered with \ref{myfreestyle} on page
\pageref{myfreestyle}. Inside the box, the \thetcbcounter can
also be referenced by |\thetcbcounter|.
The real counter name is \texttt{\tcbcounter}.
\end{phbox}
```

**Question (Q/4/A): Title with freestyle number**

This box is automatically numbered with (Q/4/A) on page 80. Inside the box, the (Q/4/A) can also be referenced by `\thetcbcounter`. The real counter name is `tcb@cnt@phbox`.



The following options `/tcb/new/crefname` and `/tcb/new/Crefname` need to be set inside the preamble.

`/tcb/new/crefname={⟨singular⟩}{⟨plural⟩}` (no default, initially unset)

This option key can be used only in conjunction with the `cleveref` package [5] which has to be loaded separately. It creates a cross-reference type for the new `tcolorbox`'es, where the lowercase `⟨singular⟩` and `⟨plural⟩` forms of the cross-reference are given. See `/tcb/label type`<sup>→P. 75</sup> and [5] for more information.

`/tcb/new/Crefname={⟨singular⟩}{⟨plural⟩}` (no default, initially unset)

This option key can be used only in conjunction with the `cleveref` package [5] which has to be loaded separately. It creates a cross-reference type for the new `tcolorbox`'es, where the uppercase `⟨singular⟩` and `⟨plural⟩` forms of the cross-reference are given. See `/tcb/label type`<sup>→P. 75</sup> and [5] for more information.

*Definition in the preamble:*

```
% \usepackage{cleveref}
\newtcolorbox[auto counter,number within=section,
  Crefname={Bluebox}{Blueboxes},crefname={bluebox}{blueboxes}]%
{mybluebox}[2][colback=blue!5!white,colframe=blue!75!black,fonttitle=\bfseries,
  title=Bluebox \thetcbcounter: #2,#1]
```

```
% \usepackage{cleveref}
% \usepackage{varioref}
\begin{mybluebox}[label={myreference}]{My title}
This is an example.
\end{mybluebox}

\Cref{myreference}, \cref{myreference}.\
\cpageref{myreference}, \cpageref{myreference}.\
\nameCref{myreference}, \namecref{myreference}.\
\labelcref{myreference}, \labelcpageref{myreference}.\
With \texttt{varioref}:\
\Vref{myreference}, \vref{myreference}.\
\Vref*{myreference}, \vref*{myreference}.
```

**Bluebox 4.1: My title**

This is an example.

Bluebox 4.1, bluebox 4.1.

Page 81, page 81.

Bluebox, bluebox.

4.1, 81.

With `varioref`:

Bluebox 4.1, bluebox 4.1.

Bluebox 4.1, bluebox 4.1.



## 4.2 Lists of tcolorboxes

For figures and tables, L<sup>A</sup>T<sub>E</sub>X provides the `\listoffigures` and `\listoftables` commands to create lists of these numbered entities. Also, a `tcolorbox` can be part of such a kind of list.

1. Assign a list  $\langle name \rangle$  by the *initialization* option `/tcb/new/list inside`.
2. Optionally, a new  $\langle type \rangle$  for list entries may be assigned by the *initialization* option `/tcb/new/list type`.
3. List entries are generated automatically within each new `tcolorbox` using the above initialization.
  - If `/tcb/list entry`<sup>→ P.76</sup> is set, the entry is generated with it.
  - Otherwise, if `/tcb/title`<sup>→ P.14</sup> is set, the entry is generated with it.
  - Otherwise, the entry is generated with the current number and the environment name.
4. The generated list is displayed by `\tcblistof`.

`/tcb/new/list inside= $\langle name \rangle$`  (no default, initially unset)

Assigns a list or contents file to the generated `tcolorboxes`. Entries to this list are saved to a file which gets the  $\langle name \rangle$  as file name extension. The list is referenced by this name in `\tcblistof`. For example:

```
list inside=exam
```

See Section 9.8 from page 219 for a complete example.

`/tcb/new/list type= $\langle type \rangle$`  (no default, initially `tcolorbox`)

Optionally, some  $\langle type \rangle$  can be assigned to the list entries. For a new  $\langle type \rangle$ , a macro `\l@ $\langle type \rangle$`  has to exist which controls the format of the list entry. The default type is defined by

```
\newcommand*\l@tcolorbox{\@dottedtocline{1}{1.5em}{2.3em}}
```

This is identical to the `\l@section` setting of L<sup>A</sup>T<sub>E</sub>X. `\l@tcolorbox` can be redefined or a new  $\langle type \rangle$  can be assigned.

`\tcblistof[ $\langle macro \rangle$ ]{ $\langle name \rangle$ }{ $\langle title text \rangle$ }`

Displays the generated list of `tcolorboxes` with the given  $\langle name \rangle$ . The heading is generated by `\langle macro \rangle{ $\langle title text \rangle$ }` where `\section` is the default setting for  $\langle macro \rangle$ .

To display the list inside a subsection, use for example:

```
\tcblistof[\subsection]{exam}{List of Exercises}
```

The result of the example is found as Subsection 9.9 on page 222.

The core of the list is generated by `\@starttoc{ $\langle name \rangle$ }` which can be wrapped into an own macro.



## 5 Saving and Loading of Verbatim Texts

The following macros are slightly modified versions of the original macros from the known packages `moreverb` and `verbatim`. They are used implicitly inside of a `tcolorbox` environment, but they can be used outside also.

```
\begin{tcbverbatimwrite}{\file name}  
  \environment content  
\end{tcbverbatimwrite}
```

Saves the `\environment content` to a file named by `\file name`. T<sub>E</sub>X macros inside the environment are not expanded.

```
\begin{tcbverbatimwrite}{\jobname_verbexp.tex}  
  This text is saved \textit{as is}.  
\end{tcbverbatimwrite}  
  
Now, we are using the file:\par  
\input{\jobname_verbexp.tex}
```

Now, we are using the file:  
This text is saved *as is*.

This environment may be used inside an own environment. Note, that inside the environment definition `\tcbverbatimwrite` has to be used instead of `\begin{tcbverbatimwrite}` and `\end{tcbverbatimwrite}` instead of `\end{tcbverbatimwrite}`.

```
\newenvironment{myverbatim}{%  
  \begin{tcbverbatimwrite}{\jobname_myverb.tex}}%  
  {\end{tcbverbatimwrite}\endgroup}  
  
\begin{myverbatim}  
  This is the text which is saved by my own environment.  
\end{myverbatim}  
  
Now, we are using the file:\par  
\input{\jobname_myverb.tex}
```

Now, we are using the file:  
This is the text which is saved by my own environment.

```
\begin{tcbwritetemp}  
  \environment content  
\end{tcbwritetemp}
```

Has the same function as `tcbverbatimwrite`, but uses the key value of `tempfile` for the file name.

```
\begin{tcbwritetemp}  
  This text is saved \textit{as is}.  
\end{tcbwritetemp}  
  
Now, we are using the file:\par  
\tcbusetemp
```

Now, we are using the file:  
This text is saved *as is*.

```
\tcbusetemp
```

Loads the current temporary file which was saved by `tcbwritetemp`.



## 6 Technical Overview and Customization

This section provides a technical overview of the skin concept of `tcolorbox`. For most applications of `tcolorbox`, one will not need to know the bells and whistles described herein. You may proceed to Section 7 on page 96 where the customization options for most users are documented.

The following explanations also cover options and settings from the `skins` library, see Section 7 on page 96.

### 6.1 Skins and Drawing Engines


From a technical point of view, a *skin* is a style definition for the appearance of a `tcolorbox`. The core package provides some additional option keys for skins but only two skins called `standard`<sup>P.143</sup> and `standard jigsaw`<sup>P.144</sup>. The `skins` library adds several more skins. To change to a skin, only one option from the core package has to be set.

**`/tcb/skin=<name>`** (style, no default, initially `standard`)

Sets the current skin to `<name>`. This is a style definition which sets all the following keys, i.e. for many use cases there is nothing more to do.

```
\tcbset{colback=Salmon!50!white,colframe=FireBrick!75!black,
width=(\linewidth-8mm)/2,before=,after=\hfill,equal height group=ske}

\begin{tcolorbox}[adjusted title=My title]
  This is my content.
\end{tcolorbox}
\begin{tcolorbox}[skin=beamer,beamer,adjusted title=My title]
  This is my content.
\end{tcolorbox}
```

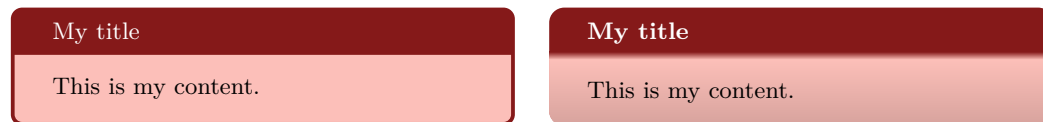

**`/tcb/skin first=<name>`** (style, no default, initially `standard`)

If the box is set to be `/tcb/breakable`<sup>P.249</sup> and *is* broken actually, then the skin for the *first* part of the break sequence is set to `<name>`, see Subsection 11.6 on page 258. Typically, this key is set by a `/tcb/skin`.

**`/tcb/skin middle=<name>`** (style, no default, initially `standard`)

If the box is set to be `/tcb/breakable`<sup>P.249</sup> and *is* broken actually, then the skin for the *middle* parts (if any) of the break sequence is set to `<name>`, see Subsection 11.6 on page 258. Typically, this key is set by a `/tcb/skin`.

**`/tcb/skin last=<name>`** (style, no default, initially `standard`)

If the box is set to be `/tcb/breakable`<sup>P.249</sup> and *is* broken actually, then the skin for the *last* part of the break sequence is set to `<name>`, see Subsection 11.6 on page 258. Typically, this key is set by a `/tcb/skin`.

**`/tcb/graphical environment=<name>`** (no default, initially `pgfpicture`)

Sets the graphical environment for the `tcolorbox` to `<name>`. Feasible values are `pgfpicture` and `tikzpicture` or environments which inherit from one of these two. This key is set by a `/tcb/skin` and may seldom be used directly.



The skin of a `tcolorbox` is drawn by up to four *engines*. Afterwards, the text content is drawn which is not part of a skin. The four steps are:

1. The *frame* of the box, drawn by `/tcb/frame engine`.
2. The *interior* of the box. The interior of a box with title is drawn differently from a box without title. `/tcb/interior titled engine` or `/tcb/interior engine`<sup>→P.86</sup> is used to draw the interior.
3. The *segmentation* (line) of the box, if there is a lower part; drawn by `/tcb/segmentation engine`<sup>→P.86</sup>.
4. The *title area* of the box, if there is a title and `/tcb/title filled`<sup>→P.19</sup> is set to `true`; drawn by `/tcb/title engine`<sup>→P.86</sup>.

`/tcb/frame engine=⟨name⟩` (no default, initially `standard`)

Sets the *frame* drawing engine for a box to `⟨name⟩`. Typically, this key is set by a `/tcb/skin`<sup>→P.84</sup>. Feasible values for `⟨name⟩` are:

- `standard`: the original code from the core package,
- `path`: a `tikz` path which is controlled by `/tcb/frame style`<sup>→P.96</sup>,
- `pathjigsaw`: a `tikz` path which is controlled by `/tcb/frame style`<sup>→P.96</sup>,
- `pathfirst`: a `tikz` path which is controlled by `/tcb/frame style`<sup>→P.96</sup>,
- `pathfirstjigsaw`: a `tikz` path which is controlled by `/tcb/frame style`<sup>→P.96</sup>,
- `pathmiddle`: a `tikz` path which is controlled by `/tcb/frame style`<sup>→P.96</sup>,
- `pathmiddlejigsaw`: a `tikz` path which is controlled by `/tcb/frame style`<sup>→P.96</sup>,
- `pathlast`: a `tikz` path which is controlled by `/tcb/frame style`<sup>→P.96</sup>,
- `pathlastjigsaw`: a `tikz` path which is controlled by `/tcb/frame style`<sup>→P.96</sup>,
- `freelance`: deprecated.
- `spartan`: a quite spartan code.
- `empty`: draw nothing.

`/tcb/interior titled engine=⟨name⟩` (no default, initially `standard`)

Sets the *interior* drawing engine for a titled box to `⟨name⟩`. Typically, this key is set by a `/tcb/skin`<sup>→P.84</sup>. Feasible values for `⟨name⟩` are:

- `standard`: the original code from the core package,
- `path`: a `tikz` path which is controlled by `/tcb/interior style`<sup>→P.97</sup>,
- `pathfirst`: a `tikz` path which is controlled by `/tcb/interior style`<sup>→P.97</sup>,
- `pathmiddle`: a `tikz` path which is controlled by `/tcb/interior style`<sup>→P.97</sup>,
- `pathlast`: a `tikz` path which is controlled by `/tcb/interior style`<sup>→P.97</sup>,
- `freelance`: deprecated.
- `spartan`: a quite spartan code.
- `empty`: draw nothing.



`/tcb/interior engine=<name>` (no default, initially **standard**)

Sets the *interior* drawing engine for an untitled box to `<name>`. Typically, this key is set by a `/tcb/skin`<sup>→P.84</sup>. Feasible values for `<name>` are:

- **standard**: the original code from the core package,
- **path**: a tikz path which is controlled by `/tcb/interior style`<sup>→P.97</sup>,
- **pathfirst**: a tikz path which is controlled by `/tcb/interior style`<sup>→P.97</sup>,
- **pathmiddle**: a tikz path which is controlled by `/tcb/interior style`<sup>→P.97</sup>,
- **pathlast**: a tikz path which is controlled by `/tcb/interior style`<sup>→P.97</sup>,
- **freelance**: deprecated.
- **spartan**: a quite spartan code.
- **empty**: draw nothing.

`/tcb/segmentation engine=<name>` (no default, initially **standard**)


Sets the *segmentation* (line) drawing engine for a box to `<name>`. Typically, this key is set by a `/tcb/skin`<sup>→P.84</sup>. Feasible values for `<name>` are:

- **standard**: the original code from the core package,
- **path**: a tikz path which is controlled by `/tcb/segmentation style`<sup>→P.99</sup>,
- **freelance**: deprecated.
- **spartan**: a quite spartan code.
- **empty**: draw nothing.

`/tcb/title engine=<name>` (no default, initially **standard**)

Sets the *title area* drawing engine for a titled box to `<name>`. Typically, this key is set by a `/tcb/skin`<sup>→P.84</sup>. Feasible values for `<name>` are:

- **standard**: the original code from the core package,
- **path**: a tikz path which is controlled by `/tcb/title style`<sup>→P.99</sup>,
- **pathfirst**: a tikz path which is controlled by `/tcb/title style`<sup>→P.99</sup>,
- **pathmiddle**: a tikz path which is controlled by `/tcb/title style`<sup>→P.99</sup>,
- **pathlast**: a tikz path which is controlled by `/tcb/title style`<sup>→P.99</sup>,
- **freelance**: deprecated.
- **spartan**: a quite spartan code.
- **empty**: draw nothing.

After an engine is set to an initializing value, the resulting graphical code can be changed using code option keys, see Section 6.2 on page 88. 





`/tcb/geometry nodes=true|false` (default `true`, initially `false`)

If set to `true`, up to four `tikz` nodes are defined for a `tcolorbox` which are named `frame`, `interior`, `segmentation`, and `title`. These nodes describe the boundaries of the equally named parts of a `tcolorbox`. They are used by most engines based on `TikZ`. Typically, this key is set automatically by a `/tcb/skin` <sup>→ P. 84</sup>.

```
\tcbset{colback=Salmon!50!white,colframe=FireBrick!75!black,
width=(\linewidth-8mm)/2,before=,after=\hfill,equal height group=geon}

\begin{tcolorbox}[adjusted title=The title]
  The upper part.\tcblower The lower part.
\end{tcolorbox}

\begin{tcolorbox}[enhanced,adjusted title=The title,
frame code={\path[draw=red,fill=red!25]
  (frame.south west) rectangle (frame.north east);},
interior titled code={\path[draw=blue,fill=blue!25]
  (interior.south west) rectangle (interior.north east);},
segmentation code={\path[draw=green,fill=green!25]
  (segmentation.south west) rectangle (segmentation.north east);},
title code={\path[draw=black,fill=brown!75!black]
  (title.south west) rectangle (title.north east);}]
  The upper part.\tcblower The lower part.
\end{tcolorbox}
```

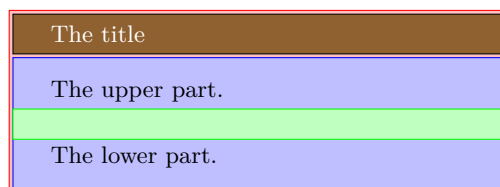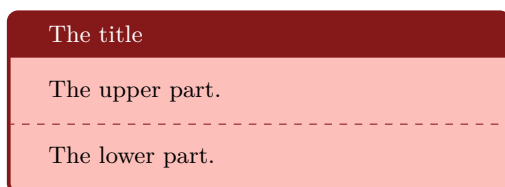




## 6.2 Code Option Keys

The following code options are applicable for all skins. The used *graphical code* can be any pgf code. For all skins with exception of `standard`<sup>P.143</sup> and `standard jigsaw`<sup>P.144</sup>, the *graphical code* can also be any TikZ code.

`/tcb/frame code=<graphical code>` (code, default from `standard`)

The given *graphical code* is used for drawing the *frame* of the box.

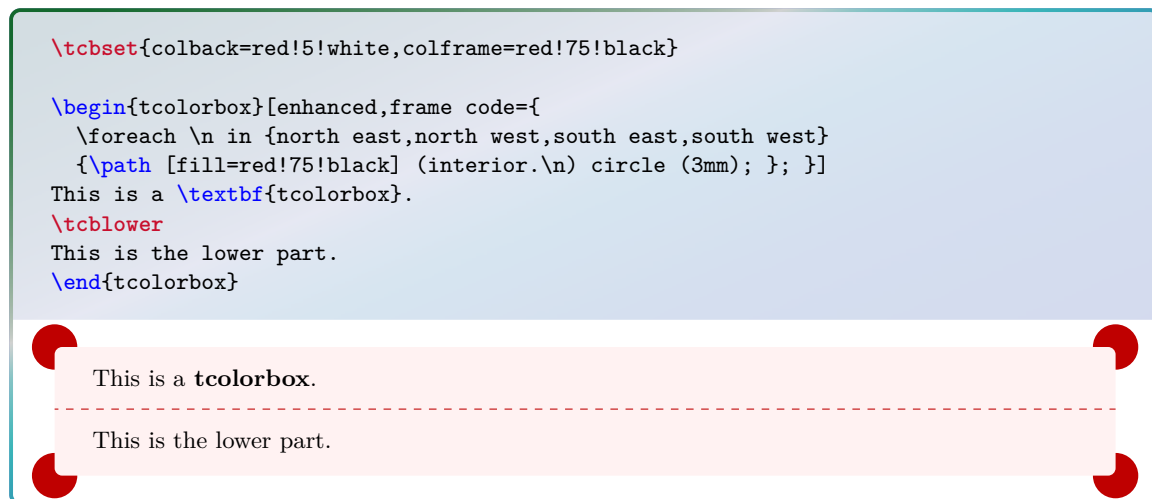


`/tcb/frame empty` (style, no value)

This is a shortcut for setting `/tcb/frame code` to empty. This option removes the drawing of the frame. Alternatively, use `/tcb/frame hidden`<sup>P.97</sup>.

`/tcb/interior titled code=<graphical code>` (code, default from `standard`)

The given *graphical code* is used for drawing the *interior* of the box, if the box comes with a title.

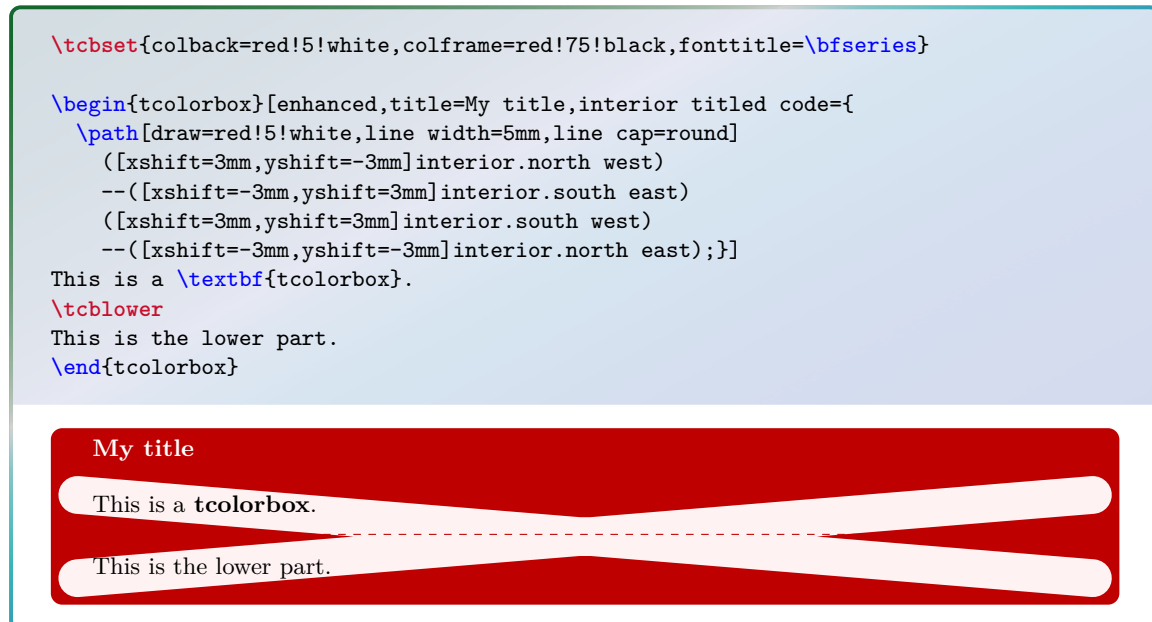

`/tcb/interior titled empty` (style, no value)

This is a shortcut for setting `/tcb/interior titled code` to empty. This option removes the drawing of the untitled interior. Alternatively, use `/tcb/interior hidden`<sup>P.98</sup>.




`/tcb/interior code=<graphical code>` (code, default from `standard`)

The given `<graphical code>` is used for drawing the *interior* of the box, if the box is without a title.

```
\tcbset{colback=red!5!white,colframe=red!75!black}

\begin{tcolorbox}[enhanced,interior code={
  \path[draw=red!5!white,line width=5mm,line cap=round]
    ([xshift=3mm,yshift=-3mm]interior.north west)
    --([xshift=-3mm,yshift=3mm]interior.south east)
    ([xshift=3mm,yshift=3mm]interior.south west)
    --([xshift=-3mm,yshift=-3mm]interior.north east);}]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```

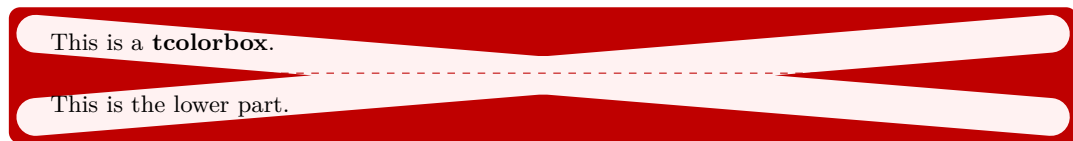

`/tcb/interior empty` (style, no value)

This is a shortcut for setting `/tcb/interior code` to empty. This option removes the drawing of the interior. Alternatively, use `/tcb/interior hidden` <sup>→ P. 98</sup>.

`/tcb/segmentation code=<graphical code>` (code, default from `standard`)

The given `<graphical code>` is used for drawing the *segmentation* area of the box.

```
\tcbset{colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries}

\begin{tcolorbox}[enhanced,title=My title,segmentation code={
  \path[top color=red!5!white,bottom color=red!5!white,middle color=blue]
    (segmentation.south west) rectangle (segmentation.north east);}]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```



`/tcb/segmentation empty` (style, no value)

This is a shortcut for setting `/tcb/segmentation code` to empty. This option removes the drawing of the segmentation line. Alternatively, use `/tcb/segmentation hidden` <sup>→ P. 99</sup>.




`/tcb/title code=<graphical code>` (code, default from `standard`)

The given `<graphical code>` is used for drawing the *title* area of the box.

```
\tcbset{colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries,
coltitle=black}

\begin{tcolorbox}[enhanced,title=My title,title code={
  \path[draw=yellow,solid,decorate,line width=2mm,
    decoration={coil,aspect=0,segment length=10.1mm}]
    ([xshift=1mm]title.west) -- ([xshift=-1mm]title.east);}]
  This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```

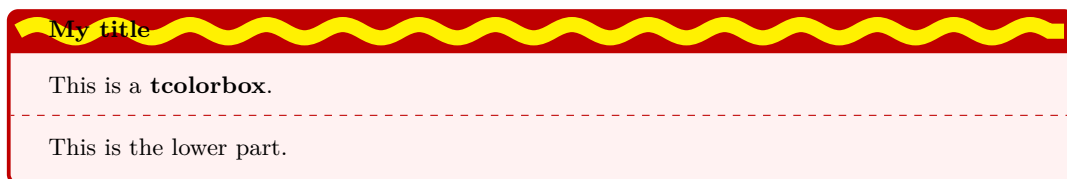

`/tcb/title empty` (style, no value)

This is a shortcut for setting `/tcb/title code` to empty. This option removes the drawing of the title area. Alternatively, use `/tcb/title hidden`<sup>→P.100</sup>.



### 6.3 Subskins

A subskin is a new `/tcb/skin`<sup>P.84</sup> based on an existing skin which is extended or changed.

Never use geometry settings or bounding box options inside a subskin definition! If one skin is replaced by another skin, the overall bounding box should stay constant. Especially, if a skin is used for a breakable box, unpredictable and unpleasant results could arise otherwise. If you want to change the geometry also, use an additional style. See the skin `beamer`<sup>→ P. 163</sup> and the style `/tcb/beamer`<sup>→ P. 163</sup> as pattern.

$$\texttt{\backslash tcbsubskin}\{\langle name \rangle\}\{\langle base skin \rangle\}\{\langle options \rangle\}$$

Creates a new skin `<name>` which inherits all properties of an existing `<base skin>` plus the given `<options>`. The new skin `<name>` can be used as value for the keys `/tcb/skin`<sup>P.84</sup>, `/tcb/skin first`<sup>P.84</sup>, `/tcb/skin middle`<sup>P.84</sup>, and `/tcb/skin last`<sup>P.84</sup>. As `<base skin>`, one can take `standard`<sup>P.143</sup>, `empty`<sup>P.172</sup>, `enhanced`<sup>P.145</sup>, or any skin from the `lib skins` library, see Section 7 on page 96.

```
% \tcbuselibrary{skins}
\tcbsubskin{mycross}{empty}{frame code={%
  \draw[red,line width=5pt] (frame.south west)--(frame.north east);
  \draw[red,line width=5pt] (frame.north west)--(frame.south east);},
  skin first=mycross,skin middle=mycross,skin last=mycross }

\begin{tcolorbox}[skin=mycross]
  This is my content.
\end{tcolorbox}
```

This is my content.

`/tcb/skin first is subskin of`= $\{\langle base\ skin \rangle\}\{\langle options \rangle\}$  (no default, initially unset)

Creates a new unnamed skin which inherits all properties of an existing  $\langle base\ skin \rangle$  plus the given  $\langle options \rangle$ . This skin is set as `/tcb/skin first`<sup>P. 84</sup>.

See a detailed example on page 177.

`/tcb/skin middle is subskin of={⟨base skin⟩}{⟨options⟩}` (no default, initially unset)

Creates a new unnamed skin which inherits all properties of an existing  $\langle base\ skin \rangle$  plus the given  $\langle options \rangle$ . This skin is set as `/tcb/skin middle`<sup>P. 84</sup>.

See a detailed example on page 177.

`/tcb/skin last is subskin of={ $\langle base\ skin \rangle$ }{ $\langle options \rangle$ }` (no default, initially unset)

Creates a new unnamed skin which inherits all properties of an existing  $\langle base\ skin \rangle$  plus the given  $\langle options \rangle$ . This skin is set as `/tcb/skin last`<sup>P.84</sup>.

See a detailed example on page 177.



## 6.4 Drawing Scheme

Depending on the complexity of a `tcolorbox` definition, the resulting box is drawn in a more or less complex series of steps.

To document and demonstrate these drawing steps, we consider the following box definition:

```
\newtcolorbox{testbox}[1][\{enhanced,title=Test Box,
  boxrule=1mm,titlerule=0.5mm,colframe=blue!50!black,
  interior style={top color=blue!20!green!50!white,bottom color=blue!20!yellow!50!white},
  colbacktitle=blue!50!green!90!white,segmentation style={solid},
  fonttitle=\bfseries,drop fuzzy shadow,borderline={0.3mm}{0.35mm}{yellow!50!white},
  underlay={\path[fill image opacity=0.15,fill image scale=0.9,
    fill stretch picture={\draw[blue,line width=2mm] circle (1);}]
    (interior.south west) rectangle (interior.north east);},
  watermark text={Watermark},watermark color={green!20!white},
  finish={\begin{tcbclipframe}
    \path[bottom color=black,top color=black!50!white,opacity=0.1]
      (frame.south west) -- (frame.south east) -- (frame.north east) -- cycle;
    \path[top color=white,bottom color=black!50!white,opacity=0.1]
      (frame.south west) -- (frame.north east) -- (frame.north west) -- cycle;
  \end{tcbclipframe}}{#1}
```

For this definition, we get the maximal number of drawing steps:


1. shadow

- Section 7.6 on page 124

2. frame

- `/tcb/colframe` <sup>→ P. 19</sup>, `/tcb/opacityframe` <sup>→ P. 36</sup>
- `/tcb/frame code` <sup>→ P. 88</sup>
- `/tcb/frame style` <sup>→ P. 96</sup>



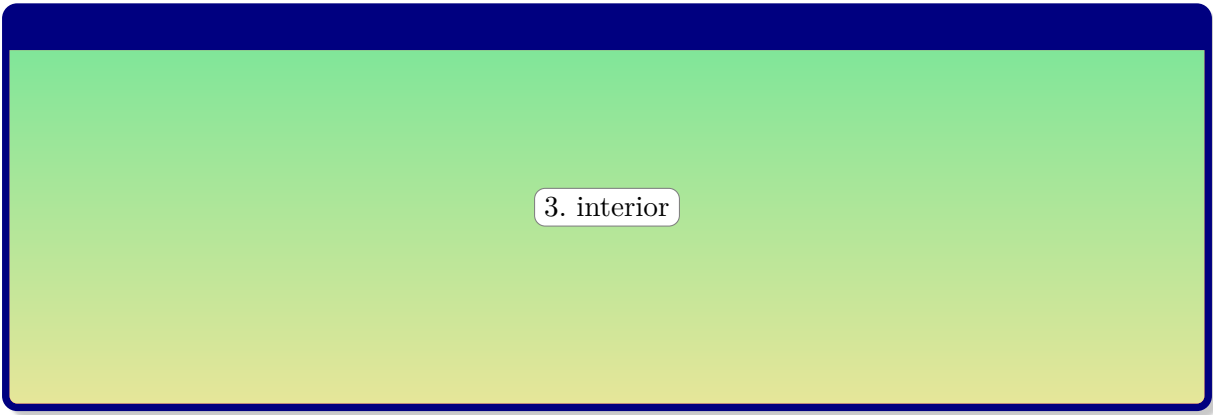

### 3. interior

- `/tcb/colback`<sup>→ P. 19</sup>, `/tcb/opacityback`<sup>→ P. 36</sup>
- `/tcb/interior code`<sup>→ P. 89</sup>, `/tcb/interior titled code`<sup>→ P. 88</sup>
- `/tcb/interior style`<sup>→ P. 97</sup>



### 4. title area


- `/tcb/colbacktitle`<sup>→ P. 19</sup>, `/tcb/opacitybacktitle`<sup>→ P. 36</sup>
- `/tcb/title code`<sup>→ P. 90</sup>
- `/tcb/title style`<sup>→ P. 99</sup>




### 5. segmentation

- `/tcb/lower separated`<sup>→ P. 17</sup>
- `/tcb/segmentation code`<sup>→ P. 89</sup>
- `/tcb/segmentation style`<sup>→ P. 99</sup>




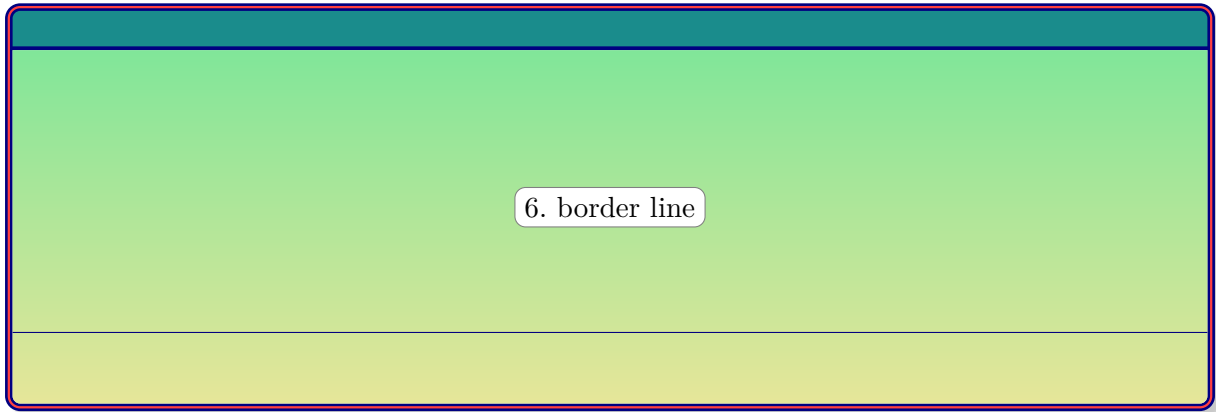

- Section 7.5 on page 121

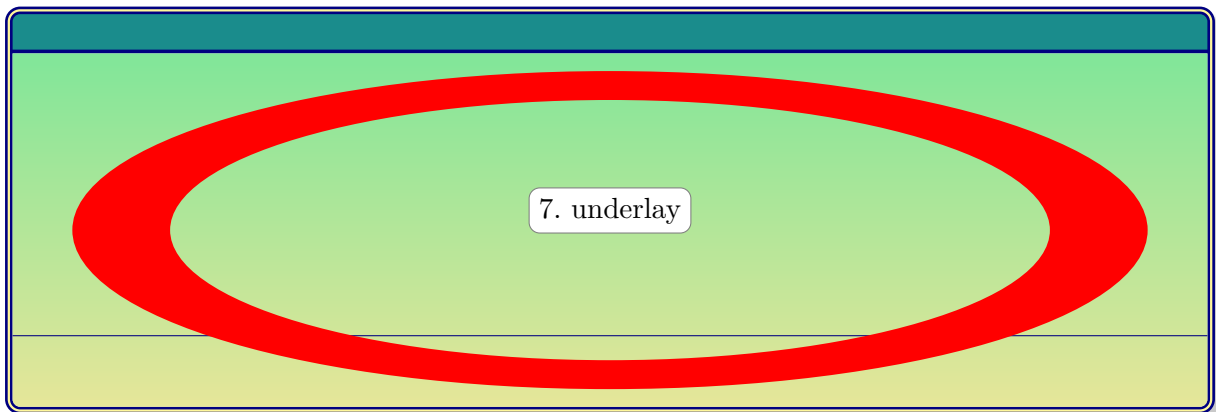

- Section 7.2 on page 102
- Section 7.8 on page 136

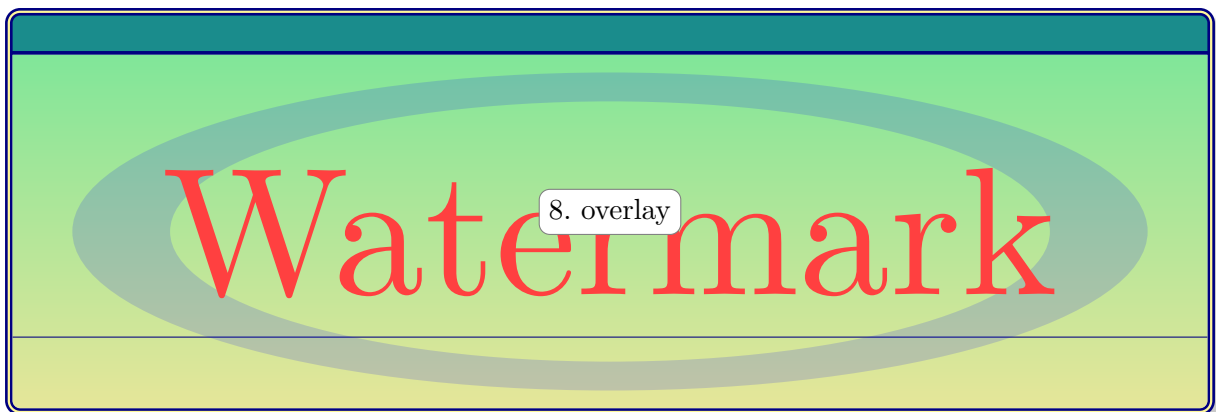

- Section 3.9 on page 53
- Section 7.3 on page 109



### Test Box

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

9. text content

Lower part

- `/tcb/colupper→P.20`, `/tcb/collower→P.20`, `/tcb/coltitle→P.20`
- `/tcb/fontupper→P.21`, `/tcb/fontlower→P.21`, `/tcb/fonttitle→P.21`
- `/tcb/opacityupper→P.37`, `/tcb/opacitylower→P.37`, `/tcb/opacitytitle→P.37`

### Test Box

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

10. finish

Lower part

- Section 7.9 on page 138

All together, the box is drawn:

```
% \usepackage{lipsum}
\begin{testbox}
\lipsum[2]
\tcblower
Lower part
\end{testbox}
```

### Test Box

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Lower part



## 7 Library

The library is loaded by a package option or inside the preamble by:

```
\tcbuselibrary{skins}
```

This also loads the package `tikz` [20]. Typically but not necessarily, the following skins use `tikz` instead of `pgf`.

### 7.1 Style Option Keys


The following style options are applicable for all skins which use engines of type `path`, `pathfirst`, `pathmiddle`, or `pathlast`. Especially, the skin `enhanced`<sup>→P.145</sup> supports *all* of them and `standard`<sup>→P.143</sup> *none*.

`/tcb/frame style=<tikz keys>` (style, no default)

The `<tikz keys>` are used inside the `tikz` path command for drawing the *frame* of the box. This option is available if the `/tcb/frame engine`<sup>→P.85</sup> is set to `path`, `pathfirst`, `pathmiddle`, or `pathlast`. It is *not* available for `standard`.

```
\tcbset{colback=red!5!white,fonttitle=\bfseries}

\begin{tcolorbox}[enhanced,title=My title,
  frame style={left color=red!75!black,
               right color=blue!75!black}]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```

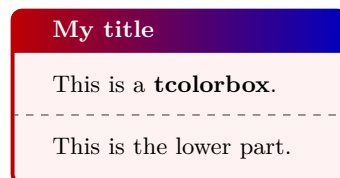


`/tcb/frame style image=<file name>` (no default, initially unset)

Fills the frame with an external image referenced by `<file name>`. For advanced features like blending of a picture with the background, use `/tcb/frame style` together with `/tikz/fill stretch image`<sup>→P.186</sup>.

```
\tcbset{colback=red!5!white,fonttitle=\bfseries}

\begin{tcolorbox}[enhanced,title=My title,
  frame style image=blueshade.png]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```

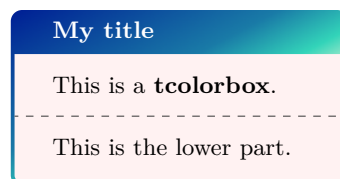




**/tcb/frame style tile**={<graphics options>}{<file name>} (no default, initially unset)

Fills the frame with a tile pattern based on an external image referenced by <file name>. The <graphics options> are given to the underlying `\includegraphics` command. For advanced features like blending of a picture with the background, use `/tcb/frame style` <sup>→ P. 96</sup> together with `/tikz/fill tile image` <sup>→ P. 190</sup>.

```
\tcbset{colback=red!5!white,coltitle=red!30!black,
  opacityback=0.75,fonttitle=\bfseries}

\begin{tcolorbox}[enhanced,title=My title,
  frame style tile={width=1cm}{pink_marble.png}]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```

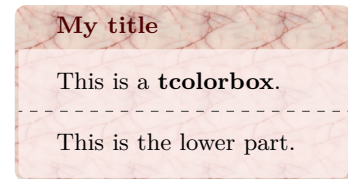

**/tcb/frame hidden** (style, no value)

This is a shortcut for `frame style={draw=none,fill=none}`. Depending on the skin, this option switches off the drawing of the frame. Alternatively, use `/tcb/frame empty` <sup>→ P. 88</sup>.

```
\tcbset{colback=red!5!white,colframe=red!75!black,
  fonttitle=\bfseries,coltitle=black}

\begin{tcolorbox}[enhanced,title=My title,
  frame hidden]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```

My title

This is a **tcolorbox**.

---


This is the lower part.

**/tcb/interior style**=<tikz keys> (style, no default)

The <tikz keys> are used inside the `tikz` path command for drawing the *interior* of the box. They are used for the titled and for the untitled version as well. This option is available if the `/tcb/interior titled engine` <sup>→ P. 85</sup> or `/tcb/interior engine` <sup>→ P. 86</sup> is set to `path`, `pathfirst`, `pathmiddle`, or `pathlast`. It is *not* available for standard.

```
\tcbset{colframe=red!75!black,fonttitle=\bfseries}

\begin{tcolorbox}[enhanced,title=My title,
  interior style={left color=red!20!white,
    right color=yellow!50!white}]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```

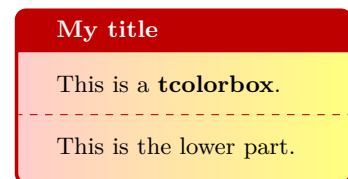




`/tcb/interior style image=<file name>` (no default, initially unset)

Fills the interior with an external image referenced by `<file name>`. For advanced features like blending of a picture with the background, use `/tcb/interior style`<sup>→P.97</sup> together with `/tikz/fill stretch image`<sup>→P.186</sup>.

```
\tcbset{colframe=red!75!black,fonttitle=\bfseries}

\begin{tcolorbox}[enhanced,title=My title,
  interior style image=goldshade.png]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```

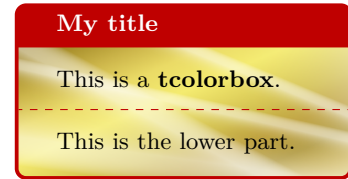


`/tcb/interior style tile={<graphics options>}{<file name>}` (no default, initially unset)

Fills the interior with a tile pattern based on an external image referenced by `<file name>`. The `<graphics options>` are given to the underlying `\includegraphics` command. For advanced features like blending of a picture with the background, use `/tcb/interior style`<sup>→P.97</sup> together with `/tikz/fill tile image`<sup>→P.190</sup>.

```
\tcbset{colframe=red!75!black,fonttitle=\bfseries}

\begin{tcolorbox}[enhanced,title=My title,
  interior style tile={width=2cm}{crinklepaper.png}]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```

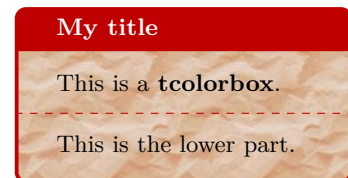


`/tcb/interior hidden` (style, no value)

This is a shortcut for `interior style={draw=none,fill=none}`. Depending on the skin, this option switches off the drawing of the interior. Alternatively, use `/tcb/interior empty`<sup>→P.89</sup> and/or `/tcb/interior titled empty`<sup>→P.88</sup>.

```
\tcbset{frame style={top color=red!20!white,
  bottom color=red!20!white!75!black},
  fonttitle=\bfseries,coltitle=black}

\begin{tcolorbox}[enhanced,title=My title,
  interior hidden]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```

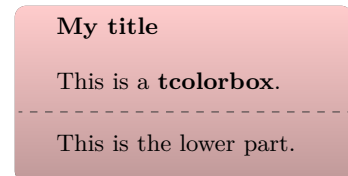




`/tcb/segmentation style=<tikz keys>` (style, no default)

The `<tikz keys>` are used inside the `tikz` path command for drawing the *segmentation* line of the box.

This option is available if the `/tcb/segmentation engine`<sup>→P.86</sup> is set to `path`. It is *not* available for `standard`.

```
\tcbset{colback=red!5!white,colframe=red!75!black,
fonttitle=\bfseries}

\begin{tcolorbox}[enhanced,title=My title,
segmentation style={double=white,draw=blue,
double distance=1pt,solid}]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```

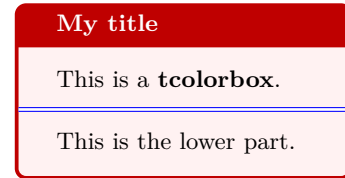


`/tcb/segmentation hidden` (style, no value)

This is a shortcut for `segmentation style={draw=none,fill=none}`. Depending on the skin, this option switches off the drawing of the segmentation line. See also `/tcb/lower separated`<sup>→P.17</sup> which has the same effect for most skins. Alternatively, use `/tcb/segmentation empty`<sup>→P.89</sup>.

```
\tcbset{colback=red!5!white,colframe=red!75!black,
fonttitle=\bfseries}

\begin{tcolorbox}[title=My title,
enhanced,segmentation hidden]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```

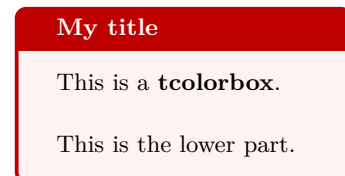


`/tcb/title style=<tikz keys>` (style, no default)

The `<tikz keys>` are used inside the `tikz` path command for drawing the *title area* of the box.

This option is available if the `/tcb/title engine`<sup>→P.86</sup> is set to `path`, `pathfirst`, `pathmiddle`, or `pathlast`. It is *not* available for `standard`.

```
\tcbset{colback=red!5!white,colframe=red!75!black,
coltitle=blue!50!black,fonttitle=\bfseries}

\begin{tcolorbox}[enhanced,title=My title,
title style={left color=blue!15!yellow,
right color=red!85!black}]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```

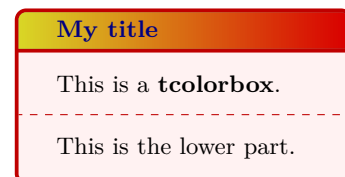




`/tcb/title style image=<file name>` (no default, initially unset)

Fills the title area with an external image referenced by `<file name>`. For advanced features like blending of a picture with the background, use `/tcb/title style`<sup>→ P. 99</sup> together with `/tikz/fill stretch image`<sup>→ P. 186</sup>.

```
\tcbset{colback=blue!5!white,colframe=blue!75!black,
fonttitle=\bfseries}

\begin{tcolorbox}[enhanced,title=My title,
title style image=blueshade.png]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```

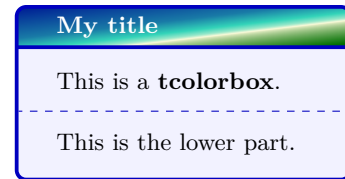


`/tcb/title style tile={<graphics options>}{<file name>}` (no default, initially unset)

Fills the title area with a tile pattern based on an external image referenced by `<file name>`. The `<graphics options>` are given to the underlying `\includegraphics` command. For advanced features like blending of a picture with the background, use `/tcb/title style`<sup>→ P. 99</sup> together with `/tikz/fill tile image`<sup>→ P. 190</sup>.

```
\tcbset{colback=red!5!white,colframe=red!75!black,
coltitle=blue!50!black,fonttitle=\bfseries}

\begin{tcolorbox}[enhanced,title=My title,
title style tile={width=1cm}{pink_marble.png}]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```

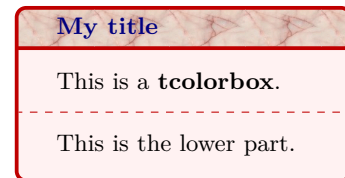


`/tcb/title hidden` (style, no value)

This is a shortcut for `title style={draw=none,fill=none}`. Depending on the skin, this option switches off the drawing of the title background. See also `/tcb/title filled`<sup>→ P. 19</sup> for a similar effect. Alternatively, use `/tcb/title empty`<sup>→ P. 90</sup>.

```
\tcbset{colback=red!5!white,colframe=red!75!black,
fonttitle=\bfseries}

\begin{tcolorbox}[title=My title,
enhanced,title hidden]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```

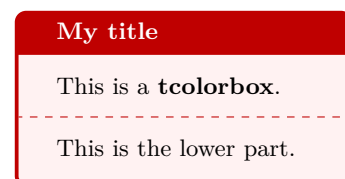




The combined TikZ style applied to frame, interior, and title background can be used by authors in customizing code.

`/tikz/tcb fill frame` (style, no value)

This is a TikZ style which is finally applied to the *frame* of the box.

```
% \tcbuselibrary{hooks}
\tcbset{enhanced,colback=red!5!white,
  colframe=red!75!black,fonttitle=\bfseries,
  frame code app={\path[tcb fill frame]
    ([yshift=-2mm]frame.north)
      circle (8mm); } }

\begin{tcolorbox}[title=My title]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```

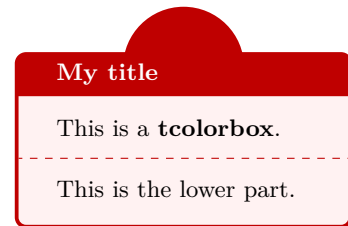


`/tikz/tcb fill interior` (style, no value)

This is a TikZ style which is finally applied to the *interior* of the box.

```
% \tcbuselibrary{hooks}
\tcbset{enhanced,colback=red!5!white,
  colframe=red!75!black,fonttitle=\bfseries,
  interior titled code app={\path[tcb fill interior]
    ([yshift=-0.1pt]interior.north east)
    --([yshift=3pt]interior.north)
    --([yshift=-0.1pt]interior.north west)
    --cycle;} }

\begin{tcolorbox}[title=My title]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```

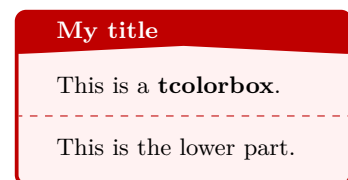


`/tikz/tcb fill title` (style, no value)

This is a TikZ style which is finally applied to the *title* area of the box.

```
% \tcbuselibrary{hooks}
\tcbset{enhanced,colback=red!5!white,
  colframe=red!75!black,fonttitle=\bfseries,
  colbacktitle=blue!75!black,
  title code app={\path[tcb fill title]
    (title) circle (5mm); } }

\begin{tcolorbox}[title=My title]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```

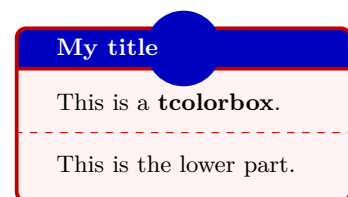



## 7.2 Boxed Title Option Keys

The following options place the title text into an own `\tcbox→P.11`. This boxed title can be customized independently from the main box using `/tcb/boxed title style→P.104`. The placement can be influenced by `\boxedtitle options`.

`/tcb/attach boxed title to top left=\boxedtitle options` (style, default empty)

The title is boxed with a `\tcbox→P.11` and attached to the top left corner of the main box.

```
\begin{tcolorbox}[enhanced,title=My title,
  attach boxed title to top left]
  This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

My title

This is a **tcolorbox**.

`/tcb/attach boxed title to top center=\boxedtitle options` (style, default empty)

The title is boxed with a `\tcbox→P.11` and attached to the top of the main box.

```
\begin{tcolorbox}[enhanced,title=My title,
  attach boxed title to top center]
  This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

My title

This is a **tcolorbox**.

`/tcb/attach boxed title to top right=\boxedtitle options` (style, default empty)

The title is boxed with a `\tcbox→P.11` and attached to the top right corner of the main box.

```
\begin{tcolorbox}[enhanced,title=My title,
  attach boxed title to top right]
  This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

My title

This is a **tcolorbox**.

`/tcb/attach boxed title to bottom left=\boxedtitle options` (style, default empty)

The title is boxed with a `\tcbox→P.11` and attached to the bottom left corner of the main box.

```
\begin{tcolorbox}[enhanced,title=My title,
  attach boxed title to bottom left]
  This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

This is a **tcolorbox**.

My title

`/tcb/attach boxed title to bottom center=\boxedtitle options` (style, default empty)

The title is boxed with a `\tcbox→P.11` and attached to the bottom of the main box.

```
\begin{tcolorbox}[enhanced,title=My title,
  attach boxed title to bottom center]
  This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

This is a **tcolorbox**.

My title

`/tcb/attach boxed title to bottom right=\boxedtitle options` (style, default empty)

The title is boxed with a `\tcbox→P.11` and attached to the bottom right corner of the main box.

```
\begin{tcolorbox}[enhanced,title=My title,
  attach boxed title to bottom right]
  This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

This is a **tcolorbox**.

My title



The  $\langle\text{boxtitle options}\rangle$  of the keys described above are shift values. The dimensions of the boxed title are stored into two macros `\tcboxedtitleheight` and `\tcboxedtitlewidth`. These macros can be used inside the following  $\langle\text{boxtitle options}\rangle$ :

`/tcb/boxtitle/xshift= $\langle\text{length}\rangle$`  (no default, initially 0pt)

The boxed title is shifted by  $\langle\text{length}\rangle$  in the horizontal direction.

```
\begin{tcolorbox}[enhanced,title=My title,
  attach boxed title to top left={xshift=-2mm},
  boxed title style={size=small,colback=blue}]
  This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

My title

This is a **tcolorbox**.

`/tcb/boxtitle/yshift= $\langle\text{length}\rangle$`  (no default, initially 0pt)

The boxed title is shifted by  $\langle\text{length}\rangle$  in the vertical direction.

```
\begin{tcolorbox}[enhanced,title=My title,
  attach boxed title to top center=
    {yshift=-\tcboxedtitleheight/2},
  boxed title style={size=small,colback=blue}]
  This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

My title

This is a **tcolorbox**.

`/tcb/boxtitle/yshifttext= $\langle\text{length}\rangle$`  (no default, initially 0pt)

The text inside the main box by  $\langle\text{length}\rangle$  to give room for e. g. a sunken title.

```
\begin{tcolorbox}[enhanced,title=My title,
  attach boxed title to top center=
    {yshift=-3mm,yshifttext=-1mm},
  boxed title style={size=small,colback=blue}]
  This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

My title

This is a **tcolorbox**.

`/tcb/boxtitle/yshift*= $\langle\text{length}\rangle$`  (no default, initially 0pt)

Sets `/tcb/boxtitle/yshift` and `/tcb/boxtitle/yshifttext` the same time.

`/tcb/boxtitle/yshifttext` is only set if necessary.

```
\begin{tcolorbox}[enhanced,title=My title,
  attach boxed title to top center={yshift*=-3mm},
  boxed title style={size=small,colback=blue}]
  This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

My title

This is a **tcolorbox**.

The bounding box of the resulting total **tcolorbox** is adapted automatically to the *vertical* dimensions of the boxed title. Possible horizontal enlargements are *not* automatically computed.

```
\begin{tcolorbox}[enhanced,title=My title,
  attach boxed title to top left=
    {xshift=-2mm,yshift=-2mm},
  boxed title style={size=small,colback=blue},
  show bounding box]
  This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

My title

This is a **tcolorbox**.



The boxed title options are implemented as an underlay, see Section 7.8 on page 136. Therefore, a boxed title is not drawn, if a skin does not support underlays like `standard`<sup>→P.143</sup>. Still, the room for the boxed titles gets reserved in these cases.


A TikZ node `title` is produced by a boxed title which can be used inside `/tcb/frame code`<sup>→P.88</sup>, `/tcb/interior code`<sup>→P.89</sup>, underlays, overlays, and finishes.

A boxed title is almost always the first underlay. The only exceptions are underlays defined by `/tcb/underlay boxed title`<sup>→P.137</sup> which are drawn before. Additionally, underlays defined by `/tcb/underlay boxed title`<sup>→P.137</sup> are only drawn, if a boxed title is actually set. They are ignored, if there is no boxed title.


`/tcb/boxed title style=<options>` (style, initially empty)

By default, a boxed title is dimensioned with `/tcb/size`<sup>→P.29</sup>=`title` and inherits `/tcb/colframe`<sup>→P.19</sup> of the main box. Also, the `/tcb/colback`<sup>→P.19</sup> is inherited from the main `/tcb/colbacktitle`<sup>→P.19</sup>. Font and color of the title text are set as usual. All other `<options>` are set by the `boxed title style` key. Since a boxed title is set by `\tcbbox`<sup>→P.11</sup>, all `tcolorbox` options are applicable here.

```
\begin{tcolorbox}[enhanced,title=My title,
fonttitle=\bfseries,coltitle=green!25!black,
attach boxed title to top center=
{yshift=-2mm,yshifttext=-1mm},
boxed title style={colframe=green!75!black,
colback=yellow!50!green}]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

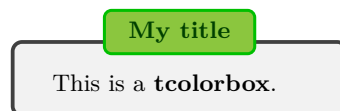

```
\begin{tcolorbox}[enhanced,title=My title,
colframe=red!50!black,colback=red!10!white,
arc=1mm,colbacktitle=red!10!white,
fonttitle=\bfseries,coltitle=red!50!black,
attach boxed title to top left=
{xshift=3.2mm,yshift=-0.50mm},
boxed title style={enhanced,
skin=enhancedfirst jigsaw,
size=small,arc=1mm,bottom=-1mm,
interior style={top color=red!30!white,
bottom color=red!20!white}}]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

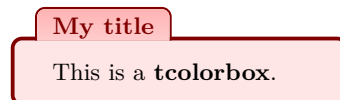



```

\begin{tcolorbox}[enhanced,title=My title,
colframe=blue!50!black,colback=blue!10!white,colbacktitle=blue!5!yellow!10!white,
fonttitle=\bfseries,coltitle=black,attach boxed title to top center=
{yshift=-0.25mm-\tcboxedtitleheight/2,yshifttext=2mm-\tcboxedtitleheight/2},
boxed title style={enhanced,boxrule=0.5mm,
frame code={ \path[tcb fill frame] ([xshift=-4mm]frame.west)
-- (frame.north west) -- (frame.north east) -- ([xshift=4mm]frame.east)
-- (frame.south east) -- (frame.south west) -- cycle; },
interior code={ \path[tcb fill interior] ([xshift=-2mm]interior.west)
-- (interior.north west) -- (interior.north east)
-- ([xshift=2mm]interior.east) -- (interior.south east) -- (interior.south west)
-- cycle;} }]
\lipsum[2]
\end{tcolorbox}

```

### My title

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

```

% \usepackage{varwidth}
\newtcolorbox{mybox}[2][{}]{enhanced,skin=enhancedlast jigsaw,
attach boxed title to top left={xshift=-4mm,yshift=-0.5mm},
fonttitle=\bfseries\sffamily,varwidth boxed title=0.7\linewidth,
colbacktitle=blue!45!white,colframe=red!50!black,
interior style={top color=blue!10!white,bottom color=red!10!white},
boxed title style={empty,arc=0pt,outer arc=0pt,boxrule=0pt},
underlay boxed title={
\fill[blue!45!white] (title.north west) -- (title.north east)
-- +(\tcboxedtitleheight-1mm,-\tcboxedtitleheight+1mm)
-- ([xshift=4mm,yshift=0.5mm]frame.north east) -- +(0mm,-1mm)
-- (title.south west) -- cycle;
\fill[blue!45!white!50!black] ([yshift=-0.5mm]frame.north west)
-- +(-0.4,0) -- +(0,-0.3) -- cycle;
\fill[blue!45!white!50!black] ([yshift=-0.5mm]frame.north east)
-- +(0,-0.3) -- +(0.4,0) -- cycle; },
title={#2},#1}

\begin{mybox}{My title}
\lipsum[2]
\end{mybox}

```

### My title

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.



```
% \usepackage{varwidth}
\newtcolorbox{mybox}[2][{}]{enhanced,
  attach boxed title to top left={xshift=1cm,yshift=-2mm},
  fonttitle=\bfseries,varwidth boxed title=0.7\linewidth,
  colbacktitle=green!45!white,coltitle=green!10!black,colframe=green!50!black,
  interior style={top color=yellow!10!white,bottom color=green!10!white},
  boxed title style={enhanced,boxrule=0.75mm,colframe=white,
    borderline={0.1mm}{0mm}{green!50!black},
    borderline={0.1mm}{0.75mm}{green!50!black},
    interior style={top color=green!10!white,bottom color=green!10!white,
      middle color=green!50!white},
    drop fuzzy shadow},
  title={#2},#1}

\begin{mybox}{My title}
  \lipsum[2]
\end{mybox}
```

### My title

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

```
% \usepackage{varwidth}
\newtcolorbox{mybox}[2][{}]{skin=enhancedlast jigsaw,interior hidden,
  boxsep=0pt,top=0pt,colframe=red,coltitle=red!50!black,
  fonttitle=\bfseries\sffamily,
  attach boxed title to bottom center,
  boxed title style={empty,boxrule=0.5mm},
  varwidth boxed title=0.5\linewidth,
  underlay boxed title={
    \draw[white,line width=0.5mm]
      ([xshift=0.3mm-\tcboxedtitleheight*2,yshift=0.3mm]title.north west)
      --([xshift=-0.3mm+\tcboxedtitleheight*2,yshift=0.3mm]title.north east);
    \path[draw=red,top color=white,bottom color=red!50!white,line width=0.5mm]
      ([xshift=0.25mm-\tcboxedtitleheight*2,yshift=0.25mm]title.north west)
      cos +(\tcboxedtitleheight,-\tcboxedtitleheight/2)
      sin +(\tcboxedtitleheight,-\tcboxedtitleheight/2)
      -- ([xshift=0.25mm,yshift=0.25mm]title.south west)
      -- ([yshift=0.25mm]title.south east)
      cos +(\tcboxedtitleheight,\tcboxedtitleheight/2)
      sin +(\tcboxedtitleheight,\tcboxedtitleheight/2); },
  title={#2},#1}

\begin{mybox}{My title}
  \lipsum[2]
\end{mybox}
```

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

### My title



### /tcb/hbox boxed title


(no value, initially set)

The title text content is captured with a horizontal box. Especially, there are no linebreak possible.

```
\newtcolorbox{mybox}[1]{hbox boxed title,
  enhanced,attach boxed title to top center=
    {yshift=-3mm,yshifttext=-1mm},
  boxed title style={size=small,colback=red},
  title={#1}}

\begin{mybox}{Short title}
  This is a \textbf{tcolorbox}.
\end{mybox}\bigskip

\begin{mybox}{This title is not really very short}
  This is a \textbf{tcolorbox}.
\end{mybox}
```

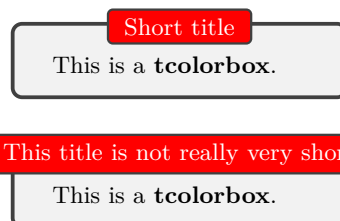

### /tcb/minipage boxed title=<length>


(initially unset)

The title text content is captured with a minipage with a width of  $\langle length \rangle$ . By default, the resulting boxed title is somewhat smaller than the main box.

```
\newtcolorbox{mybox}[1]{minipage boxed title,
  enhanced,attach boxed title to top center=
    {yshift=-3mm,yshifttext=-1mm},
  boxed title style={size=small,colback=red},
  center title,title={#1}}

\begin{mybox}{Short title}
  This is a \textbf{tcolorbox}.
\end{mybox}\bigskip

\begin{mybox}{This title is not really very short}
  This is a \textbf{tcolorbox}.
\end{mybox}
```

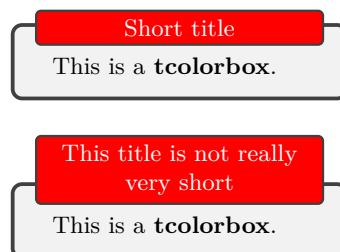

### /tcb/minipage boxed title\*=<length>


(initially unset)

The title text content is captured with a minipage with a width of main box width plus  $\langle length \rangle$ . By default, the resulting boxed title is somewhat smaller than the main box.

```
\newtcolorbox{mybox}[1]{minipage boxed title*=-2cm,
  enhanced,attach boxed title to top center=
    {yshift=-3mm,yshifttext=-1mm},
  boxed title style={size=small,colback=red},
  center title,title={#1}}

\begin{mybox}{Short title}
  This is a \textbf{tcolorbox}.
\end{mybox}\bigskip

\begin{mybox}{This title is not really very short}
  This is a \textbf{tcolorbox}.
\end{mybox}
```

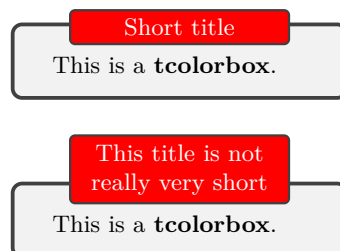




`/tcb/tikznode boxed title=<options>` (initially unset)

The title text content is captured with a TikZ node with given TikZ *<options>*. The text is centered by default

```
\newtcolorbox{mybox}[1]{tikznode boxed title,
  enhanced,attach boxed title to top center=
    {yshift=-3mm,yshifttext=-1mm},
  boxed title style={size=small,colback=red},
  title={#1}}

\begin{mybox}{Short title}
  This is a \textbf{tcolorbox}.
\end{mybox}\bigskip

\begin{mybox}{This title\\is not really\\very short}
  This is a \textbf{tcolorbox}.
\end{mybox}
```

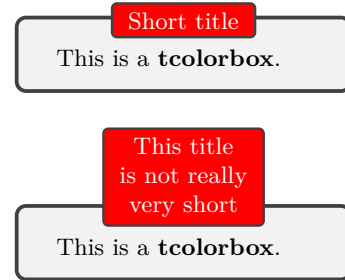


`/tcb/varwidth boxed title=<length>` (initially unset)

The title text content is captured with a `varwidth` environment with a width of *<length>*. This style needs the `varwidth` package [1] to be loaded manually. By default, the resulting boxed title is somewhat smaller than the main box.

```
% \usepackage{varwidth}
\newtcolorbox{mybox}[1]{varwidth boxed title,
  enhanced,attach boxed title to top center=
    {yshift=-3mm,yshifttext=-1mm},
  boxed title style={size=small,colback=red},
  center title,title={#1}}

\begin{mybox}{Short title}
  This is a \textbf{tcolorbox}.
\end{mybox}\bigskip

\begin{mybox}{This title is not really very short}
  This is a \textbf{tcolorbox}.
\end{mybox}
```

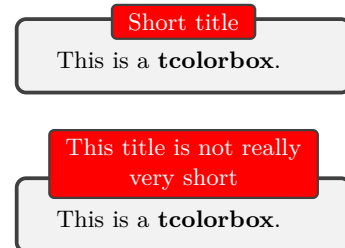


`/tcb/varwidth boxed title*=<length>` (initially unset)

The title text content is captured with a `varwidth` environment with a width of main box width plus *<length>*. This style needs the `varwidth` package [1] to be loaded manually. By default, the resulting boxed title is somewhat smaller than the main box.

```
% \usepackage{varwidth}
\newtcolorbox{mybox}[1]{varwidth boxed title*=-2cm,
  enhanced,attach boxed title to top center=
    {yshift=-3mm,yshifttext=-1mm},
  boxed title style={size=small,colback=red},
  center title,title={#1}}

\begin{mybox}{Short title}
  This is a \textbf{tcolorbox}.
\end{mybox}\bigskip

\begin{mybox}{This title is not really very short}
  This is a \textbf{tcolorbox}.
\end{mybox}
```

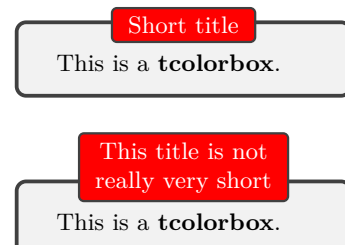



### 7.3 Watermark Option Keys

The following watermark options are applicable for all skins which use `tikzpicture` as `/tcb/graphical environment`<sup>→ P. 84</sup>. Therefore, the skin `standard`<sup>→ P. 143</sup> does not support these watermarks, but all other skins, e. g. `enhanced`<sup>→ P. 145</sup>.

The watermark options rely on the more general overlay options described in Section 3.9 from page 53. Therefore, *watermarks* and *overlays* cannot be used mixed. But a mixture is possible with the `lib hooks` library, see Section 13.

`/tcb/watermark text=<text>` (no default, initially unset)

Writes some *<text>* in the center of the interior region of a `tcolorbox`. This *<text>* is written *after* the frame and interior are drawn and *before* the text content is drawn. It is zoomed or stretched according the values of `/tcb/watermark zoom`<sup>→ P. 112</sup> or `/tcb/watermark stretch`<sup>→ P. 114</sup>.

```
\tcbset{colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries}

\begin{tcolorbox}[enhanced,title=My title,watermark text=My Watermark]
\lipsum[1]
\tcblower
\lipsum[2]
\end{tcolorbox}
```

#### My title

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

`/tcb/watermark text on=<part> is <text>` (no default, initially unset)

This option writes some *<text>* in the center of the interior region of a `tcolorbox` as described for `/tcb/watermark text`. But this is done only for boxes named *<part>* of a break sequence, see `/tcb/breakable`<sup>→ P. 249</sup>.

Feasible values for *<part>* are:

- **broken**: all broken box parts,
- **unbroken**: unbroken boxes only,
- **first**: first parts of a break sequence,
- **middle**: middle parts of a break sequence,
- **last**: last parts of a break sequence,
- **unbroken and first**: unbroken boxes and first parts of a break sequence,
- **middle and last**: middle and last parts of a break sequence.



**/tcb/watermark graphics**=*<file name>* (no default, initially unset)

Draws an external picture referenced by *<file name>* in the center of the interior region of a `tcolorbox`. The picture is drawn *after* the frame and interior are drawn and *before* the text content is drawn. It is zoomed or stretched according the values of `/tcb/watermark zoom`<sup>→ P. 112</sup> or `/tcb/watermark stretch`<sup>→ P. 114</sup>.

```
\tcbset{colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries}

\begin{tcolorbox}[enhanced,title=My title,watermark graphics=Basilica_5.png,
  watermark opacity=0.15]
\lipsum[1-2]
\tcblower
This example uses a public domain picture from\
\url{http://commons.wikimedia.org/wiki/File:Basilica_5.png}
\end{tcolorbox}
```

#### My title

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

This example uses a public domain picture from  
[http://commons.wikimedia.org/wiki/File:Basilica\\_5.png](http://commons.wikimedia.org/wiki/File:Basilica_5.png)

**/tcb/watermark graphics on**=*<part>* is *<file name>* (no default, initially unset)

This option draws a picture referenced by *<file name>* in the center of the interior region of a `tcolorbox` as described for `/tcb/watermark graphics`. But this is done only for boxes named *<part>* of a break sequence, see `/tcb/breakable`<sup>→ P. 249</sup>.

Feasible values for *<part>* are:

- **broken**: all broken box parts,
- **unbroken**: unbroken boxes only,
- **first**: first parts of a break sequence,
- **middle**: middle parts of a break sequence,
- **last**: last parts of a break sequence,
- **unbroken and first**: unbroken boxes and first parts of a break sequence,
- **middle and last**: middle and last parts of a break sequence.



`/tcb/watermark tikz=<graphical code>` (no default, initially unset)

Draws the given `tikz` *<graphical code>* in the center of the interior region of a `tcolorbox`. The code is executed *after* the frame and interior are drawn and *before* the text content is drawn. The result is zoomed or stretched according the values of `/tcb/watermark zoom`<sup>→ P. 112</sup> or `/tcb/watermark stretch`<sup>→ P. 114</sup>.

```
\tcbset{colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries}

\begin{tcolorbox}[enhanced,title=My title,
  watermark tikz={\draw[line width=2mm] circle (1cm)
    node{\fontfamily{ptm}\fontseries{b}\fontsize{20mm}{20mm}\selectfont ?};}]
\lipsum[1]
\tcblower
\lipsum[2]
\end{tcolorbox}
```

#### My title

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

`/tcb/watermark tikz on=<part> is <graphical code>` (no default, initially unset)

This option draws the given `tikz` *<graphical code>* in the center of the interior region of a `tcolorbox` as described for `/tcb/watermark tikz`. But this is done only for boxes named *<part>* of a break sequence, see `/tcb/breakable`<sup>→ P. 249</sup>.

Feasible values for *<part>* are:

- **broken**: all broken box parts,
- **unbroken**: unbroken boxes only,
- **first**: first parts of a break sequence,
- **middle**: middle parts of a break sequence,
- **last**: last parts of a break sequence,
- **unbroken and first**: unbroken boxes and first parts of a break sequence,
- **middle and last**: middle and last parts of a break sequence.

`/tcb/no watermark` (style, no default, initially set)

Removes the watermark if set before. This is an alias for `/tcb/no overlay`<sup>→ P. 54</sup>.



`/tcb/watermark opacity=<fraction>` (no default, initially 1.00)

Sets the opacity value  $\in [0, 1]$  for a watermark.

```
\tcbset{enhanced,colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries,
  watermark text=Watermark,nobeforeafter,width=(\linewidth-2mm)/2}

\begin{tcolorbox}[title=Opacity 1.00,watermark opacity=1.00]
\lipsum[2]
\end{tcolorbox}\hfill%
\begin{tcolorbox}[title=Opacity 0.50,watermark opacity=0.50]
\lipsum[2]
\end{tcolorbox}%
```

#### Opacity 1.00

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

#### Opacity 0.50

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

`/tcb/watermark zoom=<fraction>` (no default, initially 0.75)

Sets the zoom value for a watermark. The zoom respects the aspect ratio. The value 1.0 means to fill the whole box until the watermark touches the frame.

```
\tcbset{enhanced,colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries,
  watermark text=Watermark,nobeforeafter,width=(\linewidth-2mm)/2}

\begin{tcolorbox}[title=Zoom 1.0,watermark zoom=1.0]
\lipsum[2]
\end{tcolorbox}\hfill%
\begin{tcolorbox}[title=Zoom 0.5,watermark zoom=0.5]
\lipsum[2]
\end{tcolorbox}%
```

#### Zoom 1.0

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

#### Zoom 0.5

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.



`/tcb/watermark shrink=<fraction>` (no default, initially unset)

Identically to `/tcb/watermark zoom`<sup>P. 112</sup>, but the watermark never gets enlarged. Thus, the watermark keeps its original size or is shrunk.

`/tcb/watermark overzoom=<fraction>` (no default, initially unset)

Sets the overzoom value for a watermark. The overzoom respects the aspect ratio. The value 1.0 means to fill the whole box until the watermark touches all four sides of the frame.

```
\tcbset{enhanced,colback=white,colframe=blue!50!black,fonttitle=\bfseries,
watermark opacity=0.5,
watermark graphics=lichtspiel.jpg,nobeforeafter,width=(\linewidth-2mm)/2}

\begin{tcolorbox}[title=Zoom 1.0,watermark zoom=1.0]
\lipsum[1]
\end{tcolorbox}\hfill%
\begin{tcolorbox}[title=Overzoom 1.0,watermark overzoom=1.0]
\lipsum[1]
\end{tcolorbox}%
```

#### Zoom 1.0

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

#### Overzoom 1.0

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

If a `/tcb/watermark overzoom` value of 1.0 is used in connection with invisible top and bottom rules which still have a thickness greater than 0pt, the space of these invisible rules may not be covered by the watermark. For example, this situation may occur during the breaking of `/tcb/enhanced`<sup>P. 145</sup> boxes. To avoid this optical glitch, just set `/tcb/pad at break`<sup>P. 253</sup> to any desired value.



`/tcb/watermark stretch=<fraction>` (no default, initially unset)

Sets the stretch value for a watermark. The stretch value is applied to width and height in relation to the box dimensions. It does not respect the aspect ratio. The value 1.0 means to fill the whole box.

```
\tcbset{enhanced,colback=white,colframe=blue!50!black,fonttitle=\bfseries,
  watermark graphics=lichtspiel.jpg,watermark opacity=0.5,
  nobeforeafter,width=(\linewidth-2mm)/2}

\begin{tcolorbox}[title=Stretch 1.00,watermark stretch=1.00]
\lipsum[2]
\end{tcolorbox}\hfill%
\begin{tcolorbox}[title=Stretch 0.50,watermark stretch=0.50]
\lipsum[2]
\end{tcolorbox}%
```

#### Stretch 1.00

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

#### Stretch 0.50

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

`/tcb/watermark color=<color>` (no default, initially mixed background and frame color)

Sets the color for the watermark.

```
\tcbset{colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries}

\begin{tcolorbox}[enhanced,title=My title,watermark text=My Watermark,
  watermark color=yellow!50!red]
\lipsum[1]
\end{tcolorbox}
```

#### My title

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.



`/tcb/clip watermark=true|false`

(default true, initially true)

Sets the watermark to be clipped to the interior area.

```
\tcbset{enhanced,colback=white,colframe=blue!50!white,fonttitle=\bfseries,
watermark opacity=0.5,watermark stretch=1.00,arc=3mm,
watermark graphics=lichtspiel.jpg}

\begin{tcolorbox}[title=Clip (default),clip watermark]
\lipsum[1]
\end{tcolorbox}

\begin{tcolorbox}[title=No clip,clip watermark=false]
\lipsum[1]
\end{tcolorbox}%
```

#### Clip (default)

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

#### No clip

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.



## 7.4 Clip Environments

The following clip environments are applicable for all skins which use engines of type `path`, `pathfirst`, `pathmiddle`, or `pathlast`. Especially, the skin `enhanced`<sup>→ P.145</sup> supports *all* of them and `standard`<sup>→ P.143</sup> *none*. The typical area of application is inside overlay code, see Section 3.9 from page 53.

```
\begin{tcbclipframe}  
  <environment content>  
\end{tcbclipframe}
```

Defines a Tikz scope which clips to the frame area path.

```
\makeatletter  
\newtcolorbox{picturebox}[2][]{%  
  enhanced,frame hidden,interior hidden,fonttitle=\bfseries,  
  overlay={\begin{tcbclipframe}\node at (frame)  
    {\includegraphics[width=\tcb@width,height=\tcb@height]{#2}};\end{tcbclipframe}}%  
  \begin{tcbclipinterior}\fill[white,opacity=0.75]  
    (frame.south west) rectangle (frame.north east);\end{tcbclipinterior}},#1}  
\makeatother  
  
\begin{picturebox}[title=My Picture Box]{lichtspiel.jpg}  
  \lipsum[1]  
\end{picturebox}
```

### My Picture Box

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.



```
\begin{tcbinvclipframe}
  <environment content>
\end{tcbinvclipframe}
```

Defines a Tikz scope which clips to the *outside* of the frame area path.

```
\tcbset{enhanced jigsaw,fonttitle=\bfseries,opacityback=0.35,colback=blue!5!white,
  frame style={left color=red!75!black,right color=red!10!yellow}}

\begin{tikzpicture}% draw two balls
  \path[use as bounding box] (0,0.8) rectangle +(0.1,0.1);
  \shadedraw [shading=ball] (0,0) circle (1cm);
  \shadedraw [ball color=red] (3,-2.2) circle (1cm);
\end{tikzpicture}

\begin{tcolorbox}[title=A translucent box,
  overlay={\begin{tcbinvclipframe}
    \draw[red,line width=1cm] ([xshift=-2mm,yshift=2mm]frame.north west)
      --([xshift=2mm,yshift=-2mm]frame.south east);
    \draw[red,line width=1cm] ([xshift=-2mm,yshift=-2mm]frame.south west)
      --([xshift=2mm,yshift=2mm]frame.north east);
  \end{tcbinvclipframe}}]
  \lipsum[2]
\end{tcolorbox}
```

#### A translucent box


Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.



```
\begin{tcbclipinterior}
  <environment content>
\end{tcbclipinterior}
```

Defines a Tikz scope which clips to the interior area path.


```
\begin{tcolorbox}[enhanced,title=My Title,
  overlay={\begin{tcbclipinterior}
    \draw[red,line width=1cm] (interior.north west)--(interior.south east);
    \draw[red,line width=1cm] (interior.south west)--(interior.north east);
  \end{tcbclipinterior}}]
\lipsum[1]
\end{tcolorbox}
```

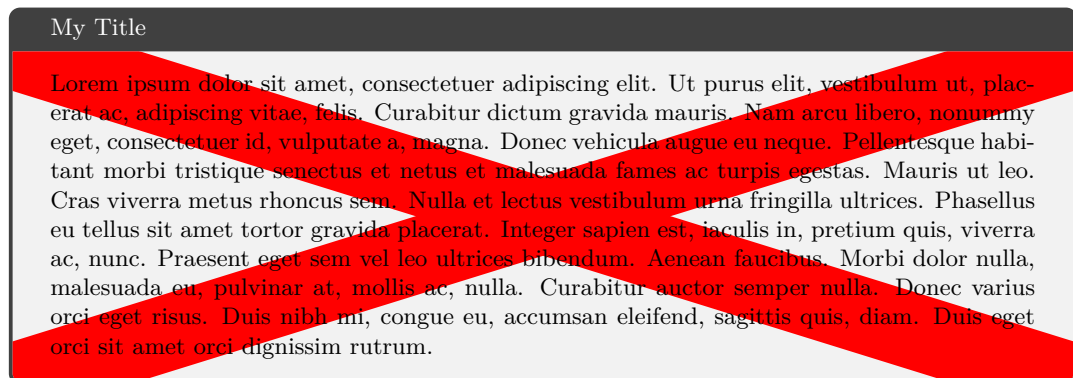

```
\begin{tcbcliptitle}
  <environment content>
\end{tcbcliptitle}
```

Defines a Tikz scope which clips to the title area path.

```
\begin{tcolorbox}[enhanced,title=My Title,colframe=blue,colback=yellow!10!white,
  overlay={\begin{tcbcliptitle}\node at (title)
    {\includegraphics[width=\linewidth]{lichtspiel.jpg}};\end{tcbcliptitle}}]
\lipsum[1]
\end{tcolorbox}
```

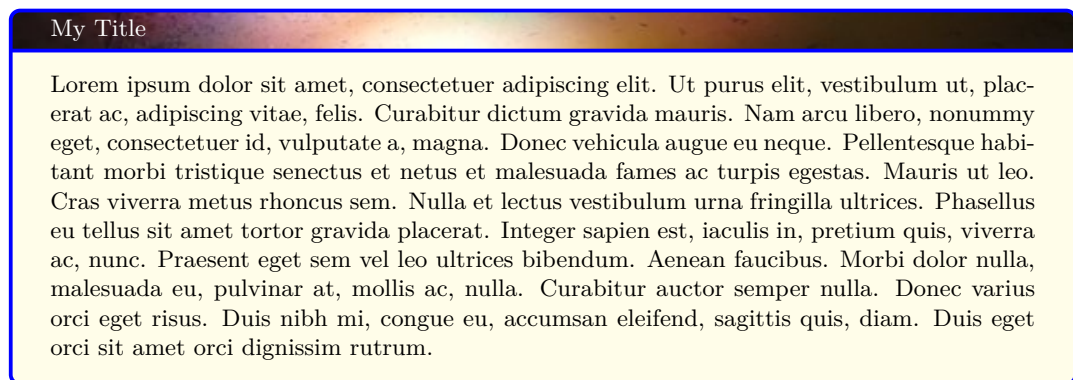



`/tcb/clip title=true|false` (default true, initially false)

Sets the title to be clipped to the title area.

```
\tcbset{enhanced,width=5cm,colframe=red!50!white,coltitle=black,
colbacktitle=yellow!50!white}

\begin{tcolorbox}[title=\mbox{This is a title which is unbreakable and far too long}]
This is a tcolorbox.
\end{tcolorbox}

\begin{tcolorbox}[title=\mbox{This is a title which is unbreakable and far too long},
clip title]
This is a tcolorbox.
\end{tcolorbox}
```

This is a title which is unbreakable and far too long

This is a tcolorbox.

This is a title which is unbreak



This is a tcolorbox.

`/tcb/clip upper=true|false` (default true, initially false)

Sets the upper part to be clipped to the interior area.

```
\newcommand{\mygraphics}[2][{}]{%
\tcbbox[enhanced,boxsep=0pt,top=0pt,bottom=0pt,left=0pt,
right=0pt,boxrule=0.4pt,drop fuzzy shadow,clip upper,
colback=black!75!white,toptitle=2pt,bottomtitle=2pt,nobeforeafter,
center title,fonttitle=\small\sffamily,title=\detokenize{#2}]
{\includegraphics[width=\the\dimexpr(\linewidth-4mm)/2\relax]{#2}}}%

\mygraphics{lichtspiel.jpg}\hfill
\mygraphics{Basilica_5.png}
```

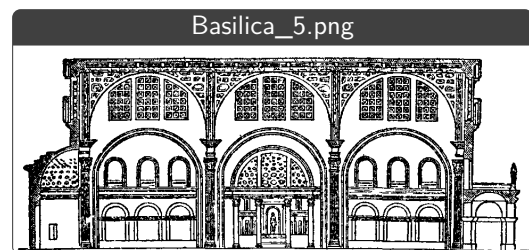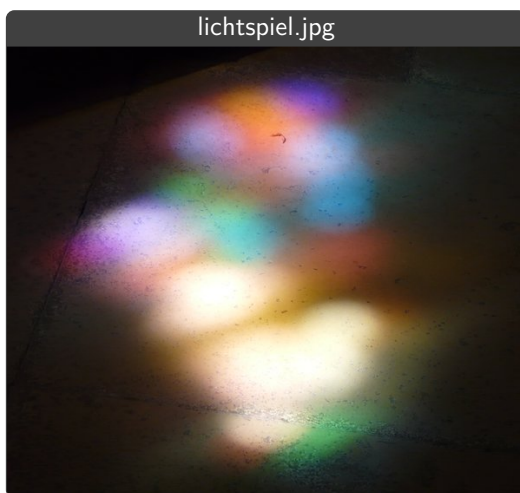




The example for `/tcb/clip upper`<sup>→ P.119</sup> sizes the box according to the dimensions of the picture. To do it the other way around, the watermark options provide an easy solution.

```
\newcommand{\mygraphics}[2][\%
\tcbbox[enhanced,capture=minipage,boxsep=0pt,top=0pt,bottom=0pt,left=0pt,
right=0pt,boxrule=0.4pt,drop fuzzy shadow,nobeforeafter,
colback=black!75!white,toptitle=2pt,bottomtitle=2pt,
center title,fonttitle=\small\sffamily,title=\detokenize{#2},
width=(\linewidth-4mm)/2,height=6cm,colbacktitle={black},
watermark zoom=1.0,watermark graphics={#2}]{}}

\mygraphics{lichtspiel.jpg}\hfill
\mygraphics{Basilica_5.png}
```

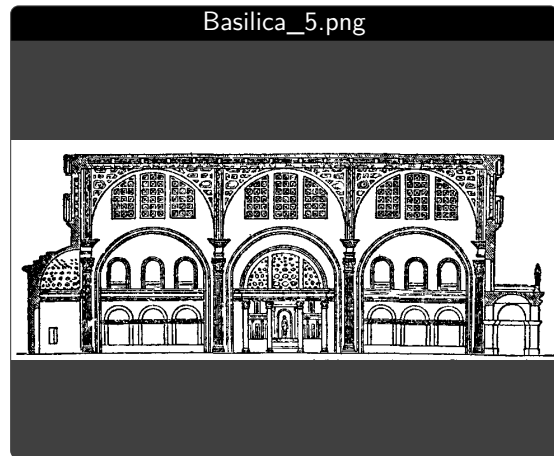

`/tcb/clip lower=true|false` (default true, initially false)  
Sets the lower part to be clipped to the interior area.

```
\tcbset{enhanced,width=5cm,colframe=red!50!black,text and listing}

\begin{tcblisting}{}
Donau\dampf\schiff\fahrts\ka\pi\t"ans\m"ut\zen\fran\sen
\end{tcblisting}

\begin{tcblisting}{clip lower}
Donau\dampf\schiff\fahrts\ka\pi\t"ans\m"ut\zen\fran\sen
\end{tcblisting}
```

Donaudampfschiffahrtska-  
pitänsmützenfransen

Donau\dampf\schiff\fahrts\ka\pi\t"ans\m"ut\zen\fran\sen

Donaudampfschiffahrtska-  
pitänsmützenfransen

Donau\dampf\schiff\fa



## 7.5 Border Line Option Keys

The following border line options are applicable for most skins which use `tikzpicture` as `/tcb/graphical environment`<sup>→ P. 84</sup>. Therefore, the skin `standard`<sup>→ P. 143</sup> does not support these border lines, but most other skins, e.g. `enhanced`<sup>→ P. 145</sup>.

The border lines are independent from the normal `tcolorbox` rules. They may be used with or without the `/tcb/segmentation engine`<sup>→ P. 86</sup>.

The border lines are stackable, i.e. several different border lines can be used on the same `tcolorbox`. They are drawn *after* the box frame and box interior and *before* overlays or watermarks.

Technically, the normal `tcolorbox` rules result from a TikZ *filling* process. The border lines are created by a TikZ *drawing* process. This can be used to apply different effects.

**`/tcb/borderline={⟨width⟩}{⟨offset⟩}{⟨options⟩}`** (no default, initially unset)

Adds a new border line to the stack of border lines. This border line is drawn with the given `⟨width⟩` and gets a `⟨offset⟩` computed from the frame outline. A positive `⟨offset⟩` value moves the borderline inside the `tcolorbox` and a negative `⟨offset⟩` value moves it outside without changing the bounding box.

The border line is drawn along a TikZ path with the given TikZ `⟨options⟩`. Note that the TikZ `line width` option should not be used here.

The border lines adapt to the rounded corners of the `tcolorbox`. An inside border line will switch to sharp corners if necessary, an outside border line will always be rounded except for `/tcb/sharp corners`<sup>→ P. 33</sup>.

```
\begin{tcolorbox}[enhanced,title=Rounded corners,fonttitle=\bfseries,boxsep=5pt,
  arc=8pt,
  borderline={0.5pt}{0pt}{red},
  borderline={0.5pt}{5pt}{blue,dotted},
  borderline={0.5pt}{-5pt}{green} ]
This is a tcolorbox.
\end{tcolorbox}
\bigskip
\begin{tcolorbox}[enhanced,title=Sharp corners,fonttitle=\bfseries,boxsep=5pt,
  arc=8pt,sharp corners=downhill,
  borderline={0.5pt}{0pt}{red},
  borderline={0.5pt}{5pt}{blue,dotted},
  borderline={0.5pt}{-5pt}{green} ]
This is a tcolorbox.
\end{tcolorbox}
```

**Rounded corners**

This is a tcolorbox.

**Sharp corners**

This is a tcolorbox.



```
% \usepackage{lipsum}
\begin{tcolorbox}[enhanced,arc=3mm,boxrule=1.5mm,boxsep=1.5mm,
colback=yellow!20!white,
colframe=blue,
borderline={1mm}{1mm}{white},
borderline={1mm}{2mm}{red} ]
\lipsum[1]
\end{tcolorbox}
```

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

```
% \usepackage{lipsum}
\begin{tcolorbox}[enhanced,arc=3mm,boxrule=1.5mm,
frame hidden,colback=blue!10!white,
borderline={1mm}{0mm}{blue,dotted} ]
\lipsum[2]
\end{tcolorbox}
```

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

```
% \usepackage{lipsum}
\begin{tcolorbox}[enhanced,skin=enhancedmiddle,
frame hidden,interior hidden,top=0mm,bottom=0mm,boxsep=0mm,
borderline={0.75mm}{0mm}{red},
borderline={0.75mm}{0.75mm}{red!50!yellow},
borderline={0.75mm}{1.5mm}{yellow}, ]
\lipsum[3]
\end{tcolorbox}
```

Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec et mi. Nam vulputate metus eu enim. Vestibulum pellentesque felis eu massa.



```
% \usepackage{lipsum}
\newtcolorbox{mygreenbox}[2][]{%
  enhanced,width=\linewidth-6pt,
  enlarge top by=3pt,enlarge bottom by=3pt,
  enlarge left by=3pt,enlarge right by=3pt,
  title={#2},frame hidden,boxrule=0pt,top=1mm,bottom=1mm,
  colframe=green!30!black, colbacktitle=green!50!yellow,
  coltitle=black, colback=green!25!white,
  borderline={0.5pt}{-0.5pt}{green!75!blue},
  borderline={1pt}{-3pt}{green!50!blue},#1}

\begin{mygreenbox}{My title}
  \lipsum[4]
\end{mygreenbox}
```

My title

Quisque ullamcorper placerat ipsum. Cras nibh. Morbi vel justo vitae lacus tincidunt ultrices. Lorem ipsum dolor sit amet, consectetur adipiscing elit. In hac habitasse platea dictumst. Integer tempus convallis augue. Etiam facilisis. Nunc elementum fermentum wisi. Aenean placerat. Ut imperdiet, enim sed gravida sollicitudin, felis odio placerat quam, ac pulvinar elit purus eget enim. Nunc vitae tortor. Proin tempus nibh sit amet nisl. Vivamus quis tortor vitae risus porta vehicula.

**/tcb/no borderline**

(no default, initially set)

Removes all border lines if set before.


**/tcb/show bounding box=***<color>*

(default **red**, initially unset)

Displays the bounding box borderline of a `tcolorbox`. Its intended use is debugging and fine tuning. It should not be part of a final document. The optional *<color>* is the base color for the bounding box borderline.

```
\tcbset{enhanced,nobeforeafter,width=4cm,fonttitle=\bfseries}

\begin{tcolorbox}[show bounding box,title=Normal]
This is a tcolorbox.
\end{tcolorbox}%
\begin{tcolorbox}[show bounding box=blue,title=Shadow,drop fuzzy shadow]
This is a tcolorbox.
\end{tcolorbox}%
\begin{tcolorbox}[show bounding box=green,title=Enlarged,drop fuzzy shadow,
  enlarge by=2mm]
This is a tcolorbox.
\end{tcolorbox}
```

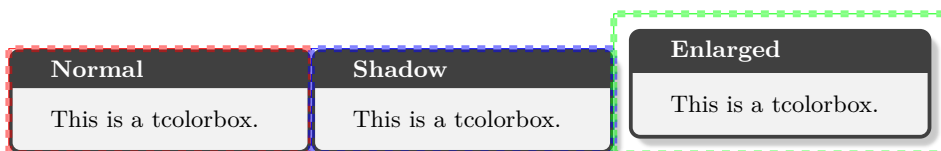



## 7.6 Shadow Option Keys

The following shadow options are applicable for most skins which use `tikzpicture` as `/tcb/graphical environment`<sup>→ P. 84</sup>. Therefore, the skin `standard`<sup>→ P. 143</sup> does not support these shadows, but most other skins, e.g. `enhanced`<sup>→ P. 145</sup>.

The shadows are stackable, i.e. several different shadows can be used on the same `tcolorbox`. They are drawn *before* the box frame is drawn.

`/tcb/no shadow` (no default)

Removes all shadows if set before.

`/tcb/shadow={⟨xshift⟩}{⟨yshift⟩}{⟨offset⟩}{⟨options⟩}` (no default)

Adds a new shadow to the stack of shadows. This shadow follows the outline of the `tcolorbox` but is shifted by `⟨xshift⟩` and `⟨yshift⟩`. The `⟨offset⟩` value is a distance value from the frame outline. A positive `⟨offset⟩` value shrinks the shadow and a negative `⟨offset⟩` value enlarges the shadow. The shadow is filled along a TikZ path with the given TikZ `⟨options⟩`.

The shadows adapt to the rounded corners of the `tcolorbox`. An shrunk shadow will switch to sharp corners if necessary, an enlarged shadow may become more rounded depending on several factors. But `/tcb/sharp corners`<sup>→ P. 33</sup> have sharp shadows.

Shadows are not considered for the bounding box computation by default. Large shadows may be overlapped by the following content. But, the bounding box can be adapted if necessary.

```
\tcbset{enhanced,colback=red!5!white,
  colframe=red!75!black,fonttitle=\bfseries}

\begin{tcolorbox}[title=My own shadow,
  shadow={2mm}{-1mm}{0mm}{black!50!white}]
This is a tcolorbox.
\end{tcolorbox}
\par\bigskip
\begin{tcolorbox}[title=Another shadow,
  shadow={-1mm}{-2mm}{0mm}{fill=blue,
  opacity=0.5}]
This is a tcolorbox.
\end{tcolorbox}
\par\bigskip
\begin{tcolorbox}[title=Double shadow,
  shadow={-1.5mm}{-1.5mm}{0mm}{fill=blue,
  opacity=0.25},
  shadow={1.5mm}{-1.5mm}{0mm}{fill=red,
  opacity=0.25}]
This is a tcolorbox.
\end{tcolorbox}
\par\bigskip
\begin{tcolorbox}[title=Far shadow,
  shadow={5.5mm}{-3.5mm}{2mm}{fill=black,
  opacity=0.25}]
This is a tcolorbox.
\end{tcolorbox}
\par\bigskip\bigskip
\begin{tcolorbox}[title=Halo shadow,
  shadow={0mm}{0mm}{-1.5mm}%
  {fill=yellow!75!red,opacity=0.5}]
This is a tcolorbox.
\end{tcolorbox}
```

**My own shadow**

This is a tcolorbox.

**Another shadow**

This is a tcolorbox.

**Double shadow**

This is a tcolorbox.

**Far shadow**

This is a tcolorbox.

**Halo shadow**

This is a tcolorbox.



**/tcb/fuzzy shadow**={ $\langle xshift \rangle$ }{ $\langle yshift \rangle$ }{ $\langle offset \rangle$ }{ $\langle step \rangle$ }{ $\langle options \rangle$ } (no default)

Adds a new fuzzy shadow to the stack of shadows. Actually, this option adds several shadows which appear like a shadow with a fuzzy border. This fuzzy shadow follows the outline of the `tcolorbox` but is shifted by  $\langle xshift \rangle$  and  $\langle yshift \rangle$ . The  $\langle offset \rangle$  value is a distance value from the frame outline. A positive  $\langle offset \rangle$  value shrinks the shadow and a negative  $\langle offset \rangle$  value enlarges the shadow. The  $\langle step \rangle$  value describes a shrink offset used for the combination of the partial shadows. The shadow is filled along a TikZ path with the given TikZ  $\langle options \rangle$  but any opacity value will be ignored.

```
\tcbset{enhanced,colback=red!5!white,
colframe=red!75!black,fonttitle=\bfseries}

\begin{tcolorbox}[title=My own shadow,
fuzzy shadow={2mm}{-1mm}{0mm}{0.1mm}%
{black!50!white}]
This is a tcolorbox.
\end{tcolorbox}
\par\bigskip
\begin{tcolorbox}[title=Another shadow,
fuzzy shadow={-1mm}{-2mm}{0mm}{0.2mm}%
{fill=blue}]
This is a tcolorbox.
\end{tcolorbox}
\par\bigskip
\begin{tcolorbox}[title=Double shadow,
fuzzy shadow={-1.5mm}{-1.5mm}{0mm}{0.1mm}%
{blue},
fuzzy shadow={1.5mm}{-1.5mm}{0mm}{0.1mm}%
{red}]
This is a tcolorbox.
\end{tcolorbox}
\par\bigskip
\begin{tcolorbox}[title=Far shadow,
fuzzy shadow={5.5mm}{-3.5mm}{0mm}{0.3mm}%
{black}]
This is a tcolorbox.
\end{tcolorbox}
\par\bigskip\bigskip
\begin{tcolorbox}[title=Glow shadow,
fuzzy shadow={0mm}{0mm}{-1.5mm}{0.15mm}%
{yellow!75!red}]
This is a tcolorbox.
\end{tcolorbox}
```

**My own shadow**

This is a tcolorbox.

**Another shadow**

This is a tcolorbox.

**Double shadow**

This is a tcolorbox.

**Far shadow**

This is a tcolorbox.

**Glow shadow**

This is a tcolorbox.

```
\newtcolorbox{mybox}[1][\tcbset{enhanced,
fuzzy shadow={1.0mm}{-1.0mm}{0.12mm}{0mm}{blue!50!white},
fuzzy shadow={-1.0mm}{-1.0mm}{0.12mm}{0mm}{red!50!white},
fuzzy shadow={-1.0mm}{1.0mm}{0.12mm}{0mm}{green!50!white},
fuzzy shadow={1.0mm}{1.0mm}{0.12mm}{0mm}{yellow!50!white},#1
}]

\begin{mybox}[title=A multi shadow box]
This is a tcolorbox.
\end{mybox}
```

**A multi shadow box**

This is a tcolorbox.



`/tcb/drop shadow=<color>` (style, default black!50!white)

Adds a new shadow with standard dimensions to the stack of shadows. Optionally, the `<color>` for the shadow can be changed.

```
\tcbset{enhanced,colback=red!5!white,
colframe=red!75!black,fonttttitle=\bfseries}

\begin{tcolorbox}[drop shadow]
This is a tcolorbox.
\end{tcolorbox}\par\bigskip
\begin{tcolorbox}[title=Another shadow,
drop shadow=blue]
This is a tcolorbox.
\end{tcolorbox}
```

This is a tcolorbox.

**Another shadow**

This is a tcolorbox.

`/tcb/drop fuzzy shadow=<color>` (style, default black!50!white)

Adds a new fuzzy shadow with standard dimensions to the stack of shadows. Optionally, the `<color>` for the shadow can be changed.

```
\tcbset{enhanced,colback=red!5!white,
colframe=red!75!black,fonttttitle=\bfseries}

\begin{tcolorbox}[drop fuzzy shadow]
This is a tcolorbox.
\end{tcolorbox}\par\bigskip
\begin{tcolorbox}[title=Another shadow,
drop fuzzy shadow=blue]
This is a tcolorbox.
\end{tcolorbox}
```

This is a tcolorbox.

**Another shadow**

This is a tcolorbox.

`/tcb/drop midday shadow=<color>` (style, default black!50!white)

Adds a new shadow with standard dimensions to the stack of shadows. Optionally, the `<color>` for the shadow can be changed.

```
\tcbset{enhanced,colback=red!5!white,
colframe=red!75!black,fonttttitle=\bfseries}

\begin{tcolorbox}[drop midday shadow]
This is a tcolorbox.
\end{tcolorbox}\par\bigskip
\begin{tcolorbox}[title=Another shadow,
drop midday shadow=blue]
This is a tcolorbox.
\end{tcolorbox}
```

This is a tcolorbox.

**Another shadow**

This is a tcolorbox.

`/tcb/drop fuzzy midday shadow=<color>` (style, default black!50!white)

Adds a new fuzzy shadow with standard dimensions to the stack of shadows. Optionally, the `<color>` for the shadow can be changed.

```
\tcbset{enhanced,colback=red!5!white,
colframe=red!75!black,fonttttitle=\bfseries}

\begin{tcolorbox}[drop fuzzy midday shadow]
This is a tcolorbox.
\end{tcolorbox}\par\bigskip
\begin{tcolorbox}[title=Another shadow,
drop fuzzy midday shadow=blue]
This is a tcolorbox.
\end{tcolorbox}
```

This is a tcolorbox.

**Another shadow**

This is a tcolorbox.



`/tcb/ halo=<size> with <color>` (style, default 0.9mm with yellow)

Adds a new halo shadow with the given `<color>` which overlaps the colorbox on all sides by `<size>`.

```
\tcbset{enhanced,colback=red!5!white,
  colframe=red!75!black,fonttttitle=\bfseries}

\begin{tcolorbox}[title=My own halo,halo]
This is a tcolorbox.
\end{tcolorbox}
\par\bigskip\bigskip
\begin{tcolorbox}[title=Another halo,
  halo=2mm with green]
This is a tcolorbox.
\end{tcolorbox}
```

My own halo

This is a tcolorbox.

Another halo

This is a tcolorbox.

`/tcb/ fuzzy halo=<size> with <color>` (style, default 0.9mm with yellow)

Adds a new fuzzy halo shadow with the given `<color>` which overlaps the colorbox on all sides by `<size>` plus 0.48mm.

```
\tcbset{enhanced,colback=red!5!white,
  colframe=red!75!black,fonttttitle=\bfseries}

\begin{tcolorbox}[title=My own halo,fuzzy halo]
This is a tcolorbox.
\end{tcolorbox}
\par\bigskip\bigskip
\begin{tcolorbox}[title=Another halo,
  fuzzy halo=2mm with green]
This is a tcolorbox.
\end{tcolorbox}
```

My own halo

This is a tcolorbox.

Another halo

This is a tcolorbox.

```
\begin{tcolorbox}[blank,enhanced jigsaw,boxsep=2pt,arc=2pt,
  fuzzy halo=2mm with red!50!white,
  fuzzy halo=1mm with white]
\lipsum[1]
\end{tcolorbox}
```

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.



For all following shadows, the optionally given  $\langle color \rangle$  for the shadow can be changed equivalent to the preceding examples.

**/tcb/drop shadow southeast= $\langle color \rangle$**  (style, default black!50!white)

Adds a new shadow with standard dimensions to the stack of shadows. This shadow is identical to `/tcb/drop shadow`<sup>→ P. 126</sup>.

```
\begin{tcolorbox}[drop shadow southeast,
  enhanced,colback=red!5!white,colframe=red!75!black]
  This is a tcolorbox.
\end{tcolorbox}
```

This is a tcolorbox.

**/tcb/drop shadow south= $\langle color \rangle$**  (style, default black!50!white)

Adds a new shadow with standard dimensions to the stack of shadows. This shadow is identical to `/tcb/drop midday shadow`<sup>→ P. 126</sup>.

```
\begin{tcolorbox}[drop shadow south,
  enhanced,colback=red!5!white,colframe=red!75!black]
  This is a tcolorbox.
\end{tcolorbox}
```

This is a tcolorbox.

**/tcb/drop shadow southwest= $\langle color \rangle$**  (style, default black!50!white)

Adds a new shadow with standard dimensions to the stack of shadows.

```
\begin{tcolorbox}[drop shadow southwest,
  enhanced,colback=red!5!white,colframe=red!75!black]
  This is a tcolorbox.
\end{tcolorbox}
```

This is a tcolorbox.

**/tcb/drop shadow west= $\langle color \rangle$**  (style, default black!50!white)

Adds a new shadow with standard dimensions to the stack of shadows.

```
\begin{tcolorbox}[drop shadow west,
  enhanced,colback=red!5!white,colframe=red!75!black]
  This is a tcolorbox.
\end{tcolorbox}
```

This is a tcolorbox.

**/tcb/drop shadow northwest= $\langle color \rangle$**  (style, default black!50!white)

Adds a new shadow with standard dimensions to the stack of shadows.

```
\begin{tcolorbox}[drop shadow northwest,
  enhanced,colback=red!5!white,colframe=red!75!black]
  This is a tcolorbox.
\end{tcolorbox}
```

This is a tcolorbox.

**/tcb/drop shadow north= $\langle color \rangle$**  (style, default black!50!white)

Adds a new shadow with standard dimensions to the stack of shadows.

```
\begin{tcolorbox}[drop shadow north,
  enhanced,colback=red!5!white,colframe=red!75!black]
  This is a tcolorbox.
\end{tcolorbox}
```

This is a tcolorbox.



`/tcb/drop shadow northeast=<color>` (style, default black!50!white)

Adds a new shadow with standard dimensions to the stack of shadows.

```
\begin{tcolorbox}[drop shadow northeast,
  enhanced,colback=red!5!white,colframe=red!75!black]
  This is a tcolorbox.
\end{tcolorbox}
```

This is a tcolorbox.

`/tcb/drop shadow east=<color>` (style, default black!50!white)

Adds a new shadow with standard dimensions to the stack of shadows.

```
\begin{tcolorbox}[drop shadow east,
  enhanced,colback=red!5!white,colframe=red!75!black]
  This is a tcolorbox.
\end{tcolorbox}
```

This is a tcolorbox.

`/tcb/drop fuzzy shadow southeast=<color>` (style, default black!50!white)

Adds a new fuzzy shadow with standard dimensions to the stack of shadows. This shadow is identical to `/tcb/drop fuzzy shadow`<sup>→ P. 126</sup>.

```
\begin{tcolorbox}[drop fuzzy shadow southeast,
  enhanced,colback=red!5!white,colframe=red!75!black]
  This is a tcolorbox.
\end{tcolorbox}
```

This is a tcolorbox.

`/tcb/drop fuzzy shadow south=<color>` (style, default black!50!white)

Adds a new fuzzy shadow with standard dimensions to the stack of shadows. This shadow is identical to `/tcb/drop fuzzy midday shadow`<sup>→ P. 126</sup>.

```
\begin{tcolorbox}[drop fuzzy shadow south,
  enhanced,colback=red!5!white,colframe=red!75!black]
  This is a tcolorbox.
\end{tcolorbox}
```

This is a tcolorbox.

`/tcb/drop fuzzy shadow southwest=<color>` (style, default black!50!white)

Adds a new fuzzy shadow with standard dimensions to the stack of shadows.

```
\begin{tcolorbox}[drop fuzzy shadow southwest,
  enhanced,colback=red!5!white,colframe=red!75!black]
  This is a tcolorbox.
\end{tcolorbox}
```

This is a tcolorbox.

`/tcb/drop fuzzy shadow west=<color>` (style, default black!50!white)

Adds a new fuzzy shadow with standard dimensions to the stack of shadows.

```
\begin{tcolorbox}[drop fuzzy shadow west,
  enhanced,colback=red!5!white,colframe=red!75!black]
  This is a tcolorbox.
\end{tcolorbox}
```

This is a tcolorbox.



`/tcb/drop fuzzy shadow northwest=<color>` (style, default black!50!white)

Adds a new fuzzy shadow with standard dimensions to the stack of shadows.

```
\begin{tcolorbox}[drop fuzzy shadow northwest,
  enhanced,colback=red!5!white,colframe=red!75!black]
  This is a tcolorbox.
\end{tcolorbox}
```

This is a tcolorbox.

`/tcb/drop fuzzy shadow north=<color>` (style, default black!50!white)

Adds a new fuzzy shadow with standard dimensions to the stack of shadows.

```
\begin{tcolorbox}[drop fuzzy shadow north,
  enhanced,colback=red!5!white,colframe=red!75!black]
  This is a tcolorbox.
\end{tcolorbox}
```

This is a tcolorbox.

`/tcb/drop fuzzy shadow northeast=<color>` (style, default black!50!white)

Adds a new fuzzy shadow with standard dimensions to the stack of shadows.

```
\begin{tcolorbox}[drop fuzzy shadow northeast,
  enhanced,colback=red!5!white,colframe=red!75!black]
  This is a tcolorbox.
\end{tcolorbox}
```

This is a tcolorbox.

`/tcb/drop fuzzy shadow east=<color>` (style, default black!50!white)

Adds a new fuzzy shadow with standard dimensions to the stack of shadows.

```
\begin{tcolorbox}[drop fuzzy shadow east,
  enhanced,colback=red!5!white,colframe=red!75!black]
  This is a tcolorbox.
\end{tcolorbox}
```

This is a tcolorbox.



**/tcb/lifted shadow**= $\{\langle xshift \rangle\}\{\langle yshift \rangle\}\{\langle bend \rangle\}\{\langle step \rangle\}\{\langle options \rangle\}$  (no default)

Adds a new lifted shadow to the stack of shadows. Actually, this option adds several shadows which appear like a shadow with a fuzzy border. This lifted shadow follows the outline of the `tcolorbox` but is shifted by  $\langle xshift \rangle$  and  $\langle yshift \rangle$  on the lower left corner and by  $-\langle xshift \rangle$  and  $\langle yshift \rangle$  on the lower right corner. Additionally, there is a  $\langle bend \rangle$  in the middle. The  $\{\langle step \rangle\}$  value describes a shrink offset used for the combination of the partial shadows. The shadow is filled along a TikZ path with the given TikZ  $\langle options \rangle$  but any opacity value will be ignored.

```
\tcbset{enhanced,colback=red!5!white,
  boxrule=0.1pt,
  colframe=red!75!black,fonttitle=\bfseries}

\begin{tcolorbox}[title=My own shadow,
  lifted shadow={1mm}{-2mm}{3mm}{0.1mm}%
    {black!50!white}]
This is a tcolorbox.
\end{tcolorbox}
```

**My own shadow**

This is a tcolorbox.

**/tcb/drop lifted shadow**= $\langle color \rangle$  (style, default black!50!white)

Adds a new lifted shadow with standard dimensions to the stack of shadows. Optionally, the  $\langle color \rangle$  for the shadow can be changed.

```
\tcbset{enhanced,colback=red!5!white,
  boxrule=0.4pt,sharp corners,
  colframe=red!75!black,fonttitle=\bfseries}

\begin{tcolorbox}[drop lifted shadow]
This is a tcolorbox.
\end{tcolorbox}\par\bigskip
\begin{tcolorbox}[title=Another shadow,
  drop lifted shadow=blue]
This is a tcolorbox.
\end{tcolorbox}
```

This is a tcolorbox.

**Another shadow**

This is a tcolorbox.

**/tcb/drop small lifted shadow**= $\langle color \rangle$  (style, default black!50!white)

Adds a new small lifted shadow with standard dimensions to the stack of shadows. Optionally, the  $\langle color \rangle$  for the shadow can be changed.

```
\tcbset{enhanced,colback=red!5!white,
  boxrule=0.4pt,sharp corners,
  colframe=red!75!black,fonttitle=\bfseries}

\tcbbox[drop small lifted shadow,size=fbox]
{This is a tcolorbox.}
\par\bigskip
\begin{tcolorbox}[title=Another shadow,
  drop small lifted shadow=black]
This is a tcolorbox.
\end{tcolorbox}
```

This is a tcolorbox.

**Another shadow**

This is a tcolorbox.



`/tcb/drop large lifted shadow=<color>` (style, default black!50!white)

Adds a new large lifted shadow with standard dimensions to the stack of shadows. Optionally, the `<color>` for the shadow can be changed.

```
\tcbset{enhanced,colback=red!5!white,
  colframe=red!75!black,fonttitle=\bfseries}

\begin{tcolorbox}[drop large lifted shadow]
This is a tcolorbox.
\end{tcolorbox}\par\bigskip
\begin{tcolorbox}[title=Another shadow,
  drop large lifted shadow=blue]
This is a tcolorbox.
\end{tcolorbox}
```

This is a tcolorbox.

**Another shadow**

This is a tcolorbox.




## 7.7 TikZ Picture Option Keys

The following general options are applicable for skins which use `tikzpicture` as `/tcb/graphical environment`<sup>→ P.84</sup>. Therefore, the skin `standard`<sup>→ P.143</sup> does not support these options, but most other skins, e.g. `enhanced`<sup>→ P.145</sup>.

**`/tcb/tikz=<tikz option list>`** (no default, initially empty)

Adds the given *<tikz option list>* to the main `tikzpicture` environment used to draw the color box, see [20]. If this option is applied a second time, the new *<tikz option list>* is appended to the current option list.

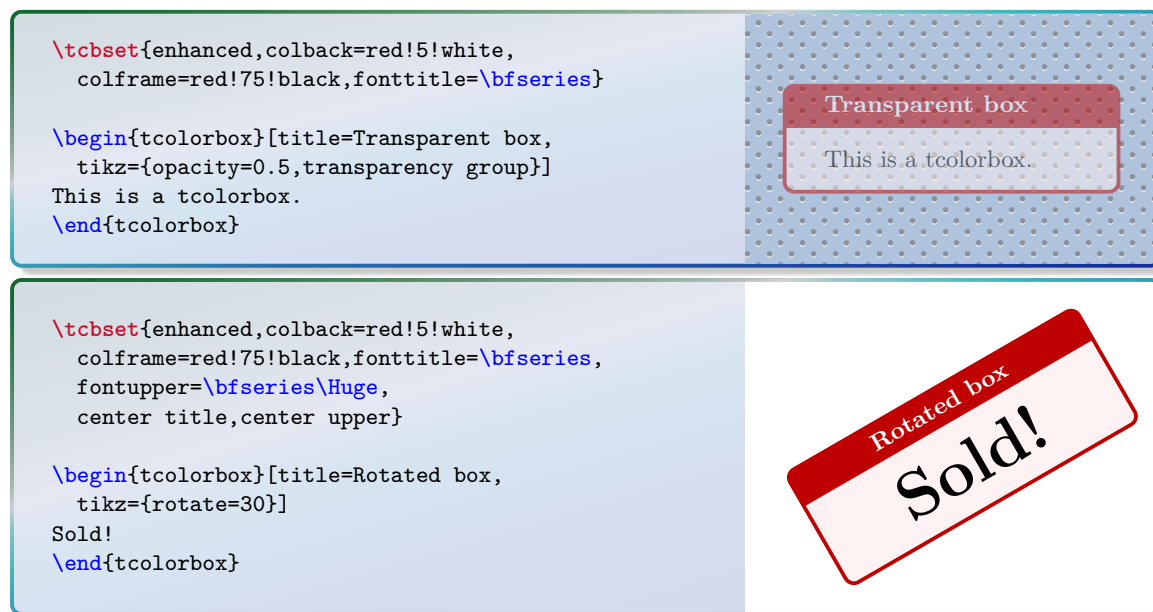

**`/tcb/tikz reset`** (initially set)

Removes all options given by `/tcb/tikz`.

**`/tcb/at begin tikz=<tikz code>`** (no default, initially empty)

The given *<tikz code>* is executed at the beginning of the `tikzpicture` environment after the TikZ option `execute at begin picture` was applied. If this option is applied a second time, the new *<tikz code>* is appended to the current code.

**`/tcb/at begin tikz reset`** (initially set)

Removes all code given by `/tcb/at begin tikz`.

**`/tcb/at end tikz=<tikz code>`** (no default, initially empty)

The given *<tikz code>* is executed at the ending of the `tikzpicture` environment before the TikZ option `execute at end picture` was applied. If this option is applied a second time, the new *<tikz code>* is appended to the current code.

**`/tcb/at end tikz reset`** (initially set)

Removes all code given by `/tcb/at end tikz`.



**/tcb/rotate**= $\langle angle \rangle$  (no default, initially unset)

Rotates the `tcolorbox` by the given  $\langle angle \rangle$ . Note that this is a TikZ coordinate transformation i.e. not all graphical elements like shadings will really be rotated.

```
\tcbset{enhanced,colback=red!5!white,
colframe=red!75!black,fonttttitle=\bfseries}

\begin{tcolorbox}[title=Rotated box,rotate=30]
This is a tcolorbox.
\end{tcolorbox}
```





**/tcb/scale**= $\langle fraction \rangle$  (no default, initially unset)

Scales the `tcolorbox` by the given  $\langle fraction \rangle$ . Note that this is a TikZ coordinate transformation i.e. not all graphical elements like line widths will really be scaled.

```
\tcbset{enhanced,colback=red!5!white,
colframe=red!75!black,fonttttitle=\bfseries}

\begin{tcolorbox}[title=Scaled box,scale=0.5]
This is a tcolorbox.
\end{tcolorbox}
\begin{tcolorbox}[title=Scaled box,scale=1.25]
This is a tcolorbox.
\end{tcolorbox}
```

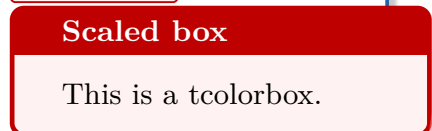

**/tcb/remember** (style, initially unset)

Shortcut for `tikz={remember picture}`. This allows one to reference nodes in other TikZ pictures.

```
\begin{tcolorbox}[enhanced,remember,colback=red!5!white,colframe=red!75!black,
fonttttitle=\bfseries,title=The four corners of a paper,
overlay={\draw[red!50!white,line width=1mm,opacity=0.5,shorten >=3mm]
(frame.north west) edge[->] (current page.north west)
(frame.north east) edge[->] (current page.north east)
(frame.south west) edge[->] (current page.south west)
(frame.south east) edge[->] (current page.south east);}]
This is a tcolorbox.
\end{tcolorbox}
```





`/tcb/remember as=<name>` (style, no default, initially unset)

The `frame` node will be remembered by the given `<name>` to be referenced in other TikZ pictures.


```
% \usepackage{lipsum}
\newtcolorbox{mybox}[1][]{enhanced,colframe=blue!75!black,colback=blue!10!white,
fonttitle=\bfseries,#1}

\begin{mybox}[title=First Box,nobeforeafter,width=\linewidth/4,remember as=one]
This is a test.
\end{mybox}
\hfill
\begin{mybox}[title=Second Box,nobeforeafter,width=\linewidth/4,remember as=two]
This is a test.
\end{mybox}
\hfill
\begin{mybox}[title=Third Box,nobeforeafter,width=\linewidth/4,remember as=three]
This is a test.
\end{mybox}

\lipsum[2]

\begin{mybox}[title=Fourth Box,remember as=four]
This is a test.
\end{mybox}

\begin{tikzpicture}[overlay,remember picture,line width=1mm,draw=red!75!black]
\draw[->] (one.east) to[bend right] node[above] {A} (two.west);
\draw[->] (two.east) to[bend left] node[above] {B} (three.west);
\draw[->] (three.east) to[bend left=90] node[right] {C} (four.east);
\draw[->] (four.west) to[bend left=90] node[left] {D} (one.west);
\end{tikzpicture}
```

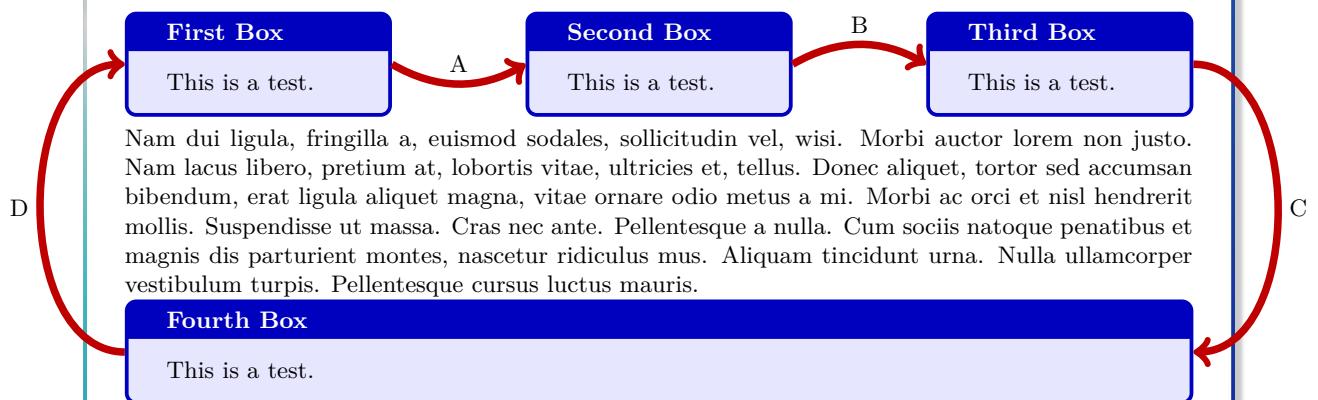



## 7.8 Underlay Option Keys

Underlays are quite similar to overlays described in Section 3.9 on page 53. Underlays are drawn *after* the frame and interior are drawn and *before* overlays and the text content is drawn; see Section 6.4 on page 92 for the general drawing scheme.

The differences between underlays and overlays are:

- Underlays are not applicable for the skins `standard`<sup>→ P.143</sup> and `standard jigsaw`<sup>→ P.144</sup>, whereas overlays are applicable also for these skins. The skin `spartan`<sup>→ P.181</sup> supports underlays but no overlays.

If an underlay is used with the `standard`<sup>→ P.143</sup> skin, it is silently ignored.

- Underlays are stackable, i.e. several different underlays can be used on the same `tcolorbox`. Overlays are not stackable by default (but with some help of the library `hooks`).
- Boxed titles are implemented with underlays (Section 7.2 on page 102), watermarks are implemented with overlays (Section 7.3 on page 109).

`/tcb/underlay=<graphical code>` (no default, initially unset)

Adds `<graphical code>` to the box drawing process. This `<graphical code>` is drawn *after* the frame and interior and *before* the text content.

```
\newtcolorbox{mybox}[1][\{enhanced,colback=red!5!white,
colbacktitle=red!85!black!50!white,
colframe=red!75!black,fonttitle=\bfseries,watermark color=yellow!50!white,
underlay={\begin{tcbclipinterior}
\draw[red!40!white,line width=1cm] (interior.south west)--(interior.north east);
\end{tcbclipinterior}}},
attach boxed title to top center={yshift=-2mm},#1}

\begin{mybox}[title=My box,watermark text=My Watermark]
\lipsum[2]
\end{mybox}
```

My box

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

`/tcb/no underlay` (style, no default, initially set)

Removes the underlay if set before.



**/tcb/underlay broken**= $\langle graphical\ code \rangle$  (no default, initially unset)  
 If the box is set to be **/tcb/breakable**<sup>→ P. 249</sup> and *is* broken actually, then the  $\langle graphical\ code \rangle$  is added to the box drawing process. **/tcb/underlay**<sup>→ P. 136</sup> overwrites this key.

**/tcb/underlay unbroken**= $\langle graphical\ code \rangle$  (no default, initially unset)  
 If the box is set to be **/tcb/breakable**<sup>→ P. 249</sup> but *is not* broken actually or if the box is set to be **/tcb/unbreakable**<sup>→ P. 250</sup>, then the  $\langle graphical\ code \rangle$  is added to the box drawing process. **/tcb/underlay**<sup>→ P. 136</sup> overwrites this key.

**/tcb/no underlay unbroken** (style, no default, initially set)  
 Removes the unbroken underlay if set before.

**/tcb/underlay first**= $\langle graphical\ code \rangle$  (no default, initially unset)  
 If the box is set to be **/tcb/breakable**<sup>→ P. 249</sup> and *is* broken actually, then the  $\langle graphical\ code \rangle$  is added to the box drawing process for the *first* part of the break sequence. **/tcb/underlay**<sup>→ P. 136</sup> overwrites this key.

**/tcb/no underlay first** (style, no default, initially set)  
 Removes the first underlay if set before.

**/tcb/underlay middle**= $\langle graphical\ code \rangle$  (no default, initially unset)  
 If the box is set to be **/tcb/breakable**<sup>→ P. 249</sup> and *is* broken actually, then the  $\langle graphical\ code \rangle$  is added to the box drawing process for the *middle* parts (if any) of the break sequence. **/tcb/underlay**<sup>→ P. 136</sup> overwrites this key.

**/tcb/no underlay middle** (style, no default, initially set)  
 Removes the middle underlay if set before.

**/tcb/underlay last**= $\langle graphical\ code \rangle$  (no default, initially unset)  
 If the box is set to be **/tcb/breakable**<sup>→ P. 249</sup> and *is* broken actually, then the  $\langle graphical\ code \rangle$  is added to the box drawing process for the *last* part of the break sequence. **/tcb/underlay**<sup>→ P. 136</sup> overwrites this key.

**/tcb/no underlay last** (style, no default, initially set)  
 Removes the last underlay if set before.

**/tcb/underlay boxed title**= $\langle graphical\ code \rangle$  (no default, initially unset)  
 If the box has a *boxed title*, see Section 7.2 on page 102, then the  $\langle graphical\ code \rangle$  is added to the box drawing process *before* the boxed title is drawn.

**/tcb/no underlay boxed title** (style, no default, initially set)  
 Removes the boxed title underlay if set before.

**/tcb/underlay unbroken and first**= $\langle graphical\ code \rangle$  (no default, initially unset)  
 This is an abbreviation for setting **/tcb/underlay unbroken** and **/tcb/underlay first** together. **/tcb/underlay**<sup>→ P. 136</sup> overwrites this key.

**/tcb/underlay middle and last**= $\langle graphical\ code \rangle$  (no default, initially unset)  
 This is an abbreviation for setting **/tcb/underlay middle** and **/tcb/underlay last** together. **/tcb/underlay**<sup>→ P. 136</sup> overwrites this key.

**/tcb/underlay unbroken and last**= $\langle graphical\ code \rangle$  (no default, initially unset)  
 This is an abbreviation for setting **/tcb/underlay unbroken** and **/tcb/underlay last** together. **/tcb/underlay**<sup>→ P. 136</sup> overwrites this key.



## 7.9 Finish Option Keys

Finishes are quite similar to underlays described in Section 7.8 on page 136 and overlays described in Section 3.9 on page 53. Finishes are drawn *after* the text content is drawn; see Section 6.4 on page 92 for the general drawing scheme. Therefore, a finish will reduce the readability of the text content.

Finishes are intended for special effects like highlights or glosses or text over text.

- Finishes are only applicable for the skins `enhanced`<sup>→ P. 145</sup>, `empty`<sup>→ P. 172</sup>, `freelance`<sup>→ P. 184</sup>, `bicolor`<sup>→ P. 158</sup>, `beamer`<sup>→ P. 163</sup>, and `widget`<sup>→ P. 168</sup>.

If a finish is used with the `standard`<sup>→ P. 143</sup> skin, it is silently ignored.

- Finishes are stackable, i. e. several different finishes can be used on the same `tcolorbox`.

`/tcb/finish=<graphical code>` (no default, initially unset)

Adds `<graphical code>` to the box drawing process. This `<graphical code>` is drawn *after* the text content.

```
\newtcolorbox{mybox}[1][\{enhanced,colback=red!5!white,
colbacktitle=red!85!black!50!white,colframe=red!75!black,fonttitle=\bfseries,
finish={\begin{tcbclipframe}
\path[bottom color=black,top color=black!50!white,opacity=0.1]
(frame.south west) -- (frame.south east) -- (frame.north east) -- cycle;
\path[top color=white,bottom color=black!50!white,opacity=0.1]
(frame.south west) -- (frame.north east) -- (frame.north west) -- cycle;
\end{tcbclipframe}}\},#1}

\begin{mybox}[title=My box]
\lipsum[2]
\end{mybox}
```

### My box

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

```
\newtcolorbox{mybox}[1][\{enhanced,colback=red!5!white,
colbacktitle=red!85!black!50!white,colframe=red!75!black,fonttitle=\bfseries,
finish={\node[draw,fill=white,fill opacity=0.85,inner sep=5mm,
rounded corners] at (frame.center) {\Huge\bfseries Finish!};}\},#1}

\begin{mybox}[title=My box]
\lipsum[2]
\end{mybox}
```

### My box

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

**Finish!**



- /tcb/no finish** (style, no default, initially set)  
Removes the finish if set before.
- /tcb/finish broken**= $\langle graphical\ code \rangle$  (no default, initially unset)  
If the box is set to be **/tcb/breakable**<sup>→ P. 249</sup> and *is* broken actually, then the  $\langle graphical\ code \rangle$  is added to the box drawing process. **/tcb/finish**<sup>→ P. 138</sup> overwrites this key.
- /tcb/finish unbroken**= $\langle graphical\ code \rangle$  (no default, initially unset)  
If the box is set to be **/tcb/breakable**<sup>→ P. 249</sup> but *is not* broken actually or if the box is set to be **/tcb/unbreakable**<sup>→ P. 250</sup>, then the  $\langle graphical\ code \rangle$  is added to the box drawing process. **/tcb/finish**<sup>→ P. 138</sup> overwrites this key.
- /tcb/no finish unbroken** (style, no default, initially set)  
Removes the unbroken finish if set before.
- /tcb/finish first**= $\langle graphical\ code \rangle$  (no default, initially unset)  
If the box is set to be **/tcb/breakable**<sup>→ P. 249</sup> and *is* broken actually, then the  $\langle graphical\ code \rangle$  is added to the box drawing process for the *first* part of the break sequence. **/tcb/finish**<sup>→ P. 138</sup> overwrites this key.
- /tcb/no finish first** (style, no default, initially set)  
Removes the first finish if set before.
- /tcb/finish middle**= $\langle graphical\ code \rangle$  (no default, initially unset)  
If the box is set to be **/tcb/breakable**<sup>→ P. 249</sup> and *is* broken actually, then the  $\langle graphical\ code \rangle$  is added to the box drawing process for the *middle* parts (if any) of the break sequence. **/tcb/finish**<sup>→ P. 138</sup> overwrites this key.
- /tcb/no finish middle** (style, no default, initially set)  
Removes the middle finish if set before.
- /tcb/finish last**= $\langle graphical\ code \rangle$  (no default, initially unset)  
If the box is set to be **/tcb/breakable**<sup>→ P. 249</sup> and *is* broken actually, then the  $\langle graphical\ code \rangle$  is added to the box drawing process for the *last* part of the break sequence. **/tcb/finish**<sup>→ P. 138</sup> overwrites this key.
- /tcb/no finish last** (style, no default, initially set)  
Removes the last finish if set before.
- /tcb/finish unbroken and first**= $\langle graphical\ code \rangle$  (no default, initially unset)  
This is an abbreviation for setting **/tcb/finish unbroken** and **/tcb/finish first** together. **/tcb/finish**<sup>→ P. 138</sup> overwrites this key.
- /tcb/finish middle and last**= $\langle graphical\ code \rangle$  (no default, initially unset)  
This is an abbreviation for setting **/tcb/finish middle** and **/tcb/finish last** together. **/tcb/finish**<sup>→ P. 138</sup> overwrites this key.
- /tcb/finish unbroken and last**= $\langle graphical\ code \rangle$  (no default, initially unset)  
This is an abbreviation for setting **/tcb/finish unbroken** and **/tcb/finish last** together. **/tcb/finish**<sup>→ P. 138</sup> overwrites this key.



## 7.10 Jigsaw Skin Variants

As described in Section 6.1 on page 84, a `tcolorbox` is drawn by up to four *engines*. Typically, the *frame* engine fills the complete box area with color and the other engines fill certain areas with other colors. Finally, only the area which you see as *frame* of the box will display the frame color. For most applications, this is a good approach.

For certain boxes, a more delicate procedure is needed. E.g., if the box should be translucent, an already painted area cannot be made unpainted. Therefore, more elaborate frame engines saw holes into the frame where the interior area and optionally the title area will be painted. The resulting skins are called *jigsaw* skins. For `standard`<sup>→ P.143</sup> and `enhanced`<sup>→ P.145</sup>, there are variants called `standard jigsaw`<sup>→ P.144</sup> and `enhanced jigsaw`<sup>→ P.152</sup>.

```
\newcommand{\ballexample}{\begin{tikzpicture}
  \path[use as bounding box] (0,0.8) rectangle +(0.1,0.1);
  \shadedraw [shading=ball] (0,0) circle (1cm);
  \shadedraw [ball color=red] (3,-2.2) circle (1cm);
\end{tikzpicture}}

\tcbset{enhanced,colback=blue!5!white,
  frame style={left color=red!75!black,right color=red!10!yellow},
  fonttitle=\bfseries }

\ballexample

\begin{tcolorbox}[title=A normal box]
  \lipsum[2]
\end{tcolorbox}

\ballexample

\begin{tcolorbox}[title=A translucent jigsaw box,
  enhanced jigsaw,opacityback=0.35]
  \lipsum[2]
\end{tcolorbox}
```

### A normal box

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

### A translucent jigsaw box

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.



```

\tcbset{enhanced,colback=red!10!white,coltitle=black,
  frame style={left color=red!75!black,right color=red!10!yellow},
  fonttitle=\bfseries,interior hidden,title hidden}

\begin{tcolorbox}[title=A normal box with hidden interior and title]
  This is a tcolorbox.
\end{tcolorbox}

\begin{tcolorbox}[enhanced jigsaw,
  title=A jigsaw box with hidden interior and title]
  This is a tcolorbox.
\end{tcolorbox}

```

A normal box with hidden interior and title

This is a tcolorbox.

A jigsaw box with hidden interior and title

This is a tcolorbox.

```

\newtcolorbox{mybox}{skin=enhancedmiddle jigsaw,leftrule=5mm,rightrule=5mm,
  boxsep=0mm,top=0mm,bottom=0mm,
  frame style={top color=blue,bottom color=red},interior hidden}

\begin{mybox}
  \lipsum[2]
\end{mybox}

```

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.



## 7.11 Draft Mode

To reduce the compilation time while drafting a document, the *draft mode* can be applied. Basically, it changes all skins to `spartan`<sup>→P.181</sup> and sets the `/tcb/fit algorithm`<sup>→P.275</sup> to `squeeze`. Especially, when fuzzy shadows are used, the speedup will be considerable high.

It is strongly recommended that the draft mode is *not* used for the final document. Use `spartan`<sup>→P.181</sup> directly, if you want to stay with it. The draft mode implementation may change in future.

Normally, switching to the draft mode should not alter the geometry of your document. Since overlays are deactivated, any code placed there (e.g. counter changes) is not executed anymore! Also, `/tcb/remember as`<sup>→P.135</sup> will not have any effect. You may exclude critical code with `\tcbinterruptdraftmode` / `\tcbcontinuedraftmode` from converting to draft mode.

### `\tcbstartdraftmode`

Any following `tcolorbox` code is put into *draft mode*. All skin settings are overruled with `spartan`<sup>→P.181</sup>. Overlays, watermarks, shadows, borderlines, and rounded corners are deactivated for all `tcolorbox` layers.

### `\tcbstopdraftmode`

The *draft mode* is deactivated for the following code.

### `\tcbinterruptdraftmode`

If the compilation is in *draft mode*, the *draft mode* is deactivated until a following `\tcbcontinuedraftmode` is detected.

If the compilation is not in *draft mode*, nothing happens and a following `\tcbcontinuedraftmode` will not start the *draft mode*.

The pair `\tcbinterruptdraftmode` and `\tcbcontinuedraftmode` cannot be used nested.

### `\tcbcontinuedraftmode`

Continues the *draft mode* which was suspended by a preceding `\tcbinterruptdraftmode`. Nothing happens, if there was no draft mode before `\tcbinterruptdraftmode`.

Code, which is place between `\tcbinterruptdraftmode` and `\tcbcontinuedraftmode` is shielded from *draft mode*.

`/tcb/draftmode=true|false` (default `true`, initially `false`)

If set to `true`, the *draft mode* is started. If set to `false`, the *draft mode* is stopped.

```
\newtcolorbox{mybeamer}[2][\beamer,colback=Salmon!50!white,
colframe=FireBrick!75!black,adjusted title={#2},#1}

\begin{mybeamer}{Beamer box}
This box looks like a box provided by the \texttt{beamer} class.
\end{mybeamer}\par\medskip
\begin{mybeamer}[draftmode]{Beamer box}
This box looks like a box provided by the \texttt{beamer} class.
\end{mybeamer}
```

Beamer box

This box looks like a box provided by the `beamer` class.

Beamer box

This box looks like a box provided by the `beamer` class.



## 7.12 Skin Family 'standard'

Note that the option keys `/tcb/frame style`<sup>→P.96</sup>, `/tcb/interior style`<sup>→P.97</sup>, `/tcb/segmentation style`<sup>→P.99</sup>, and `/tcb/title style`<sup>→P.99</sup> are not applicable to the standard skin. Also, watermarks (see Subsection 7.3) are not usable with the standard skin.

`/tcb/skin=standard` (skin)

This is the standard skin from the core package. All drawing engines are set to type standard. The drawing is based on pgf commands and does not need the tikz package.

### Environment and engines for the skin 'standard'

<code>/tcb/graphical environment</code> <sup>→P.84</sup> :	<code>pgfpicture</code>
<code>/tcb/frame engine</code> <sup>→P.85</sup> :	<code>standard</code>
<code>/tcb/interior titled engine</code> <sup>→P.85</sup> :	<code>standard</code>
<code>/tcb/interior engine</code> <sup>→P.86</sup> :	<code>standard</code>
<code>/tcb/segmentation engine</code> <sup>→P.86</sup> :	<code>standard</code>
<code>/tcb/title engine</code> <sup>→P.86</sup> :	<code>standard</code>

`/tcb/standard` (style, no value)

This is an abbreviation for setting `skin=standard`.

```
\tcbset{standard,equal height group=standard,
  colback=LightGreen,colframe=DarkGreen,colbacklower=LimeGreen!75!LightGreen,
  colbacktitle=LimeGreen!75!DarkGreen,width=(\linewidth-6mm)/4,nobeforeafter,
  left=1mm,right=1mm,top=1mm,bottom=1mm,middle=1mm}
%
\begin{tcolorbox}
  This is my content.
\end{tcolorbox}\hfill
\begin{tcolorbox}
  This is my content.
  \tcblower
  More content.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=My title]
  This is my content.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=My title]
  This is my content.
  \tcblower
  More content.
\end{tcolorbox}
```

This is my content.

This is my content.  
-----  
More content.

My title  
-----  
This is my content.

My title  
-----  
This is my content.  
-----  
More content.



`/tcb/skin=standard jigsaw` (skin)

This is the standard jigsaw skin from the core package. It differs from the skin `standard`<sup>→P.143</sup> by its frame engine, see Section 7.10 on page 140.

Environment and engines for the skin 'standard jigsaw'

```
/tcb/graphical environment→P.84: pgfpicture
/tcb/frame engine→P.85: standardjigsaw
/tcb/interior titled engine→P.85: standard
/tcb/interior engine→P.86: standard
/tcb/segmentation engine→P.86: standard
/tcb/title engine→P.86: standard
```

`/tcb/standard jigsaw` (style, no value)

This is an abbreviation for setting `skin=standard jigsaw`.

```
\tcbset{standard jigsaw,equal height group=standardjigsaw,
colback=LightGreen,colframe=DarkGreen,colbacklower=LimeGreen!75!LightGreen,
colbacktitle=LimeGreen!75!DarkGreen,width=(\linewidth-6mm)/4,nobeforeafter,
opacityframe=0.5,opacityback=0.5,opacitybacktitle=0.5,
left=1mm,right=1mm,top=1mm,bottom=1mm,middle=1mm}
%
\begin{tcolorbox}
  This is my content.
\end{tcolorbox}\hfill
\begin{tcolorbox}
  This is my content.
  \tcblower
  More content.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=My title]
  This is my content.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=My title]
  This is my content.
  \tcblower
  More content.
\end{tcolorbox}
```

This is my content.

This is my content.  
-----  
More content.

My title  
-----  
This is my content.

My title  
-----  
This is my content.  
-----  
More content.



## 7.13 Skin Family 'enhanced'

If you like the standard appearance of a `tcolorbox` but you want to have some 'enhanced' features, the `enhanced` skin is what you are looking for.

`/tcb/skin=enhanced` (skin)

This skin translates the drawing commands of the core package into `tikz` path commands. Therefore, it allows all `tikz` high level options for these paths and has more flexibility compared to the `standard`<sup>→P.143</sup> skin. You pay for this with some prolonged compilation time. The `tikz` path options can be given with the option keys `/tcb/frame style`<sup>→P.96</sup>, `/tcb/interior style`<sup>→P.97</sup>, `/tcb/segmentation style`<sup>→P.99</sup>, and `/tcb/title style`<sup>→P.99</sup>.

### Environment and engines for the skin 'enhanced'

```
/tcb/graphical environment→P.84: tikzpicture
/tcb/frame engine→P.85: path
/tcb/interior titled engine→P.85: path
/tcb/interior engine→P.86: path
/tcb/segmentation engine→P.86: path
/tcb/title engine→P.86: path
```

`/tcb/enhanced` (style, no value)

This is an abbreviation for setting `skin=enhanced`.

```
\tcbset{enhanced,equal height group=enhanced,
colback=LightGreen,colframe=DarkGreen,colbacklower=LimeGreen!75!LightGreen,
width=(\linewidth-6mm)/4,nobeforeafter,
left=1mm,right=1mm,top=1mm,bottom=1mm,middle=1mm}
%
\begin{tcolorbox}
  This is my content.
\end{tcolorbox}\hfill
\begin{tcolorbox}
  This is my content.
  \tcblower
  More content.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=My title]
  This is my content.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=My title]
  This is my content.
  \tcblower
  More content.
\end{tcolorbox}
```

This is my content.

This is my content.

My title

My title

-----  
More content.

This is my content.

This is my content.

-----  
More content.



```
% \usetikzlibrary{shadings} % preamble
\tcbset{skin=enhanced,fonttitle=\bfseries,
  frame style={upper left=blue,upper right=red,lower left=yellow,lower right=green},
  interior style={white,opacity=0.5},
  segmentation style={black,solid,opacity=0.2,line width=1pt}}

\begin{tcolorbox}[title=Nice box in rainbow colors]
  With the 'enhanced' skin, it is quite easy to produce fancy looking effects.
  \tcblower
  Note that this is still a \texttt{tcolorbox}.
\end{tcolorbox}
```

#### Nice box in rainbow colors

With the 'enhanced' skin, it is quite easy to produce fancy looking effects.

Note that this is still a `tcolorbox`.

```
% \usetikzlibrary{decorations.pathmorphing} % preamble
\tcbset{skin=enhanced,fonttitle=\bfseries,boxrule=1mm,
  frame style={draw=FireBrick,fill=Salmon},drop fuzzy shadow,
  interior style={draw=FireBrick,top color=Salmon!10,bottom color=Salmon!20},
  segmentation style={draw=FireBrick,solid,decorate,
    decoration={coil,aspect=0,segment length=10.1mm}}}}

\begin{tcblisting}{title=A listing box with shadow and some specials}
Of course, skins can be used for listings also.
\begin{equation}
\int\limits_1^2 \frac{1}{x} dx = \ln(2).
\end{equation}
\end{tcblisting}
```

#### A listing box with shadow and some specials

Of course, skins can be used for listings also.

```
\begin{equation}
\int\limits_1^2 \frac{1}{x} dx = \ln(2).
\end{equation}
```

Of course, skins can be used for listings also.

$$\int_1^2 \frac{1}{x} dx = \ln(2). \quad (2)$$



**/tcb/enhanced standard** (style, no value)

For unbreakable boxes, this is identical to using **/tcb/enhanced**<sup>→P.145</sup>. But, for breakable boxes, the *break sequence* is identical to the **standard**<sup>→P.143</sup> skin, see Section 11.6 from page 258.

**/tcb/blank** (style, initially unset)

This style relies on the skin **enhanced**<sup>→P.145</sup>. All drawing operations are hidden and all margins are set to 0pt. See **/tcb/blanker**<sup>→P.173</sup> for switching off the drawing engines.

```
\begin{tcolorbox}[blank,watermark text=A blank box]
\lipsum[1]
\end{tcolorbox}
```

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.



## `\tcbline`

Sometimes, a line is only a line. With `\tcblower`<sup>→P.9</sup> you separate the box content into two functional units. `\tcbline` draws only a line which looks like the segmentation line between upper and lower part. Furthermore, you can use `\tcbline` more than just once. `\tcbline` always uses the `path` drawing engine. Therefore, the `/tcb/segmentation style`<sup>→P.99</sup> can be applied.

```
\tcbset{enhanced,colframe=blue!50!black,colback=white}  
  
\begin{tcolorbox}[colupper=red!50!black,collower=green!50!black]  
  \lipsum[1]  
  \tcbline  
  \lipsum[2]  
  \tcblower  
  \lipsum[3]  
  \tcbline  
  \lipsum[4]  
\end{tcolorbox}
```

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec et mi. Nam vulputate metus eu enim. Vestibulum pellentesque felis eu massa.

Quisque ullamcorper placerat ipsum. Cras nibh. Morbi vel justo vitae lacus tincidunt ultrices. Lorem ipsum dolor sit amet, consectetur adipiscing elit. In hac habitasse platea dictumst. Integer tempus convallis augue. Etiam facilisis. Nunc elementum fermentum wisi. Aenean placerat. Ut imperdiet, enim sed gravida sollicitudin, felis odio placerat quam, ac pulvinar elit purus eget enim. Nunc vitae tortor. Proin tempus nibh sit amet nisl. Vivamus quis tortor vitae risus porta vehicula.

## `\tcbline*`

Equivalent to `\tcbline`, but in a breakable box, `\tcbline*` is removed if at a page/box break. Also, it is removed at the end of a box.



`/tcb/skin=enhancedfirst` (skin)

This is a flavor of `enhanced`<sup>→P.145</sup> which is used as a *first* part in a break sequence for `enhanced`<sup>→P.145</sup>. Nevertheless, this skin can be applied independently.

#### Environment and engines for the skin 'enhancedfirst'

```
/tcb/graphical environment→P.84: tikzpicture
/tcb/frame engine→P.85: pathfirst
/tcb/interior titled engine→P.85: pathfirst
/tcb/interior engine→P.86: pathfirst
/tcb/segmentation engine→P.86: path
/tcb/title engine→P.86: pathfirst
```

```
\tcbset{skin=enhancedfirst,equal height group=enhancedfirst,
colback=LightGreen,colframe=DarkGreen,
width=(\linewidth-6mm)/4,nobeforeafter,
left=1mm,right=1mm,top=1mm,bottom=1mm,middle=1mm}
%
\begin{tcolorbox}
  This is my content.
\end{tcolorbox}\hfill
\begin{tcolorbox}
  This is my content.
  \tcblower
  More content.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=My title]
  This is my content.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=My title]
  This is my content.
  \tcblower
  More content.
\end{tcolorbox}
```

This is my content.

This is my content.

-----  
More content.

My title

This is my content.

My title

This is my content.

-----  
More content.



`/tcb/skin=enhancedmiddle` (skin)

This is a flavor of `enhanced`<sup>→P.145</sup> which is used as a *middle* part in a break sequence for `enhanced`<sup>→P.145</sup>. Nevertheless, this skin can be applied independently.

#### Environment and engines for the skin 'enhancedmiddle'

```
/tcb/graphical environment→P.84: tikzpicture
/tcb/frame engine→P.85: pathmiddle
/tcb/interior titled engine→P.85: pathmiddle
/tcb/interior engine→P.86: pathmiddle
/tcb/segmentation engine→P.86: path
/tcb/title engine→P.86: pathmiddle
```

```
\tcbset{skin=enhancedmiddle,equal height group=enhancedmiddle,
colback=LightGreen,colframe=DarkGreen,
width=(\linewidth-6mm)/4,nobeforeafter,
left=1mm,right=1mm,top=1mm,bottom=1mm,middle=1mm}
%
\begin{tcolorbox}
This is my content.
\end{tcolorbox}\hfill
\begin{tcolorbox}
This is my content.
\tcbblower
More content.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=My title]
This is my content.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=My title]
This is my content.
\tcbblower
More content.
\end{tcolorbox}
```

This is my content.

This is my content.

My title

My title

-----  
More content.

This is my content.

This is my content.

-----  
More content.



`/tcb/skin=enhancedlast` (skin)

This is a flavor of `enhanced`<sup>→P.145</sup> which is used as a *last* part in a break sequence for `enhanced`<sup>→P.145</sup>. Nevertheless, this skin can be applied independently.

#### Environment and engines for the skin 'enhancedlast'

```
/tcb/graphical environment→P.84: tikzpicture
/tcb/frame engine→P.85: pathlast
/tcb/interior titled engine→P.85: pathlast
/tcb/interior engine→P.86: pathlast
/tcb/segmentation engine→P.86: path
/tcb/title engine→P.86: pathlast
```

```
\tcbset{skin=enhancedlast,equal height group=enhancedlast,
colback=LightGreen,colframe=DarkGreen,
width=(\linewidth-6mm)/4,nobeforeafter,
left=1mm,right=1mm,top=1mm,bottom=1mm,middle=1mm}
%
\begin{tcolorbox}
  This is my content.
\end{tcolorbox}\hfill
\begin{tcolorbox}
  This is my content.
  \tcblower
  More content.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=My title]
  This is my content.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=My title]
  This is my content.
  \tcblower
  More content.
\end{tcolorbox}
```

This is my content.

This is my content.

My title

My title

-----  
More content.

This is my content.

This is my content.

-----  
More content.



`/tcb/skin=enhanced jigsaw` (skin)

This is the jigsaw variant of skin `enhanced`<sup>→P.145</sup>. It differs by its frame engine, see Section 7.10 on page 140.

#### Environment and engines for the skin 'enhanced jigsaw'

```
/tcb/graphical environment→P.84: tikzpicture
/tcb/frame engine→P.85: pathjigsaw
/tcb/interior titled engine→P.85: path
/tcb/interior engine→P.86: path
/tcb/segmentation engine→P.86: path
/tcb/title engine→P.86: path
```

`/tcb/enhanced jigsaw` (style, no value)

This is an abbreviation for setting `skin=enhanced jigsaw`.

```
\tcbset{enhanced jigsaw,equal height group=enhancedjigsaw,
colback=LightGreen,colframe=DarkGreen,colbacklower=LimeGreen!75!LightGreen,
colbacktitle=LimeGreen!75!DarkGreen,width=(\linewidth-6mm)/4,nobeforeafter,
opacityframe=0.5,opacityback=0.5,opacitybacktitle=0.5,
left=1mm,right=1mm,top=1mm,bottom=1mm,middle=1mm}
%
\begin{tcolorbox}
  This is my content.
\end{tcolorbox}\hfill
\begin{tcolorbox}
  This is my content.
  \tcblower
  More content.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=My title]
  This is my content.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=My title]
  This is my content.
  \tcblower
  More content.
\end{tcolorbox}
```

This is my content.

This is my content.  
-----  
More content.

My title  
-----  
This is my content.

My title  
-----  
This is my content.  
-----  
More content.



`/tcb/skin=enhancedfirst jigsaw` (skin)

This is the jigsaw variant of skin `enhancedfirst`<sup>→ P. 149</sup>. It differs by its frame engine, see Section 7.10 on page 140.

#### Environment and engines for the skin 'enhancedfirst jigsaw'

```
/tcb/graphical environment→ P. 84: tikzpicture
/tcb/frame engine→ P. 85: pathfirstjigsaw
/tcb/interior titled engine→ P. 85: pathfirst
/tcb/interior engine→ P. 86: pathfirst
/tcb/segmentation engine→ P. 86: path
/tcb/title engine→ P. 86: pathfirst
```

```
\tcbset{skin=enhancedfirst jigsaw,equal height group=enhancedfirstjigsaw,
colback=LightGreen,colframe=DarkGreen,colbacklower=LimeGreen!75!LightGreen,
colbacktitle=LimeGreen!75!DarkGreen,width=(\linewidth-6mm)/4,nobeforeafter,
opacityframe=0.5,opacityback=0.5,opacitybacktitle=0.5,
left=1mm,right=1mm,top=1mm,bottom=1mm,middle=1mm}
%
\begin{tcolorbox}
  This is my content.
\end{tcolorbox}\hfill
\begin{tcolorbox}
  This is my content.
  \tcblower
  More content.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=My title]
  This is my content.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=My title]
  This is my content.
  \tcblower
  More content.
\end{tcolorbox}
```

This is my content.

This is my content.

My title

My title

More content.

This is my content.

This is my content.

More content.



`/tcb/skin=enhancedmiddle jigsaw` (skin)

This is the jigsaw variant of skin `enhancedmiddle`<sup>→P. 150</sup>. It differs by its frame engine, see Section 7.10 on page 140.

#### Environment and engines for the skin 'enhancedmiddle jigsaw'

```
/tcb/graphical environment→P. 84: tikzpicture
/tcb/frame engine→P. 85: pathmiddlejigsaw
/tcb/interior titled engine→P. 85: pathmiddle
/tcb/interior engine→P. 86: pathmiddle
/tcb/segmentation engine→P. 86: path
/tcb/title engine→P. 86: pathmiddle
```

```
\tcbset{skin=enhancedmiddle jigsaw,equal height group=enhancedmiddlejigsaw,
colback=LightGreen,colframe=DarkGreen,colbacklower=LimeGreen!75!LightGreen,
colbacktitle=LimeGreen!75!DarkGreen,width=(\linewidth-6mm)/4,nobeforeafter,
opacityframe=0.5,opacityback=0.5,opacitybacktitle=0.5,
left=1mm,right=1mm,top=1mm,bottom=1mm,middle=1mm}
%
\begin{tcolorbox}
  This is my content.
\end{tcolorbox}\hfill
\begin{tcolorbox}
  This is my content.
  \tcblower
  More content.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=My title]
  This is my content.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=My title]
  This is my content.
  \tcblower
  More content.
\end{tcolorbox}
```

This is my content.

This is my content.

My title

My title

More content.

This is my content.

This is my content.

More content.

`/tcb/marker` (style, no value)

This styles relies on the skin `enhancedmiddle jigsaw`. It is intended to be used as an optical marker like a highlighter pen.

```
\begin{tcolorbox}[marker]
\lipsum[2]
\end{tcolorbox}
```

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.



This examples demonstrates the creation of several *text marker* environments based on `enhancedmiddle` → P. 150.

```
\tcbset{textmarker/.style={%
    skin=enhancedmiddle jigsaw,breakable,parbox=false,
    boxrule=0mm,leftrule=5mm,boxsep=0mm,arc=0mm,outer arc=0mm,
    left=3mm,right=3mm,top=1mm,bottom=1mm,toptitle=1mm,bottomtitle=1mm,oversize}}

\newtcolorbox{yellow}{textmarker,colback=yellow!5!white,colframe=yellow}
\newtcolorbox{orange}{textmarker,colback=DarkOrange!5!white,
    colframe=DarkOrange!75!yellow}
\newtcolorbox{red}{textmarker,colback=red!5!white,colframe=red}
\newtcolorbox{blue}{textmarker,colback=DeepSkyBlue!5!white,colframe=DeepSkyBlue}
\newtcolorbox{green}{textmarker,colback=Chartreuse!5!white,colframe=Chartreuse}
\newtcolorbox{rainbow}{textmarker,interior hidden,
    frame style={top color=blue,bottom color=red,middle color=green}}

\begin{yellow}
    \lipsum[1-3]
\end{yellow}

\begin{orange}
    \lipsum[4]
\end{orange}

\begin{red}
    \lipsum[5]
\end{red}

\begin{green}
    \lipsum[6]
\end{green}

\begin{blue}
    \lipsum[7]
\end{blue}

\begin{rainbow}
    \lipsum[8]
\end{rainbow}
```

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.



Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec et mi. Nam vulputate metus eu enim. Vestibulum pellentesque felis eu massa.

Quisque ullamcorper placerat ipsum. Cras nibh. Morbi vel justo vitae lacus tincidunt ultrices. Lorem ipsum dolor sit amet, consectetur adipiscing elit. In hac habitasse platea dictumst. Integer tempus convallis augue. Etiam facilisis. Nunc elementum fermentum wisi. Aenean placerat. Ut imperdiet, enim sed gravida sollicitudin, felis odio placerat quam, ac pulvinar elit purus eget enim. Nunc vitae tortor. Proin tempus nibh sit amet nisl. Vivamus quis tortor vitae risus porta vehicula.

Fusce mauris. Vestibulum luctus nibh at lectus. Sed bibendum, nulla a faucibus semper, leo velit ultricies tellus, ac venenatis arcu wisi vel nisl. Vestibulum diam. Aliquam pellentesque, augue quis sagittis posuere, turpis lacus congue quam, in hendrerit risus eros eget felis. Maecenas eget erat in sapien mattis porttitor. Vestibulum porttitor. Nulla facilisi. Sed a turpis eu lacus commodo facilisis. Morbi fringilla, wisi in dignissim interdum, justo lectus sagittis dui, et vehicula libero dui cursus dui. Mauris tempor ligula sed lacus. Duis cursus enim ut augue. Cras ac magna. Cras nulla. Nulla egestas. Curabitur a leo. Quisque egestas wisi eget nunc. Nam feugiat lacus vel est. Curabitur consectetur.

Suspendisse vel felis. Ut lorem lorem, interdum eu, tincidunt sit amet, laoreet vitae, arcu. Aenean faucibus pede eu ante. Praesent enim elit, rutrum at, molestie non, nonummy vel, nisl. Ut lectus eros, malesuada sit amet, fermentum eu, sodales cursus, magna. Donec eu purus. Quisque vehicula, urna sed ultricies auctor, pede lorem egestas dui, et convallis elit erat sed nulla. Donec luctus. Curabitur et nunc. Aliquam dolor odio, commodo pretium, ultricies non, pharetra in, velit. Integer arcu est, nonummy in, fermentum faucibus, egestas vel, odio.

Sed commodo posuere pede. Mauris ut est. Ut quis purus. Sed ac odio. Sed vehicula hendrerit sem. Duis non odio. Morbi ut dui. Sed accumsan risus eget odio. In hac habitasse platea dictumst. Pellentesque non elit. Fusce sed justo eu urna porta tincidunt. Mauris felis odio, sollicitudin sed, volutpat a, ornare ac, erat. Morbi quis dolor. Donec pellentesque, erat ac sagittis semper, nunc dui lobortis purus, quis congue purus metus ultricies tellus. Proin et quam. Class aptent taciti sociosqu ad litora torquent per conubia nostra, per inceptos hymenaeos. Praesent sapien turpis, fermentum vel, eleifend faucibus, vehicula eu, lacus.

Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Donec odio elit, dictum in, hendrerit sit amet, egestas sed, leo. Praesent feugiat sapien aliquet odio. Integer vitae justo. Aliquam vestibulum fringilla lorem. Sed neque lectus, consectetur at, consectetur sed, eleifend ac, lectus. Nulla facilisi. Pellentesque eget lectus. Proin eu metus. Sed porttitor. In hac habitasse platea dictumst. Suspendisse eu lectus. Ut mi mi, lacinia sit amet, placerat et, mollis vitae, dui. Sed ante tellus, tristique ut, iaculis eu, malesuada ac, dui. Mauris nibh leo, facilisis non, adipiscing quis, ultrices a, dui.



`/tcb/skin=enhancedlast jigsaw` (skin)

This is the jigsaw variant of skin `enhancedlast`<sup>→P.151</sup>. It differs by its frame engine, see Section 7.10 on page 140.

#### Environment and engines for the skin 'enhancedlast'

```
/tcb/graphical environment→P.84: tikzpicture
/tcb/frame engine→P.85: pathlastjigsaw
/tcb/interior titled engine→P.85: pathlast
/tcb/interior engine→P.86: pathlast
/tcb/segmentation engine→P.86: path
/tcb/title engine→P.86: pathlast
```

```
\tcbset{skin=enhancedlast jigsaw,equal height group=enhancedlastjigsaw,
colback=LightGreen,colframe=DarkGreen,colbacklower=LimeGreen!75!LightGreen,
colbacktitle=LimeGreen!75!DarkGreen,width=(\linewidth-6mm)/4,nobeforeafter,
opacityframe=0.5,opacityback=0.5,opacitybacktitle=0.5,
left=1mm,right=1mm,top=1mm,bottom=1mm,middle=1mm}
%
\begin{tcolorbox}
  This is my content.
\end{tcolorbox}\hfill
\begin{tcolorbox}
  This is my content.
  \tcblower
  More content.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=My title]
  This is my content.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=My title]
  This is my content.
  \tcblower
  More content.
\end{tcolorbox}
```

This is my content.

This is my content.  
-----  
More content.

My title  
-----  
This is my content.

My title  
-----  
This is my content.  
-----  
More content.



## 7.14 Skin Family 'bicolor'

`/tcb/skin=bicolor` (skin)


This skin is quite similar to the `standard`<sup>→P.143</sup> and `enhanced`<sup>→P.145</sup> skin. But instead of a segmentation line, the optional lower part of the box is filled with a different color or drawn with a different style.

### Environment and engines for the skin 'bicolor'

```
/tcb/graphical environment→P.84: tikzpicture
/tcb/frame engine→P.85: path
/tcb/interior titled engine→P.85: special
/tcb/interior engine→P.86: special
/tcb/segmentation engine→P.86: special
/tcb/title engine→P.86: path
```


- The most basic usage of this skin is to set the background color of the lower part by `/tcb/colbacklower`<sup>→P.159</sup> and all other options like for the `standard`<sup>→P.143</sup> skin.

```
\begin{tcolorbox}[skin=bicolor,title=The title,
  colframe=FireBrick!75!black,colback=Salmon!50!white,colbacklower=Salmon]
  The upper part.
  \tcblower
  The lower part.
\end{tcolorbox}
```



- The more advanced usage of this skin is to apply the `/tcb/frame style`<sup>→P.96</sup> and the `/tcb/interior style`<sup>→P.97</sup> like for the `enhanced`<sup>→P.145</sup> skin. Also, the `/tcb/segmentation style`<sup>→P.99</sup> can be used, but it is applied to the whole lower part.

```
\begin{tcolorbox}[skin=bicolor,title=The title,
  frame style={top color=FireBrick,
    bottom color=FireBrick!15!white,draw=black},
  interior style={left color=Salmon,right color=Salmon!50!white},
  segmentation style={right color=Salmon,left color=Salmon!50!white}]
  The upper part.
  \tcblower
  The lower part.
\end{tcolorbox}
```

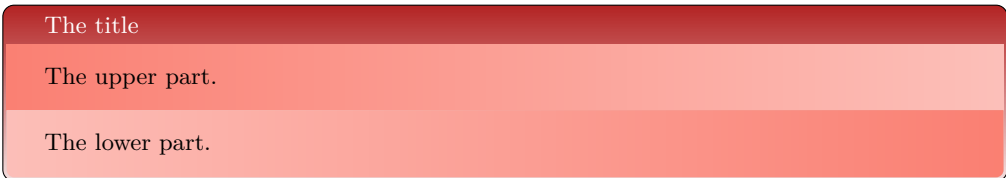

`/tcb/bicolor` (style, no value)

This is an abbreviation for setting `skin=bicolor`.



```

\tcbset{bicolor,equal height group=bicolor,
  colback=LightGreen,colframe=DarkGreen,colbacklower=LimeGreen!75!LightGreen,
  width=(\linewidth-6mm)/4,nobeforeafter,
  left=1mm,right=1mm,top=1mm,bottom=1mm,middle=1mm}
%
\begin{tcolorbox}
  This is my content.
\end{tcolorbox}\hfill
\begin{tcolorbox}
  This is my content.
  \tcblower
  More content.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=My title]
  This is my content.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=My title]
  This is my content.
  \tcblower
  More content.
\end{tcolorbox}

```

This is my content.

This is my content.  
More content.

My title  
This is my content.

My title  
This is my content.  
More content.

`/tcb/colbacklower=<color>` (no default, initially black!15!white)  
Sets the background `<color>` of the lower part. It depends on the skin, if this value is used.

```

\tcbset{gitexample/.style={listing and comment,comment={#1},
  skin=bicolor,boxrule=1mm,fonttitle=\bfseries,coltitle=black,
  frame style={draw=black,left color=Gold,right color=Goldenrod!50!Gold},
  colback=black,colbacklower=Goldenrod!75!Gold,
  colupper=white,collower=black,
  listing options={language={bash},aboveskip=0pt,belowskip=0pt,nolol,
  basicstyle=\ttfamily\bfseries,extendedchars=true}}}

\begin{tcblisting}{title={Snapshot of the staging area},
  gitexample={The option '-a' automatically stages all tracked and modified
    files before the commit.\par
    This can be combined with the message option '-m'
    as seen in the third line.}}

git commit
git commit -a
git commit -am 'changes to my example'
\end{tcblisting}

```

#### Snapshot of the staging area

```

git commit
git commit -a
git commit -am 'changes to my example'

```

The option '-a' automatically stages all tracked and modified files before the commit.  
This can be combined with the message option '-m' as seen in the third line.



`/tcb/skin=bicolorfirst` (skin)

This is a flavor of `bicolor`<sup>→P.158</sup> which is used as a *first* part in a break sequence for `bicolor`<sup>→P.158</sup>. Nevertheless, this skin can be applied independently.

#### Environment and engines for the skin 'bicolorfirst'

```
/tcb/graphical environment→P.84: tikzpicture
/tcb/frame engine→P.85: pathfirst
/tcb/interior titled engine→P.85: special
/tcb/interior engine→P.86: special
/tcb/segmentation engine→P.86: special
/tcb/title engine→P.86: pathfirst
```

```
\tcbset{skin=bicolorfirst,equal height group=bicolorfirst,
colback=LightGreen,colframe=DarkGreen,colbacklower=LimeGreen!75!LightGreen,
width=(\linewidth-6mm)/4,nobeforeafter,
left=1mm,right=1mm,top=1mm,bottom=1mm,middle=1mm}
%
\begin{tcolorbox}
  This is my content.
\end{tcolorbox}\hfill
\begin{tcolorbox}
  This is my content.
  \tcblower
  More content.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=My title]
  This is my content.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=My title]
  This is my content.
  \tcblower
  More content.
\end{tcolorbox}
```

This is my content.

This is my content.

My title

My title

More content.

This is my content.

This is my content.

More content.



`/tcb/skin=bicolormiddle` (skin)

This is a flavor of `bicolor`<sup>→P.158</sup> which is used as a *middle* part in a break sequence for `bicolor`<sup>→P.158</sup>. Nevertheless, this skin can be applied independently.

#### Environment and engines for the skin 'bicolormiddle'

```
/tcb/graphical environment→P.84: tikzpicture
/tcb/frame engine→P.85: pathmiddle
/tcb/interior titled engine→P.85: special
/tcb/interior engine→P.86: special
/tcb/segmentation engine→P.86: special
/tcb/title engine→P.86: pathmiddle
```

```
\tcbset{skin=bicolormiddle,equal height group=bicolormiddle,
colback=LightGreen,colframe=DarkGreen,colbacklower=LimeGreen!75!LightGreen,
width=(\linewidth-6mm)/4,nobeforeafter,
left=1mm,right=1mm,top=1mm,bottom=1mm,middle=1mm}
%
\begin{tcolorbox}
  This is my content.
\end{tcolorbox}\hfill
\begin{tcolorbox}
  This is my content.
  \tcblower
  More content.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=My title]
  This is my content.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=My title]
  This is my content.
  \tcblower
  More content.
\end{tcolorbox}
```

This is my content.

This is my content.

My title

My title

More content.

This is my content.

This is my content.

More content.



`/tcb/skin=bicolorlast` (skin)

This is a flavor of `bicolor`<sup>→P.158</sup> which is used as a *last* part in a break sequence for `bicolor`<sup>→P.158</sup>. Nevertheless, this skin can be applied independently.

#### Environment and engines for the skin 'bicolorlast'

```
/tcb/graphical environment→P.84: tikzpicture
/tcb/frame engine→P.85: pathlast
/tcb/interior titled engine→P.85: special
/tcb/interior engine→P.86: special
/tcb/segmentation engine→P.86: special
/tcb/title engine→P.86: pathlast
```

```
\tcbset{skin=bicolorlast,equal height group=bicolorlast,
colback=LightGreen,colframe=DarkGreen,colbacklower=LimeGreen!75!LightGreen,
width=(\linewidth-6mm)/4,nobeforeafter,
left=1mm,right=1mm,top=1mm,bottom=1mm,middle=1mm}
%
\begin{tcolorbox}
  This is my content.
\end{tcolorbox}\hfill
\begin{tcolorbox}
  This is my content.
  \tcblower
  More content.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=My title]
  This is my content.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=My title]
  This is my content.
  \tcblower
  More content.
\end{tcolorbox}
```

This is my content.

This is my content.

My title

My title

More content.

This is my content.

This is my content.

More content.



## 7.15 Skin Family 'beamer'

`/tcb/skin=beamer` (skin)

This skin resembles boxes known from the `beamer` class and therefore is called 'beamer'. It uses the normal colors from the core package but shades them a little bit. To use this skin, the `tikz` library `shadings` has to be included in the preamble by:

```
\usetikzlibrary{shadings}
```

The appearance of the skin can be controlled by `/tcb/frame style`<sup>→P.96</sup> and `/tcb/interior style`<sup>→P.97</sup>, if needed. Here, the *segmentation* cannot be controlled by a style.

### Environment and engines for the skin 'beamer'

```
/tcb/graphical environment→P.84: tikzpicture
/tcb/frame engine→P.85: path
/tcb/interior titled engine→P.85: special
/tcb/interior engine→P.86: special
/tcb/segmentation engine→P.86: special
/tcb/title engine→P.86: path
```

`/tcb/beamer` (style, no value)

This is an abbreviation for setting `skin=beamer`.

It also changes the geometry and some style options.

```
\tcbset{beamer,equal height group=beamer,
colback=LightGreen,colframe=DarkGreen,
width=(\linewidth-6mm)/4,nobeforeafter,
left=1mm,right=1mm,top=1mm,bottom=1mm,middle=1mm}
%
\begin{tcolorbox}
This is my content.
\end{tcolorbox}\hfill
\begin{tcolorbox}
This is my content.
\tcblower
More content.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=My title]
This is my content.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=My title]
This is my content.
\tcblower
More content.
\end{tcolorbox}
```

This is my content.

This is my content.

My title

My title

More content.

This is my content.

This is my content.

More content.



```
\begin{tcolorbox}[beamer,colback=Salmon!50!white,colframe=FireBrick!75!black,
adjusted title=A colored box with the 'beamer' skin]
This box looks like a box provided by the \texttt{beamer} class.
\end{tcolorbox}
```

#### A colored box with the 'beamer' skin

This box looks like a box provided by the `beamer` class.

```
\begin{tcolorbox}[beamer,colframe=blue,colback=black,
watermark graphics=lichtspiel.jpg,
coltext=white,watermark opacity=0.75,watermark stretch=1.0,
title=Beamer Box with background picture]
\lipsum[1]
\end{tcolorbox}
```

#### Beamer Box with background picture

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

```
\newtcolorbox{myblock}[2][\%
beamer,breakable,colback=LightBlue,colframe=DarkBlue,#1,title=#2]\%

\begin{myblock}{Beamerish \texttt{block}: \texttt{myblock}}
\lipsum[1]
\end{myblock}
```

#### Beamerish block: myblock

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.



`/tcb/skin=beamerfirst` (skin)

This is a flavor of `beamer`<sup>→P.163</sup> which is used as a *first* part in a break sequence for `beamer`<sup>→P.163</sup>. Nevertheless, this skin can be applied independently.

#### Environment and engines for the skin 'beamerfirst'

```
/tcb/graphical environment→P.84: tikzpicture
/tcb/frame engine→P.85: pathfirst
/tcb/interior titled engine→P.85: special
/tcb/interior engine→P.86: special
/tcb/segmentation engine→P.86: special
/tcb/title engine→P.86: pathfirst
```

```
\tcbset{beamer,skin=beamerfirst,equal height group=beamerfirst,
colback=LightGreen,colframe=DarkGreen,
width=(\linewidth-6mm)/4,nobeforeafter,
left=1mm,right=1mm,top=1mm,bottom=1mm,middle=1mm}
%
\begin{tcolorbox}
  This is my content.
\end{tcolorbox}\hfill
\begin{tcolorbox}
  This is my content.
  \tcblower
  More content.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=My title]
  This is my content.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=My title]
  This is my content.
  \tcblower
  More content.
\end{tcolorbox}
```

This is my content.

This is my content.

More content.

My title

This is my content.

My title

This is my content.

More content.



`/tcb/skin=beamermiddle` (skin)

This is a flavor of `beamer`<sup>→P.163</sup> which is used as a *middle* part in a break sequence for `beamer`<sup>→P.163</sup>. Nevertheless, this skin can be applied independently.

#### Environment and engines for the skin 'beamermiddle'

```
/tcb/graphical environment→P.84: tikzpicture
/tcb/frame engine→P.85: pathmiddle
/tcb/interior titled engine→P.85: special
/tcb/interior engine→P.86: special
/tcb/segmentation engine→P.86: special
/tcb/title engine→P.86: pathmiddle
```

```
\tcbset{beamer,skin=beamermiddle,equal height group=beamermiddle,
colback=LightGreen,colframe=DarkGreen,
width=(\linewidth-6mm)/4,nobeforeafter,
left=1mm,right=1mm,top=1mm,bottom=1mm,middle=1mm}
%
\begin{tcolorbox}
  This is my content.
\end{tcolorbox}\hfill
\begin{tcolorbox}
  This is my content.
  \tcblower
  More content.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=My title]
  This is my content.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=My title]
  This is my content.
  \tcblower
  More content.
\end{tcolorbox}
```

This is my content.

This is my content.

My title

My title

More content.

This is my content.

This is my content.

More content.



`/tcb/skin=beamerlast` (skin)

This is a flavor of `beamer`<sup>→P. 163</sup> which is used as a *last* part in a break sequence for `beamer`<sup>→P. 163</sup>. Nevertheless, this skin can be applied independently.

#### Environment and engines for the skin 'beamerlast'

```
/tcb/graphical environment→P. 84: tikzpicture
/tcb/frame engine→P. 85: pathlast
/tcb/interior titled engine→P. 85: special
/tcb/interior engine→P. 86: special
/tcb/segmentation engine→P. 86: special
/tcb/title engine→P. 86: pathlast
```

```
\tcbset{beamer,skin=beamerlast,equal height group=beamerlast,
colback=LightGreen,colframe=DarkGreen,
width=(\linewidth-6mm)/4,nobeforeafter,
left=1mm,right=1mm,top=1mm,bottom=1mm,middle=1mm}
%
\begin{tcolorbox}
  This is my content.
\end{tcolorbox}\hfill
\begin{tcolorbox}
  This is my content.
  \tcblower
  More content.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=My title]
  This is my content.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=My title]
  This is my content.
  \tcblower
  More content.
\end{tcolorbox}
```

This is my content.

This is my content.

My title

My title

More content.

This is my content.

This is my content.

More content.



## 7.16 Skin Family 'widget'

`/tcb/skin=widget` (skin)

This skin uses the normal colors from the core package but shades them a little bit. To use this skin, the `tikz` library `shadings` has to be included in the preamble by:

```
\usetikzlibrary{shadings}
```

The appearance of the skin can be controlled by `/tcb/frame style`<sup>→P.96</sup>, `/tcb/interior style`<sup>→P.97</sup>, and `/tcb/segmentation style`<sup>→P.99</sup>, if needed.

### Environment and engines for the skin 'widget'

```
/tcb/graphical environment→P.84: tikzpicture
/tcb/frame engine→P.85: path
/tcb/interior titled engine→P.85: path
/tcb/interior engine→P.86: path
/tcb/segmentation engine→P.86: special
/tcb/title engine→P.86: special
```

`/tcb/widget` (style, no value)

This is an abbreviation for setting `skin=widget`.

It also changes the geometry and some style options.

```
\tcbset{widget,equal height group=widget,
colback=LightGreen,colframe=DarkGreen,
width=(\linewidth-6mm)/4,nobeforeafter,
left=1mm,right=1mm,top=1mm,bottom=1mm,middle=1mm}
%
\begin{tcolorbox}
This is my content.
\end{tcolorbox}\hfill
\begin{tcolorbox}
This is my content.
\tcblower
More content.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=My title]
This is my content.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=My title]
This is my content.
\tcblower
More content.
\end{tcolorbox}
```

This is my content.

This is my content.

My title

My title

More content.

This is my content.

This is my content.

More content.



```

\begin{tcolorbox}[widget,colback=Salmon!50!white,colframe=FireBrick!75!black,
adjusted title=A colored box with the 'widget' skin]
This is my content.
\end{tcolorbox}

```

A colored box with the 'widget' skin

This is my content.

`/tcb/skin=widgetfirst`

(skin)

This is a flavor of `widget`<sup>→P. 168</sup> which is used as a *first* part in a break sequence for `widget`<sup>→P. 168</sup>. Nevertheless, this skin can be applied independently.

Environment and engines for the skin 'widgetfirst'

```

/tcb/graphical environment→P. 84: tikzpicture
/tcb/frame engine→P. 85: pathfirst
/tcb/interior titled engine→P. 85: pathfirst
/tcb/interior engine→P. 86: pathfirst
/tcb/segmentation engine→P. 86: special
/tcb/title engine→P. 86: special

```

```

\tcbset{widget,skin=widgetfirst,equal height group=widgetfirst,
colback=LightGreen,colframe=DarkGreen,
width=(\linewidth-6mm)/4,nobeforeafter,
left=1mm,right=1mm,top=1mm,bottom=1mm,middle=1mm}
%
\begin{tcolorbox}
This is my content.
\end{tcolorbox}\hfill
\begin{tcolorbox}
This is my content.
\tcblower
More content.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=My title]
This is my content.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=My title]
This is my content.
\tcblower
More content.
\end{tcolorbox}

```

This is my content.

This is my content.

My title

My title

More content.

This is my content.

This is my content.

More content.



`/tcb/skin=widgetmiddle` (skin)

This is a flavor of `widget`<sup>→P.168</sup> which is used as a *middle* part in a break sequence for `widget`<sup>→P.168</sup>. Nevertheless, this skin can be applied independently.

#### Environment and engines for the skin 'widgetmiddle'

```
/tcb/graphical environment→P.84: tikzpicture
/tcb/frame engine→P.85: pathmiddle
/tcb/interior titled engine→P.85: pathmiddle
/tcb/interior engine→P.86: pathmiddle
/tcb/segmentation engine→P.86: special
/tcb/title engine→P.86: special
```

```
\tcbset{widget,skin=widgetmiddle,equal height group=widgetmiddle,
colback=LightGreen,colframe=DarkGreen,
width=(\linewidth-6mm)/4,nobeforeafter,
left=1mm,right=1mm,top=1mm,bottom=1mm,middle=1mm}
%
\begin{tcolorbox}
  This is my content.
\end{tcolorbox}\hfill
\begin{tcolorbox}
  This is my content.
  \tcblower
  More content.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=My title]
  This is my content.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=My title]
  This is my content.
  \tcblower
  More content.
\end{tcolorbox}
```

This is my content.

This is my content.

My title

My title

More content.

This is my content.

This is my content.

More content.



`/tcb/skin=widgetlast` (skin)

This is a flavor of `widget`<sup>→P. 168</sup> which is used as a *last* part in a break sequence for `widget`<sup>→P. 168</sup>. Nevertheless, this skin can be applied independently.

#### Environment and engines for the skin 'widgetlast'

```
/tcb/graphical environment→P. 84: tikzpicture
/tcb/frame engine→P. 85: pathlast
/tcb/interior titled engine→P. 85: pathlast
/tcb/interior engine→P. 86: pathlast
/tcb/segmentation engine→P. 86: special
/tcb/title engine→P. 86: special
```

```
\tcbset{widget,skin=widgetlast,equal height group=widgetlast,
colback=LightGreen,colframe=DarkGreen,
width=(\linewidth-6mm)/4,nobeforeafter,
left=1mm,right=1mm,top=1mm,bottom=1mm,middle=1mm}
%
\begin{tcolorbox}
  This is my content.
\end{tcolorbox}\hfill
\begin{tcolorbox}
  This is my content.
  \tcblower
  More content.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=My title]
  This is my content.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=My title]
  This is my content.
  \tcblower
  More content.
\end{tcolorbox}
```

This is my content.

This is my content.

My title

My title

More content.

This is my content.

This is my content.

More content.



## 7.17 Skin Family 'empty'

`/tcb/skin=empty` (skin)

This skin sets all engines to `empty`, i. e. nothing is drawn at all. Therefore, this skin is a good starting point to create a complete new style by yourself.

### Environment and engines for the skin 'empty'

```
/tcb/graphical environment→P.84: tikzpicture
/tcb/frame engine→P.85: empty
/tcb/interior titled engine→P.85: empty
/tcb/interior engine→P.86: empty
/tcb/segmentation engine→P.86: empty
/tcb/title engine→P.86: empty
```

`/tcb/empty` (style, no value)

This is an abbreviation for setting `skin=empty`.

```
\tcbset{empty,equal height group=empty,
coltitle=Navy,borderline={2pt}{Opt}{black!10!white},
width=(\linewidth-6mm)/4,nobeforeafter,
left=1mm,right=1mm,top=1mm,bottom=1mm,middle=1mm}
%
\begin{tcolorbox}
  This is my content.
\end{tcolorbox}\hfill
\begin{tcolorbox}
  This is my content.
  \tcblower
  More content.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=My title]
  This is my content.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=My title]
  This is my content.
  \tcblower
  More content.
\end{tcolorbox}
```

This is my content.

This is my content.

My title

My title

More content.

This is my content.

This is my content.

More content.



This style relies on the skin `empty`<sup>→ P. 172</sup>. All engines are set to empty and all margins are set to 0pt. In contrast to `/tcb/blank`<sup>→ P. 147</sup>, the graphical paths are not constructed with exception of the geometry nodes.

```
\begin{tcolorbox}[blanker,watermark text=A blank box]
\lipsum[1]
\end{tcolorbox}
```

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

```
% \tcbuselibrary{fitting}
\newtcbboxfit{\mybox}[1]{blanker,width=4cm,height=7cm,top=4pt,
  watermark text=#1}

\begin{tabular}{|c|c|c|}\hline
A & B & C\\\hline
\mybox{A}{\lipsum[1]} & \mybox{B}{\lipsum[2]} & \mybox{C}{\lipsum[3]}\\\hline
\end{tabular}
```

A	B	C
<p>Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.</p>	<p>Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.</p>	<p>Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec et mi. Nam vulputate metus eu enim. Vestibulum pellentesque felis eu massa.</p>



`/tcb/skin=emptyfirst` (skin)

This is a flavor of `empty`<sup>→P.172</sup> which is used as a *first* part in a break sequence for `empty`<sup>→P.172</sup>. Nevertheless, this skin can be applied independently.

#### Environment and engines for the skin 'emptyfirst'

```
/tcb/graphical environment→P.84: tikzpicture
/tcb/frame engine→P.85: empty
/tcb/interior titled engine→P.85: empty
/tcb/interior engine→P.86: empty
/tcb/segmentation engine→P.86: empty
/tcb/title engine→P.86: empty
```

```
\tcbset{empty,skin=emptyfirst,equal height group=emptyfirst,
coltitle=Navy,borderline={2pt}{0pt}{black!10!white},
width=(\linewidth-6mm)/4,nobeforeafter,
left=1mm,right=1mm,top=1mm,bottom=1mm,middle=1mm}
%
\begin{tcolorbox}
  This is my content.
\end{tcolorbox}\hfill
\begin{tcolorbox}
  This is my content.
  \tcblower
  More content.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=My title]
  This is my content.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=My title]
  This is my content.
  \tcblower
  More content.
\end{tcolorbox}
```

This is my content.

This is my content.

My title

My title

More content.

This is my content.

This is my content.

More content.



`/tcb/skin=emptymiddle` (skin)

This is a flavor of `empty`<sup>→P.172</sup> which is used as a *middle* part in a break sequence for `empty`<sup>→P.172</sup>. Nevertheless, this skin can be applied independently.

#### Environment and engines for the skin 'emptymiddle'

```
/tcb/graphical environment→P.84: tikzpicture
/tcb/frame engine→P.85: empty
/tcb/interior titled engine→P.85: empty
/tcb/interior engine→P.86: empty
/tcb/segmentation engine→P.86: empty
/tcb/title engine→P.86: empty
```

```
\tcbset{empty,skin=emptymiddle,equal height group=emptymiddle,
coltitle=Navy,borderline={2pt}{0pt}{black!10!white},
width=(\linewidth-6mm)/4,nobeforeafter,
left=1mm,right=1mm,top=1mm,bottom=1mm,middle=1mm}
%
\begin{tcolorbox}
  This is my content.
\end{tcolorbox}\hfill
\begin{tcolorbox}
  This is my content.
  \tcblower
  More content.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=My title]
  This is my content.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=My title]
  This is my content.
  \tcblower
  More content.
\end{tcolorbox}
```

This is my content.

This is my content.

My title

My title

More content.

This is my content.

This is my content.

More content.



`/tcb/skin=emptylast` (skin)

This is a flavor of `empty`<sup>→P.172</sup> which is used as a *last* part in a break sequence for `empty`<sup>→P.172</sup>. Nevertheless, this skin can be applied independently.

#### Environment and engines for the skin 'emptylast'

```
/tcb/graphical environment→P.84: tikzpicture
/tcb/frame engine→P.85: empty
/tcb/interior titled engine→P.85: empty
/tcb/interior engine→P.86: empty
/tcb/segmentation engine→P.86: empty
/tcb/title engine→P.86: empty
```

```
\tcbset{empty,skin=emptylast,equal height group=emptylast,
coltitle=Navy,borderline={2pt}{0pt}{black!10!white},
width=(\linewidth-6mm)/4,nobeforeafter,
left=1mm,right=1mm,top=1mm,bottom=1mm,middle=1mm}
%
\begin{tcolorbox}
  This is my content.
\end{tcolorbox}\hfill
\begin{tcolorbox}
  This is my content.
  \tcblower
  More content.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=My title]
  This is my content.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=My title]
  This is my content.
  \tcblower
  More content.
\end{tcolorbox}
```

This is my content.

This is my content.

My title

My title

More content.

This is my content.

This is my content.

More content.



This example demonstrates a breakable customized box. Here, we define an environment `freebox`. The first application of `freebox` produces an unbroken `tcolorbox`. The box is drawn by the code given by `/tcb/frame` code<sup>P.88</sup> and `/tcb/interior` code<sup>P.89</sup>. The second application of `freebox` is broken into several parts which are drawn by the codes given by `/tcb/skin first` is `subskin of`<sup>P.91</sup>, `/tcb/skin middle` is `subskin of`<sup>P.91</sup>, and `/tcb/skin last` is `subskin of`<sup>P.91</sup>.

```
% Preamble:
%\usepackage{tikz,lipsum}
%\tcbuselibrary{skins,breakable}
\tikzset{coltria/.style={fill=red!15!white}}

\newtcolorbox{freebox}[1][{}]{empty,breakable,leftrule=5mm,left=2mm,
  frame style={fill,top color=red!75!black,bottom color=red!75!black,middle color=red},
  colback=yellow!50!white,
  watermark color=red!50!yellow!75!white,
  watermark text on=unbroken is unbroken box,
  watermark text on=first is first part,
  watermark text on=middle is middle part,
  watermark text on=last is last part,
  % code for unbroken boxes:
  frame code={\path[tcb fill frame] (frame.south west)--(frame.north west)
    --([xshift=-5mm]frame.north east)--([yshift=-5mm]frame.north east)
    --([yshift=5mm]frame.south east)--([xshift=-5mm]frame.south east)--cycle; },
  interior code={\path[tcb fill interior] (interior.south west)--(interior.north west)
    --([xshift=-4.8mm]interior.north east)--([yshift=-4.8mm]interior.north east)
    --([yshift=4.8mm]interior.south east)--([xshift=-4.8mm]interior.south east)
    --cycle; },
  % code for the first part of a break sequence:
  skin first is subskin of={emptyfirst}{%
    frame code={\path[tcb fill frame] (frame.south west)--(frame.north west)
      --([xshift=-5mm]frame.north east)--([yshift=-5mm]frame.north east)
      --(frame.south east)--cycle;
      \path[coltria] ([xshift=2.5mm,yshift=1mm]frame.south west) -- +(120:2mm)
      -- +(60:2mm)-- cycle; },
    interior code={\path[tcb fill interior] (interior.south west|-frame.south)
      --(interior.north west)--([xshift=-4.8mm]interior.north east)
      --([yshift=-4.8mm]interior.north east)--(interior.south east|-frame.south)
      --cycle; },
  },%
  % code for the middle part of a break sequence:
  skin middle is subskin of={emptymiddle}{%
    frame code={\path[tcb fill frame] (frame.south west)--(frame.north west)
      --(frame.north east)--(frame.south east)--cycle;
      \path[coltria] ([xshift=2.5mm,yshift=-1mm]frame.north west) -- +(240:2mm)
      -- +(300:2mm) -- cycle;
      \path[coltria] ([xshift=2.5mm,yshift=1mm]frame.south west) -- +(120:2mm)
      -- +(60:2mm) -- cycle;
    },
    interior code={\path[tcb fill interior] (interior.south west|-frame.south)
      --(interior.north west|-frame.north)--(interior.north east|-frame.north)
      --(interior.south east|-frame.south)--cycle; },
  },
  % code for the last part of a break sequence:
  skin last is subskin of={emptylast}{%
    frame code={\path[tcb fill frame] (frame.south west)--(frame.north west)
      --(frame.north east)--([yshift=5mm]frame.south east)
      --([xshift=-5mm]frame.south east)--cycle;
      \path[coltria] ([xshift=2.5mm,yshift=-1mm]frame.north west) -- +(240:2mm)
      -- +(300:2mm) -- cycle;
    },
    interior code={\path[tcb fill interior] (interior.south west)
```



```

--(interior.north west|-frame.north)--(interior.north east|-frame.north)
--([yshift=4.8mm]interior.south east)--([xshift=-4.8mm]interior.south east)
--cycle; },
},
#1}

\begin{freebox}
\lipsum[1]
\end{freebox}

\begin{freebox}
\lipsum[1-12]
\end{freebox}

```

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec et mi. Nam vulputate metus eu enim.



Vestibulum pellentesque felis eu massa.

Quisque ullamcorper placerat ipsum. Cras nibh. Morbi vel justo vitae lacus tincidunt ultrices. Lorem ipsum dolor sit amet, consectetur adipiscing elit. In hac habitasse platea dictumst. Integer tempus convallis augue. Etiam facilisis. Nunc elementum fermentum wisi. Aenean placerat. Ut imperdiet, enim sed gravida sollicitudin, felis odio placerat quam, ac pulvinar elit purus eget enim. Nunc vitae tortor. Proin tempus nibh sit amet nisl. Vivamus quis tortor vitae risus porta vehicula.

Fusce mauris. Vestibulum luctus nibh at lectus. Sed bibendum, nulla a faucibus semper, leo velit ultricies tellus, ac venenatis arcu wisi vel nisl. Vestibulum diam. Aliquam pellentesque, augue quis sagittis posuere, turpis lacus congue quam, in hendrerit risus eros eget felis. Maecenas eget erat in sapien mattis porttitor. Vestibulum porttitor. Nulla facilisi. Sed a turpis eu lacus commodo facilisis. Morbi fringilla, wisi in dignissim interdum, justo lectus sagittis dui, et vehicula libero dui cursus dui. Mauris tempor ligula sed lacus. Duis cursus enim ut augue. Cras ac magna. Cras nulla. Nulla egestas. Curabitur a leo. Quisque egestas wisi eget nunc. Nam feugiat lacus vel est. Curabitur consectetur.

Suspendisse vel felis. Ut lorem lorem, interdum eu, tincidunt sit amet, laoreet vitae, arcu. Aenean faucibus pede eu ante. Praesent enim elit, rutrum at, molestie non, nonummy vel, nisl. Ut lectus eros, malesuada sit amet, fermentum eu, sodales cursus, magna. Donec eu purus. Quisque vehicula, urna sed ultricies auctor, pede lorem egestas dui, et convallis elit erat sed nulla. Donec luctus. Curabitur et nunc. Aliquam dolor odio, commodo pretium, ultricies non, pharetra in, velit. Integer arcu est, nonummy in, fermentum faucibus, egestas vel, odio.

Sed commodo posuere pede. Mauris ut est. Ut quis purus. Sed ac odio. Sed vehicula hendrerit sem. Duis non odio. Morbi ut dui. Sed accumsan risus eget odio. In hac habitasse platea dictumst. Pellentesque non elit. Fusce sed justo eu urna porta tincidunt. Mauris felis odio, sollicitudin sed, volutpat a, ornare ac, erat. Morbi quis dolor. Donec pellentesque, erat ac sagittis semper, nunc dui lobortis purus, quis congue purus metus ultricies tellus. Proin et quam. Class aptent taciti sociosqu ad litora torquent per conubia nostra, per inceptos hymenaeos. Praesent sapien turpis, fermentum vel, eleifend faucibus, vehicula eu, lacus.

Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Donec odio elit, dictum in, hendrerit sit amet, egestas sed, leo. Praesent feugiat sapien aliquet odio. Integer vitae justo. Aliquam vestibulum fringilla lorem. Sed neque lectus, consectetur at, consectetur sed, eleifend ac, lectus. Nulla facilisi. Pellentesque eget lectus. Proin eu metus. Sed porttitor. In hac habitasse platea dictumst. Suspendisse eu lectus. Ut mi mi, lacinia sit amet, placerat et, mollis vitae, dui. Sed ante tellus, tristique ut, iaculis eu, malesuada ac, dui. Mauris nibh leo, facilisis non, adipiscing quis, ultrices a, dui.

Morbi luctus, wisi viverra faucibus pretium, nibh est placerat odio, nec commodo wisi enim eget quam. Quisque libero justo, consectetur a, feugiat vitae, porttitor eu, libero. Suspendisse sed mauris vitae elit sollicitudin malesuada. Maecenas ultricies eros sit amet ante. Ut venenatis velit. Maecenas sed mi eget dui varius euismod. Phasellus aliquet volutpat odio. Vestibulum ante ipsum primis in faucibus orci luctus et ultrices posuere cubilia Curae; Pellentesque sit amet pede ac sem eleifend consectetur. Nullam elementum, urna vel imperdiet sodales, elit ipsum pharetra ligula, ac pretium ante justo a nulla. Curabitur tristique arcu eu metus. Vestibulum lectus. Proin mauris. Proin eu nunc eu urna hendrerit faucibus. Aliquam auctor, pede consequat laoreet varius, eros tellus scelerisque quam, pellentesque hendrerit ipsum dolor sed augue. Nulla nec lacus. Suspendisse vitae elit. Aliquam arcu neque, ornare in, ullamcorper quis, commodo eu, libero. Fusce sagittis erat at erat tristique mollis. Maecenas sapien libero, molestie et,



lobortis in, sodales eget, dui. Morbi ultrices rutrum lorem. Nam elementum ullamcorper leo. Morbi dui. Aliquam sagittis. Nunc placerat. Pellentesque tristique sodales est. Maecenas imperdiet lacinia velit. Cras non urna. Morbi eros pede, suscipit ac, varius vel, egestas non, eros. Praesent malesuada, diam id pretium elementum, eros sem dictum tortor, vel consectetur odio sem sed wisi.

Sed feugiat. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Ut pellentesque augue sed urna. Vestibulum diam eros, fringilla et, consectetur eu, nonummy id, sapien. Nullam at lectus. In sagittis ultrices mauris. Curabitur malesuada erat sit amet massa. Fusce blandit. Aliquam erat volutpat. Aliquam euismod. Aenean vel lectus. Nunc imperdiet justo nec dolor.

Etiam euismod. Fusce facilisis lacinia dui. Suspendisse potenti. In mi erat, cursus id, nonummy sed, ullamcorper eget, sapien. Praesent pretium, magna in eleifend egestas, pede pede pretium lorem, quis consectetur tortor sapien facilisis magna. Mauris quis magna varius nulla scelerisque imperdiet. Aliquam non quam. Aliquam porttitor quam a lacus. Praesent vel arcu ut tortor cursus volutpat. In vitae pede quis diam bibendum placerat. Fusce elementum convallis neque. Sed dolor orci, scelerisque ac, dapibus nec, ultricies ut, mi. Duis nec dui quis leo sagittis commodo.



## 7.18 Skin 'spartan'

`/tcb/skin=spartan` (skin)

This skin is quite ... spartan. It supports no rounded corners, no overlays, no shadows, no borderlines, and no finishes. The only exception are underlays. One cannot do very fancy things with this skin, but it compiles very fast. Therefore, the `spartan` skin is used for the draft mode, see Section 7.11 on page 142. Nevertheless, it can be used as a normal skin.

### Environment and engines for the skin 'spartan'

```
/tcb/graphical environment→P.84: tikzpicture
/tcb/frame engine→P.85: spartan
/tcb/interior titled engine→P.85: spartan
/tcb/interior engine→P.86: spartan
/tcb/segmentation engine→P.86: spartan
/tcb/title engine→P.86: spartan
```

`/tcb/spartan` (style, no value)

This is an abbreviation for setting `skin=spartan`.

```
\tcbset{spartan,equal height group=spartan,
colback=LightGreen,colframe=DarkGreen,colbacklower=LimeGreen!75!LightGreen,
width=(\linewidth-6mm)/4,nobeforeafter,
left=1mm,right=1mm,top=1mm,bottom=1mm,middle=1mm}
%
\begin{tcolorbox}
This is my content.
\end{tcolorbox}\hfill
\begin{tcolorbox}
This is my content.
\tcblower
More content.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=My title]
This is my content.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=My title]
This is my content.
\tcblower
More content.
\end{tcolorbox}
```

This is my content.

This is my content.

My title

My title

More content.

This is my content.

This is my content.

More content.



## 7.19 Skin 'draft'

`/tcb/skin=draft` (skin)

This skin is intended to be used while drafting new geometric settings for a `tcolorbox`.

### Environment and engines for the skin 'draft'

```
/tcb/graphical environment→P.84: tikzpicture
/tcb/frame engine→P.85: special
/tcb/interior titled engine→P.85: special
/tcb/interior engine→P.86: special
/tcb/segmentation engine→P.86: path
/tcb/title engine→P.86: path
```

`/tcb/draft` (style, no value)

This is an abbreviation for setting `skin=draft`.

```
\tcbset{draft,equal height group=draft,
colback=LightGreen,colframe=DarkGreen,
width=(\linewidth-6mm)/4,nobeforeafter,
left=1mm,right=1mm,top=1mm,bottom=1mm,middle=1mm}
%
\begin{tcolorbox}
This is my content.
\end{tcolorbox}\hfill
\begin{tcolorbox}
This is my content.
\tcblower
More content.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=My title]
This is my content.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=My title]
This is my content.
\tcblower
More content.
\end{tcolorbox}
```

frame: w=101.71863pt, h=56.11296pt, h=56.11296pt, h=56.11296pt, h=56.11296pt, h=56.11296pt, h=56.11296pt, h=56.11296pt

upper: w=87.49234pt, h=7.93pt, h=7.93pt, h=7.93pt, h=7.93pt, h=7.93pt, h=7.93pt, h=7.93pt  
upper: w=87.49234pt, h=41.8866pt, h=41.8866pt, h=41.8866pt, h=41.8866pt, h=41.8866pt, h=41.8866pt, h=41.8866pt  
lower: w=87.49234pt, h=22.5531pt, h=22.5531pt, h=22.5531pt, h=22.5531pt, h=22.5531pt, h=22.5531pt, h=22.5531pt  
interior: w=98.87338pt, h=53.2675pt, h=53.2675pt, h=53.2675pt, h=53.2675pt, h=53.2675pt, h=53.2675pt, h=53.2675pt



```

\vspace*{3mm}
\begin{tcolorbox}[draft,title=A colored box with the 'draft' skin]
\lipsum[1-3]
\tcblower
\lipsum[4-6]
\end{tcolorbox}

```

frame: w=423.94617pt, h=506.20157pt

A colored box with the 'draft' skin title: w=392.64822pt, h=6.2pt

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultrices et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquam.

hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec et mi. Nam vulputate metus eu enim. Vestibulum pellentesque felis eu massa.

Quisque ullamcorper placerat ipsum. Cras nibh. Morbi vel justo vitae lacus tincidunt ultrices. Lorem ipsum dolor sit amet, consectetur adipiscing elit. In hac habitasse platea dictumst. Integer tempus convallis augue. Etiam facilisis. Nunc elementum fermentum wisi. Aenean placerat. Ut imperdiet, enim sed gravida sollicitudin, felis odio placerat quam, ac pulvinar elit purus eget enim. Nunc vitae tortor. Proin tempus nibh sit amet nisl. Vivamus quis tortor vitae risus porta vehicula. Fusce mauris. Vestibulum luctus nibh at lectus. Sed bibendum, nulla a faucibus semper, leo velit ultrices tellus, ac venenatis arcu wisi vel nisl. Vestibulum diam. Aliquam pellentesque, augue quis sagittis posuere, turpis lacus congue quam, in hendrerit risus eros eget felis. Maecenas eget erat in sapien mattis porttitor. Vestibulum porttitor. Nulla facilisi. Sed a turpis eu lacus commodo facilisis. Morbi fringilla, wisi in dui.

Suspendisse vel felis. Ut lorem lorem, interdum eu, tincidunt sit amet, laoreet vitae, arcu. Aenean faucibus pede eu ante. Praesent enim elit, rutrum at, molestie non, nonummy vel, nisl. Ut lectus eros, malesuada sit amet, fermentum eu, sodales cursus, magna. Donec eu purus. Quisque vehicula, urna sed ultrices auctor, pede lorem egestas dui, et convallis elit erat sed nulla. Donec luctus. Curabitur et nunc. Aliquam dolor odio, commodo pretium, ultrices non, pharetra in, velit. Integer arcu est, nonummy in, fermentum faucibus, egestas vel, odio.

interior: w=421.10092pt, h=490.04318pt



## 7.20 Skin Family 'freelance'

This skin family 'freelance' is deprecated with `tcolorbox` 3.00. It is not longer needed, because `/tcb/frame code`<sup>→P.88</sup>, `/tcb/interior code`<sup>→P.89</sup>, `/tcb/interior titled code`<sup>→P.88</sup>, and `/tcb/title code`<sup>→P.90</sup> can be applied to every skin now. In this sense, everything has become *freelance* now.

For users of `/tcb/freelance`: Old code should continue to work. There may be exceptions for breakable freelance boxes under certain circumstances. For new code, use `/tcb/empty`<sup>→P.172</sup> or `/tcb/enhanced`<sup>→P.145</sup> where you would have used `/tcb/freelance` before.

`/tcb/skin=freelance` (skin)

This skin gives full freedom for the appearance of the `tcolorbox`. All drawing engines are set to type `freelance`; they use the `tikz` package and compute the `/tcb/geometry nodes`<sup>→P.87</sup>.

### Environment and engines for the skin 'freelance'

```
/tcb/graphical environment→P.84: tikzpicture
/tcb/frame engine→P.85:          freelance
/tcb/interior titled engine→P.85: freelance
/tcb/interior engine→P.86:       freelance
/tcb/segmentation engine→P.86:  freelance
/tcb/title engine→P.86:          freelance
```

`/tcb/freelance` (style, no value)

This is an abbreviation for setting `skin=freelance`.

`/tcb/skin=freelancefirst` (skin)

This skin equals `freelance` with exception of the break sequence, see Section 11.6 on page 258.

`/tcb/skin=freelancemiddle` (skin)

This skin equals `freelance` with exception of the break sequence, see Section 11.6 on page 258.

`/tcb/skin=freelancelast` (skin)

This skin equals `freelance` with exception of the break sequence, see Section 11.6 on page 258.

`/tcb/extend freelance=<options>` (no default, initially empty)

The `<options>` are added to the skin definition of `freelance`.

`/tcb/extend freelancefirst=<options>` (no default, initially empty)

The `<options>` are added to the skin definition of `freelancefirst` which is used as first part of the break sequence of `freelance`. See `/tcb/skin first is subskin of`<sup>→P.91</sup> for a substitute of this key.

`/tcb/extend freelancemiddle=<options>` (no default, initially empty)

The `<options>` are added to the skin definition of `freelancemiddle` which is used as middle part of the break sequence of `freelance`. See `/tcb/skin middle is subskin of`<sup>→P.91</sup> for a substitute of this key.

`/tcb/extend freelancelast=<options>` (no default, initially empty)

The `<options>` are added to the skin definition of `freelancelast` which is used as last part of the break sequence of `freelance`. See `/tcb/skin last is subskin of`<sup>→P.91</sup> for a substitute of this key.



## 8 TikZ Image and Picture Fill Extensions

The `\skins` library adds some image and picture fill options to the vast option set of TikZ [20]. These options can be used in any `tikzpicture`. For the following options, the `\skins` library has to be loaded by a package option or inside the preamble by:

```
\tcbuselibrary{skins}
```


See Section 7 on page 96 for the documentation of all other options of the `\skins` library.

### 8.1 Fill Plain

`/tikz/fill plain image=<file name>` (no default, initially unset)

Fills the current path with an external image referenced by `<file name>`. The image is put in the center of the path, but it is not resized to fit into the path area.


```
\begin{tikzpicture}
\path[draw,fill plain image=goldshade.png]
(2.75,-0.75) -- (3,0) -- (2.75,0.75)
\foreach \w in {45,90,...,315}
{ -- (\w:1.5cm) } -- cycle;
\end{tikzpicture}
```

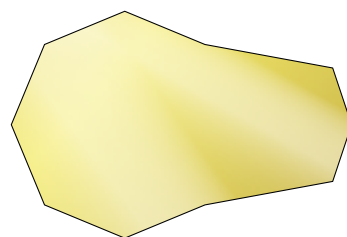

`/tikz/fill plain image*=<file name>` (no default, initially unset)

Fills the current path with an external image referenced by `<file name>`. The image is put in the center of the path, but it is not resized to fit into the path area. The `<graphics options>` are given to the underlying `\includegraphics` command.


```
\begin{tikzpicture}
\path[draw,fill plain *
{image*={width=2.5cm}{goldshade.png}}]
(2.75,-0.75) -- (3,0) -- (2.75,0.75)
\foreach \w in {45,90,...,315}
{ -- (\w:1.5cm) } -- cycle;
\end{tikzpicture}
```

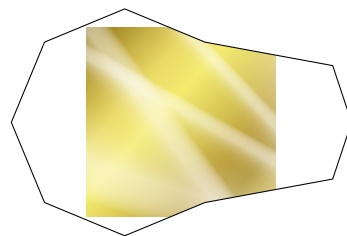

`/tikz/fill plain picture=<graphical code>` (no default, initially unset)

Fills the current path with the given `<graphical code>`. The result is put in the center of the path, but it is not resized to fit into the path area. Note that this is almost identical to the standard `path picture` option.

```
\begin{tikzpicture}
\path[draw,fill plain picture={%
\draw[red!50!yellow,line width=2mm]
(0,0) circle (1cm);
\draw[red,line width=5mm] (-1,-1) -- (1,1);
\draw[red,line width=5mm] (-1,1) -- (1,-1);
}]
(2.75,-0.75) -- (3,0) -- (2.75,0.75)
\foreach \w in {45,90,...,315}
{ -- (\w:1.5cm) } -- cycle;
\end{tikzpicture}
```

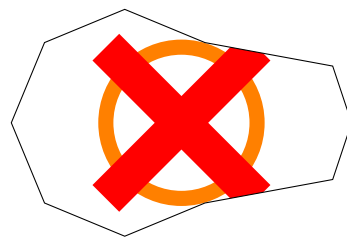




## 8.2 Fill Stretch

**/tikz/fill stretch image=***<file name>* (no default, initially unset)

Fills the current path with an external image referenced by *<file name>*. The image is stretched to fill the path area.


```
\begin{tikzpicture}
\path[fill stretch image=goldshade.png]
  (2.75,-0.75) -- (3,0) -- (2.75,0.75)
  \foreach \w in {45,90,...,315}
    { -- (\w:1.5cm) } -- cycle;
\end{tikzpicture}
```

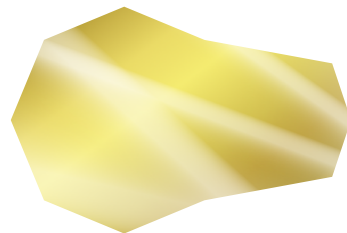

**/tikz/fill stretch image\*=***<graphics options>*{*<file name>*} (no default, initially unset)

Fills the current path with an external image referenced by *<file name>*. The *<graphics options>* are given to the underlying `\includegraphics` command. The image is stretched to fill the path area.


```
\begin{tikzpicture}
\path[fill stretch image*=
  {angle=90,origin=c}{goldshade.png}]
  (2.75,-0.75) -- (3,0) -- (2.75,0.75)
  \foreach \w in {45,90,...,315}
    { -- (\w:1.5cm) } -- cycle;
\end{tikzpicture}
```

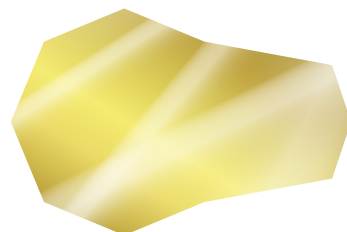

**/tikz/fill stretch picture=***<graphical code>* (no default, initially unset)

Fills the current path with the given *<graphical code>*. The result is stretched to fill the path area.

```
\begin{tikzpicture}
\path[draw,fill stretch picture={%
  \draw[red!50!yellow,line width=2mm]
    (0,0) circle (1cm);
  \draw[red,line width=5mm] (-1,-1) -- (1,1);
  \draw[red,line width=5mm] (-1,1) -- (1,-1);
}]
  (2.75,-0.75) -- (3,0) -- (2.75,0.75)
  \foreach \w in {45,90,...,315}
    { -- (\w:1.5cm) } -- cycle;
\end{tikzpicture}
```

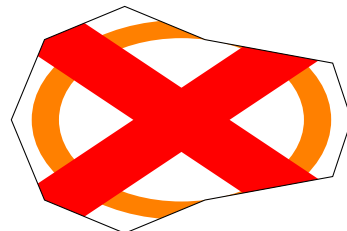




### 8.3 Fill Overzoom

**/tikz/fill overzoom image=***<file name>* (no default, initially unset)

Fills the current path with an external image referenced by *<file name>*. The image is zoomed such that the path area fills the image.


```
\begin{tikzpicture}
\path[fill overzoom image=goldshade.png]
(2.75,-0.75) -- (3,0) -- (2.75,0.75)
\foreach \w in {45,90,...,315}
{ -- (\w:1.5cm) } -- cycle;
\end{tikzpicture}
```

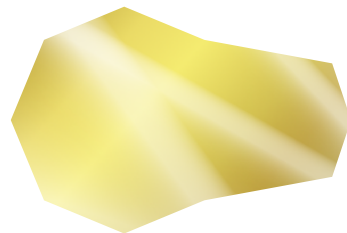

**/tikz/fill overzoom image\*=***<graphics options>*{*<file name>*} (no default, initially unset)

Fills the current path with an external image referenced by *<file name>*. The *<graphics options>* are given to the underlying `\includegraphics` command. The image is zoomed such that the path area fills the image.


```
\begin{tikzpicture}
\path[fill overzoom image*=
{angle=90,origin=c}{goldshade.png}]
(2.75,-0.75) -- (3,0) -- (2.75,0.75)
\foreach \w in {45,90,...,315}
{ -- (\w:1.5cm) } -- cycle;
\end{tikzpicture}
```

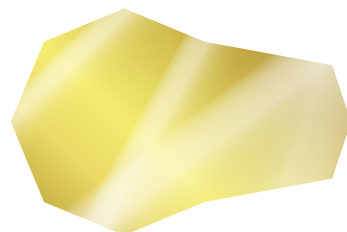

**/tikz/fill overzoom picture=***<graphical code>* (no default, initially unset)

Fills the current path with the given *<graphical code>*. The result is zoomed such that the path area fills the image.

```
\begin{tikzpicture}
\path[draw,fill overzoom picture={%
\draw[red!50!yellow,line width=2mm]
(0,0) circle (1cm);
\draw[red,line width=5mm] (-1,-1) -- (1,1);
\draw[red,line width=5mm] (-1,1) -- (1,-1);
}]
(2.75,-0.75) -- (3,0) -- (2.75,0.75)
\foreach \w in {45,90,...,315}
{ -- (\w:1.5cm) } -- cycle;
\end{tikzpicture}
```

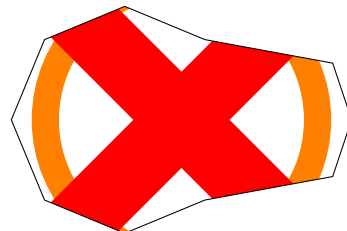




## 8.4 Fill Zoom

**/tikz/fill zoom image**=*<file name>* (no default, initially unset)

Fills the current path with an external image referenced by *<file name>*. The image is zoomed such that it fits inside the path area. Typically, some parts of the path area will stay unfilled.


```
\begin{tikzpicture}
\path[draw,fill zoom image=goldshade.png]
(2.75,-0.75) -- (3,0) -- (2.75,0.75)
\foreach \w in {45,90,...,315}
{ -- (\w:1.5cm) } -- cycle;
\end{tikzpicture}
```

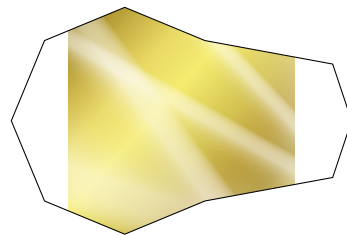

**/tikz/fill zoom image\***=*<graphics options>*{*<file name>*} (no default, initially unset)

Fills the current path with an external image referenced by *<file name>*. The *<graphics options>* are given to the underlying **\includegraphics** command. The image is zoomed such that it fits inside the path area. Typically, some parts of the path area will stay unfilled.


```
\begin{tikzpicture}
\path[draw,fill zoom image*=
{angle=90,origin=c}{goldshade.png}]
(2.75,-0.75) -- (3,0) -- (2.75,0.75)
\foreach \w in {45,90,...,315}
{ -- (\w:1.5cm) } -- cycle;
\end{tikzpicture}
```

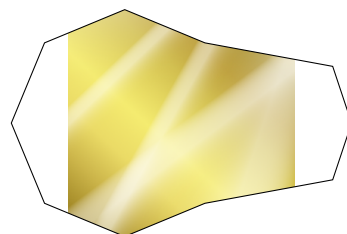

**/tikz/fill zoom picture**=*<graphical code>* (no default, initially unset)

Fills the current path with the given *<graphical code>*. The result is zoomed such that it fits inside the path area. Typically, some parts of the path area will stay unfilled.

```
\begin{tikzpicture}
\path[draw,fill zoom picture={%
\draw[red!50!yellow,line width=2mm]
(0,0) circle (1cm);
\draw[red,line width=5mm] (-1,-1) -- (1,1);
\draw[red,line width=5mm] (-1,1) -- (1,-1);
}]
(2.75,-0.75) -- (3,0) -- (2.75,0.75)
\foreach \w in {45,90,...,315}
{ -- (\w:1.5cm) } -- cycle;
\end{tikzpicture}
```

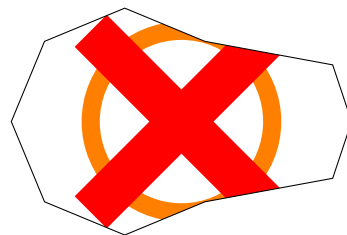




## 8.5 Fill Shrink

`/tikz/fill shrink image=<file name>` (no default, initially unset)

Fills the current path with an external image referenced by `<file name>`. The image is zoomed such that it fits inside the path area, but it never gets enlarged. Typically, some parts of the path area will stay unfilled.


```
\begin{tikzpicture}
\path[draw,fill shrink image=goldshade.png]
(2.75,-0.75) -- (3,0) -- (2.75,0.75)
\foreach \w in {45,90,...,315}
{ -- (\w:1.5cm) } -- cycle;
\end{tikzpicture}
```

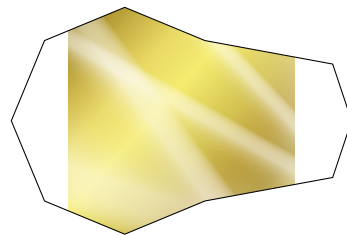

`/tikz/fill shrink image*=<file name>` (no default, initially unset)

Fills the current path with an external image referenced by `<file name>`. The `<graphics options>` are given to the underlying `\includegraphics` command. The image is zoomed such that it fits inside the path area, but it never gets enlarged. Typically, some parts of the path area will stay unfilled.


```
\begin{tikzpicture}
\path[draw,fill shrink *
{image*={width=1.5cm}{goldshade.png}}]
(2.75,-0.75) -- (3,0) -- (2.75,0.75)
\foreach \w in {45,90,...,315}
{ -- (\w:1.5cm) } -- cycle;
\end{tikzpicture}
```

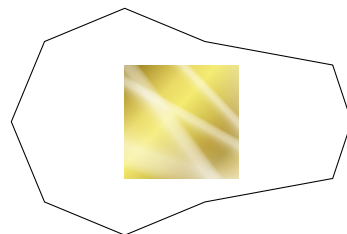

`/tikz/fill shrink picture=<graphical code>` (no default, initially unset)

Fills the current path with the given `<graphical code>`. The result is zoomed such that it fits inside the path area, but it never gets enlarged. Typically, some parts of the path area will stay unfilled.

```
\begin{tikzpicture}
\path[draw,fill shrink picture={%
\draw[red!50!yellow,line width=2mm]
(0,0) circle (1cm);
\draw[red,line width=5mm] (-1,-1) -- (1,1);
\draw[red,line width=5mm] (-1,1) -- (1,-1);
}]
(2.75,-0.75) -- (3,0) -- (2.75,0.75)
\foreach \w in {45,90,...,315}
{ -- (\w:1.5cm) } -- cycle;
\end{tikzpicture}
```

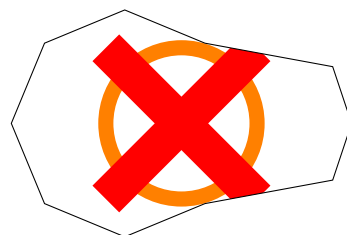



## 8.6 Fill Tile

`/tikz/fill tile image=<file name>` (no default, initially unset)

Fills the current path with a tile pattern using an external image referenced by `<file name>`.


```
\begin{tikzpicture}
\path[fill tile image=pink_marble.png]
(2.75,-0.75) -- (3,0) -- (2.75,0.75)
\foreach \w in {45,90,...,315}
{ -- (\w:1.5cm) } -- cycle;
\end{tikzpicture}
```



`/tikz/fill tile image*={<graphics options>}{<file name>}` (no default, initially unset)

Fills the current path with a tile pattern using an external image referenced by `<file name>`. The `<graphics options>` are given to the underlying `\includegraphics` command.


```
\begin{tikzpicture}
\path[fill tile image*={width=1cm}{pink_marble.png}]
(2.75,-0.75) -- (3,0) -- (2.75,0.75)
\foreach \w in {45,90,...,315}
{ -- (\w:1.5cm) } -- cycle;
\end{tikzpicture}
```

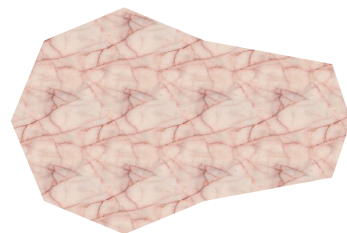

`/tikz/fill tile picture=<graphical code>` (no default, initially unset)

Fills the current path with a tile pattern using the given `<graphical code>`.


```
\begin{tikzpicture}
\path[draw,fill tile picture={%
\draw[red!50!yellow,line width=2mm]
(0,0) circle (1cm);
\draw[red,line width=5mm] (-1,-1) -- (1,1);
\draw[red,line width=5mm] (-1,1) -- (1,-1);
}]
(2.75,-0.75) -- (3,0) -- (2.75,0.75)
\foreach \w in {45,90,...,315}
{ -- (\w:1.5cm) } -- cycle;
\end{tikzpicture}
```

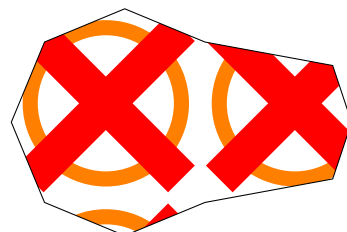

`/tikz/fill tile picture*={<fraction>}{<graphical code>}` (no default, initially unset)

Fills the current path with a tile pattern using the given `<graphical code>`. The graphic is resized by `<fraction>`.

```
\begin{tikzpicture}
\path[draw,fill tile picture*={0.25}{%
\draw[red!50!yellow,line width=2mm]
(0,0) circle (1cm);
\draw[red,line width=5mm] (-1,-1) -- (1,1);
\draw[red,line width=5mm] (-1,1) -- (1,-1);
}]
(2.75,-0.75) -- (3,0) -- (2.75,0.75)
\foreach \w in {45,90,...,315}
{ -- (\w:1.5cm) } -- cycle;
\end{tikzpicture}
```

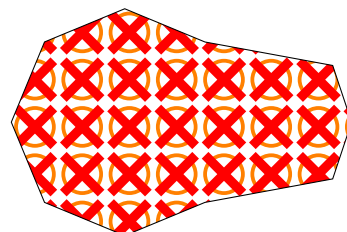




## 8.7 Filling Options

**/tikz/fill image opacity= $\langle fraction \rangle$**  (no default, initially 1.0)

Sets the fill opacity for the image or picture fill options to the given  $\langle fraction \rangle$ .

```
\begin{tikzpicture}
\path[fill stretch image=goldshade.png] (0,0) circle (1cm);
\path[fill=red,fill stretch image=goldshade.png,fill image opacity=0.75]
(2,0) circle (1cm);
\path[fill=red,fill stretch image=goldshade.png,fill image opacity=0.5]
(4,0) circle (1cm);
\path[fill=red,fill stretch image=goldshade.png,fill image opacity=0.25]
(6,0) circle (1cm);
\path[fill=red] (8,0) circle (1cm);
\end{tikzpicture}
```

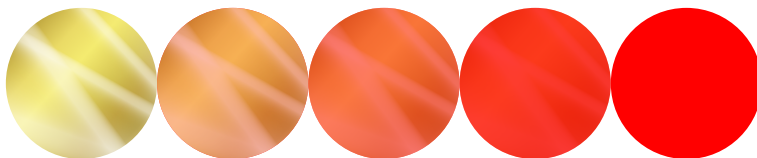

**/tikz/fill image scale= $\langle fraction \rangle$**  (no default, initially 1.0)

Stretches, zooms, overzooms or shrinks the image or picture to the given  $\langle fraction \rangle$  of the width and height of the current path.

```
\begin{tikzpicture}
\path[draw,fill zoom image=goldshade.png]
(0,0) rectangle +(2,2);

\path[draw,fill zoom image=goldshade.png,fill image scale=0.75]
(3,0) rectangle +(2,2);


\path[draw,fill zoom image=goldshade.png,fill image scale=1.5]
(6,0) rectangle +(2,2);
\end{tikzpicture}
```



**/tikz/fill image options= $\langle graphics options \rangle$**  (no default, initially empty)

The  $\langle graphics options \rangle$  are given to the underlying `\includegraphics` command for the image fill options. This can be just together with `/tikz/fill stretch image`<sup>P.186</sup>, `/tikz/fill overzoom image`<sup>P.187</sup>, `/tikz/fill zoom image`<sup>P.188</sup>, and `/tikz/fill tile image`<sup>P.190</sup>.


```
\begin{tikzpicture}
\path[fill image options={width=1cm},
fill tile image=pink_marble.png]
(2.75,-0.75) -- (3,0) -- (2.75,0.75)
\foreach \w in {45,90,...,315}
{ -- (\w:1.5cm) } -- cycle;
\end{tikzpicture}
```

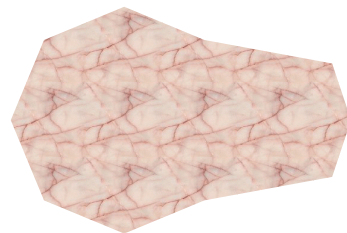



## Image blending example

```
\begin{tikzpicture}[every node/.style=
  {circle,minimum width=2cm}]
\node[fill stretch image=blueshade.png]
  (A) at (120:3cm) {A};
\node[fill stretch image=goldshade.png]
  (B) at (60:3cm) {B};
\node[
  preaction={fill stretch image=blueshade.png},
  fill stretch image=goldshade.png,
  fill image opacity=0.5] (C) {C};
\path (A) -- node{+} (B);
\draw[->,very thick] (A)--(C);
\draw[->,very thick] (B)--(C);
\end{tikzpicture}
```

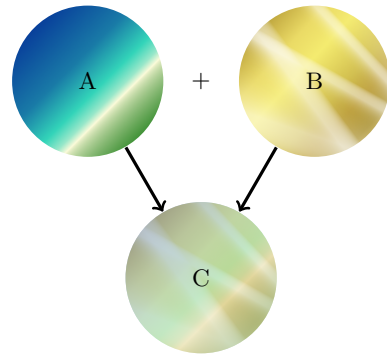



## 9 Libraries `\listings`, `\listingsutf8`, and `\minted`

### 9.1 Loading the Libraries

In contrast to other `tcolorbox` libraries, the libraries `\listings`, `\listingsutf8`, and `\minted` are concurrent in the sense that they all do the same thing, i. e. displaying listings with or without typesetting the listing in  $\text{\LaTeX}$  parallel. The difference is the underlying  $\text{\LaTeX}$  package which does the core job for displaying a listing. So, typically, you need just *one* of these libraries. If you do not have a clue, which one of them you should use, you should take `\listingsutf8`.

The order in which the libraries are included influences the default settings and the `/tcb/reset`<sup>→ P. 77</sup> behavior. The settings of a later loaded library overwrite the settings of a previous loaded library. A library is never loaded twice.

#### 9.1.1 Loading `\listings`

This library uses the package `listings` [6] to typeset listings. It is loaded by a package option or inside the preamble by:

```
\tcbuselibrary{listings}
```

This also loads the package `listings` [6].

The `/tcb/listing engine`<sup>→ P. 205</sup> is set to `listings` by the library. To reactivate this setting, if overwritten by other libraries, use

```
\tcbset{listing engine=listings}
```

#### 9.1.2 Loading `\listingsutf8`

To extend `listings` for UTF-8 encoded sources, you can use the support from the package `listingsutf8` [10] by loading the library variant `\listingsutf8`.

```
\tcbuselibrary{listingsutf8}  
\tcbset{listing utf8=latin1}% optional; 'latin1' is the default.
```

This also loads the library `\listings` and the packages `listings` [6] and `listingsutf8` [10].

The `/tcb/listing engine`<sup>→ P. 205</sup> is set to `listings` by the library. To reactivate this setting, if overwritten by other libraries, use

```
\tcbset{listing engine=listings}
```




### 9.1.3 Loading

This library uses the package `minted` [14] to typeset listings. It is loaded by a package option or inside the preamble by:

```
\tcbuselibrary{minted}
```

This also loads the package `minted` [14].

The `minted` package uses the external tool `Pygments` [12] to apply syntax highlighting. It has to be installed and set up, before the library can be used, see [14] and [12]. The `tcolorbox` library  does not work, if the package `minted` [14] does not work.

The `/tcb/listing engine` <sup>→ P. 205</sup> is set to `minted` by the library. To reactivate this setting, if overwritten by other libraries, use

```
\tcbset{listing engine=minted}
```

## 9.2 Common Macros of the Libraries

```
\begin{tcblisting}{\langle options \rangle}
\langle environment content \rangle
\end{tcblisting}
```

Creates a colored box based on a `tcolorbox` <sup>→ P. 9</sup>. Controlled by the given *⟨options⟩*, the environment content is typeset normally and/or as a listing. Furthermore, the *⟨options⟩* control appearance and functions of the `tcolorbox`. By default, the listing is interpreted as a  $\text{\LaTeX}$  listing.

```
\begin{tcblisting}{colback=red!5!white,colframe=red!75!black}
This is a \LaTeX\ example which displays the text as source code
and in compiled form.
\end{tcblisting}
```

This is a  $\text{\LaTeX}$  example which displays the text as source code  
and in compiled form.

This is a  $\text{\LaTeX}$  example which displays the text as source code and in compiled form.



```
% \usetikzlibrary{listings} /or/ \usetikzlibrary{listingsutf8}
\begin{tcblisting}{colback=yellow!5,colframe=yellow!50!black,listing only,
  title=This is source code in another language (XML), fonttitle=\bfseries,
  listing options={language=XML,columns=fullflexible,keywordstyle=\color{red}}}
<?xml version="1.0"?>
<project name="Package tcolorbox" default="documentation" basedir=".">
  <description>
    Apache Ant build file (http://ant.apache.org/)
  </description>
</project>
\end{tcblisting}
```

This is source code in another language (XML)

```
<?xml version="1.0"?>
<project name="Package_tcolorbox" default="documentation" basedir=".">
  <description>
    Apache Ant build file (http://ant.apache.org/)
  </description>
</project>
```

```
% \usetikzlibrary{minted}
\begin{tcblisting}{colback=yellow!5,colframe=yellow!50!black,listing only,
  title=This is source code in another language (XML), fonttitle=\bfseries,
  listing engine=minted,minted language=xml}
<?xml version="1.0"?>
<project name="Package tcolorbox" default="documentation" basedir=".">
  <description>
    Apache Ant build file (http://ant.apache.org/)
  </description>
</project>
\end{tcblisting}
```

This is source code in another language (XML)

```
<?xml version="1.0"?>
<project name="Package tcolorbox" default="documentation" basedir=".">
  <description>
    Apache Ant build file (http://ant.apache.org/)
  </description>
</project>
```

```
% This box is as wide as needed (listing only !!)
% \usetikzlibrary{skins}
\begin{tcblisting}{colback=green!5!white,colframe=green!50!black,listing only,
  hbox,enhanced,drop fuzzy shadow,before=\begin{center},after=\end{center}}
\begin{tikzpicture}
\fill[red] (0,0) rectangle (1,1);
\end{tikzpicture}
\end{tcblisting}
```

```
\begin{tikzpicture}
\fill[red] (0,0) rectangle (1,1);
\end{tikzpicture}
```



```
\begin{tcboutputlisting}
  <environment content>
\end{tcboutputlisting}
```


Saves the environment content to a file which is named by the key value of listing file. Later, this file can be loaded by `\tcbinputlisting` or `\tcbuselistingtext` or `\tcbuselistinglisting`.

```
\begin{tcboutputlisting}
This \textbf{text} is written to a standardized file for later usage.
\end{tcboutputlisting}
```

```
\tcbinputlisting{<options>}
```

Creates a colored boxed based on a `tcolorbox`. The text content is read from a file named by the key value of listing file. Apart from that, the function is equal to that of `tcblisting` <sup>→ P.194</sup>.

```
\tcbinputlisting{colback=red!5!white,colframe=red!75!black,text only}
\tcbinputlisting{colback=green!5,colframe=green!75!black,listing only}
```

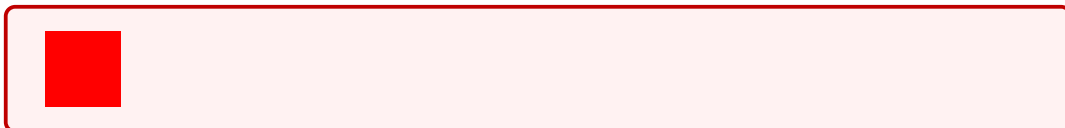

```
\begin{tikzpicture}
\fill[red] (0,0) rectangle (1,1);
\end{tikzpicture}
```

```
\tcbuselistingtext
```

Loads text from a file named by the key value of listing file.

```
\tcbuselistingtext
```



```
\tcbuselistinglisting
```

Typesets text as listing from a file named by the key value of listing file.

```
\tcbuselistinglisting

\begin{tikzpicture}
\fill[red] (0,0) rectangle (1,1);
\end{tikzpicture}
```

```
\tcbusetemplisting
```

Typesets text as listing from a temporary file which was written by `tcbwritetemp` <sup>→ P.83</sup>.



See Section 14.4 on page 295 and Section 14.5 on page 297 for more elaborate methods to create new environments and commands.

If a new sort of `tcblisting` environments should be created with one optional argument only, one is highly recommended to use `\DeclareTCBListing`<sup>→ P. 295</sup> or `\NewTCBListing`<sup>→ P. 295</sup> instead of `\newtcblisting` to avoid content scanning problems.

**`\newtcblisting`***[`<init options>`]{`<name>`}[`<number>`][`<default>`]{`<options>`}*

Creates a new environment `<name>` based on `tcblisting`<sup>→ P. 194</sup>. Basically, `\newtcblisting` operates like `\newenvironment`. This means, the new environment `<name>` optionally takes `<number>` arguments, where `<default>` is the default value for the optional first argument. The `<options>` are given to the underlying `tcblisting`. Note that `/tcb/savedelimiter`<sup>→ P. 18</sup> is set to the given `<name>` automatically. The `<init options>` allow setting up automatic numbering, see Section 4 from page 78.

```
\newtcblisting{mybox}{%
  colback=red!5!white,
  colframe=red!75!black}
```

```
\begin{mybox}
This is my \LaTeX\ box.
\end{mybox}
```

This is my \LaTeX\ box.

This is my L<sup>A</sup>T<sub>E</sub>X box.

```
\newtcblisting{mybox}[1]{%
  colback=red!5!white,
  colframe=red!75!black,
  fonttitle=\bfseries,
  title=#1}
```

```
\begin{mybox}{Listing Box}
This is my \LaTeX\ box.
\end{mybox}
```

Listing Box

This is my \LaTeX\ box.

This is my L<sup>A</sup>T<sub>E</sub>X box.

```
\newtcblisting{mybox}[2][{}]{%
  colback=red!5!white,
  colframe=red!75!black,
  fonttitle=\bfseries,
  title=#2,#1}
```

```
\begin{mybox}[listing only]
{Listing Box}
This is my \LaTeX\ box.
\end{mybox}
\bigskip
```

```
\begin{mybox}[listing side text]
{Listing Box}
This is my
\LaTeX\ box.
\end{mybox}
```

Listing Box

This is my \LaTeX\ box.

Listing Box

This is my  
\LaTeX\ box.

This is my  
L<sup>A</sup>T<sub>E</sub>X box.



*Definition in the preamble:*

```
\newtcblisting[auto counter]{mycbox}[1]{%  
  colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries,  
  title=Listing \thetcbcounter: #1}
```

```
\begin{mycbox}{Listing Box}  
This is my \LaTeX\ box.  
\end{mycbox}
```

**Listing 1: Listing Box**

This is my \LaTeX\ box.

-----  
This is my L<sup>A</sup>T<sub>E</sub>X box.

**\renewtcblisting** [*init options*] {*name*} [*number*] [*default*] {*options*}

Operates like `\newtcblisting`<sup>→ P. 197</sup>, but based on `\renewenvironment` instead of `\newenvironment`. An existing environment is redefined.



`\newtcbinputlisting`[*<init options>*]{*<name>*}[*<number>*][*<default>*]{*<options>*}

Creates a new macro `\<name>` based on `\tcbinputlisting`<sup>P. 196</sup>. Basically, `\newtcbinputlisting` operates like `\newcommand`. The new macro `\<name>` optionally takes *<number>* arguments, where *<default>* is the default value for the optional first argument. The *<options>* are given to the underlying `tcbinputlisting`. The *<init options>* allow setting up automatic numbering, see Section 4 from page 78.

```
\newtcbinputlisting[use counter from=mycbox]{\mylisting}[2][]{%
  listing file={#2},
  title=Listing (\thetcbcounter) of \texttt{#2},
  colback=red!5!white,colframe=red!75!black,fonttttitle=\bfseries,
  listing only,breakable,#1}

\mylisting[before upper=\textit{This is the included file content:}]
  {\jobname.tcbtemp}
```

Listing (2) of `tcolorbox.tcbtemp`

*This is the included file content:*

```
\newtcbinputlisting[use counter from=mycbox]{\mylisting}[2][]{%
  listing file={#2},
  title=Listing (\thetcbcounter) of \texttt{#2},
  colback=red!5!white,colframe=red!75!black,fonttttitle=\bfseries,
  listing only,breakable,#1}

\mylisting[before upper=\textit{This is the included file content:}]
  {\jobname.tcbtemp}
```

```
\newtcbinputlisting[use counter from=mycbox]{\mylisting}[2][]{%
  listing engine=minted,minted language=latex,minted style=colorful,
  listing file={#2},
  title=Listing (\thetcbcounter) of \texttt{#2},
  colback=red!5!white,colframe=red!75!black,fonttttitle=\bfseries,
  listing only,breakable,#1}

\mylisting[before upper=\textit{This is the included file content:}]
  {\jobname.tcbtemp}
```

Listing (3) of `tcolorbox.tcbtemp`

*This is the included file content:*

```
\newtcbinputlisting[use counter from=mycbox]{\mylisting}[2][]{%
  listing engine=minted,minted language=latex,minted style=colorful,
  listing file={#2},
  title=Listing (\thetcbcounter) of \texttt{#2},
  colback=red!5!white,colframe=red!75!black,fonttttitle=\bfseries,
  listing only,breakable,#1}

\mylisting[before upper=\textit{This is the included file content:}]
  {\jobname.tcbtemp}
```

`\renewtcbinputlisting`[*<init options>*]{*<name>*}[*<number>*][*<default>*]{*<options>*}

Operates like `\newtcbinputlisting`, but based on `\renewcommand` instead of `\newcommand`. An existing macro is redefined.



### 9.3 Option Keys of the `listings` Library

`/tcb/listing options=<key list>` (no default, initially `style=tcblatex`)

Sets the options from the package `listings` [6] which are used during typesetting of the listing. For  $\text{\LaTeX}$  listings, there is a predefined `listings` style named `tcblatex` which can be used.

```
\begin{tcblisting}{colback=red!5!white,colframe=red!25,left=6mm,
listing options={style=tcblatex,numbers=left,numberstyle=\tiny\color{red!75!black}}}
This is a \LaTeX\ example which displays the text as source code
and in compiled form. Additionally, we use line numbers here.
\end{tcblisting}
```

```
1 This is a \LaTeX\ example which displays the text as source code
2 and in compiled form. Additionally, we use line numbers here.
```

This is a  $\text{\LaTeX}$  example which displays the text as source code and in compiled form. Additionally, we use line numbers here.

`/tcb/no listing options` (no value, initially unset)

Abbreviation for `listing options={}`. This removes all options for the `listings` package. This includes the `tcblisting` standard style `tcblatex` and the encoding presets. Use this option, if you want to set the `listings` options outside of `tcblisting`, e.g. globally in the preamble.

```
\begin{tcblisting}{no listing options}
All \textit{listings} options removed.
\end{tcblisting}
```

All `\textit{listings}` options removed.

All *listings* options removed.

`/tcb/listing style=<style>` (no default, initially `tcblatex`)

Abbreviation for `listing options={style=...}`. This key sets a `<style>` for the `listings` package, see [6]. For  $\text{\LaTeX}$ , there is a predefined style named `tcblatex`.

```
\begin{tcblisting}{colback=red!5!white,colframe=red!75!black,
listing style=tcblatex}
Here, we use the predefined style.
\end{tcblisting}
```

Here, we use the predefined style.

Here, we use the predefined style.



`/tcb/listing inputencoding=<encoding>` (no default, initially `\inputencodingname`)

Sets the input encoding value for the predefined listing style `tcblatex` and `tcbdocumentation` from the library `libdocumentation`. The initial value is derived from the package `inputenc` if used.

`/tcb/listing remove caption=true|false` (default `true`, initially `true`)

If set to `true`, some part of the caption building code of the `listings` package is silenced to prevent some unwanted interaction with the `hyperref` package resulting in additional vertical space. If set to `false`, the `listings` package code is kept unchanged. Note that listings outside `tcblisting`<sup>→ P. 194</sup> and `\tcbinputlisting`<sup>→ P. 196</sup> are always processed normally. Typically, a user is not expected to use this key at all.

`/tcb/every listing line=<text>` (no default, initially unset/empty)

Inserts some `<text>` to the begin of every line of a listing. Note that this is a hack of the `listings` package code. This may become unusable or superfluous in the future.

```
\newtcblisting{commandshell}{colback=black,colupper=white,colframe=yellow!75!black,
  listing only,listing options={style=tcblatex,language=sh},
  every listing line={\textcolor{red}{\small\ttfamily\bfseries root \$> }}}

\begin{commandshell}
ls -al
cd /usr/lib
\end{commandshell}
```

```
root $> ls -al
root $> cd /usr/lib
```

`/tcb/every listing line*=<text>` (no default, initially unset/empty)

Identical to `/tcb/every listing line` plus additional enlargement of `/tcb/rightupper`<sup>→ P. 26</sup> by the width of `<text>`. Therefore, this option has to be used after the geometry settings are done. This option is intended to be used in conjunction with `/tcb/hbox`<sup>→ P. 72</sup>.

```
\newtcblisting{commandshell}{colback=black,colupper=white,colframe=yellow!75!black,
  listing only,listing options={style=tcblatex,language=sh},hbox,
  every listing line*={\textcolor{red}{\small\ttfamily\bfseries root \$> }}}

\begin{commandshell}
ls -al
cd /usr/lib
\end{commandshell}
```

```
root $> ls -al
root $> cd /usr/lib
```

See further options in Section 9.6 on page 205.

For an combined example of using `\lstinline` inside a `tcolorbox`, see `\DeclareTotalTCBox`<sup>→ P. 293</sup>.



## 9.4 Option Keys of the `listingsutf8` Library

The `listingsutf8` library is an extension of the `listings` library, so all options from Section 9.3 on page 200 are applicable.

`/tcb/listing utf8=<one-byte-encoding>` (style, no default, initially `latin1`)  
Abbreviation for using `/tcb/listing inputencoding`<sup>→ P. 201</sup> together with UTF-8 support from the package `listingsutf8` [10]. This option is available only for the library variant `listingsutf8`. The `<one-byte-encoding>` is one of the applicable encodings from [10], e. g. `latin1`.

See further options in Section 9.6 on page 205.



## 9.5 Option Keys of the `minted` Library

`/tcb/minted language=<programming language>` (no default, initially `latex`)

Sets a `<programming language>` known to Pygments [12].

```
\begin{tcblisting}{listing engine=minted,minted style=trac,
  minted language=java,
  colback=red!5!white,colframe=red!75!black,listing only}
public class HelloWorld {
  // A 'Hello World' in Java
  public static void main(String[] args) {
    System.out.println("Hello World!");
  }
}
\end{tcblisting}
```

```
public class HelloWorld {
  // A 'Hello World' in Java
  public static void main(String[] args) {
    System.out.println("Hello World!");
  }
}
```

`/tcb/minted options=<key list>` (no default, initially `tabsize=2,fontsize=\small`)

Sets the options from the package `minted` [14] which are used during typesetting of the listing.

```
% \tcbuselibrary{skins}
\newtcblisting{myjava}{listing engine=minted,minted style=colorful,
  minted language=java,minted options={fontsize=\small,linenos,numbersep=3mm},
  colback=blue!5!white,colframe=blue!75!black,listing only,
  left=5mm,enhanced,
  overlay={\begin{tcbclipinterior}\fill[red!20!blue!20!white] (frame.south west)
    rectangle ([xshift=5mm]frame.north west);\end{tcbclipinterior}}}}

\begin{myjava}
public class HelloWorld {
  // A 'Hello World' in Java
  public static void main(String[] args) {
    System.out.println("Hello World!");
  }
}
\end{myjava}
```

```
1 public class HelloWorld {
2   // A 'Hello World' in Java
3   public static void main(String[] args) {
4     System.out.println("Hello World!");
5   }
6 }
```



`/tcb/minted style=<style>` (no default, initially unset)

Sets a `<style>` known to `Pygments` [12]. This is independent from `/tcb/minted options`<sup>→ P. 203</sup>. Note that styles are always applied globally; all following examples will be set in the given `<style>` until a new style is set. Also note that setting `\usemintedstyle{<style>}` only once per document is more economic, if all styles in a document are the same. For examples of different styles, see `/tcb/minted language`<sup>→ P. 203</sup> and `/tcb/minted options`<sup>→ P. 203</sup>.

See further options in Section 9.6 on the following page.



## 9.6 Common Option Keys of all Libraries

For the  $\langle options \rangle$  in `tcblisting`<sup>→ P. 194</sup> respectively `\tcbinputlisting`<sup>→ P. 196</sup> the following `pgf` keys can be applied. The key tree path `/tcb/` is not to be used inside these macros.

`/tcb/listing engine= $\langle engine \rangle$`  (no default)

Sets the  $\langle engine \rangle$  which typesets the listings. Feasible values are

- `listings`, if library `\lib listings` or `\lib listingsutf8` is loaded.
- `minted`, if library `\lib minted` is loaded.

`/tcb/listing file= $\langle file name \rangle$`  (no default, initially `\jobname.listing`)

Sets the  $\langle file name \rangle$  of the file which is used to save listings.

`/tcb/listing and text` (no value, initially set)

Typesets the environment content as listing in the upper part and as compiled text in the lower part.

```
\begin{tcblisting}{colback=red!5!white,colframe=red!75!black,listing and text}
This is a \LaTeX\ example.
\end{tcblisting}
```

This is a \LaTeX\ example.

-----  
This is a L<sup>A</sup>T<sub>E</sub>X example.

`/tcb/text and listing` (no value)

Typesets the environment content as compiled text in the upper part and as listing in the lower part.

```
\begin{tcblisting}{colback=red!5!white,colframe=red!75!black,text and listing}
This is a \LaTeX\ example.
\end{tcblisting}
```

This is a L<sup>A</sup>T<sub>E</sub>X example.

-----  
This is a \LaTeX\ example.

`/tcb/listing only` (no value)

Typesets the environment content as listing.

```
\begin{tcblisting}{colback=red!5!white,colframe=red!75!black,listing only}
This is a \LaTeX\ example.
\end{tcblisting}
```

This is a \LaTeX\ example.



### /tcb/text only

(no value)

Typesets the environment content as compiled text.

```
\begin{tcblisting}{colback=red!5!white,colframe=red!75!black,text only}
This is a \LaTeX\ example.
\end{tcblisting}
```

This is a  $\text{\LaTeX}$  example.

### /tcb/comment=*<text>*

(no default, initially empty)

Records a comment with *<text>* as content. The comment is displayed e.g. in conjunction with `/tcb/listing and comment`<sup>P.207</sup> and `/tcb/comment and listing`<sup>P.207</sup>.

```
\begin{tcblisting}{comment={This comment is really only a comment},
colback=red!5!white,colframe=red!75!black}
This is a \textbf{tcolorbox}.
\end{tcblisting}
```

This is a `\textbf{tcolorbox}`.

This is a `tcolorbox`.


### /tcb/image comment={*<options>*}{*<filename>*}

(style, no default, initially unset)

Uses an image denoted by *<filename>* as *comment* for the listing. The image is included by the standard `\includegraphics` macro with given *<options>*.

```
\begin{tcblisting}{colback=red!5!white,colframe=red!75!black,listing side comment,
image comment={width=2.5cm}{example-image-a.pdf},center lower}
This is a \LaTeX\ example.
\end{tcblisting}
```

This is a `\LaTeX` example.





### /tcb/listing and comment

(no value)

Typesets the environment content as listing in the upper part and a given comment in the lower part.

```
\begin{tcblisting}{colback=red!5!white,colframe=red!75!black,listing and comment,
comment={This is my comment. It may contain line breaks.\par
It can even use the environment content
\flqq\ignorespaces\tcbuselistingtext\unskip\frqq}}
This is a \LaTeX\ example.
\end{tcblisting}
```

This is a \LaTeX\ example.

This is my comment. It may contain line breaks.  
It can even use the environment content «This is a  $\LaTeX$  example.»

### /tcb/comment and listing

(no value)

Typesets a given comment in the upper part and the environment content as listing in the lower part.

```
\begin{tcblisting}{colback=red!5!white,colframe=red!75!black,comment and listing,
comment={This is my comment.}}
This is a \LaTeX\ example.
\end{tcblisting}
```

This is my comment.

This is a \LaTeX\ example.



### `/tcb/listing side text` (no value)

Typesets the environment content side by side as listing in the left (upper) part and as compiled text in the right (lower) part.

```
\begin{tcblisting}{colback=red!5!white,colframe=red!75!black,listing side text}
This is a \LaTeX\ example.
\end{tcblisting}
```

This is a \LaTeX\ example.

This is a L<sup>A</sup>T<sub>E</sub>X example.

### `/tcb/text side listing` (no value)

Typesets the environment content side by side as compiled text in the left (upper) part and as listing in the right (lower) part.

```
\begin{tcblisting}{colback=red!5!white,colframe=red!75!black,text side listing}
This is a \LaTeX\ example.
\end{tcblisting}
```

This is a L<sup>A</sup>T<sub>E</sub>X example.

This is a \LaTeX\ example.

### `/tcb/listing outside text` (no value)

Typesets the environment content side by side as listing in a `tcolorbox` and as compiled text outside the box in the right part of the page. Nevertheless, the outside text is treated as *lower* part of the `tcolorbox` and can be formatted with all lower part options. The space partitioning is done with the side by side options from Section 3.11, see page 59.

```
\begin{tcblisting}{colback=red!5!white,colframe=red!75!black,listing outside text}
This is a \LaTeX\ example.
\end{tcblisting}
```

This is a \LaTeX\ example.

This is a L<sup>A</sup>T<sub>E</sub>X example.

### `/tcb/text outside listing` (no value)

Typesets the environment content side by side as listing in a `tcolorbox` and as compiled text outside the box in the left part of the page. Nevertheless, the outside text is treated as *lower* part of the `tcolorbox` and can be formatted with all lower part options. The space partitioning is done with the side by side options from Section 3.11, see page 59.

```
\begin{tcblisting}{colback=red!5!white,colframe=red!75!black,text outside listing}
This is a \LaTeX\ example.
\end{tcblisting}
```

This is a L<sup>A</sup>T<sub>E</sub>X example.

This is a \LaTeX\ example.



### `/tcb/listing side comment` (no value)

Typesets the environment content side by side as listing in the left (upper) part and a given comment in the right (lower) part.

```
\begin{tcblisting}{colback=red!5!white,colframe=red!75!black,listing side comment,
  righthand width=1.5cm,image comment={width=1.5cm}{example-image-a.pdf}}
This is a \LaTeX\ example.
\end{tcblisting}
```


This is a \LaTeX\ example.



### `/tcb/comment side listing` (no value)

Typesets the environment content side by side with a given comment in the left (upper) part and as listing in the right (lower) part.

```
\begin{tcblisting}{colback=red!5!white,colframe=red!75!black,comment side listing,
  lefthand width=1.5cm,image comment={width=1.5cm}{example-image-a.pdf}}
This is a \LaTeX\ example.
\end{tcblisting}
```



This is a \LaTeX\ example.

### `/tcb/listing outside comment` (no value)

Typesets the environment content side by side as listing in a `tcolorbox` and a given comment outside the box in the right part of the page. Nevertheless, the outside text is treated as *lower* part of the `tcolorbox` and can be formatted with all lower part options. The space partitioning is done with the side by side options from Section 3.11, see page 59.

```
\begin{tcblisting}{colback=red!5!white,colframe=red!75!black,listing outside comment,
  righthand width=1.5cm,image comment={width=1.5cm}{example-image-a.pdf}}
This is a \LaTeX\ example.
\end{tcblisting}
```

This is a \LaTeX\ example.



### `/tcb/comment outside listing` (no value)

Typesets the environment content side by side as listing in a `tcolorbox` and a given comment outside the box in the left part of the page. Nevertheless, the outside text is treated as *lower* part of the `tcolorbox` and can be formatted with all lower part options. The space partitioning is done with the side by side options from Section 3.11, see page 59.

```
\begin{tcblisting}{colback=red!5!white,colframe=red!75!black,comment outside listing,
  lefthand width=1.5cm,image comment={width=1.5cm}{example-image-a.pdf}}
This is a \LaTeX\ example.
\end{tcblisting}
```



This is a \LaTeX\ example.



### /tcb/listing above text

(no value)

Typesets the environment content as listing in a `tcolorbox` and as compiled text outside and below the box. The outside text is treated as *lower* part of the `tcolorbox` and can be formatted with all lower part options. The distance between box and text is controlled by `/tcb/middle`<sup>→ P. 28</sup>.

```
\begin{tcblisting}{colback=red!5!white,colframe=red!75!black,listing above text}
This is a \LaTeX\ example.
\end{tcblisting}
```

This is a \LaTeX\ example.

This is a L<sup>A</sup>T<sub>E</sub>X example.

### /tcb/text above listing

(no value)

Typesets the environment content as listing in a `tcolorbox` and as compiled text outside and above the box. The outside text is treated as *lower* part of the `tcolorbox` and can be formatted with all lower part options. The distance between box and text is controlled by `/tcb/middle`<sup>→ P. 28</sup>.

```
\begin{tcblisting}{colback=red!5!white,colframe=red!75!black,text above listing}
This is a \LaTeX\ example.
\end{tcblisting}
```

This is a L<sup>A</sup>T<sub>E</sub>X example.

This is a \LaTeX\ example.




`/tcb/listing above comment` (no value)

Typesets the environment content as listing in a `tcolorbox` and a given comment outside and below the box. The outside text is treated as *lower* part of the `tcolorbox` and can be formatted with all lower part options. The distance between box and comment is controlled by `/tcb/middle` → P. 28.

```
\begin{tcblisting}{colback=red!5!white,colframe=red!75!black,listing above comment,
  center lower,image comment={width=3cm}{example-image-a.pdf}}
This is a \LaTeX\ example.
\end{tcblisting}
```

This is a \LaTeX\ example.



`/tcb/comment above listing` (no value)

Typesets the environment content as listing in a `tcolorbox` and a given comment outside and above the box. The outside text is treated as *lower* part of the `tcolorbox` and can be formatted with all lower part options. The distance between box and comment is controlled by `/tcb/middle` → P. 28.

```
\begin{tcblisting}{colback=red!5!white,colframe=red!75!black,comment above listing,
  center lower,image comment={width=3cm}{example-image-a.pdf}}
This is a \LaTeX\ example.
\end{tcblisting}
```



This is a \LaTeX\ example.



## 9.7 Creation of L<sup>A</sup>T<sub>E</sub>X Tutorials

The following source code gives a guideline for the creation of L<sup>A</sup>T<sub>E</sub>X tutorials. In the next section, a framework for L<sup>A</sup>T<sub>E</sub>X exercises is described. All examples shall be numbered optionally.

Firstly, some additional `tcb` keys are defined for the appearance. For the examples, three environments `texexp`, `texexptitled`, and `texexptitledspec` are defined with automatic numbering.

- `texexp` is used for untitled examles,
- `texexptitled` is used for titled examles,
- `texexptitledspec` is used for titled examles with special treatment.

*Definition in the preamble:*

```
\tcbset{
  texexp/.style={colframe=red!50!yellow!50!black, colback=red!50!yellow!5!white,
    coltitle=red!50!yellow!3!white,
    fonttitle=\small\sffamily\bfseries, fontupper=\small, fontlower=\small},
  example/.style 2 args={texexp,
    title={Example \thetcbcounter: #1},label={#2}},
}

\newtcblisting{texexp}[1]{texexp,#1}
\newtcblisting[auto counter,number within=section]{texexptitled}[3] [] {%
  example={#2}{#3},#1}
\newcolorbox[use counter from=texexptitled]{texexptitledspec}[3] [] {%
  example={#2}{#3},#1}
```

```
\begin{tcblisting}{texexp}
This is a \LaTeX\ example which displays the text as source code
and in compiled form.
\end{tcblisting}
```

This is a \LaTeX\ example which displays the text as source code  
and in compiled form.

This is a L<sup>A</sup>T<sub>E</sub>X example which displays the text as source code and in compiled form.

```
\begin{texexptitled}{First example with a title line}{firstExample}
Here, we use Example \ref{firstExample} with a title line.
\end{texexptitled}
```

**Example 9.1: First example with a title line**

Here, we use Example \ref{firstExample} with a title line.

Here, we use Example 9.1 with a title line.



```
\begin{texexp}{}
```

This is a `\LaTeX` example which displays the text as source code  
and in compiled form.

```
\end{texexp}
```

This is a `\LaTeX` example which displays the text as source code  
and in compiled form.

This is a  $\text{\LaTeX}$  example which displays the text as source code and in compiled form.

```
\begin{texexp}{text and listing}
```

This is a `\LaTeX` example which displays the text as source code  
and in compiled form.

```
\end{texexp}
```

This is a  $\text{\LaTeX}$  example which displays the text as source code and in compiled form.

This is a `\LaTeX` example which displays the text as source code  
and in compiled form.

```
\begin{texexp}{listing only}
```

This is a `\LaTeX` example which displays the text as source code only.

```
\end{texexp}
```

This is a `\LaTeX` example which displays the text as source code only.

```
\begin{texexp}{text only}
```

This is a `\LaTeX` example which displays the text in compiled form only.

```
\end{texexp}
```

This is a  $\text{\LaTeX}$  example which displays the text in compiled form only.



```
\begin{texexptitled}{An Example with a Heading}{heading1}
This is a \LaTeX\ example with a numbered heading line
which can be referred to.
\end{texexptitled}
Here, we see Example \ref{heading1}.
```

#### Example 9.2: An Example with a Heading

This is a \LaTeX\ example with a numbered heading line  
which can be referred to.

---

This is a L<sup>A</sup>T<sub>E</sub>X example with a numbered heading line which can be referred to.

Here, we see Example 9.2.

```
\begin{texexptitled}[listing only]{Another Example with a Heading}{heading2}
The keys can be used in combination. Here, an example with a heading line
and source code only is given.
\end{texexptitled}
Here, we see Example \ref{heading2}.
```

#### Example 9.3: Another Example with a Heading

The keys can be used in combination. Here, an example with a heading line  
and source code only is given.

Here, we see Example 9.3.

```
\begin{texexptitled}[float]{A floating Example with a Heading}{heading3}
This is another \LaTeX\ example with numbered heading line.
But now, the box is a floating object.
\end{texexptitled}
```

#### Example 9.4: A floating Example with a Heading

This is another \LaTeX\ example with numbered heading line.  
But now, the box is a floating object.

---

This is another L<sup>A</sup>T<sub>E</sub>X example with numbered heading line. But now, the box is a floating object.

The floating box of the last example is seen as Example \ref{heading3}  
on page \pageref{heading3}.

The floating box of the last example is seen as Example 9.4 on page 214.



```

\begin{texeptitledspec}{Special application}{texexpbox1}
\begin{lstlisting}[style=tcblatex]
Some \LaTeX\ source code.
\end{lstlisting}
\tcblower

```

For special cases, the environment `texeptitledspec` with style `example` can be used directly. As one can see, the upper and the lower part of the box can be used uncoupled also.

```

\end{texeptitledspec}

```

#### Example 9.5: Special application

Some `\LaTeX` source code.

For special cases, the environment `texeptitledspec` with style `example` can be used directly. As one can see, the upper and the lower part of the box can be used uncoupled also.

The following series of examples demonstrate the application of `tcolorbox`<sup>→P.9</sup> options for diversification.

```

\begin{texeptitled}{How to use options (1):\par The basic example}{options1}
\begin{tikzpicture}
\path[fill=yellow!50!white] (0,0) circle (11mm);
\path[fill=white] (0,0) circle (9mm);
\foreach \w/\c in {90/red,210/green,330/blue}
{\path[shading=ball,ball color=\c] (\w:1cm) circle (7mm);}
\end{tikzpicture}
\end{texeptitled}


```

#### Example 9.6: How to use options (1): The basic example

```

\begin{tikzpicture}
\path[fill=yellow!50!white] (0,0) circle (11mm);
\path[fill=white] (0,0) circle (9mm);
\foreach \w/\c in {90/red,210/green,330/blue}
{\path[shading=ball,ball color=\c] (\w:1cm) circle (7mm);}
\end{tikzpicture}

```





```

\begin{texexptitled}[center lower,enhanced,segmentation hidden,middle=0mm]
{How to use options (2):\par The text output is centered and the
segmentation line has vanished.}{options2}
\begin{tikzpicture}
\path[fill=yellow!50!white] (0,0) circle (11mm);
\path[fill=white] (0,0) circle (9mm);
\foreach \w/\c in {90/red,210/green,330/blue}
{\path[shading=ball,ball color=\c] (\w:1cm) circle (7mm);}
\end{tikzpicture}
\end{texexptitled}

```


**Example 9.7: How to use options (2):**

The text output is centered and the segmentation line has vanished.

```

\begin{tikzpicture}
\path[fill=yellow!50!white] (0,0) circle (11mm);
\path[fill=white] (0,0) circle (9mm);
\foreach \w/\c in {90/red,210/green,330/blue}
{\path[shading=ball,ball color=\c] (\w:1cm) circle (7mm);}
\end{tikzpicture}

```



```

\begin{texexptitled}[tikz lower,bicolor,colbacklower=white]
{How to use options (3):\par Here, the |tikzpicture| is totally hidden.
The |bicolor| skin highlights the output.}{options3}
\path[fill=yellow!50!white] (0,0) circle (11mm);
\path[fill=white] (0,0) circle (9mm);
\foreach \w/\c in {90/red,210/green,330/blue}
{\path[shading=ball,ball color=\c] (\w:1cm) circle (7mm);}
\end{texexptitled}

```


**Example 9.8: How to use options (3):**

Here, the tikzpicture is totally hidden. The bicolor skin highlights the output.

```

\path[fill=yellow!50!white] (0,0) circle (11mm);
\path[fill=white] (0,0) circle (9mm);
\foreach \w/\c in {90/red,210/green,330/blue}
{\path[shading=ball,ball color=\c] (\w:1cm) circle (7mm);}

```





```

\begin{texexptitled}[center lower,listing side text,righthand width=3.5cm,
  bicolor,colbacklower=white]
{How to use options (4):\par The |bicolor| skin also works with side
  by side mode}{options4}
\begin{tikzpicture}
\path[fill=yellow!50!white] (0,0) circle (11mm);
\path[fill=white] (0,0) circle (9mm);
\foreach \w/\c in {90/red,210/green,330/blue}
{\path[shading=ball,ball color=\c]
  (\w:1cm) circle (7mm);}
\end{tikzpicture}
\end{texexptitled}


```

**Example 9.9: How to use options (4):**  
**The bicolor skin also works with side by side mode**

```

\begin{tikzpicture}
\path[fill=yellow!50!white] (0,0) circle (11mm);
\path[fill=white] (0,0) circle (9mm);
\foreach \w/\c in {90/red,210/green,330/blue}
{\path[shading=ball,ball color=\c]
  (\w:1cm) circle (7mm);}
\end{tikzpicture}

```



```

\begin{texexptitled}[center lower,listing outside text,righthand width=3.5cm]
{How to use options (5):\par Putting our picture outside is just
  a matter of one word.}{options5}
\begin{tikzpicture}
\path[fill=yellow!50!white] (0,0) circle (11mm);
\path[fill=white] (0,0) circle (9mm);
\foreach \w/\c in {90/red,210/green,330/blue}
{\path[shading=ball,ball color=\c]
  (\w:1cm) circle (7mm);}
\end{tikzpicture}
\end{texexptitled}


```

**Example 9.10: How to use options (5):**  
**Putting our picture outside is just a matter of one word.**

```

\begin{tikzpicture}
\path[fill=yellow!50!white] (0,0) circle (11mm);
\path[fill=white] (0,0) circle (9mm);
\foreach \w/\c in {90/red,210/green,330/blue}
{\path[shading=ball,ball color=\c]
  (\w:1cm) circle (7mm);}
\end{tikzpicture}

```






```

\begin{texexptitled}[center lower,text above listing]
{How to use options (6):\par The picture may also be put above
the listing box.}{options6}
\begin{tikzpicture}
\path[fill=yellow!50!white] (0,0) circle (11mm);
\path[fill=white] (0,0) circle (9mm);
\foreach \w/\c in {90/red,210/green,330/blue}
{\path[shading=ball,ball color=\c]
(\w:1cm) circle (7mm);}
\end{tikzpicture}
\end{texexptitled}

```



**Example 9.11: How to use options (6):**  
The picture may also be put above the listing box.

```


\begin{tikzpicture}
\path[fill=yellow!50!white] (0,0) circle (11mm);
\path[fill=white] (0,0) circle (9mm);
\foreach \w/\c in {90/red,210/green,330/blue}
{\path[shading=ball,ball color=\c]
(\w:1cm) circle (7mm);}
\end{tikzpicture}

```

```

\begin{texexptitled}[beamer,center lower,text outside listing,lefthand width=3.5cm]
{How to use options (7):\par Our style is easily transformed into
a beamerish one.}{options7}
\begin{tikzpicture}
\path[fill=yellow!50!white] (0,0) circle (11mm);
\path[fill=white] (0,0) circle (9mm);
\foreach \w/\c in {90/red,210/green,330/blue}
{\path[shading=ball,ball color=\c]
(\w:1cm) circle (7mm);}
\end{tikzpicture}
\end{texexptitled}

```



**Example 9.12: How to use options (7):**  
Our style is easily transformed into a beamerish one.

```

\begin{tikzpicture}
\path[fill=yellow!50!white] (0,0) circle (11mm);
\path[fill=white] (0,0) circle (9mm);
\foreach \w/\c in {90/red,210/green,330/blue}
{\path[shading=ball,ball color=\c]
(\w:1cm) circle (7mm);}
\end{tikzpicture}

```



## 9.8 Creation of L<sup>A</sup>T<sub>E</sub>X Exercises

In the following, a guideline is given for the creation of L<sup>A</sup>T<sub>E</sub>X exercises with solutions. These solutions are saved to disk for application at a place of choice. Therefore, all used exercises are logged to a file `\jobname.sol` for automatic processing. The solution contents themselves are saved to a subdirectory named `solutions`.

```
%\newcounter{texercise} % preamble

\newwrite\solout
\def\openoutsol{\immediate\openout\solout\jobname.sol}
\def\solfile#1{solutions/texercise#1.tex}
\def\writesol#1{\immediate\write\solout{\noexpand\processsol{\thetcbcounter}{#1}}}%
\def\closeoutsol{\immediate\closeout\solout}
\def\inputsol{\IfFileExists{\jobname.sol}{\input{\jobname.sol}}{}}
```

- Before the first exercise is given, `\openoutsol` has to be called to start logging.
- The solution is given as content of a `tcboutputlisting`<sup>→ P. 196</sup> environment. Note, that you can use this content also inside the exercise with `\tcbuselistingtext`<sup>→ P. 196</sup> in compiled form.
- After the last exercise is given (and before using the solutions), `\closeoutsol` has to be called to stop logging.
- The solutions are loaded by `\inputsol`.

Inside the exercise text, there may be text parts which are needed as L<sup>A</sup>T<sub>E</sub>X source code and as compiled text as well. These parts can be saved by `tcbwritetemp`<sup>→ P. 83</sup> and used in compiled form by `\tcbusetemp`<sup>→ P. 83</sup> or as source code by `\tcbusetemplisting`<sup>→ P. 196</sup>.

At first, we generate some a common style for the exercises and the solutions. Further, since exercises and solutions should be numbered, we force to use a label `<marker>`. Automatically, the label `exe:<marker>` is used to mark the exercise and the label `sol:<marker>` is used to mark the solution.

```
\tcbset{texercisestyle/.style={arc=0.5mm, colframe=blue!25!yellow!90!white,
colback=blue!25!yellow!5!white, coltitle=blue!25!yellow!40!black,
fonttitle=\small\sffamily\bfseries, fontupper=\small, fontlower=\small}}
```

With these preparations, the kernel environment `texercise` for our exercises is created quickly:

*Definition in the preamble:*

```
\newcolorbox[auto counter,number within=section,list inside=exam]%
{texercise}[2][{}]{texercisestyle,
listing file={\solfile\thetcbcounter},label={exe:#2},
phantom={\writesol{#2}},
title={Exercise \thetcbcounter\hfill\mdseries Solution on page \pageref{sol:#2}},
list entry={\protect\numberline{\thetcbcounter}Exercise with solution on
page \pageref{sol:#2}},#1}
```

```
\newcolorbox{texercise}[2][{}]{texercisestyle,
listing file={\solfile\thetexercise},
phantom={\refstepcounter{texercise}\label{exe:#2}\writesol{#2}},
title={Exercise \arabic{texercise}%
\hfill\mdseries Solution on page \pageref{sol:#2}},#1}
```



The following examples demonstrate the application.

```
\begin{texercise}{tabular_example}
\textit{Create the following table:}\par\smallskip%
\begin{tcboutputlisting}
\begin{tabular}{|p{3cm}|p{3cm}|p{3cm}|p{3cm}|}\hline
\multicolumn{4}{|c|}{\bfseries\itshape Das alte Italien}\hline
\multicolumn{2}{|c|}{\bfseries Antike} & & \\
\multicolumn{2}{|c|}{\bfseries Mittelalter}\hline
\multicolumn{1}{|c|}{\itshape Republik}& & & \\
\multicolumn{1}{|c|}{\itshape Kaiserreich}& & & \\
\multicolumn{1}{|c|}{\itshape Franken}& & & \\
\multicolumn{1}{|c|}{\itshape Teilstaaten}\hline
In den Zeiten der r\{"o}mischen Republik standen dem Staat jeweils zwei
Konsuln vor, deren Machtbefugnisse identisch waren. & & & \\
Das r\{"o}mische Kaiserreich wurde von einem Alleinherrscher, dem Kaiser,
regiert.
& In der V\{"o}lkerwanderungszeit \{"u}bernahmen die Goten und sp\{a}ter die
Franken die Vorherrschaft.
& Im sp\{a}teren Mittelalter regierten F\{"u}rsten einen Fleckenteppich
von Einzelstaaten.\hline
\end{tabular}
\end{tcboutputlisting}
\tcbuselistingtext%
\end{texercise}
```

#### Exercise 9.1

Solution on page 223

Create the following table:

<i>Das alte Italien</i>			
<b>Antike</b>		<b>Mittelalter</b>	
<i>Republik</i>	<i>Kaiserreich</i>	<i>Franken</i>	<i>Teilstaaten</i>
In den Zeiten der römischen Republik standen dem Staat jeweils zwei Konsuln vor, deren Machtbefugnisse identisch waren.	Das römische Kaiserreich wurde von einem Alleinherrscher, dem Kaiser, regiert.	In der Völkerwanderungszeit übernahmen die Goten und später die Franken die Vorherrschaft.	Im späteren Mittelalter regierten Fürsten einen Fleckenteppich von Einzelstaaten.



```

\begin{texercise}{macro_oneparam}
\begin{tcboutputlisting}
\newcommand{\headingline}[1]{%
  \begin{center}\Large\bfseries #1\end{center}}
\end{tcboutputlisting}
\tcbuselistingtext%

```

Create a new macro `\verb+\headingline+` which produces the following output: `\par\smallskip`

```

\begin{tcbwritetemp}
\headingline{Very important heading}
\end{tcbwritetemp}
\tcbusetemplisting\tcbusetemp%
\end{texercise}

```

### Exercise 9.2

Solution on page 223

Create a new macro `\headingline` which produces the following output:

```
\headingline{Very important heading}
```

**Very important heading**

```

\begin{texercise}{macro_twoparam}
\begin{tcboutputlisting}
\newcommand{\minitable}[2]{%
  \begin{center}\begin{tabular}{p{10cm}}\hline%
    \multicolumn{1}{c}{\bfseries#1}\hline%
    #2\hline%
  \end{tabular}\end{center}}
\end{tcboutputlisting}
\tcbuselistingtext%

```

Create a new macro `\verb+\minitable+` which produces the following output: `\par\smallskip`

```

\begin{tcbwritetemp}
\minitable{My heading}{In this tiny tabular, there is only a heading
  and some text below which has a width of ten centimeters.}
\end{tcbwritetemp}
\tcbusetemplisting\par\smallskip\tcbusetemp%
\end{texercise}

```

### Exercise 9.3

Solution on page 223

Create a new macro `\minitable` which produces the following output:

```
\minitable{My heading}{In this tiny tabular, there is only a heading
  and some text below which has a width of ten centimeters.}
```

**My heading**

In this tiny tabular, there is only a heading and some text below  
which has a width of ten centimeters.



```

\begin{texercise}{macro_threeparam}
\begin{tcboutputlisting}
\newcommand{\synop}[3]{%
  \begin{tabular}{@{}p{(\linewidth-\tabcolsep*2-\arrayrulewidth)/2}|%
    p{(\linewidth-\tabcolsep*2-\arrayrulewidth)/2}@{}}\hline
    \multicolumn{2}{c}{\bfseries #1}\\ \hline
    \multicolumn{1}{c|}{\itshape English}&
    \multicolumn{1}{c}{\itshape German}\\ \hline
    #2 & #3
  \end{tabular}}
\end{tcboutputlisting}
\tcbuselistingtext%
Create a new macro \verb+\synop+ which typesets a synoptic text according
to the following example. Base your macro on a tabular which takes the
total line width. \par\smallskip
\begin{tcbwritetemp}
\synop{Neil Armstrong}%
{That's one small step for a man, one giant leap for mankind.}%
{Das ist ein kleiner Schritt f\"{u}r einen Mann,
  ein riesiger Sprung f\"{u}r die Menschheit.}
\end{tcbwritetemp}
\tcbusetemplisting\par\smallskip\tcbusetemp%
\end{texercise}

```

#### Exercise 9.4

Solution on page 224

Create a new macro `\synop` which typesets a synoptic text according to the following example. Base your macro on a tabular which takes the total line width.

```

\synop{Neil Armstrong}%
{That's one small step for a man, one giant leap for mankind.}%
{Das ist ein kleiner Schritt f\"{u}r einen Mann,
  ein riesiger Sprung f\"{u}r die Menschheit.}

```

Neil Armstrong	
<i>English</i>	<i>German</i>
That's one small step for a man, one giant leap for mankind.	Das ist ein kleiner Schritt für einen Mann, ein riesiger Sprung für die Menschheit.

Now, we give a list of all exercises with:

```

\tcblistof[\subsection]{exam}{List of Exercises%
  \label{listofexercises}}

```

## 9.9 List of Exercises

9.1	Exercise with solution on page 223	220
9.2	Exercise with solution on page 223	221
9.3	Exercise with solution on page 223	221
9.4	Exercise with solution on page 224	222



## 9.10 Solutions for the given L<sup>A</sup>T<sub>E</sub>X Exercises

For all solutions, a macro `\processsol` was written to the file `\jobname.sol`. Now, we need a definition for this macro to use the solutions.

```
% \usepackage{hyperref} % for \phantomsection
\newcommand{\processsol}[2]{%
  \tcbinputlisting{texercisestyle,listing only,
    phantom={\phantomsection\label{sol:#2}},%
    title={Solution for Exercise \ref{exe:#2} on page \pageref{exe:#2}},
    listing file={\solfile{#1}}}}
```

The loading of all solutions is done by:

```
\inputsol
```

With this, we get:

### Solution for Exercise 9.1 on page 220

```
\begin{tabular}{|p{3cm}|p{3cm}|p{3cm}|p{3cm}|}\hline
\multicolumn{4}{|c|}{\bfseries\itshape Das alte Italien}\hline
\multicolumn{2}{|c|}{\bfseries Antike} &
\multicolumn{2}{c|}{\bfseries Mittelalter}\hline
\multicolumn{1}{|c|}{\itshape Republik}&
\multicolumn{1}{c|}{\itshape Kaiserreich}&
\multicolumn{1}{c|}{\itshape Franken}&
\multicolumn{1}{c|}{\itshape Teilstaaten}\hline
In den Zeiten der r"\{o}mischen Republik standen dem Staat jeweils zwei
Konsuln vor, deren Machtbefugnisse identisch waren. &
Das r"\{o}mische Kaiserreich wurde von einem Alleinherrscher, dem Kaiser,
regiert.
& In der V"\{o}lkerwanderungszeit "\{u}bernahmen die Goten und sp"\{a}ter die
Franken die Vorherrschaft.
& Im sp"\{a}teren Mittelalter regierten F"\{u}rsten einen Fleckenteppich
von Einzelstaaten.\hline
\end{tabular}
```

### Solution for Exercise 9.2 on page 221

```
\newcommand{\headingline}[1]{%
  \begin{center}\Large\bfseries #1\end{center}}
```

### Solution for Exercise 9.3 on page 221

```
\newcommand{\minitable}[2]{%
  \begin{center}\begin{tabular}{p{10cm}}\hline%
  \multicolumn{1}{c}{\bfseries#1}\hline%
  #2\hline%
  \end{tabular}\end{center}}
```



```

\newcommand{\synop}[3]{%
  \begin{tabular}{@{}p{(\linewidth-\tabcolsep*2-\arrayrulewidth)/2}|%
    p{(\linewidth-\tabcolsep*2-\arrayrulewidth)/2}@{}}\hline
    \multicolumn{2}{c}{\bfseries #1}\\ \hline
    \multicolumn{1}{c|}{\itshape English}&
    \multicolumn{1}{c}{\itshape German}\\ \hline
    #2 & #3
  \end{tabular}}

```



## 10 Library LIB **theorems**

The library is loaded by a package option or inside the preamble by:

```
\tcbuselibrary{theorems}
```

This also loads the package `amsmath`.

### 10.1 Macros of the Library

```
\newtcbtheorem[<init options>]{<name>}{<display name>}{<options>}{<prefix>}
```

Creates new environments  $\langle name \rangle$  and  $\langle name \rangle^*$  based on `tcolorbox` to frame a (mathematical) theorem. The  $\langle display name \rangle$  is used in the title line with a number, e.g. «Theorem 5.1». The  $\langle options \rangle$  are given to the underlying `tcolorbox` to control the appearance. The  $\langle init options \rangle$  allow setting up automatic numbering, see Section 4 on page 78. The new environment  $\langle name \rangle$  takes one optional and two mandatory parameters. The optional parameter supplements the options and should be used only in rare cases. The first mandatory parameter is the title text for the theorem and the second mandatory parameter is a  $\langle marker \rangle$ . The theorem is automatically labeled with  $\langle prefix \rangle : \langle marker \rangle$ . The new environment  $\langle name \rangle^*$  takes one optional and one mandatory parameter and represents an unnumbered variant of the environment  $\langle name \rangle$ . This variant is not labeled and not listed in lists of theorems.

*Definition in the preamble:*

```
\newtcbtheorem[number within=section]{mytheo}{My Theorem}%  
{colback=green!5,colframe=green!35!black,fonttitle=\bfseries}{th}
```

```
\begin{mytheo}{This is my title}{theoexample}  
This is the text of the theorem. The counter is automatically assigned and,  
in this example, prefixed with the section number. This theorem is numbered with  
\ref{th:theoexample} and is given on page \pageref{th:theoexample}.  
\end{mytheo}
```

**My Theorem 10.1: This is my title**

This is the text of the theorem. The counter is automatically assigned and, in this example, prefixed with the section number. This theorem is numbered with 10.1 and is given on page 225.

```
\begin{mytheo}[label=myownlabel]{This is my title}{}  
The label parameter can be left empty without \LaTeX error.  
Or you may use an own label to reference Theorem \ref{myownlabel}.  
\end{mytheo}
```

**My Theorem 10.2: This is my title**

The label parameter can be left empty without  $\text{\LaTeX}$  error. Or you may use an own label to reference Theorem 10.2.



```
\begin{mytheo}{}{}
  The title can also be left empty without problem. Note that the ':'
  vanished magically.
\end{mytheo}
```

### My Theorem 10.3

The title can also be left empty without problem. Note that the ':' vanished magically.

```
\begin{mytheo*}{Unnumbered Theorem}
  This theorem is not numbered.
\end{mytheo*}
```

### My Theorem: Unnumbered Theorem

This theorem is not numbered.

```
\begin{mytheo*}{}{}
  This theorem has no number and no title.
\end{mytheo*}
```

### My Theorem

This theorem has no number and no title.

**`\renewtcbtheorem`**[*`<init options>`*]{*`<name>`*}{*`<display name>`*}{*`<options>`*}{*`<prefix>`*}

Operates like `\newtcbtheorem`<sup>P. 225</sup>, but based on `\renewenvironment` instead of `\newenvironment`. An existing environment is redefined.

**`\tcbmaketheorem`**{*`<name>`*}{*`<display name>`*}{*`<options>`*}{*`<counter>`*}{*`<prefix>`*}

`\newtcbtheorem`<sup>P. 225</sup> supersedes this macro.

Creates a new environment *`<name>`* based on `tcolorbox` to frame a (mathematical) theorem. The *`<display name>`* is used in the title line with a number, e.g. «Theorem 5.1». The *`<options>`* are given to the underlying `tcolorbox` to control the appearance. The *`<counter>`* is used for automatic numbering. The new environment *`<name>`* takes one optional and two mandatory parameters. The optional parameter supplements the options and should be used only in rare cases. The first mandatory parameter is the title text for the theorem and the second mandatory parameter is a *`<marker>`*. The theorem is automatically labeled with *`<prefix>`*:*`<marker>`*.



`\tcboxmath[⟨options⟩]{⟨mathematical box content⟩}`

Creates a `\tcolorbox`<sup>P.9</sup> which is fitted to the width of the given *⟨mathematical box content⟩*. This box is intended to be applied as part of a larger formula and may be used as replacement for the `\boxed` macro of `amsmath`.

```
\begin{equation}
\tcbset{fonttitle=\scriptsize}
\tcbboxmath[colback=LightBlue!25!white,colframe=blue]{ a^2 = 16 }
\quad \Rightarrow \quad
\tcbboxmath[colback=Salmon!25!white,colframe=red,title=Implication]{
  { a = 4 ~\vee~ a=-4. }
}
\end{equation}
```

$$\boxed{a^2 = 16} \Rightarrow \boxed{\text{Implication}} \quad a = 4 \vee a = -4. \quad (3)$$

`\tcbhighmath[⟨options⟩]{⟨mathematical box content⟩}`

This is a special case of the `\tcboxmath` macro which uses the style `/tcb/highlight math`<sup>P.234</sup>. It is intended to provide context sensitive highlighting of formula parts. The color settings via `/tcb/highlight math style`<sup>P.234</sup> may be different inside theorems or other colored areas and outside.

```
\tcbset{myformula/.style={colback=yellow!10!white,colframe=red!50!black,
every box/.style={highlight math style={colback=LightBlue!50!white,colframe=Navy}}}

\begin{align}
\tcbhighmath{\sum\limits_{n=1}^{\infty} \frac{1}{n}} &= \infty. \\
\int x^2 \, dx &= \frac{1}{3} x^3 + c.
\end{align}

\begin{tcolorbox}[ams align,myformula]
\tcbhighmath{\sum\limits_{n=1}^{\infty} \frac{1}{n}} &= \infty. \\
\int x^2 \, dx &= \frac{1}{3} x^3 + c.
\end{tcolorbox}
```

$$\boxed{\sum_{n=1}^{\infty} \frac{1}{n}} = \infty. \quad (4)$$

$$\int x^2 \, dx = \frac{1}{3} x^3 + c. \quad (5)$$

$$\boxed{\sum_{n=1}^{\infty} \frac{1}{n}} = \infty. \quad (6)$$

$$\int x^2 \, dx = \frac{1}{3} x^3 + c. \quad (7)$$



`\tcbhighmath`<sup>→ P. 227</sup> can be used in symbiosis with the `empheq` package which allows to specify own boxing commands to mark multiline formulas.

```
% \usepackage{empheq}
\begin{empheq}[box=\tcbhighmath]{align}
a&=\sin(z)\\
E&=mc^2 + \int_a^b x\, dx
\end{empheq}

\tcbset{highlight math style={enhanced,
  colframe=red!60!black,colback=yellow!50!white,arc=4pt,boxrule=1pt,
  drop fuzzy shadow}}

\begin{empheq}[box=\tcbhighmath]{align}
a&=\sin(z)\\
E&=mc^2 + \int_a^b x\, dx
\end{empheq}
```

$$a = \sin(z) \tag{8}$$

$$E = mc^2 + \int_a^b x \, dx \tag{9}$$

$$a = \sin(z) \tag{10}$$

$$E = mc^2 + \int_a^b x \, dx \tag{11}$$

Besides `\tcbhighmath`<sup>→ P. 227</sup>, one can easily define an independent new box based on `\tcbox`<sup>→ P. 11</sup> which acts like `\tcbhighmath`<sup>→ P. 227</sup>:

```
% \usepackage{empheq}
\newtcbox{\otherbox}[1][\nobeforeafter,math upper,tcbbox raise base,
  enhanced,frame hidden,boxrule=0pt,interior style={top color=green!10!white,
  bottom color=green!10!white,middle color=green!50!yellow},
  fuzzy halo=1pt with green,#1]

\begin{empheq}[box=\otherbox]{align}
a&=\sin(z)\\
E&=mc^2 + \int_a^b x\, dx
\end{empheq}

\begin{equation}
\tcbhighmath{E} = \otherbox{mc^2}
\end{equation}
```

$$a = \sin(z) \tag{12}$$

$$E = mc^2 + \int_a^b x \, dx \tag{13}$$

$$E = mc^2 \tag{14}$$



## 10.2 Option Keys of the Library

`/tcb/separator sign= $\langle sign \rangle$`  (no default, initially :)

The given  $\langle sign \rangle$  is used inside the title text of a theorem as separator between display name combined with number and the specific title text. It is omitted, if there is no specific title text.

```
% \usepackage{amssymb}
\newtcbtheorem[use counter from=mytheo]{sometheorem}{Theorem}%
{colback=white,colframe=red!50!black,fonttitle=\bfseries,
 separator sign={\ $\blacktriangleright$}}{theo}
\begin{sometheorem}{My example}{}
My theorem text.
\end{sometheorem}
```

**Theorem 10.4  $\blacktriangleright$  My example**

My theorem text.

`/tcb/separator sign colon` (style, no value, initially set)

Sets `/tcb/separator sign` to the default colon : sign.

`/tcb/separator sign dash` (style, no value)

Sets `/tcb/separator sign` to an en-dash sign.

```
\newtcbtheorem[use counter from=mytheo]{sometheorem}{Theorem}%
{colback=white,colframe=red!50!black,fonttitle=\bfseries,
 separator sign dash}{theo}
\begin{sometheorem}{My example}{}
My theorem text.
\end{sometheorem}
```

**Theorem 10.5 – My example**

My theorem text.

`/tcb/separator sign none` (style, no value)

Sets `/tcb/separator sign` to empty.

```
\newtcbtheorem[use counter from=mytheo]{sometheorem}{Theorem}%
{colback=white,colframe=red!50!black,fonttitle=\bfseries,
 separator sign none}{theo}
\begin{sometheorem}{My example}{}
My theorem text.
\end{sometheorem}
```

**Theorem 10.6 My example**

My theorem text.



`/tcb/description delimiters={\langle left\rangle}{\langle right\rangle}` (no default, initially empty)

The given  $\langle left\rangle$  and  $\langle right\rangle$  delimiter signs are used to frame the descriptive title text of a theorem.

```
\newtcbtheorem[use counter from=mytheo]{sometheorem}{Theorem}%
{colback=white,colframe=red!50!black,fonttitle=\bfseries,
description delimiters={\flqq}{\frqq}}{theo}
\begin{sometheorem}{My example}{}
My theorem text.
\end{sometheorem}
```

**Theorem 10.7: «My example»**

My theorem text.

`/tcb/description delimiters parenthesis` (style, no value)

Sets `/tcb/description delimiters` to ( and ).

```
\newtcbtheorem[use counter from=mytheo]{sometheorem}{Theorem}%
{colback=white,colframe=red!50!black,fonttitle=\bfseries,
description delimiters parenthesis}{theo}
\begin{sometheorem}{My example}{}
My theorem text.
\end{sometheorem}
```

**Theorem 10.8: (My example)**

My theorem text.

`/tcb/description delimiters none` (style, no value, initially set)

Sets `/tcb/description delimiters` to the default empty texts.

`/tcb/description color=\langle color\rangle` (default empty, initially empty)

Sets the  $\langle color\rangle$  of the descriptive title text deviating from `/tcb/coltitle`<sup>→ P. 20</sup>. The color is reset to `/tcb/coltitle`<sup>→ P. 20</sup>, if `description color` is used without value.

```
\newtcbtheorem[use counter from=mytheo]{sometheorem}{Theorem}%
{colback=white,colframe=red!50!black,fonttitle=\bfseries,
description color=red!25!yellow}{theo}
\begin{sometheorem}{My example}{}
My theorem text.
\end{sometheorem}
```

**Theorem 10.9: My example**

My theorem text.



`/tcb/description font=<text>` (default empty, initially empty)

Sets  $\langle text \rangle$  (e.g. font settings) before the descriptive title text deviating from `/tcb/fonttitle`<sup>P.21</sup>. The  $\langle text \rangle$  is removed, if `description font` is used without value.

```
\newtcbtheorem[use counter from=mytheo]{sometheorem}{Theorem}%
{colback=white,colframe=red!50!black,fonttitle=\bfseries,
description delimiters={\glqq}{\grqq},
description font=\mdseries\itshape}{theo}
\begin{sometheorem}{My example}{}
My theorem text.
\end{sometheorem}
```

**Theorem 10.10:** „*My example*“

My theorem text.

`/tcb/description formatter=<macro>` (default empty, initially empty)

Sets  $\langle macro \rangle$  as formatter for the descriptive title text. The  $\langle macro \rangle$  has to take one mandatory argument (the description text).

Note that `/tcb/description delimiters`<sup>P.230</sup>, `/tcb/description color`<sup>P.230</sup>, and `/tcb/description font` are ignored, if this option is used.

If `description formatter` is used without value, the formatter is reset to its standard behavior.

```
\newtcbbox{\formbox}{enhanced,frame empty,size=minimal,boxsep=2pt,arc=1pt,
on line,interior style image=goldshade.png}

\newtcbtheorem[use counter from=mytheo]{sometheorem}{Theorem}%
{colback=white,colframe=red!50!black,fonttitle=\bfseries,
description formatter=\formbox}{theo}
\begin{sometheorem}{My example}{}
My theorem text.
\end{sometheorem}
```

**Theorem 10.11:** **My example**

My theorem text.

`/tcb/terminator sign=<sign>` (no default, initially empty)

The given  $\langle sign \rangle$  is used as terminator at the end of the title text of a theorem.

```
\newtcbtheorem[use counter from=mytheo]{sometheorem}{Theorem}%
{colback=white,colframe=red!50!black,fonttitle=\bfseries,
terminator sign={.}}{theo}
\begin{sometheorem}{My example}{}
My theorem text.
\end{sometheorem}
```

**Theorem 10.12:** My example.

My theorem text.



`/tcb/terminator sign colon` (style, no value, initially set)

Sets `/tcb/terminator sign` <sup>→ P. 231</sup> to the colon : sign.

```
\newtcbtheorem[use counter from=mytheo]{sometheorem}{Theorem}%  
  {colback=white,colframe=red!50!black,fonttttitle=\bfseries,  
   separator sign dash,terminator sign colon}{theo}  
\begin{sometheorem}{My example}{}  
My theorem text.  
\end{sometheorem}
```

**Theorem 10.13 – My example:**

My theorem text.

`/tcb/terminator sign dash` (style, no value)

Sets `/tcb/terminator sign` <sup>→ P. 231</sup> to an en-dash sign.

```
\newtcbtheorem[use counter from=mytheo]{sometheorem}{Theorem}%  
  {colback=white,colframe=red!50!black,fonttttitle=\bfseries,  
   terminator sign dash}{theo}  
\begin{sometheorem}{My example}{}  
My theorem text.  
\end{sometheorem}
```

**Theorem 10.14: My example –**

My theorem text.

`/tcb/terminator sign none` (style, no value)

Sets `/tcb/terminator sign` <sup>→ P. 231</sup> to the default empty text.

`/tcb/theorem name and number` (style, no value, initially set)

Prints theorem name followed by theorem number inside the title.

```
\newtcbtheorem[use counter from=mytheo]{sometheorem}{Theorem}%  
  {colback=white,colframe=red!50!black,fonttttitle=\bfseries,  
   theorem name and number}{theo}  
\begin{sometheorem}{My example}{}  
My theorem text.  
\end{sometheorem}
```

**Theorem 10.15: My example**

My theorem text.



`/tcb/theorem number and name` (style, no value)

Prints theorem number followed by theorem name inside the title.

```
\newtcbtheorem[use counter from=mytheo]{sometheorem}{Theorem}%
{colback=white,colframe=red!50!black,fonttitle=\bfseries,
theorem number and name}{theo}
\begin{sometheorem}{My example}{}
My theorem text.
\end{sometheorem}
```

**10.16 Theorem: My example**

My theorem text.

`/tcb/theorem name` (style, no value)

Prints theorem name without number inside the title.

```
\newtcbtheorem[use counter from=mytheo]{sometheorem}{Theorem}%
{colback=white,colframe=red!50!black,fonttitle=\bfseries,
theorem name,enhanced,watermark text={\thetcbcounter}}{theo}
\begin{sometheorem}{My example}{}
My theorem text.
\end{sometheorem}
```

**Theorem: My example**

My theorem text.

10.17

`/tcb/theorem={\langle display name \rangle}{\langle counter \rangle}{\langle title \rangle}{\langle marker \rangle}` (no default)

This key is internally used by `\tcbmaketheorem`<sup>→ P. 226</sup>, but can be used directly in a `tcolorbox` for a more flexible approach. The `\langle display name \rangle` is used together with the increased `\langle counter \rangle` value and the `\langle title \rangle` for the title line of the box. Additionally, a `\label` with the given `\langle marker \rangle` is created.

```
% \newcounter{texercise}% preamble
\begin{tcolorbox}[colback=green!10,colframe=green!50!black,arc=4mm,
theorem={Test}{texercise}{Direct usage}{myMarker}]
Here, we see the test \ref{myMarker}.
\end{tcolorbox}
```

**Test 1: Direct usage**

Here, we see the test 1.

For a common appearance inside the document, the key `theorem` should not be used directly as in the example above, but as part of a new environment created by hand or using `\tcbmaketheorem`<sup>→ P. 226</sup> or using its successor `\newtcbtheorem`<sup>→ P. 225</sup>.



`/tcb/highlight math` (style, no value)

Predefined style which is used for `\tcbhighmath` <sup>P.227</sup>. It can be changed comfortably with `/tcb/highlight math style`.

`/tcb/highlight math style=<style definition>` (style, no default)

Changes the definition for `/tcb/highlight math` to the given *<style definition>*. See `\tcbhighmath` <sup>P.227</sup> for another example.

```
% \tcbuselibrary{skins}
\tcbset{highlight math style={enhanced,%<-- needed for the 'remember' options
colframe=red,colback=red!10!white,boxsep=0pt}}
\begin{align*}
\tcbhighmath[remember as=fx]{f(x)}
&= \int\limits_{-1}^x \frac{1}{t^2} dt \\
&= \left[ -\frac{1}{t} \right]_{-1}^x \\
&= -\frac{1}{x} + \frac{1}{1} \\
&= 1 - \frac{1}{x}
\tcbhighmath[remember,overlay={%
\draw[blue,very thick,->] (fx.south) to[bend right] ([yshift=2mm]frame.west);}]
{1-\frac{1}{x}.}
\end{align*}
```

$$\begin{aligned}
 f(x) &= \int_{-1}^x \frac{1}{t^2} dt = \left[ -\frac{1}{t} \right]_{-1}^x \\
 &= -\frac{1}{x} + \frac{1}{1} \\
 &= 1 - \frac{1}{x}
 \end{aligned}$$

`/tcb/math upper` (style, no value)

Sets the upper part to mathematical mode with font `\displaystyle`.

`/tcb/math lower` (style, no value)

Sets the lower part to mathematical mode with font `\displaystyle`.

`/tcb/math` (style, no value)

Sets the upper part *and* lower part to mathematical mode with font `\displaystyle`.

```
\begin{tcolorbox}[math,colback=yellow!10!white,colframe=red!50!black]
\sum\limits_{n=1}^{\infty} \frac{1}{n} = \infty.
\end{tcolorbox}
```

$$\sum_{n=1}^{\infty} \frac{1}{n} = \infty.$$



The following styles are only tested to work with the original `amsmath` environments. If e.g. the `equation` environment is redefined as `gather`, then `/tcb/ams equation` should / could not be used. Obviously, you are encouraged to use `/tcb/ams gather`<sup>→ P. 237</sup> in this case.

`/tcb/ams equation upper` (style, no value)

Adds an `amsmath equation` environment to the start and end of the upper part.

`/tcb/ams equation lower` (style, no value)

Adds an `amsmath equation` environment to the start and end of the lower part.

`/tcb/ams equation` (style, no value)

Adds an `amsmath equation` environment to the start and end of the upper *and* lower part.

```
\begin{tcolorbox}[ams equation,colback=yellow!10!white,colframe=red!50!black]
\sum\limits_{n=1}^{\infty} \frac{1}{n} = \infty.
\end{tcolorbox}
```

$$\sum_{n=1}^{\infty} \frac{1}{n} = \infty. \quad (15)$$

`/tcb/ams equation* upper` (style, no value)

Adds an `amsmath equation*` environment to the start and end of the upper part.

`/tcb/ams equation* lower` (style, no value)

Adds an `amsmath equation*` environment to the start and end of the lower part.

`/tcb/ams equation*` (style, no value)

Adds an `amsmath equation*` environment to the start and end of the upper *and* lower part.

```
\begin{tcolorbox}[ams equation*,colback=yellow!10!white,colframe=red!50!black]
\sum\limits_{n=1}^{\infty} \frac{1}{n} = \infty.
\end{tcolorbox}
```

$$\sum_{n=1}^{\infty} \frac{1}{n} = \infty.$$



`/tcb/ams align upper` (style, no value)

Adds an `amsmath align` environment to the start and end of the upper part.

`/tcb/ams align lower` (style, no value)

Adds an `amsmath align` environment to the start and end of the lower part.

`/tcb/ams align` (style, no value)

Adds an `amsmath align` environment to the start and end of the upper *and* lower part.

```
\begin{tcolorbox}[ams align,colback=yellow!10!white,colframe=red!50!black]
  \sum\limits_{n=1}^{\infty} \frac{1}{n} = \infty.\\
  \int x^2 \, dx = \frac{1}{3} x^3 + c.
\end{tcolorbox}
```

$$\sum_{n=1}^{\infty} \frac{1}{n} = \infty. \quad (16)$$

$$\int x^2 \, dx = \frac{1}{3} x^3 + c. \quad (17)$$

`/tcb/ams align* upper` (style, no value)

Adds an `amsmath align*` environment to the start and end of the upper part.

`/tcb/ams align* lower` (style, no value)

Adds an `amsmath align*` environment to the start and end of the lower part.

`/tcb/ams align*` (style, no value)

Adds an `amsmath align*` environment to the start and end of the upper *and* lower part.

```
\begin{tcolorbox}[ams align*,colback=yellow!10!white,colframe=red!50!black]
  \sum\limits_{n=1}^{\infty} \frac{1}{n} = \infty.\\
  \int x^2 \, dx = \frac{1}{3} x^3 + c.
\end{tcolorbox}
```

$$\sum_{n=1}^{\infty} \frac{1}{n} = \infty.$$

$$\int x^2 \, dx = \frac{1}{3} x^3 + c.$$



`/tcb/ams gather upper` (style, no value)

Adds an `amsmath gather` environment to the start and end of the upper part.

`/tcb/ams gather lower` (style, no value)

Adds an `amsmath gather` environment to the start and end of the lower part.

`/tcb/ams gather` (style, no value)

Adds an `amsmath gather` environment to the start and end of the upper *and* lower part.

```
\begin{tcolorbox}[ams gather,colback=yellow!10!white,colframe=red!50!black]
  \sum\limits_{n=1}^{\infty} \frac{1}{n} = \infty.\\
  \int x^2 \, dx = \frac{1}{3} x^3 + c.
\end{tcolorbox}
```

$$\sum_{n=1}^{\infty} \frac{1}{n} = \infty. \quad (18)$$

$$\int x^2 \, dx = \frac{1}{3} x^3 + c. \quad (19)$$

`/tcb/ams gather* upper` (style, no value)

Adds an `amsmath gather*` environment to the start and end of the upper part.

`/tcb/ams gather* lower` (style, no value)

Adds an `amsmath gather*` environment to the start and end of the lower part.

`/tcb/ams gather*` (style, no value)

Adds an `amsmath gather*` environment to the start and end of the upper *and* lower part.

```
\begin{tcolorbox}[ams gather*,colback=yellow!10!white,colframe=red!50!black]
  \sum\limits_{n=1}^{\infty} \frac{1}{n} = \infty.\\
  \int x^2 \, dx = \frac{1}{3} x^3 + c.
\end{tcolorbox}
```

$$\sum_{n=1}^{\infty} \frac{1}{n} = \infty.$$

$$\int x^2 \, dx = \frac{1}{3} x^3 + c.$$



`/tcb/ams nodisplayskip upper` (style, no value)

Neutralizes the `\abovedisplayskip` of a following `align` or `gather` environment for the upper part. Note that the text content has to start with such a formula.

`/tcb/ams nodisplayskip lower` (style, no value)

Neutralizes the `\abovedisplayskip` of a following `align` or `gather` environment for the lower part. Note that the text content has to start with such a formula.

`/tcb/ams nodisplayskip` (style, no value)

Neutralizes the `\abovedisplayskip` of a following `align` or `gather` environment for the upper part *and* lower part. Note that the text content has to start with such a formula.

```
\begin{tcolorbox}[ams nodisplayskip,colback=yellow!10!white,colframe=red!50!black]
\begin{gather}
\sum\limits_{n=1}^{\infty} \frac{1}{n} = \infty.\\
\int x^2 \sim \text{d}x = \frac{1}{3} x^3 + c.
\end{gather}
And now for something completely different.
\end{tcolorbox}
```

$$\sum_{n=1}^{\infty} \frac{1}{n} = \infty. \quad (20)$$

$$\int x^2 \, dx = \frac{1}{3} x^3 + c. \quad (21)$$

And now for something completely different.

New colored mathematical environments are easily created using `\newtcolorbox`<sup>→ P. 12</sup>:

```
\newtcolorbox{mymath}{ams gather*,colback=yellow!10!white,colframe=red!50!black}

\begin{mymath}
\sum\limits_{n=1}^{\infty} \frac{1}{n} = \infty.\\
\int x^2 \sim \text{d}x = \frac{1}{3} x^3 + c.
\end{mymath}
```

$$\sum_{n=1}^{\infty} \frac{1}{n} = \infty.$$

$$\int x^2 \, dx = \frac{1}{3} x^3 + c.$$

All described options like `/tcb/ams gather upper`<sup>→ P. 237</sup>, `/tcb/ams gather lower`<sup>→ P. 237</sup>, `/tcb/ams gather`<sup>→ P. 237</sup> are (partially) setting (overwriting) the keys `/tcb/before upper`<sup>→ P. 44</sup>, `/tcb/after upper`<sup>→ P. 45</sup>, `/tcb/before lower`<sup>→ P. 45</sup>, `/tcb/after lower`<sup>→ P. 45</sup>.

Therefore, e.g. `\tcbset{ams gather,before upper={\text{Pythagoras:}}}` produces an invalid result. For this case, you are invited to use

`\tcbset{ams gather,before upper app={\text{Pythagoras:}}}`,  
see `/tcb/before upper app`<sup>→ P. 278</sup>.



`/tcb/theorem style=<name>` (no default, initially `standard`)

Applies a predefined style `<name>` to the theorem environment. Some of the feasible `<name>` values resemble style names from the packages `theorem` and `ntheorem` to give convenient access to known patterns.

The styles alter `/tcb/separator sign`<sup>→P.229</sup>, `/tcb/description delimiters`<sup>→P.230</sup>, `/tcb/terminator sign`<sup>→P.231</sup>, and more. Therefore, one should apply such keys *after* a theorem style.

For the following examples, we use:

*Definition in the preamble:*

```
\newtcbtheorem[use counter from=mytheo]{theorem}{Theorem}{%
  fonttitle=\bfseries\upshape,fontupper=\itshape,
  colframe=green!50!black,colback=green!10!white,
  colbacktitle=green!20!white,coltitle=blue!75!black}{theo}
```

The predefined styles are:

- `standard`: This is the initial value.

```
\begin{theorem}[theorem style=standard]{standard}{}
This is my theorem. \begin{equation*} a^2 + b^2 = c^2. \end{equation*}
\end{theorem}
```

**Theorem 10.18: standard**

*This is my theorem.*

$$a^2 + b^2 = c^2.$$

- `change standard`

```
\begin{theorem}[theorem style=change standard]{change standard}{}
This is my theorem. \begin{equation*} a^2 + b^2 = c^2. \end{equation*}
\end{theorem}
```

**10.19 Theorem: change standard**

*This is my theorem.*

$$a^2 + b^2 = c^2.$$

- `plain`

```
\begin{theorem}[theorem style=plain]{plain}{}
This is my theorem. \begin{equation*} a^2 + b^2 = c^2. \end{equation*}
\end{theorem}
```

**Theorem 10.20 (plain):** *This is my theorem.*

$$a^2 + b^2 = c^2.$$



- **break**

```
\begin{theorem}[theorem style=break]{break}{}
This is my theorem. \begin{equation*} a^2 + b^2 = c^2. \end{equation*}
\end{theorem}
```

**Theorem 10.21 (break):**

*This is my theorem.*

$$a^2 + b^2 = c^2.$$

- **plain apart**

```
\begin{theorem}[theorem style=plain apart]{plain apart}{}
This is my theorem. \begin{equation*} a^2 + b^2 = c^2. \end{equation*}
\end{theorem}
```

**Theorem 10.22 (plain apart)**

*This is my theorem.*

$$a^2 + b^2 = c^2.$$

- **change**

```
\begin{theorem}[theorem style=change]{change}{}
This is my theorem. \begin{equation*} a^2 + b^2 = c^2. \end{equation*}
\end{theorem}
```

**10.23 Theorem (change):** *This is my theorem.*

$$a^2 + b^2 = c^2.$$

- **change break**

```
\begin{theorem}[theorem style=change break]{change break}{}
This is my theorem. \begin{equation*} a^2 + b^2 = c^2. \end{equation*}
\end{theorem}
```

**10.24 Theorem (change break):**

*This is my theorem.*

$$a^2 + b^2 = c^2.$$

- **change apart**

```
\begin{theorem}[theorem style=change apart]{change apart}{}
This is my theorem. \begin{equation*} a^2 + b^2 = c^2. \end{equation*}
\end{theorem}
```

**10.25 Theorem (change apart)**

*This is my theorem.*

$$a^2 + b^2 = c^2.$$



- **margin**

```
\begin{theorem}[theorem style=margin,left=10mm]{margin}{}
This is my theorem. \begin{equation*} a^2 + b^2 = c^2. \end{equation*}
\end{theorem}
\begin{theorem}[theorem style=margin,left=10mm,oversize]{margin}{}
This is my theorem. \begin{equation*} a^2 + b^2 = c^2. \end{equation*}
\end{theorem}
```

**10.26 Theorem (margin):** *This is my theorem.*

$$a^2 + b^2 = c^2.$$

**10.27 Theorem (margin):** *This is my theorem.*

$$a^2 + b^2 = c^2.$$

- **margin break**

```
\begin{theorem}[theorem style=margin break,left=10mm]{margin break}{}
This is my theorem. \begin{equation*} a^2 + b^2 = c^2. \end{equation*}
\end{theorem}
\begin{theorem}[theorem style=margin break,left=10mm,oversize]{margin break}{}
This is my theorem. \begin{equation*} a^2 + b^2 = c^2. \end{equation*}
\end{theorem}
```

**10.28 Theorem (margin break):**

*This is my theorem.*

$$a^2 + b^2 = c^2.$$

**10.29 Theorem (margin break):**

*This is my theorem.*

$$a^2 + b^2 = c^2.$$

- **margin apart**

```
\begin{theorem}[theorem style=margin apart,left=10mm]{margin apart}{}
This is my theorem. \begin{equation*} a^2 + b^2 = c^2. \end{equation*}
\end{theorem}
\begin{theorem}[theorem style=margin apart,left=10mm,oversize]{margin apart}{}
This is my theorem. \begin{equation*} a^2 + b^2 = c^2. \end{equation*}
\end{theorem}
```

**10.30 Theorem (margin apart)**

*This is my theorem.*

$$a^2 + b^2 = c^2.$$

**10.31 Theorem (margin apart)**

*This is my theorem.*

$$a^2 + b^2 = c^2.$$



### 10.3 Examples for Definitions and Theorems

In the following, the application of `\tcbmaketheorem`<sup>P. 226</sup> to highlight mathematical definitions, theorems, or the like is demonstrated.

At first, additional `tcb` keys are created for the appearance of the colored boxes. It is assumed that theorems and corollaries should be identically colored. All following environments are numbered with a common counter, but this can be changed easily. Here, the counter output is supplemented by the subsection number.

*Definition in the preamble:*

```
\tcbset{
  defstyle/.style={fonttitle=\bfseries\upshape, fontupper=\slshape,
    arc=0mm, colback=blue!5!white,colframe=blue!75!black},
  theostyle/.style={fonttitle=\bfseries\upshape, fontupper=\slshape,
    colback=red!10!white,colframe=red!75!black},
}
\newtcbtheorem[number within=subsection]{Definition}{Definition}{defstyle}{def}
\newtcbtheorem[use counter from=Definition]{Theorem}{Theorem}{theostyle}{theo}
\newtcbtheorem[use counter from=Definition]{Corollary}{Corollary}{theostyle}{cor}
```

By `\newtcbtheorem`<sup>P. 225</sup>, commonly numbered theorem environments are created now. `defstyle` and `theostyle` are used for the appearance.

Now, everything is prepared for the following examples.

The following theorem is numbered as Theorem `\ref{theo:diffbarstetig}` and referenced with the marker `\texttt{theo:diffbarstetig}.``\bigskip`

```
\begin{Theorem}{Differenzierbarkeit bedingt Stetigkeit, wobei diese Benennung
zu Testzwecken ungew\u{ohnlich lang ist}{diffbarstetig}%
Eine Funktion $f:I\to\mathbb{R}$ ist in $x_0\in I$ stetig, wenn $f$ in
$x_0$ differenzierbar ist.
\end{Theorem}
```

The following theorem is numbered as Theorem 10.3.1 and referenced with the marker `theo:diffbarstetig`.

**Theorem 10.3.1: Differenzierbarkeit bedingt Stetigkeit, wobei diese Benennung zu Testzwecken ungewöhnlich lang ist**

Eine Funktion  $f : I \rightarrow \mathbb{R}$  ist in  $x_0 \in I$  stetig, wenn  $f$  in  $x_0$  differenzierbar ist.



The following definition is numbered as Definition `\ref{def:diffbarkeit}` and referenced with the marker `\texttt{def:diffbarkeit}`.  
`\bigskip`

```
\begin{Definition}{Differenzierbarkeit}{diffbarkeit}
  Eine Funktion  $f: I \rightarrow \mathbb{R}$  auf einem Intervall  $I$  heit in  $x_0 \in I$  differenzierbar oder linear approximierbar, wenn der Grenzwert
  \begin{equation*}
    \lim_{x \rightarrow x_0} \frac{f(x) - f(x_0)}{x - x_0} = \lim_{h \rightarrow 0} \frac{f(x_0 + h) - f(x_0)}{h}
  \end{equation*}
  existiert. Bei Existenz heit dieser Grenzwert Ableitung oder Differentialquotient von  $f$  in  $x_0$  und man schreibt  $f'(x_0)$  fr ihn
  \begin{equation*}
    f'(x_0) \quad \text{oder} \quad \frac{df}{dx}(x_0).
  \end{equation*}
\end{Definition}
```

The following definition is numbered as Definition 10.3.2 and referenced with the marker `def:diffbarkeit`.

### Definition 10.3.2: Differenzierbarkeit

Eine Funktion  $f : I \rightarrow \mathbb{R}$  auf einem Intervall  $I$  heit in  $x_0 \in I$  differenzierbar oder linear approximierbar, wenn der Grenzwert

$$\lim_{x \rightarrow x_0} \frac{f(x) - f(x_0)}{x - x_0} = \lim_{h \rightarrow 0} \frac{f(x_0 + h) - f(x_0)}{h}$$

existiert. Bei Existenz heit dieser Grenzwert Ableitung oder Differentialquotient von  $f$  in  $x_0$  und man schreibt fr ihn

$$f'(x_0) \quad \text{oder} \quad \frac{df}{dx}(x_0).$$

The following corollary is numbered as Corollary `\ref{cor:nullstellen}` and referenced with the marker `\texttt{cor:nullstellen}`.  
`\bigskip`

```
\begin{Corollary}{Nullstellenexistenz}{nullstellen}
  Ist  $f: [a, b] \rightarrow \mathbb{R}$  stetig und haben  $f(a)$  und  $f(b)$  entgegengesetzte Vorzeichen, also  $f(a)f(b) < 0$ , so besitzt  $f$  eine Nullstelle  $x_0 \in ]a, b[$ , also  $f(x_0) = 0$ .
\end{Corollary}
```

The following corollary is numbered as Corollary 10.3.3 and referenced with the marker `cor:nullstellen`.

### Corollary 10.3.3: Nullstellenexistenz

Ist  $f : [a, b] \rightarrow \mathbb{R}$  stetig und haben  $f(a)$  und  $f(b)$  entgegengesetzte Vorzeichen, also  $f(a)f(b) < 0$ , so besitzt  $f$  eine Nullstelle  $x_0 \in ]a, b[$ , also  $f(x_0) = 0$ .



```
\begin{Theorem}[boxrule=2mm,toptitle=-1.5mm,bottomtitle=-1.5mm]{%
  Hinreichende Bedingung f\"{u}r Wendepunkte}{wendehinreichend}%
  $$$ sei eine auf einem Intervall $]a,b[$ dreimal stetig differenzierbare Funktion.
  Ist $$$'(x_0)=0$ in $x_0\in]a,b[$ und $$$''(x_0)\neq 0$, so ist
  $(x_0,f(x_0))$ ein Wendepunkt von $f$.
\end{Theorem}
```

#### Theorem 10.3.4: Hinreichende Bedingung für Wendepunkte

*$f$  sei eine auf einem Intervall  $]a,b[$  dreimal stetig differenzierbare Funktion. Ist  $f''(x_0) = 0$  in  $x_0 \in ]a,b[$  und  $f'''(x_0) \neq 0$ , so ist  $(x_0, f(x_0))$  ein Wendepunkt von  $f$ .*

```
% \usepackage{varioref}
% \usepackage{cleveref}
% \tcbuselibrary{skins}
\newtctheorem[use counter from=Definition]{YetAnotherTheorem}{Theorem}%
{theorem style=plain apart,label type=theorem,enhanced,frame hidden,
 boxrule=2mm,titlerule=0mm,toptitle=1mm,bottomtitle=1mm,
 fonttitle=\bfseries\large,fontupper=\normalsize,
 coltitle=green!35!black,colbacktitle=green!15!white,
 colback=green!50!yellow!15!white,borderline={1pt}{0pt}{green!25!blue},
 }{theo}

\begin{YetAnotherTheorem}{Mittelwertsatz f\"{u}r $n$ Variable}{meanvalueththeorem}%
  Es sei $n\in\mathbb{N}$, $D\subseteq\mathbb{R}^n$ eine offene Menge und
  $f\in C^1(D,\mathbb{R})$. Dann gibt es auf jeder Strecke
  $[x_0,x]\subseteq D$ einen Punkt $\xi\in[x_0,x]$, so dass gilt
  \begin{equation*}
    f(x)-f(x_0) = \operatorname{grad} f(\xi)^\top(x-x_0)
  \end{equation*}
\end{YetAnotherTheorem}

\medskip
Here, |cleveref| support is used to reference \Cref{theo:meanvalueththeorem}
on \Cpageref{theo:meanvalueththeorem}. This \namecref{theo:meanvalueththeorem}
can also be referenced by |\Vref| resulting in \Vref{theo:meanvalueththeorem}.
```

#### Theorem 10.3.5 (Mittelwertsatz für $n$ Variable)

Es sei  $n \in \mathbb{N}$ ,  $D \subseteq \mathbb{R}^n$  eine offene Menge und  $f \in C^1(D, \mathbb{R})$ . Dann gibt es auf jeder Strecke  $[x_0, x] \subset D$  einen Punkt  $\xi \in [x_0, x]$ , so dass gilt

$$f(x) - f(x_0) = \operatorname{grad} f(\xi)^\top (x - x_0)$$

Here, `cleveref` support is used to reference Theorem 10.3.5 on Page 244. This theorem can also be referenced by `\Vref` resulting in Theorem 10.3.5.

Note that `/tcb/label type→ P. 75` was used in the example above to feed `cleveref` [5] with the needed name information.



Here, using `\Vref` resulting in `\Vref{theo:meanvalueththeorem}` is more interesting`\ldots`

Here, using `\Vref` resulting in Theorem 10.3.5 on page 244 is more interesting...

```
% \tcbuselibrary{skins}
\newtcbtheorem[use counter from=Definition]{YetAnotherTheorem}{Theorem}%
{theorem style=change apart,enhanced,arc=0mm,outer arc=0mm,
boxrule=0mm,toprule=1mm,bottomrule=1mm,left=1mm,right=1mm,
titlerule=0mm,toptitle=0mm,bottomtitle=1mm,top=0mm,
colframe=red!50!black,colback=red!5!white,coltitle=red!50!black,
title style={top color=yellow!50!white,bottom color=red!5!white,
middle color=yellow!50!white},
fonttitle=\bfseries\sffamily\normalsize,fontupper=\normalsize\itshape,
}{theo}

\begin{YetAnotherTheorem}{Mittelwertsatz f"\{u\}r $n$ Variable}{mittelwertsatz_n2}%
Es sei $n\in\mathbb{N}$, $D\subseteq\mathbb{R}^n$ eine offene Menge und
$f\in C^1(D,\mathbb{R})$. Dann gibt es auf jeder Strecke
$[x_0,x]\subseteq D$ einen Punkt $\xi\in[x_0,x]$, so dass gilt
\begin{equation*}
f(x)-f(x_0) = \operatorname{grad} f(\xi)^{\top}(x-x_0)
\end{equation*}
\end{YetAnotherTheorem}
```

### 10.3.6 Theorem (Mittelwertsatz für $n$ Variable)

Es sei  $n \in \mathbb{N}$ ,  $D \subseteq \mathbb{R}^n$  eine offene Menge und  $f \in C^1(D, \mathbb{R})$ . Dann gibt es auf jeder Strecke  $[x_0, x] \subset D$  einen Punkt  $\xi \in [x_0, x]$ , so dass gilt

$$f(x) - f(x_0) = \operatorname{grad} f(\xi)^{\top}(x - x_0)$$

```
% \usepackage{varwidth} \tcbuselibrary{skins}
\newtcbtheorem[use counter from=Definition]{YetAnotherTheorem}{Theorem}%
{enhanced,frame empty,interior empty,colframe=ForestGreen!50!white,
coltitle=ForestGreen!50!black,fonttitle=\bfseries,colbacktitle=ForestGreen!15!white,
borderline={0.5mm}{0mm}{ForestGreen!15!white},
borderline={0.5mm}{0mm}{ForestGreen!50!white,dashed},
attach boxed title to top center={yshift=-2mm},
boxed title style={boxrule=0.4pt,varwidth boxed title}{theo}

\begin{YetAnotherTheorem}{Mittelwertsatz f"\{u\}r $n$ Variable}{mittelwertsatz_n3}%
Es sei $n\in\mathbb{N}$, $D\subseteq\mathbb{R}^n$ eine offene Menge und
$f\in C^1(D,\mathbb{R})$. Dann gibt es auf jeder Strecke
$[x_0,x]\subseteq D$ einen Punkt $\xi\in[x_0,x]$, so dass gilt
\begin{equation*}
f(x)-f(x_0) = \operatorname{grad} f(\xi)^{\top}(x-x_0)
\end{equation*}
\end{YetAnotherTheorem}
```

#### Theorem 10.3.7: Mittelwertsatz für $n$ Variable

Es sei  $n \in \mathbb{N}$ ,  $D \subseteq \mathbb{R}^n$  eine offene Menge und  $f \in C^1(D, \mathbb{R})$ . Dann gibt es auf jeder Strecke  $[x_0, x] \subset D$  einen Punkt  $\xi \in [x_0, x]$ , so dass gilt

$$f(x) - f(x_0) = \operatorname{grad} f(\xi)^{\top}(x - x_0)$$



You need more attention for your theorems? Here, you are ...

```
% tcbuselibrary{skins} % preamble
\begin{Theorem}[enhanced,
  fuzzy halo=3mm with yellow,
  fuzzy halo=2mm with red,
  fuzzy halo=1mm with yellow,
  watermark color=red!35!white,
  watermark text={Overacting\\Fundamental Theorem}]%
{Fundamental Theorem of Theorems}{fundamental}%
\lipsum[1-2]
\end{Theorem}
```

#### Theorem 10.3.8: Fundamental Theorem of Theorems

*Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.*  
*Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.*

Let's try a more conservative approach:

```
% \tcbuselibrary{skins}
\newtcbtheorem[use counter from=Definition]{YetAnotherTheorem}{Theorem}%
{theorem style=plain,enhanced,colframe=blue!50!black,colback=yellow!20!white,
 coltitle=red!50!black,fonttitle=\upshape\bfseries,fontupper=\itshape,
 drop fuzzy shadow=blue!50!black!50!white,boxrule=0.4pt}{theo}

\begin{YetAnotherTheorem}{Mittelwertsatz f\{"{u}r $n$ Variable}{mittelwertsatz_n3}%
Es sei $n\in\mathbb{N}$, $D\subseteq\mathbb{R}^n$ eine offene Menge und
$f\in C^1(D,\mathbb{R})$. Dann gibt es auf jeder Strecke
$[x_0,x]\subseteq D$ einen Punkt $\xi\in[x_0,x]$, so dass gilt
\begin{equation*}
f(x)-f(x_0) = \operatorname{grad} f(\xi)^{\top}(x-x_0)
\end{equation*}
\end{YetAnotherTheorem}
```

**Theorem 10.3.9 (Mittelwertsatz für  $n$  Variable):** Es sei  $n \in \mathbb{N}$ ,  $D \subseteq \mathbb{R}^n$  eine offene Menge und  $f \in C^1(D, \mathbb{R})$ . Dann gibt es auf jeder Strecke  $[x_0, x] \subset D$  einen Punkt  $\xi \in [x_0, x]$ , so dass gilt

$$f(x) - f(x_0) = \operatorname{grad} f(\xi)^{\top}(x - x_0)$$



## 11 Library lib breakable

The library is loaded by a package option or inside the preamble by:

```
\tcbuselibrary{breakable}
```

### 11.1 Technical Overview

The library lib breakable supports the automatic breaking of a `tcolorbox`. This feature is enabled by `/tcb/breakable`<sup>→ P. 249</sup> and disabled by `/tcb/unbreakable`<sup>→ P. 250</sup>.

If a `tcolorbox` is set to be `/tcb/breakable`<sup>→ P. 249</sup>, then the following algorithm is executed:

1. The box content is read to a box register similar but not identical to the unbreakable case.
2. If the total box fits into the current page, it is shipped out visibly unbroken and the algorithm stops.

#### Unbroken Box

The box.

unbroken

3. Otherwise, it is checked if at least `/tcb/lines before break`<sup>→ P. 250</sup> of the upper box can be placed on the current page. If not, a page break is inserted and the algorithm goes back to Step 2.
4. Now, the *break sequence* starts. The upper box part or the lower box part is split such that it fits into the current page. The fitting part is named *first part* of the *break sequence* and shipped out.

#### Broken Box

The box.

first

5. If the remaining content of the total box fits into the current page, the algorithm continues with Step 7, else with Step 6.
6. The upper box part or the lower box part is split such that it fits into the current page. The fitting part is named *middle part* of the *break sequence* and shipped out. Then, the algorithm goes back to Step 5.

The box.

middle

7. The remaining part is named *last part* of the *break sequence* and shipped out. The algorithm stops.

The box.

last

The algorithm takes care that the optional segmentation line never appears at the end of a box. The optional lower box part is also checked to have at least `/tcb/lines before break`<sup>→ P. 250</sup>.



In principal, all boxes of the *break sequence* share the same geometric parameters. The differences are:

- The given `/tcb/before→P.62` and `/tcb/after→P.62` values are used only before the *first* and after the *last* part of the *break sequence*.
- A special behavior between the parts of the *break sequence* can be given by `/tcb/toprule at break→P.253`, `/tcb/bottomrule at break→P.253`, `/tcb/enlarge top at break by→P.64`, and `/tcb/enlarge bottom at break by→P.64`.
- The `/tcb/skin→P.84` decides *how* the *first*, *middle*, and *last* part look like. Actually, every part type has its own skin given by the options `/tcb/skin first→P.84`, `/tcb/skin middle→P.84`, and `/tcb/skin last→P.84`. Typically, these options are set automatically by the main skin, see Subsection 11.6 from page 258.

## 11.2 Limitations and Known Bugs

- The maximal total height of the upper and of the lower part of normal breakable `tcolorboxes` is about 65536pt (ca. 2300cm) apiece. If such a part gets longer, the output will get buggy without warning. For very oversized boxes which are longer than 65536pt, use the `unlimited` value for `/tcb/breakable→P.249`. With the `unlimited` setting, the applied algorithm has (virtually) no height limit for boxes, but very likely the compiler memory will have to be increased for boxes longer than 300 pages (depending on compiler settings and box content). But it is recommended to use `unlimited` for critical large boxes only.
- You can nest an unbreakable `tcolorbox` inside another `tcolorbox`, even inside a breakable one. But you cannot not nest a breakable box inside a breakable box. The `/tcb/breakable→P.249` key for a nested box is ignored automatically<sup>4</sup>, i.e. inner boxes are always unbreakable.

After all, in the unlikely case you really want to have the nested box to be breakable, use `/tcb/enforce breakable→P.250` for the nested box<sup>5</sup>. **But, a breakable box inside a breakable box will usually give a mess.**

- If your text content contains some text color changing commands, your color will not survive the break to the next box.

---

<sup>4</sup>Until `tcolorbox` 3.04, the `/tcb/breakable→P.249` key was not ignored for nested boxes.

<sup>5</sup> `/tcb/enforce breakable→P.250` acts like `/tcb/breakable→P.249` until `tcolorbox` 3.04.



## 11.3 Main Option Keys

`/tcb/breakable=true|false|unlimited` (default `true`, initially `false`)

Allows the `tcolorbox` to be breakable. If the box is larger than the available space at the current page, the box is automatically broken and continued to the next next page. All sorts of `tcolorbox` can be made breakable. It depends on the skin how the breaking looks like. If you do not know better, use `/tcb/enhanced`<sup>P.145</sup> for breaking a box. The parts of the *break sequence* are numbered by the counter `tcbbreakpart`.

- **false**: Sets the `tcolorbox` to be unbreakable.
- **true**: Breaks the `tcolorbox` from one page to another. The maximal total height of the upper and of the lower part is about 65536pt (ca. 2300cm or ca. 90 pages) apiece.
- **unlimited**: Experimental code for unlimited total height of breakable boxes. For boxes longer than 300 pages (or even shorter ones) the compiler memory will have to be increased.

```
% \usepackage{lipsum} % preamble
\tcbset{enhanced jigsaw,colback=red!5!white,colframe=red!75!black,
  watermark color=yellow!25!white,watermark text=\arabic{tcbbreakpart},
  fonttitle=\bfseries}

\begin{tcolorbox}[breakable,title=My breakable box]
\lipsum[1-6]
\end{tcolorbox}
```

### My breakable box

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec et mi. Nam vulputate metus eu enim. Vestibulum pellentesque felis eu massa.

Quisque ullamcorper placerat ipsum. Cras nibh. Morbi vel justo vitae lacus tincidunt ultrices. Lorem ipsum dolor sit amet, consectetur adipiscing elit. In hac habitasse platea



dictumst. Integer tempus convallis augue. Etiam facilisis. Nunc elementum fermentum wisi. Aenean placerat. Ut imperdiet, enim sed gravida sollicitudin, felis odio placerat quam, ac pulvinar elit purus eget enim. Nunc vitae tortor. Proin tempus nibh sit amet nisl. Vivamus quis tortor vitae risus porta vehicula.

Fusce mauris. Vestibulum luctus nibh at lectus. Sed bibendum, nulla a faucibus semper, leo velit ultricies tellus, ac venenatis arcu wisi vel nisl. Vestibulum diam. Aliquam pellentesque, augue quis sagittis posuere, turpis lacus congue quam, in hendrerit risus eros eget felis. Maecenas eget erat in sapien mattis porttitor. Vestibulum porttitor. Nulla facilisi. Sed a turpis eu lacus commodo facilisis. Morbi fringilla, wisi in dignissim interdum, justo lectus sagittis dui, et vehicula libero dui cursus dui. Mauris tempor ligula sed lacus. Duis cursus enim ut augue. Cras ac magna. Cras nulla. Nulla egestas. Curabitur a leo. Quisque egestas wisi eget nunc. Nam feugiat lacus vel est. Curabitur consetetuer.

Suspendisse vel felis. Ut lorem lorem, interdum eu, tincidunt sit amet, laoreet vitae, arcu. Aenean faucibus pede eu ante. Praesent enim elit, rutrum at, molestie non, nonummy vel, nisl. Ut lectus eros, malesuada sit amet, fermentum eu, sodales cursus, magna. Donec eu purus. Quisque vehicula, urna sed ultricies auctor, pede lorem egestas dui, et convallis elit erat sed nulla. Donec luctus. Curabitur et nunc. Aliquam dolor odio, commodo pretium, ultricies non, pharetra in, velit. Integer arcu est, nonummy in, fermentum faucibus, egestas vel, odio.

**/tcb/unbreakable** (no value, initially set)

Sets the `tcolorbox` to be unbreakable.

**/tcb/enforce breakable** (no value)

A `tcolorbox` inside a `tcolorbox` is automatically set to be unbreakable. Using `/tcb/breakable`<sup>P. 249</sup> on such an inner box has no effect. If one *really* wants the inner box to be breakable, use `/tcb/enforce breakable`. **This will usually give a mess of shattered boxes. You are advised to not use this option.**

Note that `/tcb/enforce breakable` has the functionality that `/tcb/breakable`<sup>P. 249</sup> had until package version 3.04 and exists for backward compatibility.

**/tcb/title after break**=*<text>* (no default, initially empty)

The `/tcb/title`<sup>P. 14</sup> is used only for the *first* part of a *break sequence*. Use `title after break` to create a heading line with *<text>* as content for all following parts.

**/tcb/notitle after break** (no value, initially set)

Removes the title line or following parts in a *break sequence* if set before.

**/tcb/adjusted title after break**=*<text>* (style, no default, initially unset)

Works like `/tcb/adjusted title`<sup>P. 14</sup> but applied to `/tcb/title after break`.

**/tcb/lines before break**=*<number>* (no default, initially 2)

Assures that the given *<number>* of lines of the upper box part or the lower box part are placed before a break happens.



`/tcb/break at=<length>/<length>/.../<length>` (no default, initially 0pt)

Defines break points at the given  $\langle length \rangle$  values. The first  $\langle length \rangle$  defines the (maximal) height of the first partial box, the second  $\langle length \rangle$  defines the (maximal) height of the second partial box, and so on. The last  $\langle length \rangle$  value is applied to all following partial boxes if any. Setting a length to 0pt means that the naturally available space is used for breaking.

```
% \usepackage{multicol,lipsum}
\begin{multicols}{3}\footnotesize
Breakable boxes inside a |multicols| environment need special attendance.
They are broken by default at |\textheight|.
The |break at| option can be used to insert better break points by hand.
\begin{tcolorbox}[enhanced jigsaw,size=small,vfill before first,
  colframe=red,colback=yellow!10!white,before title=\raggedright,
  title={Broken box inside a |multicols| environment},fonttitle=\bfseries,
  enforce breakable,% use only breakable in the real world!
  pad at break=1mm,break at=3cm/6.3cm ]
\lipsum[1]
\end{tcolorbox}
\refKey{/tcb/height fixed for} may also be considered for |multicols| environments.
\end{multicols}
```

Breakable boxes inside a `multicols` environment need special attendance. They are broken by default at `\textheight`. The `break at` option can be used to insert better break points by hand.

#### Broken box inside a multicols environment

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dic-

tum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis,

viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

`/tcb/height fixed for`<sup>→ P. 254</sup> may also be considered for `multicols` environments.

`/tcb/enlargepage=<length>/<length>/.../<length>` (no default, initially 0pt)

Inserts a `\enlargethispage{<length>}` to the pages of the break sequence, i.e. allows one to enlarge (or shrink) partial boxes. The first  $\langle length \rangle$  is applied to the first partial box, the second  $\langle length \rangle$  is applied to the second partial box, and so on. The last  $\langle length \rangle$  value is applied to all following partial boxes if any. Note that floating boxes will not be enlarged.

```
\begin{tcolorbox}[breakable,enlargepage=0mm/\baselineskip/2\baselineskip/0mm,...
```

The example code enlarged the second partial box by one line, the third partial box by two lines, and all following parts are not enlarged.

If an automated page break occurs before the first partial box, the page enlargement is applied to the page before the first partial box *and* again to the page of the first partial box. Insert a manual break to prevent this.

In general, `enlargepage` should be used at the final stage of a document for fine-tuning only.



`/tcb/enlargepage flexible=<length>` (no default, initially 0pt)

This allows an automated page enlargement for up to  $\langle length \rangle$ . The algorithm can use this to avoid breaking a box, if there is enough room after enlargement. Also, the *last* partial box of a break sequence may be enlarged to avoid further breaking.

Note that this potential enlargement is *additive* to settings of `/tcb/enlargepage`<sup>→ P. 251</sup>. But `/tcb/enlargepage flexible` overwrites settings of `/tcb/pad before break*`<sup>→ P. 253</sup> or `/tcb/pad at break*`<sup>→ P. 254</sup>.

```
% The following setting hinders orphan lines for the last partial box
\tcbset{enlargepage flexible=\baselineskip}
```

`/tcb/shrink break goal=<length>` (no default, initially 0pt)

This is an emergency parameter if the break algorithm produces unpleasant breaks. It shrinks the goal height of the current box part by  $\langle length \rangle$  which may result in smaller boxes. Never use negative values. *Usually, this option will never be needed at all.*



## 11.4 Option Keys for the Break Appearance

**/tcb/toprule at break=⟨length⟩** (no default, initially 0.5mm)

Sets the line width of the top rule to ⟨length⟩ if the box is `/tcb/breakable`<sup>→ P. 249</sup>. In this case, it is applied to *middle* and *last* parts in a break sequence. Note that `/tcb/toprule`<sup>→ P. 22</sup> overwrites this value if used afterwards.

**/tcb/bottomrule at break=⟨length⟩** (no default, initially 0.5mm)

Sets the line width of the bottom rule to ⟨length⟩ if the box is `/tcb/breakable`<sup>→ P. 249</sup>. In this case, it is applied to *first* and *middle* parts in a break sequence. Note that `/tcb/bottomrule`<sup>→ P. 22</sup> overwrites this value if used afterwards.

**/tcb/topsep at break=⟨length⟩** (no default, initially 0mm)

Additional vertical space of ⟨length⟩ which is added at the top of *middle* and *last* parts in a break sequence. In general, it is not advisable to change this value if these parts start with a rule or a title.

**/tcb/bottomsep at break=⟨length⟩** (no default, initially 0mm)

Additional vertical space of ⟨length⟩ which is added at the bottom of *first* and *middle* parts in a break sequence. In general, it is not advisable to change this value if these parts end with a rule.

**/tcb/pad before break=⟨length⟩** (style, no default, initially 3.5mm)

Sets the total amount of vertical space after the text content and before the break point to ⟨length⟩. This style sets `/tcb/toprule at break` to 0pt and changes `/tcb/topsep at break` as required. In general, it is not advisable to change this value if the *middle* and *last* parts in a break sequence start with a rule or a title.

**/tcb/pad before break\*=⟨length⟩** (style, no default)

Sets `/tcb/pad before break` to ⟨length⟩ and `/tcb/enlargepage flexible`<sup>→ P. 252</sup> to an appropriate value such that empty closing frames are avoided.

**/tcb/pad after break=⟨length⟩** (style, no default, initially 3.5mm)

Sets the total amount of vertical space after the break point and before the text content to ⟨length⟩. This style sets `/tcb/bottomrule at break` to 0pt and changes `/tcb/bottomsep at break` as required. In general, it is not advisable to change this value if the *first* and *middle* parts in a break sequence end with a rule.

**/tcb/pad at break=⟨length⟩** (style, no default, initially 3.5mm)

Abbreviation for setting ⟨length⟩ to `/tcb/pad before break` and `/tcb/pad after break`.

```
% \usepackage{lipsum} % preamble
\tcbset{colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries}

\begin{tcolorbox}[enhanced jigsaw,breakable,pad at break=0mm,
  title={For this box, the pad space at the break point is set to 0mm}]
  \lipsum[1-2]
\end{tcolorbox}
```

**For this box, the pad space at the break point is set to 0mm**

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est,



iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum. Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

`/tcb/pad at break*=<length>` (style, no default)  
 Sets `/tcb/pad at break`<sup>→P.253</sup> to `<length>` and `/tcb/enlargepage flexible`<sup>→P.252</sup> to an appropriate value such that empty closing frames are avoided.

`/tcb/pad at break`<sup>→P.253</sup> or `/tcb/pad at break*` should be used as very last option in an option list, because they adapt other settings.

Also see `/tcb/enlarge top at break by`<sup>→P.64</sup> and `/tcb/enlarge bottom at break by`<sup>→P.64</sup>.

`/tcb/height fixed for=<part>` (no default, initially `none`)

When certain amount of space is available for a partial box of a break sequence, the partial box typically is smaller than this space (depending on the box content). For given `<part>(s)`, the height can be set to all available space.

- **none**: Every partial `tcolorbox` is set with its natural height.
- **first**: The *first* partial box is set to a height which matches the available space.
- **middle**: All *middle* partial boxes are set to a height which matches the available space.
- **last**: The *last* partial box is set to a height which matches the available space.
- **first and middle**: The *first* and all *middle* partial boxes are set to a height which matches the available space.
- **middle and last**: All *middle* partial boxes and the *last* partial box are set to a height which matches the available space.
- **all**: All partial boxes are set to a height which matches the available space.

If the box keeps unbroken, this option is not applied. See `/tcb/height`<sup>→P.38</sup> for setting a fixed height for unbroken boxes.

`/tcb/vfill before first=true|false` (default `true`, initially `false`)

Inserts a `\vfill` at the begin of the *first* partial box to move this partial box to the end of the current page. This may be used as an alternative to `/tcb/height fixed for=first` to get justified columns or pages. The `\vfill` is not inserted, if the box gets not actually broken.



## 11.5 Breakable boxes and the multicol package

Unbreakable `tcolorboxes` can be used without special care inside a `multicols` environment from the `multicol` package [9].

Since version 3.10, a breakable `tcolorbox` detects, if it is used inside a `multicols` environment. But choosing break points for a

breakable box cannot be done by the balancing routine of `multicols`. By default, boxes will break at `\textheight`. To get pleasant results, use the `/tcb/break at`<sup>→P.251</sup> and `/tcb/height fixed for`<sup>→P.254</sup> options.

```
% \usepackage{lipsum,multicol} % preamble
\small
\begin{multicols}{2}
  \lipsum[1]
  \begin{tcolorbox}[enhanced jigsaw,breakable,size=title,
    colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries,
    title=My breakable box,pad at break=1mm, break at=7.5cm/0pt ]
  \lipsum[2-4]
  \end{tcolorbox}
  \lipsum[4]
\end{multicols}
```

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

### My breakable box

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis.

Donec nonummy pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec et mi. Nam vulputate metus eu enim. Vestibulum pellentesque felis eu massa.

Quisque ullamcorper placerat ipsum. Cras nibh. Morbi vel justo vitae lacus tincidunt ultrices. Lorem ipsum dolor sit amet, consectetur adipiscing elit. In hac habitasse platea dictumst. Integer tempus convallis augue. Etiam facilisis. Nunc elementum fermentum wisi. Aenean placerat. Ut imperdiet, enim sed gravida sollicitudin, felis odio placerat quam, ac pulvinar elit purus eget enim. Nunc vitae tortor. Proin tempus nibh sit amet nisl. Vivamus quis tortor vitae risus porta vehicula.

Quisque ullamcorper placerat ipsum. Cras nibh. Morbi vel justo vitae lacus tincidunt ultrices. Lorem ipsum dolor sit amet, consectetur adipiscing elit. In hac habitasse platea dictumst. Integer tempus convallis augue. Etiam facilisis. Nunc elementum fermentum wisi. Aenean placerat. Ut imperdiet, enim sed gravida sollicitudin, felis odio placerat quam, ac pulvinar elit purus eget enim. Nunc vitae tortor. Proin tempus nibh sit amet nisl. Vivamus quis tortor vitae risus porta vehicula.



This example is already set inside a `multicols` environment. This time, a *middle* part has full `\textheight`. `/tcb/height fixed for`<sup>P.254</sup> is used to spread this box part over the full height to align with neighboring columns.

```
% \usepackage{lipsum,multicol}
\lipsum[1]
\begin{tcolorbox}[enhanced 2
  {jigsaw,breakable,
  size=title,
  colback=red!5!white,
  colframe=red!75!black,
  fonttitle=\bfseries,
  title=My breakable box,
  pad at break=2mm,
  break at=8.2cm/0pt,
  height fixed for=middle ]
\lipsum[2-7]
\end{tcolorbox}
\lipsum[8]
```

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

#### My breakable box

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris. Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellentesque ante. Phasellus

adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec et mi. Nam vulputate metus eu enim. Vestibulum pellentesque felis eu massa.

Quisque ullamcorper placerat ipsum. Cras nibh. Morbi vel justo vitae lacus tincidunt ultrices. Lorem ipsum dolor sit amet, consectetur adipiscing elit. In hac habitasse platea dictumst. Integer tempus convallis augue. Etiam facilisis. Nunc elementum fermentum wisi. Aenean placerat. Ut imperdiet, enim sed gravida sollicitudin, felis odio placerat quam, ac pulvinar elit purus eget enim. Nunc vitae tortor. Proin tempus nibh sit amet nisl. Vivamus quis tortor vitae risus porta vehicula. Fusce mauris. Vestibulum luctus nibh at lectus. Sed bibendum, nulla a faucibus semper, leo velit ultricies tellus, ac venenatis arcu wisi vel nisl. Vestibulum diam. Aliquam pellentesque, augue quis sagittis posuere, turpis lacus congue quam, in hendrerit risus eros eget felis. Maecenas eget erat in sapien mattis porttitor. Vestibulum porttitor. Nulla facilisi. Sed a turpis eu lacus commodo facilisis. Morbi fringilla, wisi in dignissim interdum, justo lectus sagittis dui, et vehicula libero dui cursus dui. Mauris tempor ligula sed lacus. Duis cursus enim ut augue. Cras ac magna. Cras nulla. Nulla egestas. Curabitur a leo. Quisque egestas wisi eget nunc. Nam feugiat lacus vel est. Curabitur consectetur.

Suspendisse vel felis. Ut lorem lorem, interdum eu, tincidunt sit amet, laoreet vitae, arcu. Aenean faucibus pede eu ante. Praesent enim elit, rutrum at, molestie non, nonummy vel, nisl. Ut lectus eros, malesuada sit amet, fermentum eu, sodales cursus, magna. Donec eu purus. Quisque vehicula, urna sed ultricies auctor, pede lorem egestas dui, et convallis elit erat sed nulla. Donec luctus. Curabitur et nunc. Aliquam dolor odio, commodo pretium, ultricies non, pharetra in, velit. Integer arcu est, nonummy in, fermentum faucibus, egestas vel, odio.

Sed commodo posuere pede. Mauris ut est. Ut quis purus. Sed ac odio. Sed vehicula hendrerit sem. Duis non odio. Morbi ut dui. Sed accumsan risus eget odio. In hac habitasse platea dictumst. Pellentesque non elit. Fusce sed justo eu urna porta tincidunt. Mauris felis odio, sollicitudin sed, volutpat a, ornare ac, erat. Morbi



quis dolor. Donec pellentesque, erat ac sagittis semper, nunc dui lobortis purus, quis congue purus metus ultricies tellus. Proin et quam. Class aptent taciti sociosqu ad litora torquent per conubia nostra, per inceptos hymenaeos. Praesent sapien turpis, fermentum vel, eleifend faucibus, vehicula eu, lacus.

Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Donec

odio elit, dictum in, hendrerit sit amet, egestas sed, leo. Praesent feugiat sapien aliquet odio. Integer vitae justo. Aliquam vestibulum fringilla lorem. Sed neque lectus, consectetur at, consectetur sed, eleifend ac, lectus. Nulla facilisi. Pellentesque eget lectus. Proin eu metus. Sed porttitor. In hac habitasse platea dictumst. Suspendisse eu lectus. Ut mi mi, lacinia sit amet, placerat et, mollis vitae, dui. Sed ante tellus, tristique ut, iaculis eu, malesuada ac, dui. Mauris nibh leo, facilisis non, adipiscing quis, ultrices a, dui.

The following example has a `\tcolorbox` which fills the `\multicols` environment completely. Here, `/tcb/height fixed for`<sup>→ P. 254</sup> is used to give all three columns the full height. Note that the appropriate `/tcb/break at`<sup>→ P. 251</sup> value is not computed automatically but set manually.

```
% \usepackage{lipsum,multicol} % preamble
\small
\begin{multicols}{3}
\begin{tcolorbox}[enhanced jigsaw,breakable,size=small,
colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries,
title=My breakable box,pad at break=2mm,drop fuzzy shadow,
height fixed for=all, break at=11.4cm ]
\lipsum[1-3]
\end{tcolorbox}
\end{multicols}
```

#### My breakable box

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur


auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum. Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec et mi. Nam vulputate metus eu enim. Vestibulum pellentesque felis eu massa.




## 11.6 Break Sequence for the Skins

The following diagrams document the *break sequence* for different skins. Depending on the main skin of a `tcolorbox`, the actual skins of the *break sequence* parts are displayed.

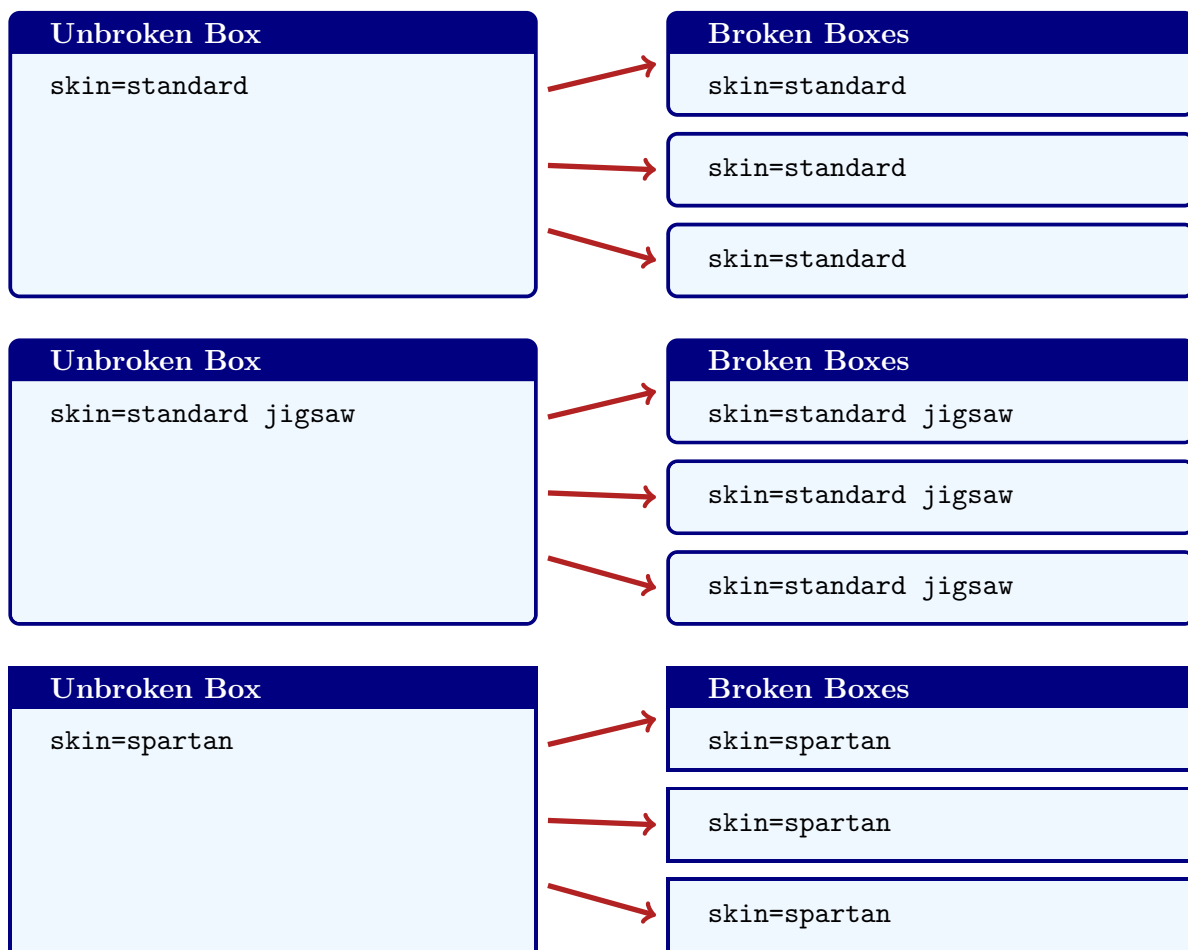




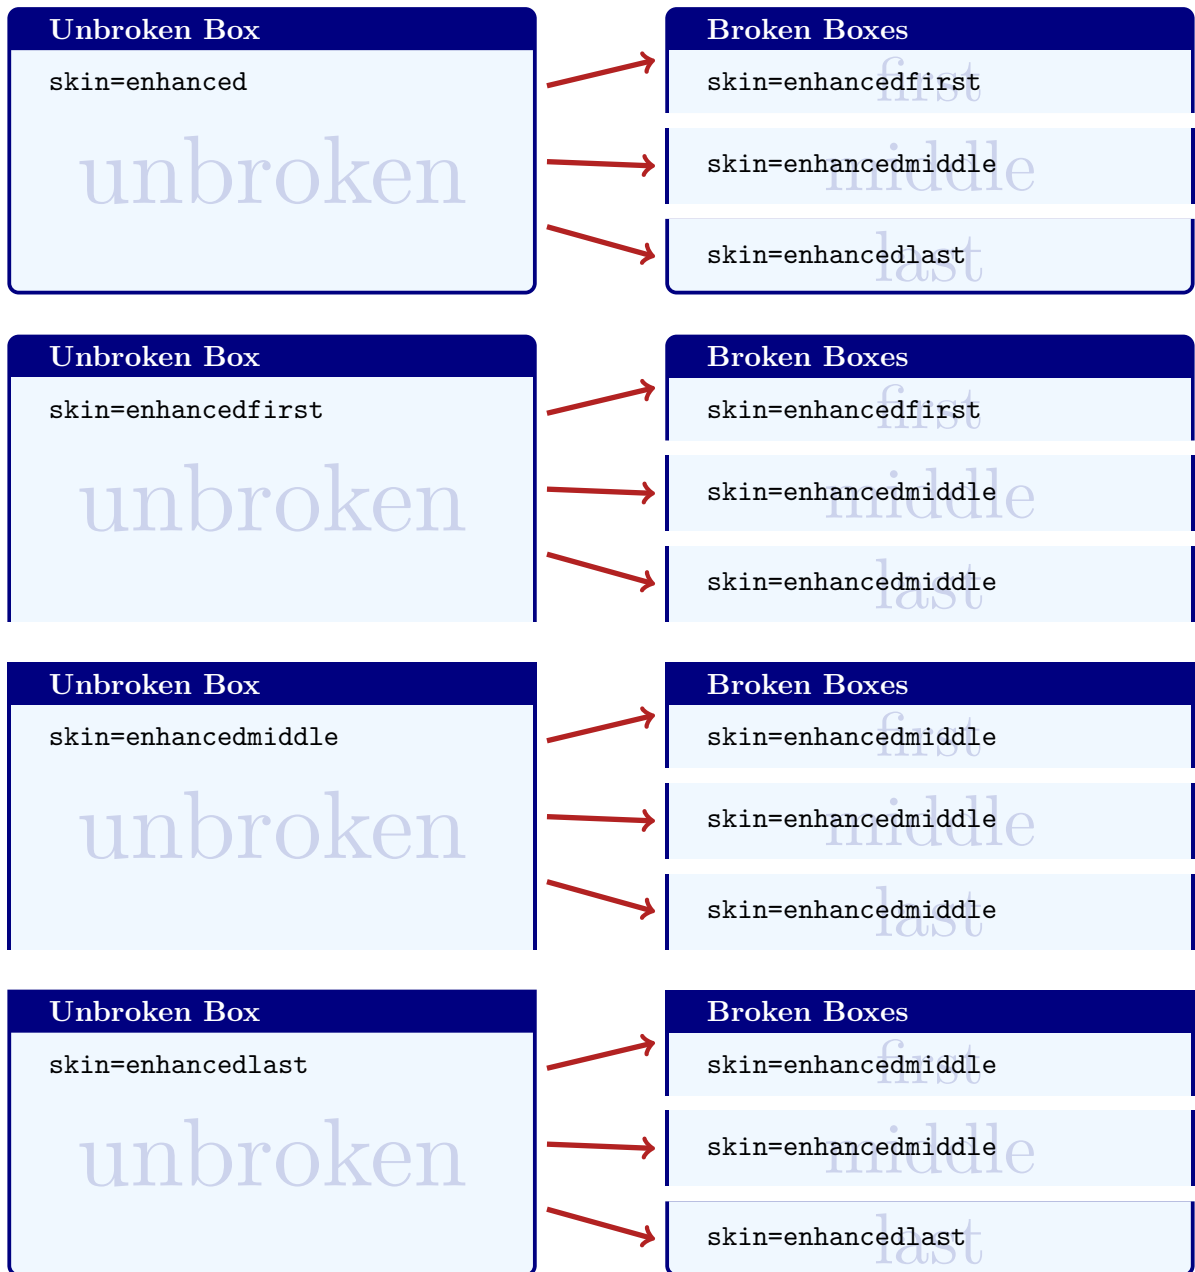








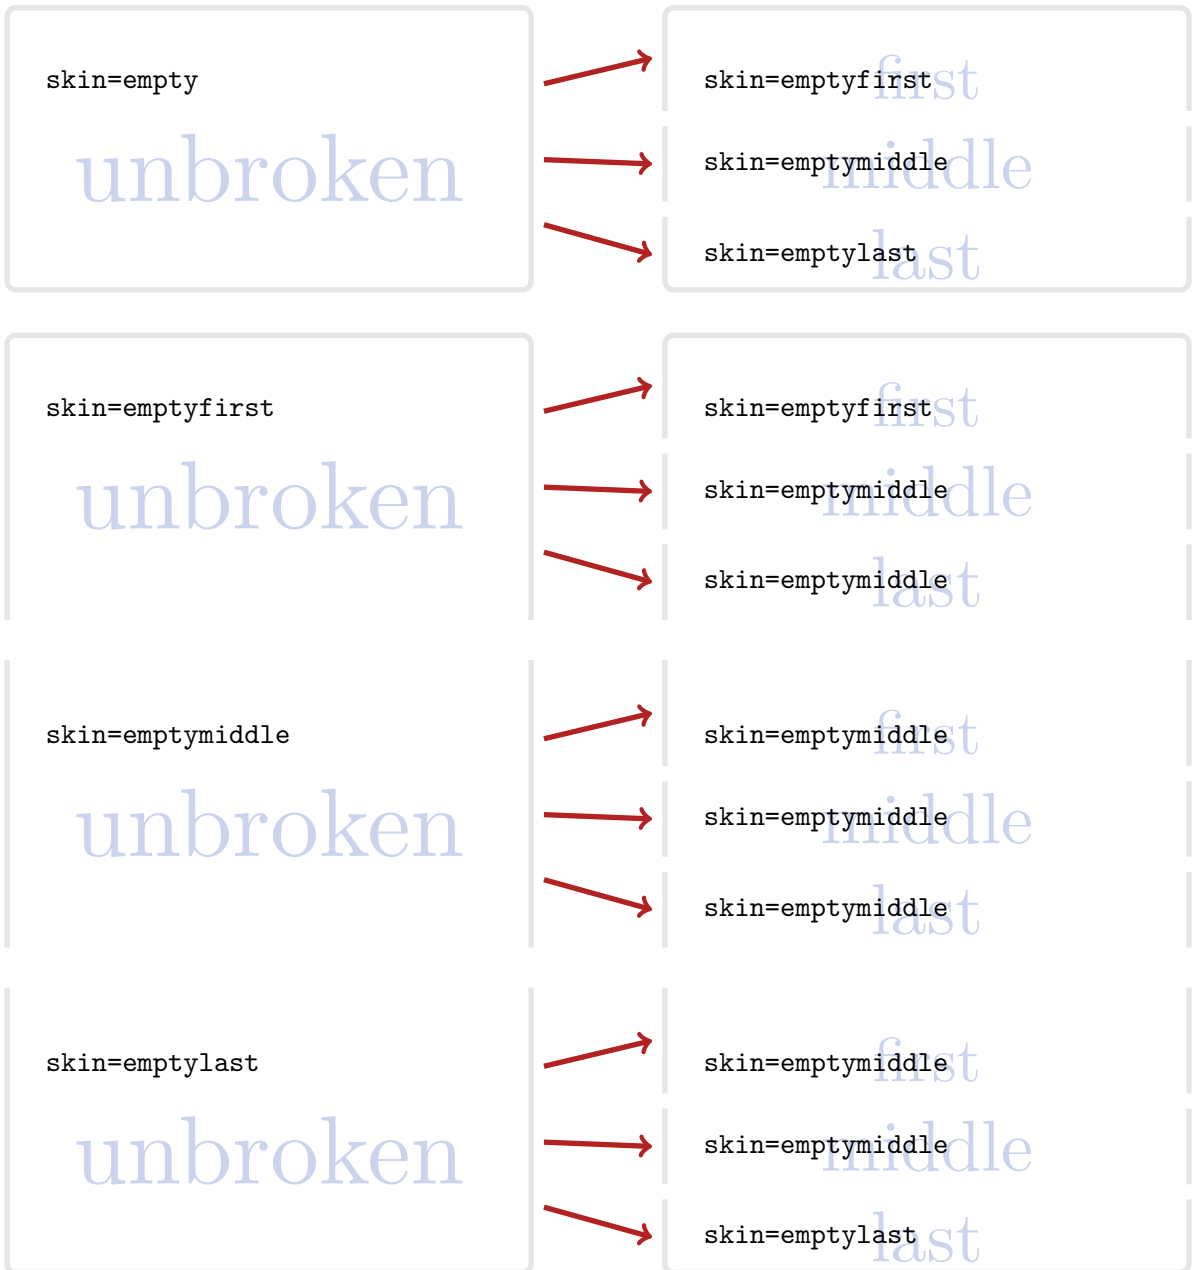




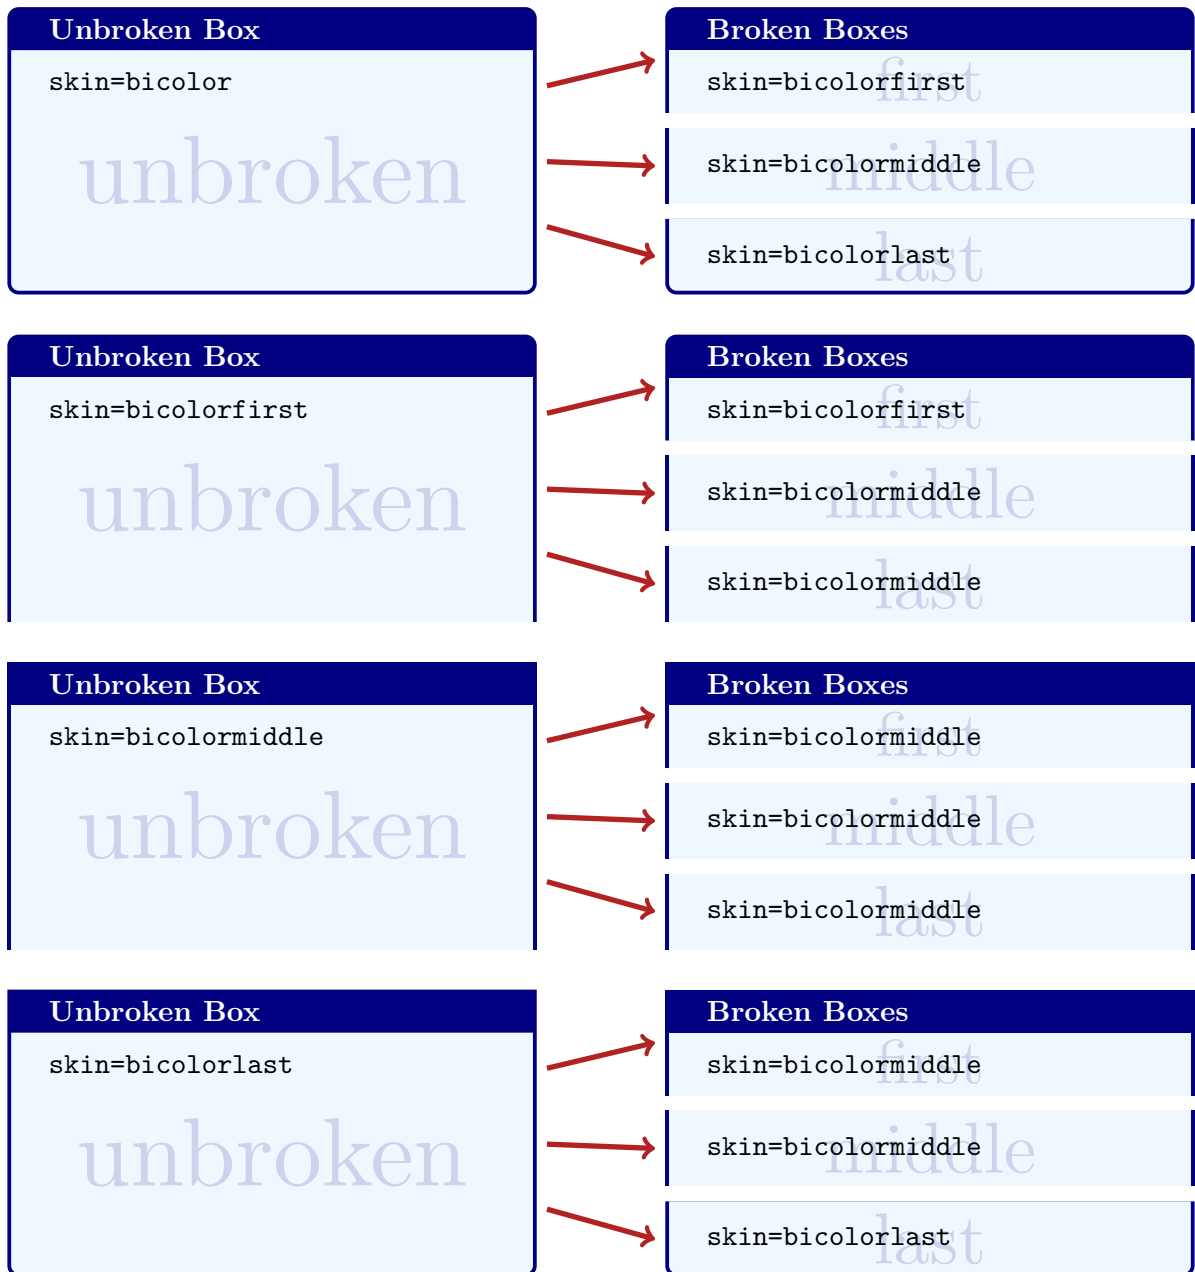








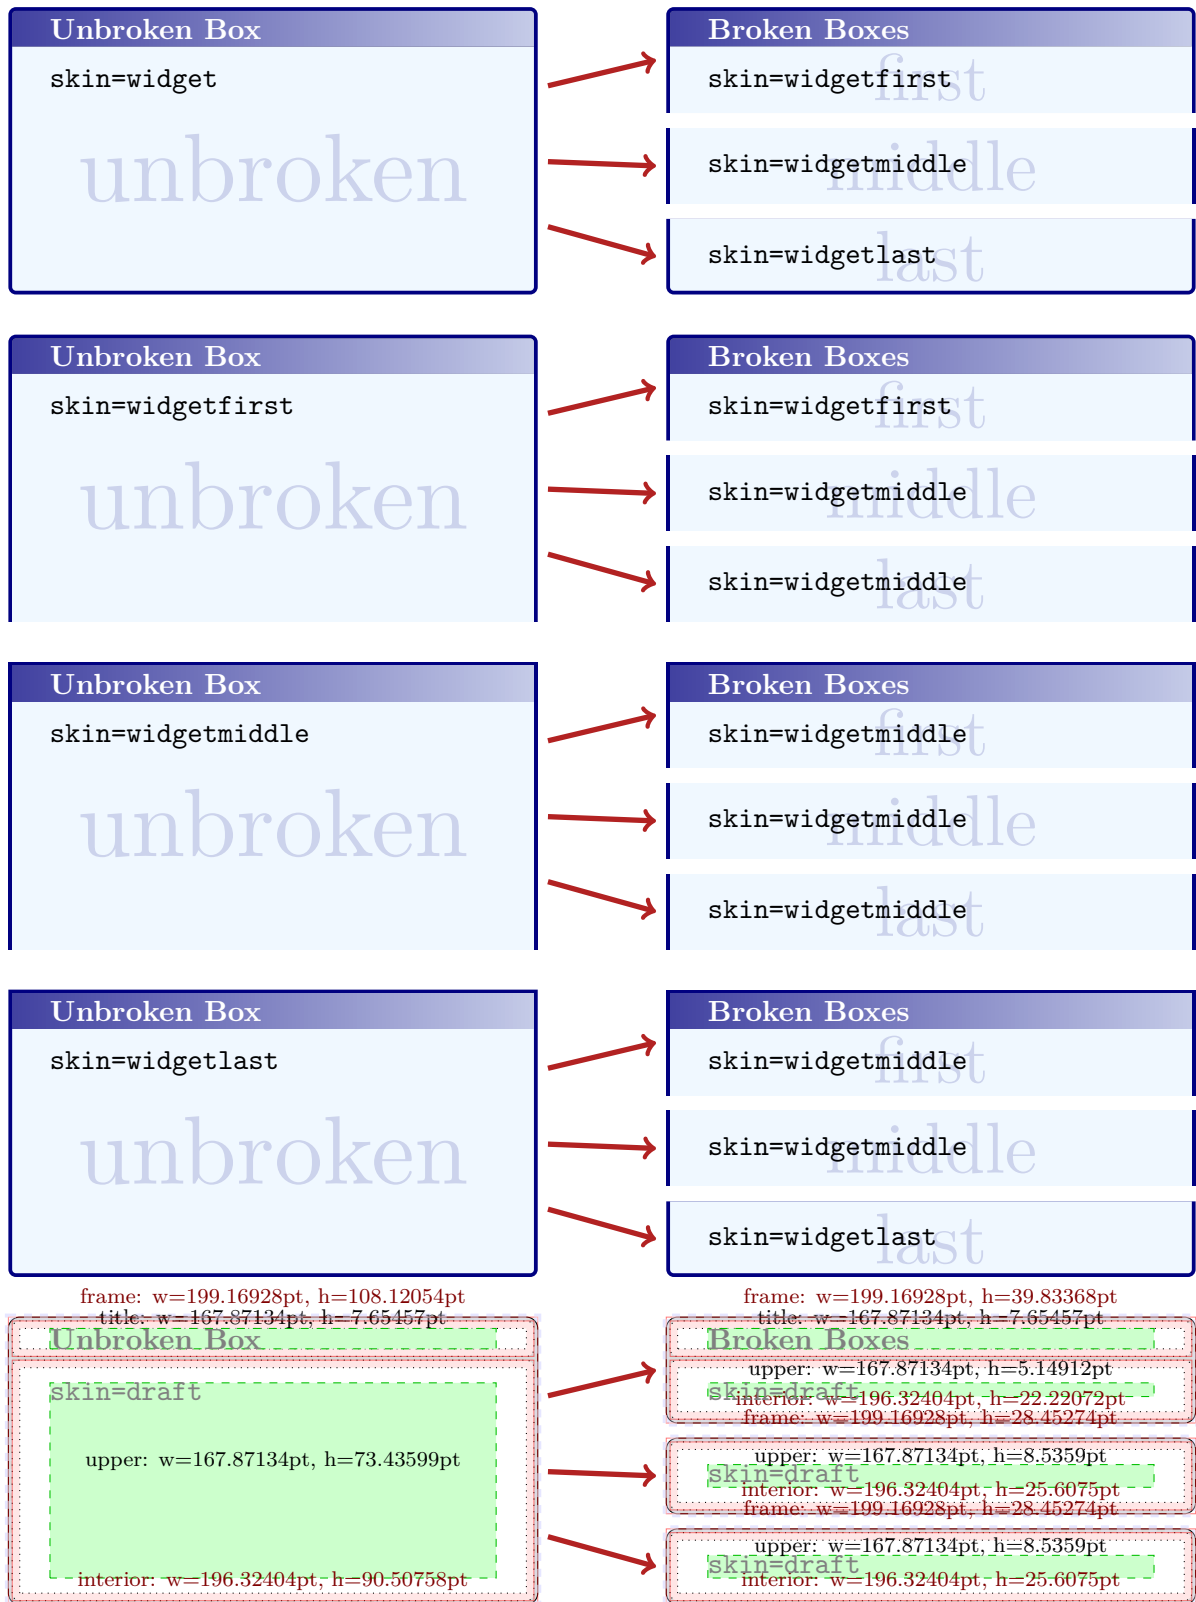



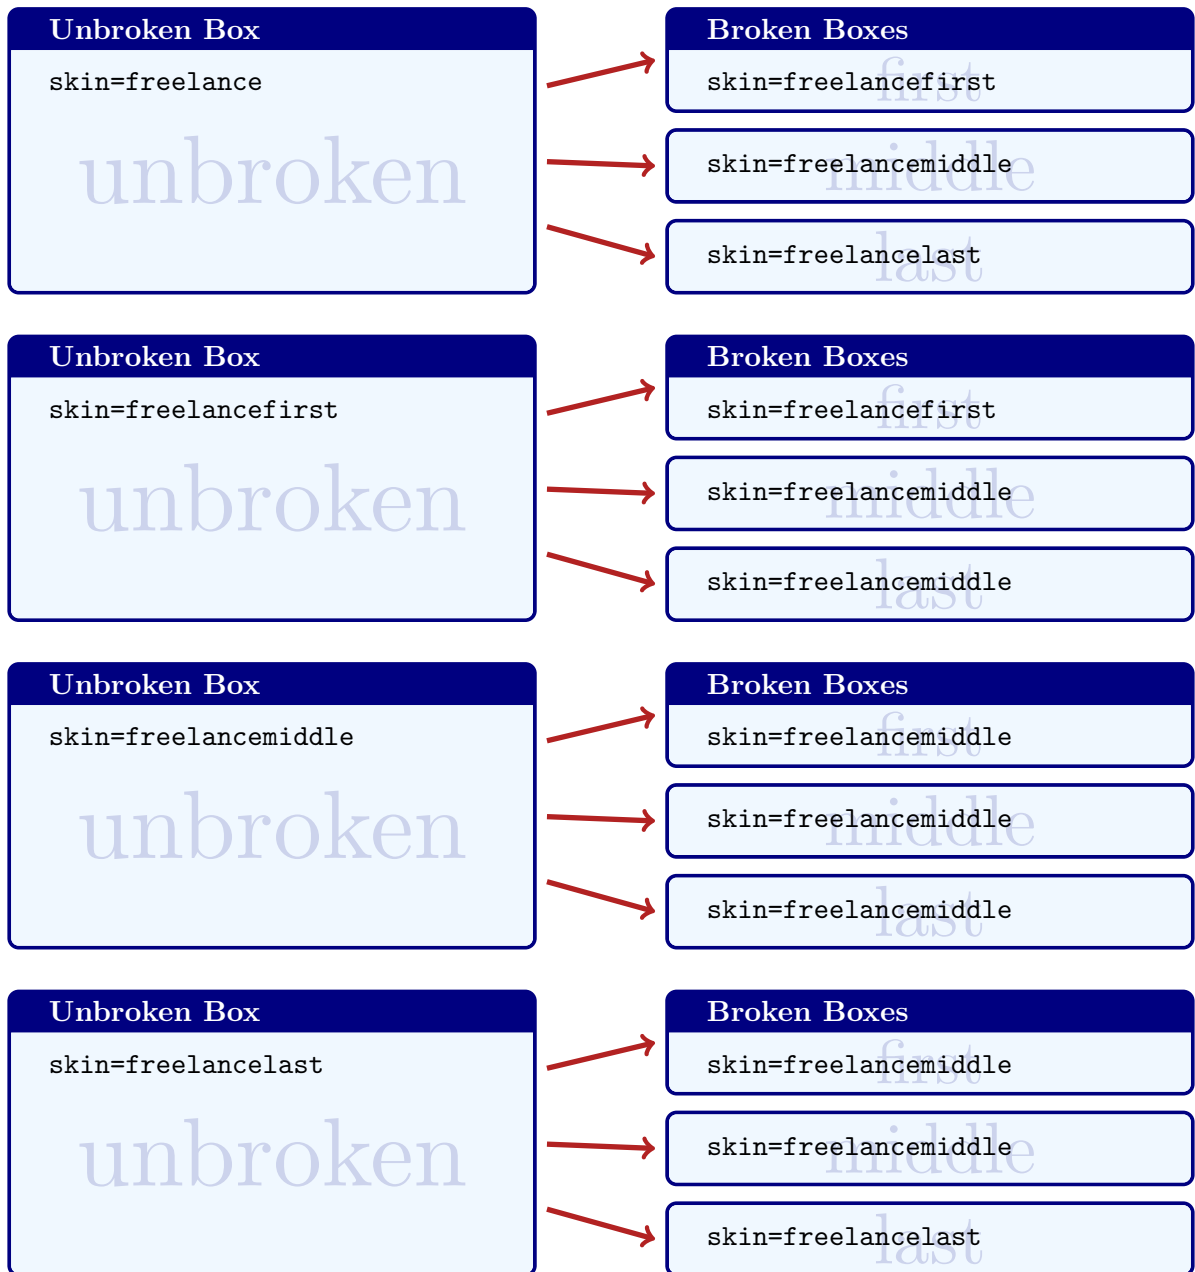



## 11.7 Break by Hand (Faked Break)

See Section 11.5 on page 255 for *real* column breaks.

Since the appearance of broken boxes is done by skins, it is quite easy to 'fake a break'. For this, you actually don't need the `lib breakable` library at all.

```
\tcbsset{enhanced,equal height group=fakedbreak,
  colback=LightGreen,colframe=DarkGreen,
  width=(\linewidth-6mm)/3,nobeforeafter,
  left=1mm,right=1mm,top=1mm,bottom=1mm,middle=1mm}
%
\begin{tcolorbox}[title=My broken box,skin=enhancedfirst]
This is a box which breaks from one column to another
\end{tcolorbox}\hfill
\begin{tcolorbox}[skin=enhancedmiddle]
column. I am sorry to say that this is a trick.
Nevertheless, you may use this trick for your
\end{tcolorbox}\hfill
\begin{tcolorbox}[skin=enhancedlast]
own purposes.
\end{tcolorbox}
```

My broken box

This is a box which breaks  
from one column to another

column. I am sorry to say that  
this is a trick. Nevertheless,  
you may use this trick for your

own purposes.



## 12 Library

The library is loaded by a package option or inside the preamble by:

```
\tcbuselibrary{fitting}
```

### 12.1 Macros of the Library

`\tcbboxfit[<options>]{<box content>}`

Creates a colored box where the given *<box content>* is fitted to the width and height of the box. A `tcbboxfit` has to have a fixed height. If no fixed height is given, a square box is constructed. In principal, most *<options>* for a `tcolorbox`<sup>→P.9</sup> can be used for `\tcbboxfit` with some restrictions. A `\tcbboxfit` cannot have a lower part and cannot be broken.

```
% \usepackage{lipsum}
\tcbset{colframe=blue!50!black,colback=red!10!white,
        boxsep=0pt,top=1mm,bottom=1mm,left=1mm,right=1mm,
        nobeforeafter,width=(\linewidth-2mm)/3}

\tcbboxfit[height=8cm]{\lipsum[1]}\hfill
\tcbboxfit[height=4cm]{\lipsum[1]}\hfill
\tcbboxfit[height=2cm]{\lipsum[1]}

\medskip
\tcbset{width=(\linewidth-2mm)/2,colback=green!10!white,boxsep=1mm}
\tcbboxfit[height=4cm]{\lipsum[2]}\hfill
\tcbboxfit[height=4cm,title=With a title]{\lipsum[2]}
```

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

#### With a title

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.



**\newtcboxfit** [*\init options*] {\<name>} [*\number*] [*\default*] {\<options>}

Creates a new macro \<name> based on \tcboxfit<sup>P. 267</sup>. Basically, \newtcboxfit operates like \newcommand. The new macro \<name> optionally takes <number>+1 arguments, where <default> is the default value for the optional first argument. The <options> are given to the underlying tcboxfit. The <init options> allow setting up automatic numbering, see Section 4 from page 78.

```
\newtcboxfit{\mybox}{colback=red!5!white,
colframe=red!75!black,width=4cm,
height=1.5cm,center upper}
```

```
\mybox{This is my own box.}\par
\mybox{This is my own box with more text
to be written.}
```

This is my own  
box.

This is my own box  
with more text to be  
written.

```
% \usepackage{lipsum}
\newtcboxfit{\mybox}[2]{colback=red!5!white,
colframe=red!75!black,fonttitle=\bfseries,
boxsep=1mm,left=0mm,right=0mm,top=0mm,
bottom=0mm,center upper,valign=center,
nobeeforeafter,width=#1,height=#2}
```

```
\mybox{2.5cm}{1cm}{First box}%
\mybox{2.5cm}{1cm}{Second box with more text}\\
\mybox{5cm}{2cm}{Third box with text}\\
\mybox{5cm}{3cm}{\lipsum[1]}
```

First box

Second box  
with more text

Third box with text

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

```
% \usepackage{lipsum}
\newtcboxfit{\mybox}[2][\colback=red!5!white,
colframe=red!75!black,
width=#2,height=#2/3*2,#1]
```

```
\mybox[colback=yellow]{5cm}%
{\lipsum[2]}
```

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

**\renewtcboxfit** [*\init options*] {\<name>} [*\number*] [*\default*] {\<options>}

Operates like \newtcboxfit, but based on \renewcommand instead of \newcommand. An existing macro is redefined.

**\tcbfontsize** {\<factor>}

Selects a font size inside a tcolorbox which is scaled with the given <factor> relative to \tcbfitdim.

```
\tcbset{colback=red!5!white,colframe=red!75!black}
\begin{tcolorbox}[fit basedim=10pt]
{\tcbfontsize{0.25} Very tiny,}\\
{\tcbfontsize{0.5} Small,}\\
{\tcbfontsize{1} Normal,}\\
{\tcbfontsize{2} Large,}\\
{\tcbfontsize{4} Huge.}
\end{tcolorbox}
```

Very tiny,

Small,

Normal,

Large,

Huge.



## 12.2 Option Keys of the Library

The font size for the content of a box with fixed width and fixed height can be adjusted automatically. This is called the *fitbox capture mode*. Note that the fit control algorithm constructs a series of versions for the box and selects the 'best'. Therefore, the compilation time is quite longer than for a normal box. The algorithm will fail, if a different selected font size does not change the overall size of the box content. The `\tcboxfit`<sup>→P.267</sup> macro uses this algorithm by default.

The fit control keys are only applicable to unbreakable boxes without a lower part. The box content should not change counters.

`/tcb/fit` (style, initially unset)

Sets the `/tcb/capture`<sup>→P.72</sup> mode to `fitbox`, i.e. enables the font size adjustment algorithm. Thereby, a `tcolorbox`<sup>→P.9</sup> acts like `\tcboxfit`<sup>→P.267</sup> where the given  $\langle box\ content \rangle$  is fitted to the width and height of the box. Therefore, the box has to have a fixed height. If no fixed height is given, a square box is constructed. The font dimension `\tcbfitdim` can also be used to adjust the margins of the box since a box with a tiny font may not need large margins. The number of constructed boxes is saved to the macro `\tcbfitsteps` for analysis.

```
% \usepackage{lipsum}
% \tcbuselibrary{skins}
\newtcolorbox{fitting}[2][]{fit,height=#2,boxsep=1pt,valign=center,opacityupper=0.5,
top=0.4\tcbfitdim,bottom=0.4\tcbfitdim,left=0.75\tcbfitdim,right=0.75\tcbfitdim,
enhanced,watermark text={\tcbfitsteps},colframe=blue!75!black,colback=white,#1}

\begin{fitting}{4cm}
\lipsum[1]
\end{fitting}

\begin{fitting}{2cm}
\lipsum[2]
\end{fitting}

\begin{fitting}{1cm}
\lipsum[3]
\end{fitting}
```

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec et mi. Nam vulputate metus eu enim. Vestibulum pellentesque felis eu massa.



`/tcb/fit to=<width> and <height>` (style, initially unset)  
 Shortcut for using `/tcb/fit`<sup>P. 269</sup> and setting the `<width>` and `<height>` values separately.

```
\tcbset{colback=red!5!white,colframe=red!75!black}

\begin{tcolorbox}[fit to=3cm and 2cm]
  This box content is fitted to the given
  dimensions.
\end{tcolorbox}
```

This box content is fitted to the given dimensions.

`/tcb/fit to height=<height>` (style, initially unset)  
 Shortcut for using `/tcb/fit`<sup>P. 269</sup> and setting the `<height>` value separately.

```
\tcbset{colback=red!5!white,colframe=red!75!black}

\begin{tcolorbox}[fit to height=2cm]
  This box content is fitted to the given
  height.
\end{tcolorbox}
```

This box content is fitted to the given height.

`/tcb/fit basedim=<length>` (no default, initially 10pt)  
 Sets the starting font dimension for the font size adjustment algorithm to `<length>`. The algorithm never enlarges this dimension.

```
\tcbset{colback=red!5!white,colframe=red!75!black}

\begin{tcolorbox}[fit to=4cm and 2cm]
  Too few words for the box.
\end{tcolorbox}

\begin{tcolorbox}[fit to=4cm and 2cm,
  fit basedim=50pt]
  Enough words for the box.
\end{tcolorbox}
```

Too few words for the box.

Enough words for the box.

`/tcb/fit skip=<real value>` (no default, initially 1.2)  
 Sets the skip value of the selected font to `<real value>` times `\tcbfitdim`.

```
% \usepackage{lipsum}
\tcbset{colback=red!5!white,
  colframe=red!75!black,left=1mm,
  right=1mm,boxsep=0mm}

\begin{tcolorbox}[fit to=5cm and 4cm,
  fit skip=1.0 ]
  \lipsum[1]
\end{tcolorbox}
```

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.



Redefines the standard L<sup>A</sup>T<sub>E</sub>X font size macros `\tiny`, `\scriptsize`, `\footnotesize`, `\small`, `\normalsize`, `\large`, `\Large`, `\LARGE`, `\huge`, and `\Huge`, to set font sizes relative to the current `\tcbfitdim`. Note that the display skip values for mathematical formulas are respected by the redefined macros.

```
% \usepackage{lipsum}
\tcbset{colback=red!5!white,
  colframe=red!75!black,left=1mm,
  right=1mm,boxsep=0mm}

\begin{tcolorbox}[fit to height=4cm]
  {\Large\bfseries This text is
    not adapted:\par}

  \lipsum[2]
\end{tcolorbox}

\begin{tcolorbox}[fit to height=4cm,
  fit fontsize macros ]
  {\Large\bfseries This text is adapted:\par}
  \lipsum[2]
\end{tcolorbox}
```

**This text is not adapted:**

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

**This text is adapted:**

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

```
\tcbset{colback=red!5!white,
  colframe=red!75!black,left=1mm,
  right=1mm,boxsep=0mm}

\let\realHuge=\Huge

\begin{tcolorbox}[fit basedim=7pt,
  fontupper=\normalsize,
  fit fontsize macros]
  The relative relative font size macros
  are also usable without the
  \textit{fit} algorithm.\par
  {\Huge Adapted Huge} ---
  {\realHuge Original Huge}
\end{tcolorbox}
```

The relative relative font size macros are also usable without the *fit* algorithm.

Adapted Huge —  
Original Huge



`/tcb/fit height plus=<dimension>` (no default, initially 0pt)

The box is allowed to enlarge the fixed height up to the given *<dimension>*, before a font size fit is applied. An optional `/tcb/fit width plus` is tried after the height adaption.

```
% \usepackage{lipsum}
\tcbset{colback=red!5!white,colframe=red!75!black,left=1mm,top=1mm,bottom=1mm,
right=1mm,boxsep=0mm,width=3cm,height=3cm,nobeforeafter}

\begin{tcolorbox}[fit]
This is a tcolorbox.
\end{tcolorbox}
\begin{tcolorbox}[fit,fit height plus=1cm]
This is a tcolorbox.
\end{tcolorbox}
\begin{tcolorbox}[fit]
\lipsum[2]
\end{tcolorbox}
\begin{tcolorbox}[fit,fit height plus=1cm]
\lipsum[2]
\end{tcolorbox}
```

This is a tcolorbox.

This is a tcolorbox.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

`/tcb/fit width plus=<dimension>` (no default, initially 0pt)

The box is allowed to enlarge the fixed width up to the given *<dimension>*, before a font size fit is applied. An optional `/tcb/fit height plus` is tried before the width adaption.

```
% \usepackage{lipsum}
\tcbset{colback=red!5!white,colframe=red!75!black,left=1mm,top=1mm,bottom=1mm,
right=1mm,boxsep=0mm,width=3cm,height=3cm,nobeforeafter}

\begin{tcolorbox}[fit]
This is a tcolorbox.
\end{tcolorbox}
\begin{tcolorbox}[fit,fit width plus=1cm]
This is a tcolorbox.
\end{tcolorbox}
\begin{tcolorbox}[fit]
\lipsum[2]
\end{tcolorbox}
\begin{tcolorbox}[fit,fit width plus=1cm]
\lipsum[2]
\end{tcolorbox}
```

This is a tcolorbox.

This is a tcolorbox.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.



Typically, the optional title of a `tcolorbox` is not part of the fit operation. If a `/tcb/fit width plus` is applied, the title is also adapted to the new width. If counters are increased inside the title text, they may be increased more than one time. To avoid this, you are encouraged to use `/tcb/phantom`<sup>→ P. 75</sup> or `/tcb/step and label`<sup>→ P. 75</sup> to set counters or use automatic numbering, see Subsection 4.1 from page 78.

`/tcb/fit width from=<min> to <max>` (style, no default)  
Sets the box width to `<min>` and allows the width to grow up to `<max>`.

```
% \usepackage{lipsum}
\tcbset{colback=red!5!white,colframe=red!75!black,left=1mm,top=1mm,bottom=1mm,
right=1mm,boxsep=0mm,height=4cm}

\begin{tcolorbox}[fit,width=\linewidth/2]
\lipsum[2]
\end{tcolorbox}\par
\begin{tcolorbox}[fit width from=\linewidth/2 to \linewidth]
\lipsum[2]
\end{tcolorbox}\par
```

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.



`/tcb/fit height from= $\langle min \rangle$  to  $\langle max \rangle$`  (style, no default)

Sets the box height to  $\langle min \rangle$  and allows the height to grow up to  $\langle max \rangle$ .

```
% \usepackage{lipsum}
\newtcolorbox{mybox}{colback=red!5!white,colframe=red!75!black,left=1mm,top=1mm,
  bottom=1mm,right=1mm,boxsep=0mm,width=4cm,nobeforeafter,
  fit height from=1cm to 8cm}

\begin{mybox}
This is a tcolorbox.
\end{mybox}
\begin{mybox}
This is a tcolorbox. This is a tcolorbox. This is a tcolorbox.
\end{mybox}
\begin{mybox}
\lipsum[2]
\end{mybox}
```

This is a tcolorbox.

This is a tcolorbox. This is a tcolorbox. This is a tcolorbox.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.



`/tcb/fit algorithm=<name>` (no default, initially `fontsize`)

Sets the algorithm for the fitting process *after* optionally width and height are adapted.

Feasible values for `<name>` are:

- **fontsize** (initial): The algorithm is a bisection method that adapts the font size until certain stop conditions are fulfilled. This is the most time-consuming method but it is robust and gives pleasant results.

The used font has to be freely scalable for this method! Other content than text is not scaled down. The aspect ratio is fully guaranteed.

- **areaseize**: The algorithm calculates the area size for the text without scaling the font. The text box is shaped for the needed aspect ratio in one or two steps. Finally, it is scaled down with a standard `\resizebox` macro.

The used font has not to be scalable. Every box content is scaled down. The aspect ratio cannot be fully guaranteed.

- **hybrid**: First, this algorithm estimates the needed font size in one or two steps. Then an `areaseize` fitting as above is applied.

The used font has to be freely scalable for this method! Other content than text may be slightly rescaled. The aspect ratio cannot be fully guaranteed.





- **squeeze**: The text box is brutally scaled down to fit.

The aspect ratio is very likely to be horrible. You should not use this method for final documents.

```
% \usepackage{lipsum}
\newtcbboxfit[mybox][1]{colback=red!5!white,colframe=red!75!black,left=1mm,top=1mm,
  bottom=1mm,right=1mm,boxsep=0mm,width=3.5cm,height=7cm,nobeforeafter,
  before upper=\textcolor{blue}{\rule{5mm}{5mm}}\ ,
  enhanced,watermark text={\tcbfitsteps},
  fonttitle=\bfseries,adjusted title=#1,fit algorithm=#1}
```

```
\mybox{fontsize}{\lipsum[2]}\hfill
\mybox{hybrid}{\lipsum[2]}\hfill
\mybox{areaseize}{\lipsum[2]}\hfill
\mybox{squeeze}{\lipsum[2]}
```

Quality `\dotfill` versus `\dotfill` Speed

fontsize	hybrid	areaseize	squeeze
 Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.	 Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.	 Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.	 Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Quality ..... versus ..... Speed



The following options set control parameters for the fit algorithm. Mainly, they apply to the `fontsize` variant, see [/tcb/fit algorithm](#) <sup>P. 275</sup>. The options should be seen as experimental and are likely to change in future versions, if necessary.

`/tcb/fit maxstep=<number>` (no default, initially 20)

Sets the maximal step size for the font size adjustment algorithm. In normal situations, the algorithm stops before reaching the initial value of 20 steps. If the box content does not shrink, this value prevents an endless loop.

`/tcb/fit maxfontdiff=<dimension>` (no default, initially 0.1pt)

The algorithm stops, if the font size is determined within a deviation of *<dimension>*.

`/tcb/fit maxfontdiffgap=<dimension>` (no default, initially 1pt)

The algorithm stops, if the number of lines is determined and the font size is determined within a deviation of *<dimension>*.

`/tcb/fit maxwidthdiff=<dimension>` (no default, initially 1pt)

The algorithm stops, if the (optionally) flexible box width is determined within a deviation of *<dimension>*.

`/tcb/fit maxwidthdiffgap=<dimension>` (no default, initially 10pt)

The algorithm stops, if the number of lines is determined and the (optionally) flexible box width is determined within a deviation of *<dimension>*.

`/tcb/fit warning=<value>` (no default, initially off)

Typically, the fit control algorithm constructs several auxiliary boxes to determine the optimal one. If not switched off, the construction of the auxiliary boxes may produce many `hbox` warnings. This option key changes the `\hbadness` value.

- **off**: Most of 'Underfull `\hbox`' and 'Overfull `\hbox`' warnings are switched off (including the ones for the finally used box).
- **on**: All warnings for all auxiliary boxes are displayed.
- **final**: Only warnings for the finally used box are displayed. Note that an additional box has to be constructed for these messages.



## 13 Library LIB hooks

The library is loaded by a package option or inside the preamble by:

```
\tcbuselibrary{hooks}
```

For the skin related options, the library LIB skins has to be loaded separately.

### 13.1 Concept of Hooks

A hook is a placeholder in some L<sup>A</sup>T<sub>E</sub>X code where additional code can be added. For example, the L<sup>A</sup>T<sub>E</sub>X macro `\AtBeginDocument` adds code to a hook which is placed at the beginning of every document.

Several option keys of `tcolorbox` allow providing some code which is added to specific places of a colored box. For example, `/tcb/before upper`<sup>→ P. 44</sup> places code before the content of the upper part. A following usage of this key overwrites any prior settings.

The library LIB hooks extends `/tcb/before upper`<sup>→ P. 44</sup> and several more existing keys to 'hookable' versions, e.g. `/tcb/before upper app`<sup>→ P. 278</sup> and `/tcb/before upper pre`<sup>→ P. 278</sup>. The 'hookable' keys don't overwrite prior settings but either *append* or *prepend* the newly given code to the existing code.

The general naming convention (with some small exceptions) is:

- `<option key> app`: works like `<option key>` but *appends* its code to the existing code.
- `<option key> pre`: works like `<option key>` but *prepends* its code to the existing code.

If the original `<option key>` is used (again), all code will be overwritten. Therefore, the order of the option key usage is crucial.

```
% \usepackage{array, tabularx}
\newcolumntype{Y}{>{\raggedleft\arraybackslash}X}% see tabularx
\tcbset{enhanced,fonttitle=\bfseries\large,fontupper=\normalsize\sfamily,
colback=yellow!10!white,colframe=red!50!black,colbacktitle=Salmon!30!white,
coltitle=black,center title,
tabularx={X||Y|Y|Y|Y|Y},% this sets 'before upper' and 'after upper'
before upper app={Group & One & Two & Three & Four & Sum\\hline\hline} }

\begin{tcolorbox}[title=My table]
Red & 1000.00 & 2000.00 & 3000.00 & 4000.00 & 10000.00\\hline
Green & 2000.00 & 3000.00 & 4000.00 & 5000.00 & 14000.00\\hline
Blue & 3000.00 & 4000.00 & 5000.00 & 6000.00 & 18000.00\\hline\hline
Sum & 6000.00 & 9000.00 & 12000.00 & 15000.00 & 42000.00
\end{tcolorbox}
```

My table					
Group	One	Two	Three	Four	Sum
Red	1000.00	2000.00	3000.00	4000.00	10000.00
Green	2000.00	3000.00	4000.00	5000.00	14000.00
Blue	3000.00	4000.00	5000.00	6000.00	18000.00
Sum	6000.00	9000.00	12000.00	15000.00	42000.00



## 13.2 Box Content Additions

The following option keys extend the options given in Subsection 3.8 from page 44.

**/tcb/before title app**= $\langle code \rangle$  (no default)

Appends the given  $\langle code \rangle$  to `/tcb/before title`<sup>→P.44</sup> *after* the color and font settings and *before* the content of the title.

**/tcb/before title pre**= $\langle code \rangle$  (no default)

Prepends the given  $\langle code \rangle$  to `/tcb/before title`<sup>→P.44</sup> *after* the color and font settings and *before* the content of the title.

**/tcb/after title app**= $\langle code \rangle$  (no default)

Appends the given  $\langle code \rangle$  to `/tcb/after title`<sup>→P.44</sup> *after* the content of the title.

**/tcb/after title pre**= $\langle code \rangle$  (no default)

Prepends the given  $\langle code \rangle$  to `/tcb/after title`<sup>→P.44</sup> *after* the content of the title.

**/tcb/before upper app**= $\langle code \rangle$  (no default)

Appends the given  $\langle code \rangle$  to `/tcb/before upper`<sup>→P.44</sup> *after* the color and font settings and *before* the content of the upper part.

**/tcb/before upper pre**= $\langle code \rangle$  (no default)

Prepends the given  $\langle code \rangle$  to `/tcb/before upper`<sup>→P.44</sup> *after* the color and font settings and *before* the content of the upper part.

**/tcb/after upper app**= $\langle code \rangle$  (no default)

Appends the given  $\langle code \rangle$  to `/tcb/after upper`<sup>→P.45</sup> *after* the content of the upper part.

**/tcb/after upper pre**= $\langle code \rangle$  (no default)

Prepends the given  $\langle code \rangle$  to `/tcb/after upper`<sup>→P.45</sup> *after* the content of the upper part.

```
% \tcbuselibrary{theorems}
\tcbset{ams align,% this sets 'before upper' and 'after upper'
  colback=yellow!10!white,colframe=red!50!black,
  before upper app={\frac{2}{\sqrt{2}}&=\sqrt{2}.\\},
  after upper pre={\\sin\left(\frac{\pi}{2}\right)&=1.},
}

\begin{tcolorbox}
  \sum\limits_{n=1}^{\infty} \frac{1}{n} &= \infty.\\
  \int x^2 \sim \text{d}x &= \frac{1}{3} x^3 + c.
\end{tcolorbox}
```

$$\frac{2}{\sqrt{2}} = \sqrt{2}. \quad (22)$$

$$\sum_{n=1}^{\infty} \frac{1}{n} = \infty. \quad (23)$$

$$\int x^2 \, dx = \frac{1}{3} x^3 + c. \quad (24)$$

$$\sin\left(\frac{\pi}{2}\right) = 1. \quad (25)$$



- `/tcb/before lower app=<code>` (no default)  
 Appends the given `<code>` to `/tcb/before lower`<sup>→ P. 45</sup> *after* the color and font settings and *before* the content of the lower part.
- `/tcb/before lower pre=<code>` (no default)  
 Prepends the given `<code>` to `/tcb/before lower`<sup>→ P. 45</sup> *after* the color and font settings and *before* the content of the lower part.
- `/tcb/after lower app=<code>` (no default)  
 Appends the given `<code>` to `/tcb/after lower`<sup>→ P. 45</sup> *after* the content of the lower part.
- `/tcb/after lower pre=<code>` (no default)  
 Prepends the given `<code>` to `/tcb/after lower`<sup>→ P. 45</sup> *after* the content of the lower part.

### 13.3 Embedding into the Surroundings

The following option keys extend the options given in Subsection 3.12 from page 62.

The 'hookable' versions are usable inside the document. In the preamble, they can only be used after explicit setting of `/tcb/before`<sup>→ P. 62</sup> and `/tcb/after`<sup>→ P. 62</sup> or by e. g. `/tcb/parskip`<sup>→ P. 62</sup>.

- `/tcb/before app=<code>` (no default)  
 Appends the given `<code>` to `/tcb/before`<sup>→ P. 62</sup> before the colored box.
- `/tcb/before pre=<code>` (no default)  
 Prepends the given `<code>` to `/tcb/before`<sup>→ P. 62</sup> before the colored box.
- `/tcb/after app=<code>` (no default)  
 Appends the given `<code>` to `/tcb/after`<sup>→ P. 62</sup> after the colored box.
- `/tcb/after pre=<code>` (no default)  
 Prepends the given `<code>` to `/tcb/after`<sup>→ P. 62</sup> after the colored box.

```
\tcbset{colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries}

\begin{tcolorbox}[title=My title,before app={The box follows:\\[4pt]},
  after app={This is the end.}]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

The box follows:

**My title**

This is a **tcolorbox**.

This is the end.



## 13.4 Overlays

The following option keys extend the options given in Subsection 3.9 from page 53.


**/tcb/overlay app**=*<graphical code>* (no default)

Appends the given *<graphical code>* to `/tcb/overlay`<sup>→ P. 53</sup>.

```
% \usetikzlibrary{patterns} % preamble
% \tcbuselibrary{skins} % preamble
\tcbset{frogbox/.style={enhanced,colback=green!10,colframe=green!65!black,
  enlarge top by=5.5mm,
  overlay={\foreach \x in {2cm,3.5cm} {
    \begin{scope}[shift={([xshift=\x]frame.north west)}]
      \path[draw=green!65!black,fill=green!10,line width=1mm] (0,0) arc (0:180:5mm);
      \path[fill=black] (-0.2,0) arc (0:180:1mm);
    \end{scope}}}}
\tcbset{ribbon/.style={overlay app={%
  \path[fill=blue!75!white,draw=blue,double=white!85!blue,
    preaction={opacity=0.6,fill=blue!75!white},
    line width=0.1mm,double distance=0.2mm,
    pattern=fivepointed stars,pattern color=white!75!blue]
    ([xshift=-0.2mm,yshift=-1.02cm]frame.north east)
    -- ++(-1,1) -- ++(-0.5,0) -- ++(1.5,-1.5) -- cycle;}}}

\begin{tcolorbox}[frogbox,title=My title]
This is a \textbf{tcolorbox}.
\end{tcolorbox}

\begin{tcolorbox}[frogbox,ribbon,title=My title]
This is a \textbf{tcolorbox}.\par
Here, we apply a second overlay.
\end{tcolorbox}
```

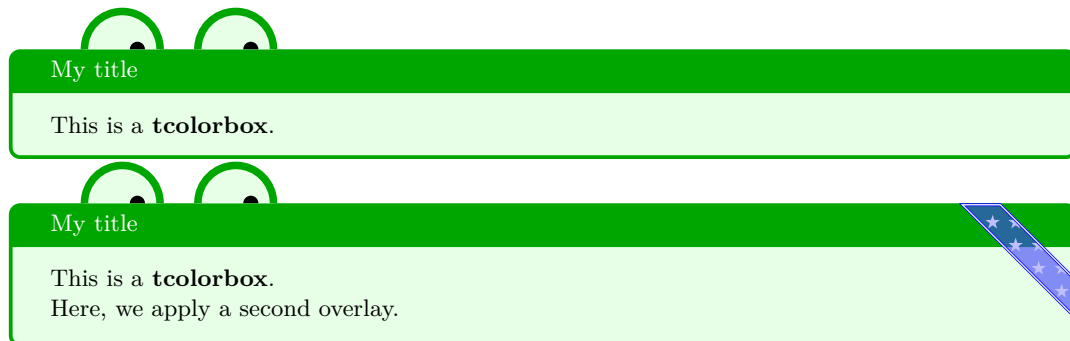

**/tcb/overlay pre**=*<graphical code>* (no default)

Prepends the given *<graphical code>* to `/tcb/overlay`<sup>→ P. 53</sup>.

**/tcb/overlay unbroken app**=*<graphical code>* (no default)

Appends the given *<graphical code>* to `/tcb/overlay unbroken`<sup>→ P. 54</sup>.

**/tcb/overlay unbroken pre**=*<graphical code>* (no default)

Prepends the given *<graphical code>* to `/tcb/overlay unbroken`<sup>→ P. 54</sup>.

**/tcb/overlay first app**=*<graphical code>* (no default)

Appends the given *<graphical code>* to `/tcb/overlay first`<sup>→ P. 54</sup>.

**/tcb/overlay first pre**=*<graphical code>* (no default)

Prepends the given *<graphical code>* to `/tcb/overlay first`<sup>→ P. 54</sup>.



<code>/tcb/overlay middle app=&lt;graphical code&gt;</code>	(no default)
Appends the given <i>&lt;graphical code&gt;</i> to <code>/tcb/overlay middle</code> <sup>→ P. 54</sup> .	
<code>/tcb/overlay middle pre=&lt;graphical code&gt;</code>	(no default)
Prepends the given <i>&lt;graphical code&gt;</i> to <code>/tcb/overlay middle</code> <sup>→ P. 54</sup> .	
<code>/tcb/overlay last app=&lt;graphical code&gt;</code>	(no default)
Appends the given <i>&lt;graphical code&gt;</i> to <code>/tcb/overlay last</code> <sup>→ P. 54</sup> .	
<code>/tcb/overlay last pre=&lt;graphical code&gt;</code>	(no default)
Prepends the given <i>&lt;graphical code&gt;</i> to <code>/tcb/overlay last</code> <sup>→ P. 54</sup> .	
<code>/tcb/overlay broken app=&lt;graphical code&gt;</code>	(no default)
Appends the given <i>&lt;graphical code&gt;</i> to <code>/tcb/overlay broken</code> <sup>→ P. 54</sup> .	
<code>/tcb/overlay broken pre=&lt;graphical code&gt;</code>	(no default)
Prepends the given <i>&lt;graphical code&gt;</i> to <code>/tcb/overlay broken</code> <sup>→ P. 54</sup> .	
<code>/tcb/overlay unbroken and first app=&lt;graphical code&gt;</code>	(no default)
Appends the given <i>&lt;graphical code&gt;</i> to <code>/tcb/overlay unbroken and first</code> <sup>→ P. 54</sup> .	
<code>/tcb/overlay unbroken and first pre=&lt;graphical code&gt;</code>	(no default)
Prepends the given <i>&lt;graphical code&gt;</i> to <code>/tcb/overlay unbroken and first</code> <sup>→ P. 54</sup> .	
<code>/tcb/overlay middle and last app=&lt;graphical code&gt;</code>	(no default)
Appends the given <i>&lt;graphical code&gt;</i> to <code>/tcb/overlay middle and last</code> <sup>→ P. 54</sup> .	
<code>/tcb/overlay middle and last pre=&lt;graphical code&gt;</code>	(no default)
Prepends the given <i>&lt;graphical code&gt;</i> to <code>/tcb/overlay middle and last</code> <sup>→ P. 54</sup> .	
<code>/tcb/overlay unbroken and last app=&lt;graphical code&gt;</code>	(no default)
Appends the given <i>&lt;graphical code&gt;</i> to <code>/tcb/overlay unbroken and last</code> <sup>→ P. 54</sup> .	
<code>/tcb/overlay unbroken and last pre=&lt;graphical code&gt;</code>	(no default)
Prepends the given <i>&lt;graphical code&gt;</i> to <code>/tcb/overlay unbroken and last</code> <sup>→ P. 54</sup> .	



## 13.5 Watermarks

The following option keys extend the options given in Subsection 7.3 from page 109.

Watermarks are special overlays. The `\tcbhooks` library allows the combination of several watermarks and overlays.

`/tcb/watermark text app=<text>` (no default)

Appends a `/tcb/watermark text` <sup>→ P. 109</sup> to the colored box.

```
\tcbset{colback=red!5!white,colframe=red!75!black,fonttttitle=\bfseries}

\begin{tcolorbox}[enhanced,title=My title,watermark graphics=Basilica_5.png,
  watermark opacity=0.25,
  watermark text app=Basilica,watermark color=Navy
]
\lipsum[1-2]
\tcblower
This example uses a public domain picture from\
\url{http://commons.wikimedia.org/wiki/File:Basilica_5.png}
\end{tcolorbox}
```

### My title

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

This example uses a public domain picture from  
[http://commons.wikimedia.org/wiki/File:Basilica\\_5.png](http://commons.wikimedia.org/wiki/File:Basilica_5.png)

`/tcb/watermark text pre=<text>` (no default)

Prepends a `/tcb/watermark text` <sup>→ P. 109</sup> to the colored box.

`/tcb/watermark text app on=<part> is <text>` (no default)

Appends a `/tcb/watermark text on` <sup>→ P. 109</sup> the named `<part>` of a break sequence.

`/tcb/watermark text pre on=<part> is <text>` (no default)

Prepends a `/tcb/watermark text on` <sup>→ P. 109</sup> the named `<part>` of a break sequence.



- `/tcb/watermark graphics app=<file name>` (no default)  
 Appends a `/tcb/watermark graphics` <sup>→ P.110</sup> referenced by `<file name>` to the colored box.
- `/tcb/watermark graphics pre=<file name>` (no default)  
 Prepends a `/tcb/watermark graphics` <sup>→ P.110</sup> referenced by `<file name>` to the colored box.
- `/tcb/watermark graphics app on=<part> is <file name>` (no default)  
 Appends a `/tcb/watermark graphics on` <sup>→ P.110</sup> the named `<part>` of a break sequence.  
 The picture is referenced by `<file name>`.
- `/tcb/watermark graphics pre on=<part> is <file name>` (no default)  
 Prepends a `/tcb/watermark graphics on` <sup>→ P.110</sup> the named `<part>` of a break sequence.  
 The picture is referenced by `<file name>`.
- `/tcb/watermark tikz app=<graphical code>` (no default)  
 Appends a `/tcb/watermark tikz` <sup>→ P.111</sup> with the given `tikz <graphical code>` to the colored box.
- `/tcb/watermark tikz pre=<graphical code>` (no default)  
 Prepends a `/tcb/watermark tikz` <sup>→ P.111</sup> with the given `tikz <graphical code>` to the colored box.

```
% \usepackage{tikz}
\tcbset{colback=red!5!white,colframe=red!75!black,fonttttitle=\bfseries,
  watermark color=Navy,watermark opacity=0.25,
  smiley/.style={watermark tikz pre={%
    \path[fill=yellow,draw=yellow!75!red] (0,0) circle (1cm);
    \fill[red] (45:5mm) circle (1mm);
    \fill[red] (135:5mm) circle (1mm);
    \draw[line width=1mm,red] (215:5mm) arc (215:325:5mm);}}}

\begin{tcolorbox}[enhanced,title=My title, watermark text=Watermark,
  smiley]
\lipsum[1-2]
\end{tcolorbox}
```

#### My title

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

- `/tcb/watermark tikz app on=<part> is <graphical code>` (no default)  
 Appends a `/tcb/watermark tikz on` <sup>→ P.111</sup> the named `<part>` of a break sequence.
- `/tcb/watermark tikz pre on=<part> is <graphical code>` (no default)  
 Prepends a `/tcb/watermark tikz on` <sup>→ P.111</sup> the named `<part>` of a break sequence.



## 13.6 Underlays

The following option keys extend the options given in Section 7.8 on page 136. There are no app type keys since underlays are stackable by default.

**/tcb/underlay pre=***<graphical code>* (no default)

Prepends the given *<graphical code>* to `/tcb/underlay`<sup>→P. 136</sup>.

**/tcb/underlay unbroken pre=***<graphical code>* (no default)

Prepends the given *<graphical code>* to `/tcb/underlay unbroken`<sup>→P. 137</sup>.

**/tcb/underlay first pre=***<graphical code>* (no default)

Prepends the given *<graphical code>* to `/tcb/underlay first`<sup>→P. 137</sup>.

**/tcb/underlay middle pre=***<graphical code>* (no default)

Prepends the given *<graphical code>* to `/tcb/underlay middle`<sup>→P. 137</sup>.

**/tcb/underlay last pre=***<graphical code>* (no default)

Prepends the given *<graphical code>* to `/tcb/underlay last`<sup>→P. 137</sup>.

**/tcb/underlay boxed title pre=***<graphical code>* (no default)

Prepends the given *<graphical code>* to `/tcb/underlay boxed title`<sup>→P. 137</sup>.

**/tcb/underlay broken pre=***<graphical code>* (no default)

Prepends the given *<graphical code>* to `/tcb/underlay broken`<sup>→P. 137</sup>.

**/tcb/underlay unbroken and first pre=***<graphical code>* (no default)

Prepends the given *<graphical code>* to `/tcb/underlay unbroken and first`<sup>→P. 137</sup>.

**/tcb/underlay middle and last pre=***<graphical code>* (no default)

Prepends the given *<graphical code>* to `/tcb/underlay middle and last`<sup>→P. 137</sup>.

**/tcb/underlay unbroken and last pre=***<graphical code>* (no default)

Prepends the given *<graphical code>* to `/tcb/underlay unbroken and last`<sup>→P. 137</sup>.



## 13.7 Finishes

The following option keys extend the options given in Section 7.9 on page 138. There are no app type keys since finishes are stackable by default.

**/tcb/finish pre**=*<graphical code>* (no default)  
Prepends the given *<graphical code>* to */tcb/finish*<sup>→ P. 138</sup>.

**/tcb/finish unbroken pre**=*<graphical code>* (no default)  
Prepends the given *<graphical code>* to */tcb/finish unbroken*<sup>→ P. 139</sup>.

**/tcb/finish first pre**=*<graphical code>* (no default)  
Prepends the given *<graphical code>* to */tcb/finish first*<sup>→ P. 139</sup>.

**/tcb/finish middle pre**=*<graphical code>* (no default)  
Prepends the given *<graphical code>* to */tcb/finish middle*<sup>→ P. 139</sup>.

**/tcb/finish last pre**=*<graphical code>* (no default)  
Prepends the given *<graphical code>* to */tcb/finish last*<sup>→ P. 139</sup>.

**/tcb/finish broken pre**=*<graphical code>* (no default)  
Prepends the given *<graphical code>* to */tcb/finish broken*<sup>→ P. 139</sup>.

**/tcb/finish unbroken and first pre**=*<graphical code>* (no default)  
Prepends the given *<graphical code>* to */tcb/finish unbroken and first*<sup>→ P. 139</sup>.

**/tcb/finish middle and last pre**=*<graphical code>* (no default)  
Prepends the given *<graphical code>* to */tcb/finish middle and last*<sup>→ P. 139</sup>.

**/tcb/finish unbroken and last pre**=*<graphical code>* (no default)  
Prepends the given *<graphical code>* to */tcb/finish unbroken and last*<sup>→ P. 139</sup>.

## 13.8 Skin Code

The following option keys extend the options given in Subsection 6.2 from page 88.

**/tcb/frame code app**=*<graphical code>* (no default)  
Appends the given *<graphical code>* to */tcb/frame code*<sup>→ P. 88</sup>.

**/tcb/frame code pre**=*<graphical code>* (no default)  
Prepends the given *<graphical code>* to */tcb/frame code*<sup>→ P. 88</sup>.

**/tcb/interior titled code app**=*<graphical code>* (no default)  
Appends the given *<graphical code>* to */tcb/interior titled code*<sup>→ P. 88</sup>.



```

\begin{tcolorbox}[title=My title,enhanced,colframe=Navy,
  frame code app={\draw[yellow,line width=1cm] (
    frame.south west)--(frame.north east);},
  interior titled code app={\draw[red,line width=1cm]
    (frame.north west)--(frame.south east);},
]
\lipsum[1]
\end{tcolorbox}

```

My title

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

**/tcb/interior titled code pre**=*<graphical code>* (no default)

Prepends the given *<graphical code>* to `/tcb/interior titled code`<sup>→P.88</sup>.

**/tcb/interior code app**=*<graphical code>* (no default)

Appends the given *<graphical code>* to `/tcb/interior code`<sup>→P.89</sup>.

**/tcb/interior code pre**=*<graphical code>* (no default)

Prepends the given *<graphical code>* to `/tcb/interior code`<sup>→P.89</sup>.

**/tcb/segmentation code app**=*<graphical code>* (no default)

Appends the given *<graphical code>* to `/tcb/segmentation code`<sup>→P.89</sup>.

**/tcb/segmentation code pre**=*<graphical code>* (no default)

Prepends the given *<graphical code>* to `/tcb/segmentation code`<sup>→P.89</sup>.

**/tcb/title code app**=*<graphical code>* (no default)

Appends the given *<graphical code>* to `/tcb/title code`<sup>→P.90</sup>.

**/tcb/title code pre**=*<graphical code>* (no default)

Prepends the given *<graphical code>* to `/tcb/title code`<sup>→P.90</sup>.



## 14 Library **xparse**

The library is loaded by a package option or inside the preamble by:

```
\tcbuselibrary{xparse}
```

This also loads the package **xparse** [11].

The purpose of this library is to give comfortable access to the powerful document command production with **xparse** for **tcolorbox**. See the **xparse** package documentation [11] for details about the argument *<specification>* used in this section.

### 14.1 Option Keys

**/tcb/verbatim** (style, no value)

Sets options for a *verbatim* style `\tcbox`<sup>→P.11</sup>. Since the indented boxes may contain only very few words, the dimensions are made smaller and `/tcb/nobeforeafter`<sup>→P.62</sup> and `/tcb/tcbox raise base`<sup>→P.74</sup> are set.

```
\DeclareTotalTCBox{\myverb}{ v }{verbatim,
colframe=red!75!black,colupper=blue}{#1}

\myverb{\textbf} is a \myverb{\LaTeX} command.
```

`\textbf` is a `\LaTeX` command.

**/tcb/IfNoValueTF**=*<argument>*{*<true options>*}{*<>false options>*} (no default)

Wraps the `\IfNoValueTF` command of **xparse** for option setting. If the *<argument>* has no value, the *<true options>* are set. Otherwise, the *<>false options>* are set.

```
\DeclareTColorBox{mybox}{ o }{colframe=red!75!black,
IfNoValueTF={#1}{colback=red!5!white}{enhanced,interior style image=#1}}

\begin{mybox}
This is a tcolorbox.
\end{mybox}

\begin{mybox}[goldshade.png]
This is a tcolorbox.
\end{mybox}
```

This is a tcolorbox.

This is a tcolorbox.



**/tcb/IfValueTF**={*<argument>*}{*<true options>*}{*<false options>*} (no default)

Wraps the `\IfValueTF` command of `xparse` for option setting. If the *<argument>* has a value, the *<true options>* are set. Otherwise, the *<false options>* are set.

```
\DeclareTColorBox{mybox}{o}{colframe=red!75!black,colback=red!5!white,
  IfValueTF={#1}{title={\flqq #1\frqq},fonttitle=\bfseries}{}}

\begin{mybox}
This is a tcolorbox.
\end{mybox}

\begin{mybox}[My title]
This is a tcolorbox.
\end{mybox}
```

This is a tcolorbox.

«My title»

This is a tcolorbox.

**/tcb/IfBooleanTF**={*<argument>*}{*<true options>*}{*<false options>*} (no default)

Wraps the `\IfBooleanTF` command of `xparse` for option setting. If the *<argument>* is `\BooleanTrue`, the *<true options>* are set. If the *<argument>* is `\BooleanFalse`, the *<false options>* are set.

```
\DeclareTColorBox{mybox}{s}{colframe=red!75!black,
  IfBooleanTF={#1}{colback=yellow!50!red}{colback=red!5!white}}

\begin{mybox}
This is a tcolorbox.
\end{mybox}

\begin{mybox}*
This is a tcolorbox.
\end{mybox}
```

This is a tcolorbox.

This is a tcolorbox.



## 14.2 Producing tcolorbox Environments and Commands

**\DeclareTColorBox**[*<init options>*]{*<name>*}{*<specification>*}{*<options>*}

Creates a new environment *<name>* based on `tcolorbox`<sup>→ P.9</sup>.

Basically, `\DeclareTColorBox` operates like `\DeclareDocumentEnvironment`. This means, the new environment *<name>* is constructed with the given argument *<specification>*. The *<options>* are given to the underlying `tcolorbox`<sup>→ P.9</sup>.

Note that `/tcb/savedelimiter`<sup>→ P.18</sup> is set to the given *<name>* automatically.

The *<init options>* allow setting up automatic numbering, see Section 4 from page 78.

The new environment is always created, irrespective of an already existing environment with the same name.

```
% counter from previous example
\DeclareTColorBox[use counter from=pabox]{mybox}{0{red} m d"" 0{}}{
  {enhanced,colframe=#1!75!black,colback=#1!5!white,
   fonttitle=\bfseries,title={\thetcbcounter~#2},
   IfValueTF={#3}{watermark text={#3}}{},{},#4}

\begin{mybox}{My title}
This is a tcolorbox.
\end{mybox}

\begin{mybox}[blue]{My title}
This is a tcolorbox.
\end{mybox}

\begin{mybox}[green]{My title}"My Watermark"
This is a tcolorbox.
\end{mybox}

\begin{mybox}[yellow]{My title}[colbacktitle=yellow!50!white,coltitle=black]
This is a tcolorbox.
\end{mybox}

\begin{mybox}[purple]{My title}"All together"[coltitle=yellow]
This is a tcolorbox.
\end{mybox}
```

### 14.1 My title

This is a tcolorbox.

### 14.2 My title

This is a tcolorbox.

### 14.3 My title

This is a tcolorbox.

My Watermark

### 14.4 My title

This is a tcolorbox.

### 14.5 My title

This is a tcolorbox.

All together



**\NewTColorBox**[*<init options>*]{*<name>*}{*<specification>*}{*<options>*}

Operates like **\DeclareTColorBox**<sup>→ P. 289</sup>, but based on **\NewDocumentEnvironment** instead of **\DeclareDocumentEnvironment**. An error is issued if *<name>* has already been defined.

**\RenewTColorBox**[*<init options>*]{*<name>*}{*<specification>*}{*<options>*}

Operates like **\DeclareTColorBox**<sup>→ P. 289</sup>, but based on **\RenewDocumentEnvironment** instead of **\DeclareDocumentEnvironment**. An existing environment is redefined.

**\ProvideTColorBox**[*<init options>*]{*<name>*}{*<specification>*}{*<options>*}

Operates like **\DeclareTColorBox**<sup>→ P. 289</sup>, but based on **\ProvideDocumentEnvironment** instead of **\DeclareDocumentEnvironment**. The environment *<name>* is only created if it is not already defined.



**\DeclareTotalTColorBox**[*<init options>*]{*<name>*}{*<specification>*}{*<options>*}{*<content>*}

Creates a new command *<name>* based on `tcolorbox`<sup>P.9</sup>. In contrast to `\DeclareTColorBox`<sup>P.289</sup>, also the *<content>* of the `tcolorbox` is specified.

Basically, `\DeclareTotalTColorBox` operates like `\DeclareDocumentCommand`. This means, the new command *<name>* is constructed with the given argument *<specification>*. The *<options>* are given to the underlying `tcolorbox`<sup>P.9</sup> which is filled with the specified *<content>*.

Note that `/tcb/savedelimiter`<sup>P.18</sup> is set to the given *<name>* automatically.

The *<init options>* allow setting up automatic numbering, see Section 4 from page 78.

The new command is always created, irrespective of an already existing command with the same name.

```
\DeclareTotalTColorBox{\diabox}{0}{v m }
{ bicolor,nobeforeafter,equal height group=diabox,width=5.7cm,
  fonttitle=\bfseries\ttfamily,adjusted title={#2},center title,
  colframe=blue!20!black,leftupper=0mm,rightupper=0mm,colback=black!75!white,#1}
{ \tikz\path[fill zoom image={#2}] (0,0) rectangle (\linewidth,4cm);%
  \tcblower#3}

\diabox{blueshade.png}{Created with |GIMP|.\\url{http://www.gimp.org}}
\diabox{goldshade.png}{Created with |GIMP|.\\url{http://www.gimp.org}}
```



**\NewTotalTColorBox**[*<init options>*]{*<name>*}{*<specification>*}{*<options>*}{*<content>*}

Operates like `\DeclareTotalTColorBox`, but based on `\NewDocumentCommand` instead of `\DeclareDocumentCommand`. An error is issued if *<name>* has already been defined.

**\RenewTotalTColorBox**[*<init options>*]{*<name>*}{*<specification>*}{*<options>*}{*<content>*}

Operates like `\DeclareTotalTColorBox`, but based on `\RenewDocumentCommand` instead of `\DeclareDocumentCommand`. An existing command is redefined.

**\ProvideTotalTColorBox**[*<init options>*]{*<name>*}{*<specification>*}{*<options>*}{*<content>*}

Operates like `\DeclareTotalTColorBox`, but based on `\ProvideDocumentCommand` instead of `\DeclareDocumentCommand`. The command *<name>* is only created if it is not already defined.



## 14.3 Producing tcbbox Commands

**\DeclareTCBox**[*<init options>*]{\<name>}{<specification>}{<options>}

Creates a new command \<name> based on \tcbbox<sup>→P.11</sup>. Basically, \DeclareTCBox operates like \DeclareDocumentCommand. This means, the new command \<name> is constructed with the given argument <specification>. The <options> are given to the underlying \tcbbox<sup>→P.11</sup>.

Note that /tcb/savedelimiter<sup>→P.18</sup> is set to the given <name> automatically.

The <init options> allow setting up automatic numbering, see Section 4 from page 78.

The new command is always created, irrespective of an already existing command with the same name.

```
% counter from previous example
\DeclareTCBox[use counter from=pabox]{\mybox}{ s m s }
{ nobeforeafter,colback=red!5!white,colframe=red!75!black,
  title={#2 (Box \thetcbcounter)},fonttitle=\bfseries,
  IfBooleanTF={#1}{enhanced,drop shadow}{},
  IfBooleanTF={#3}{colbacktitle=red!50!white}{}}

\mybox{Bird}{This is my first box.}
\hfill
\mybox*{Tree}{This is my second box.}
\par\bigskip
\mybox{Bike}*{This is my third box.}
\hfill
\mybox*{City}*{This is my fourth box.}
```

**Bird (Box 14.6)**

This is my first box.

**Tree (Box 14.7)**

This is my second box.

**Bike (Box 14.8)**

This is my third box.

**City (Box 14.9)**

This is my fourth box.

**\NewTCBox**[*<init options>*]{\<name>}{<specification>}{<options>}

Operates like \DeclareTCBox, but based on \NewDocumentCommand instead of \DeclareDocumentCommand. An error is issued if \<name> has already been defined.

**\RenewTCBox**[*<init options>*]{\<name>}{<specification>}{<options>}

Operates like \DeclareTCBox, but based on \RenewDocumentCommand instead of \DeclareDocumentCommand. An existing command is redefined.

**\ProvideTCBox**[*<init options>*]{\<name>}{<specification>}{<options>}

Operates like \DeclareTCBox, but based on \ProvideDocumentCommand instead of \DeclareDocumentCommand. The command \<name> is only created if it is not already defined.



**\DeclareTotalTCBox**[*\init options*]{\<name>}{\<specification>}{\<options>}{\<content>}

Creates a new command \<name> based on \tcbox<sup>→P.11</sup>. In contrast to \DeclareTCBox<sup>→P.292</sup>, also the <content> of the tcbox is specified.

Basically, \DeclareTotalTCBox operates like \DeclareDocumentCommand. This means, the new command \<name> is constructed with the given argument <specification>. The <options> are given to the underlying \tcbox<sup>→P.11</sup> which is filled with the specified <content>.

Note that /tcb/savedelimiter<sup>→P.18</sup> is set to the given <name> automatically.

The <init options> allow setting up automatic numbering, see Section 4 from page 78.

The new command is always created, irrespective of an already existing command with the same name.

```
\DeclareTotalTCBox{\myverb}{ 0{red} v 0{ } }
{ fontupper=\ttfamily,nobeforeafter,tcbbox raise base,arc=0pt,outer arc=0pt,
  top=0pt,bottom=0pt,left=0mm,right=0mm,
  leftrule=0pt,rightrule=0pt,toprule=0.3mm,bottomrule=0.3mm,boxsep=0.5mm,
  colback=#1!10!white,colframe=#1!50!black,#3}{#2}
```

To set a word \textbf{bold} in \myverb{\LaTeX}, one uses  
\myverb[green]{\textbf{bold}}. Alternatively, write  
\myverb[yellow]{\bfseries bold}.  
In \myverb[blue]{\LaTeX}[enhanced,fuzzy halo], other font settings are  
done in the same way, e.\,g. \myverb{\textit}, \myverb{\itshape}\  
or \myverb[brown]{\texttt}, \myverb[brown]{\ttfamily}.

To set a word **bold** in \LaTeX, one uses \textbf{bold}. Alternatively, write {\bfseries bold}.  
In \LaTeX, other font settings are done in the same way, e.g. \textit, \itshape  
or \texttt, \ttfamily.

The next example uses \lstinline from the listings package to typeset the verbatim content.

```
% \usepackage{listings} or \tcbuselibrary{listings}
\DeclareTotalTCBox{\commandbox}{ s v }
{verbatim,colupper=white,colback=black!75!white,colframe=black}
{\IfBooleanTF{#1}{\textcolor{red}{\ttfamily\bfseries > }}{}}%
  \lstinline[language=command.com,keywordstyle=\color{blue!35!white}\bfseries]^#2~}

\commandbox*{cd "My Documents"} changes to directory \commandbox{My Documents}.

\commandbox*{dir /A} lists the directory content.

\commandbox*{copy example.txt d:\target} copies \commandbox{example.txt} to
\commandbox{d:\target}.
```

> cd "My Documents" changes to directory My Documents .

> dir /A lists the directory content.

> copy example.txt d:\target copies example.txt to d:\target .



- \NewTotalTCBox**[*<init options>*]{\<name>}{<specification>}{<options>}{<content>}
- Operates like `\DeclareTotalTCBox`<sup>P. 293</sup>, but based on `\NewDocumentCommand` instead of `\DeclareDocumentCommand`. An error is issued if `\<name>` has already been defined.
- \RenewTotalTCBox**[*<init options>*]{\<name>}{<specification>}{<options>}{<content>}
- Operates like `\DeclareTotalTCBox`<sup>P. 293</sup>, but based on `\RenewDocumentCommand` instead of `\DeclareDocumentCommand`. An existing command is redefined.
- \ProvideTotalTCBox**[*<init options>*]{\<name>}{<specification>}{<options>}{<content>}
- Operates like `\DeclareTotalTCBox`<sup>P. 293</sup>, but based on `\ProvideDocumentCommand` instead of `\DeclareDocumentCommand`. The command `\<name>` is only created if it is not already defined.
- \tcboxverb**[*<options>*]{<verbatim box content>}
- Creates a colored box based on `\tcbox`<sup>P. 11</sup> which is fitted to the width of the given `<verbatim box content>`. The underlying `\tcbox`<sup>P. 11</sup> is styled with `/tcb/verbatim`<sup>P. 287</sup> plus the given `<options>`. The difference to `\tcbox`<sup>P. 11</sup> is that the `<verbatim box content>` is interpreted *verbatim*. Therefore, `\tcboxverb` acts similar to `\verb`.

```
\tcboxverb{\LaTeX}, \tcboxverb[colback=blue!10!white,colupper=blue]{\LaTeX},
\tcbboxverb[blank,fuzzy halo]{\LaTeX}, \tcboxverb[beamer]{\LaTeX},
\tcbboxverb[enhanced,skin=enhancedmiddle jigsaw,colframe=red]{\LaTeX}.
```

`\LaTeX`, `\LaTeX`, `\LaTeX`, `\LaTeX`, `\LaTeX`.



## 14.4 Producing tcblisting Environments

The following commands need the `\usepackage{listings}` library to be included.

**`\DeclareTCBListing`**`[<init options>]{<name>}{<specification>}{<options>}`

Creates a new environment *<name>* based on `tcblisting`<sup>→ P. 194</sup>.

Basically, `\DeclareTCBListing` operates like `\DeclareDocumentEnvironment`. This means, the new environment *<name>* is constructed with the given argument *<specification>*.

The *<options>* are given to the underlying `tcblisting`<sup>→ P. 194</sup>.

Note that `/tcb/savedelimiter`<sup>→ P. 18</sup> is set to the given *<name>* automatically.

The *<init options>* allow setting up automatic numbering, see Section 4 from page 78.

The new environment is always created, irrespective of an already existing environment with the same name.

```
\DeclareTCBListing{mybox}{ s 0{ } m }{%
  colback=red!5!white,
  colframe=red!75!black,
  fonttitle=\bfseries,
  IfBooleanTF={#1}
    {listing side text}
    {text side listing},
  title=#3,#2}

\begin{mybox}{Listing Box}
This is my
\LaTeX\ box.
\end{mybox}
\bigskip

\begin{mybox}*{Listing Box}
This is my
\LaTeX\ box.
\end{mybox}
\bigskip

\begin{mybox}[colback=yellow]
{Listing Box}
This is my
\LaTeX\ box.
\end{mybox}
```

### Listing Box

This is my LaTeX box.	This is my LaTeX box.
--------------------------	--------------------------

### Listing Box

This is my LaTeX box.	This is my LaTeX box.
--------------------------	--------------------------

### Listing Box

This is my LaTeX box.	This is my LaTeX box.
--------------------------	--------------------------

**`\NewTCBListing`**`[<init options>]{<name>}{<specification>}{<options>}`

Operates like `\DeclareTCBListing`, but based on `\NewDocumentEnvironment` instead of `\DeclareDocumentEnvironment`. An error is issued if *<name>* has already been defined.

**`\RenewTCBListing`**`[<init options>]{<name>}{<specification>}{<options>}`

Operates like `\DeclareTCBListing`, but based on `\RenewDocumentEnvironment` instead of `\DeclareDocumentEnvironment`. An existing environment is redefined.

**`\ProvideTCBListing`**`[<init options>]{<name>}{<specification>}{<options>}`

Operates like `\DeclareTCBListing`, but based on `\ProvideDocumentEnvironment` instead of `\DeclareDocumentEnvironment`. The environment *<name>* is only created if it is not already defined.



## Caveats of using an environment ending with an optional argument

```
\DeclareTCBListing{mybox}{0}{ }{listing only,#1}
```

```
\begin{mybox}[colframe=red]  
\good  
\end{mybox}
```

```
\begin{mybox}[colframe=red]\good\end{mybox}
```

```
\begin{mybox}  
\good  
\end{mybox}
```

```
\begin{mybox} \good\end{mybox}
```

```
\begin{mybox}\bad!\end{mybox}
```

```
\begin{mybox}  
[\good]  
\end{mybox}
```

```
\begin{mybox} [\good]\end{mybox}
```

```
\begin{mybox} [\bad!]\end{mybox}
```



## 14.5 Producing tcbinputlisting Commands

The following commands need the `\lib listings` library to be included.

**\DeclareTCBInputListing**[*<init options>*]{*<name>*}{*<specification>*}{*<options>*}

Creates a new command *<name>* based on `\tcbinputlisting`<sup>→ P. 196</sup>. Basically, `\DeclareTCBInputListing` operates like `\DeclareDocumentCommand`. This means, the new command *<name>* is constructed with the given argument *<specification>*. The *<options>* are given to the underlying `\tcbinputlisting`<sup>→ P. 196</sup>.

The *<init options>* allow setting up automatic numbering, see Section 4 from page 78.

The new command is always created, irrespective of an already existing command with the same name.

```
% counter from previous example
\DeclareTCBInputListing[use counter from=pabox]{\mylisting}{ 0{ } 0{red} m }{%
  listing file={#3},title=Listing~\thetcbcounter,
  colback=#2!5!white,colframe=#2!50!black,colbacktitle=#2!75!black,
  fonttitle=\bfseries,listing only,#1}

\mylisting[before upper=\textit{This is the included file content:}]
[blue]{\jobname.tcbtemp}
```

### Listing 14.10

*This is the included file content:*

```
% counter from previous example
\DeclareTCBInputListing[use counter from=pabox]{\mylisting}{ 0{ }
  0{red} m }{%
  listing file={#3},title=Listing~\thetcbcounter,
  colback=#2!5!white,colframe=#2!50!black,colbacktitle=#2!75!black,
  fonttitle=\bfseries,listing only,#1}

\mylisting[before upper=\textit{This is the included file content:}]
[blue]{\jobname.tcbtemp}
```

**\NewTCBInputListing**[*<init options>*]{*<name>*}{*<specification>*}{*<options>*}

Operates like `\DeclareTCBInputListing`, but based on `\NewDocumentCommand` instead of `\DeclareDocumentCommand`. An error is issued if *<name>* has already been defined.

**\RenewTCBInputListing**[*<init options>*]{*<name>*}{*<specification>*}{*<options>*}

Operates like `\DeclareTCBInputListing`, but based on `\RenewDocumentCommand` instead of `\DeclareDocumentCommand`. An existing command is redefined.

**\ProvideTCBInputListing**[*<init options>*]{*<name>*}{*<specification>*}{*<options>*}

Operates like `\DeclareTCBInputListing`, but based on `\ProvideDocumentCommand` instead of `\DeclareDocumentCommand`. The command *<name>* is only created if it is not already defined.



## 14.6 Producing `tbxfit` Commands

The following commands need the `lib fitting` library to be included.

**`\DeclareTCBoxFit`** [*init options*] {\<name>} {\<specification>} {\<options>}

Creates a new command `\<name>` based on `\tcboxfit`<sup>P. 267</sup>. Basically, `\DeclareTCBoxFit` operates like `\DeclareDocumentCommand`. This means, the new command `\<name>` is constructed with the given argument `\<specification>`. The `\<options>` are given to the underlying `\tcboxfit`<sup>P. 267</sup>.

Note that `/tcb/savedelimiter`<sup>P. 18</sup> is set to the given `\<name>` automatically.

The `\<init options>` allow setting up automatic numbering, see Section 4 from page 78.

The new command is always created, irrespective of an already existing command with the same name.

```
% \usepackage{lipsum}

\DeclareTCBoxFit{\mybox}{0}{m o }
{colback=red!5!white,
 colframe=red!75!black,
 width=#2,height=#2/3*2,
 IfValueTF={#3}{height=#3}{},
 #1}

\mybox[colback=yellow]{5cm}%
{\lipsum[2]}

\mybox[colback=yellow]{5cm}[4cm]{\lipsum[2]}
```

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

**`\NewTCBoxFit`** [*init options*] {\<name>} {\<specification>} {\<options>}

Operates like `\DeclareTCBoxFit`, but based on `\NewDocumentCommand` instead of `\DeclareDocumentCommand`. An error is issued if `\<name>` has already been defined.

**`\RenewTCBoxFit`** [*init options*] {\<name>} {\<specification>} {\<options>}

Operates like `\DeclareTCBoxFit`, but based on `\RenewDocumentCommand` instead of `\DeclareDocumentCommand`. An existing command is redefined.

**`\ProvideTCBoxFit`** [*init options*] {\<name>} {\<specification>} {\<options>}

Operates like `\DeclareTCBoxFit`, but based on `\ProvideDocumentCommand` instead of `\DeclareDocumentCommand`. The command `\<name>` is only created if it is not already defined.



```
\DeclareTotalTCBoxFit[<init options>]{\<name>}{<specification>}{<options>}{<content>}
```

Creates a new command `\langle name \rangle` based on `\tcboxfit`<sup>P.267</sup>. In contrast to `\DeclareTCBoxFit`<sup>P.298</sup>, also the  $\langle content \rangle$  of the `tcboxfit` is specified.

Basically, `\DeclareTotalTCBoxFit` operates like `\DeclareDocumentCommand`. This means, the new command `\langle name \rangle` is constructed with the given argument `\langle specification \rangle`. The `\langle options \rangle` are given to the underlying `\tcboxfit`<sup>P. 267</sup> which is filled with the specified `\langle content \rangle`.

Note that `/tcb/savedelimiter`<sup>P.18</sup> is set to the given  $\langle name \rangle$  automatically.

The `init options` allow setting up automatic numbering, see Section 4 from page 78.

The new command is always created, irrespective of an already existing command with the same name.

```
% \usepackage{lipsum}
```

```
\DeclareTotalTCBoxFit{\multibox}{ 0{ } m 0{10} m }
{nobeforeafter,colback=red!5!white,colframe=red!75!black,width=#2,height=#2/3*2,
  valign=center,#1}
{ \foreach \n in {1,...,#3} { #4} }

\multibox{5cm}{I shall not repeat.}
\multibox[colframe=blue!75!white]{5cm}[20]{I shall not repeat.}\\
\multibox[colback=yellow,height=5cm]{14cm}[100]{I shall not repeat.}
```

I shall not repeat. I shall  
not repeat. I shall not re-  
peat. I shall not repeat. I  
shall not repeat. I shall not  
repeat. I shall not repeat. I  
shall not repeat. I shall not  
repeat. I shall not repeat.

[illegible][illegible]

```
\NewTotalTCBoxFit[<init options>]{\<name>}{<specification>}{<options>}{<content>}
```

Operates like `\DeclareTotalTCBoxFit`, but based on `\NewDocumentCommand` instead of `\DeclareDocumentCommand`. An error is issued if `\langle name \rangle` has already been defined.

```
\RenewTotalTCBoxFit[<init options>]{\<name>}{<specification>}{<options>}{<content>}
```

Operates like `\DeclareTotalTCBoxFit`, but based on `\RenewDocumentCommand` instead of `\DeclareDocumentCommand`. An existing command is redefined.

```
\ProvideTotalTCBoxFit[<init options>]{\<name>}{<specification>}{<options>}{<content>}
```

Operates like `\DeclareTotalTCBoxFit`, but based on `\ProvideDocumentCommand` instead of `\DeclareDocumentCommand`. The command `\langle name \rangle` is only created if it is not already defined.





## 15 Library documentation

This library has the single purpose to support L<sup>A</sup>T<sub>E</sub>X package documentations like this one. Actually, the visual nature follows the approach from Till Tantau’s `pgf` [20] documentation. Typically, this library is assumed to be used in conjunction with the class `ltxdoc` or alike.

The library is loaded by a package option or inside the preamble by:

```
\tcbuselibrary{documentation}
```

This also loads the library  `listings`, see Section 9 on page 193, the library  `skins`, see Section 7 on page 96, and a bunch of packages, namely `doc`, `pifont`, `marvosym`, `makeidx`, `refcount`, and `hyperref`.

The package `makeidx` is loaded only, if `\printindex` is *not* already defined. Therefore, one can include an alternative to `makeidx` like `imakeidx` *before* the library documentation is used.

For UTF-8 support, load:

```
\tcbuselibrary{listingsutf8,documentation}
```

For `minted` [14] support, load:

```
\tcbuselibrary{documentation,minted}
\tcbset{listing engine=minted}
```

### 15.1 Macros of the Library

```
\begin{docCommand}[<options>]{<name>}{<parameters>}
  <command description>
\end{docCommand}
```

Documents a L<sup>A</sup>T<sub>E</sub>X macro with given  $\langle name \rangle$  where  $\langle name \rangle$  is written without backslash. The given  $\langle options \rangle$  are set with `\tcbset`<sup>P.10</sup>. This macro takes mandatory or optional  $\langle parameters \rangle$ . It is automatically indexed and can be referenced with `\refCom`<sup>P.306</sup> $\{\langle name \rangle\}$ .

```
\begin{docCommand}{foomakedocSubKey}{\marg{name}\marg{key path}}
  Creates a new environment \meta{name} based on \refEnv{docKey} for the
  documentation of keys with the given \meta{key path}.
\end{docCommand}
```

```
\foomakedocSubKey{\langle name \rangle}{\langle key path \rangle}
  Creates a new environment \langle name \rangle based on docKeyP.301 for the documentation of keys with
  the given \langle key path \rangle.
```

```
\begin{docCommand}[color definition=blue]{foomakedocSubKey*}%
  {\marg{name}\marg{key path}}
  Creates a new environment \meta{name} based on \refEnv{docKey} for the
  documentation of keys with the given \meta{key path}.
\end{docCommand}
```

```
\foomakedocSubKey*{\langle name \rangle}{\langle key path \rangle}
  Creates a new environment \langle name \rangle based on docKeyP.301 for the documentation of keys with
  the given \langle key path \rangle.
```



```
\begin{docCommand*}[\langle options \rangle]{\langle name \rangle}{\langle parameters \rangle}
  \langle command description \rangle
\end{docCommand*}
```

Identical to `docCommand`<sup>→ P. 300</sup>, but without index entry.

```
\begin{docEnvironment}[\langle options \rangle]{\langle name \rangle}{\langle parameters \rangle}
  \langle environment description \rangle
\end{docEnvironment}
```

Documents a L<sup>A</sup>T<sub>E</sub>X environment with given  $\langle name \rangle$ . The given  $\langle options \rangle$  are set with `\tcbsset`<sup>→ P. 10</sup>. This environment takes mandatory or optional  $\langle parameters \rangle$ . It is automatically indexed and can be referenced with `\refEnv`<sup>→ P. 306</sup> $\{\langle name \rangle\}$ .

```
\begin{docEnvironment}{foocolorbox}{\oarg{options}}
  This is the main environment to create an accentuated colored text box with
  rounded corners and, optionally, two parts.
\end{docEnvironment}
```

```
\begin{foocolorbox}[\langle options \rangle]
  \langle environment content \rangle
\end{foocolorbox}
```

This is the main environment to create an accentuated colored text box with rounded corners and, optionally, two parts.

```
\begin{docEnvironment}%
  [doclang/environment content=My content text]%
  {foocolorbox*}{\oarg{options}}
  This is the main environment to create an accentuated colored text box with
  rounded corners and, optionally, two parts.
\end{docEnvironment}
```

```
\begin{foocolorbox*}[\langle options \rangle]
  \langle My content text \rangle
\end{foocolorbox*}
```

This is the main environment to create an accentuated colored text box with rounded corners and, optionally, two parts.

```
\begin{docEnvironment*}[\langle options \rangle]{\langle name \rangle}{\langle parameters \rangle}
  \langle environment description \rangle
\end{docEnvironment*}
```

Identical to `docEnvironment`, but without index entry.

```
\begin{docKey}[\langle key path \rangle]{\langle name \rangle}{\langle parameters \rangle}{\langle description \rangle}
  \langle key description \rangle
\end{docKey}
```

Documents a key with given  $\langle name \rangle$  and an optional  $\langle key path \rangle$ . This key takes mandatory or optional  $\langle parameters \rangle$  as value with a short  $\langle description \rangle$ . It is automatically indexed and can be referenced with `\refKey`<sup>→ P. 307</sup> $\{\langle name \rangle\}$ .

```
\begin{docKey}[foo]{footitle}{=\meta{text}}{no default, initially empty}
  Creates a heading line with \meta{text} as content.
\end{docKey}
```

```
/foo/footitle=\langle text \rangle (no default, initially empty)
  Creates a heading line with  $\langle text \rangle$  as content.
```



```
\begin{docKey*}[\langle key path \rangle]{\langle name \rangle}{\langle parameters \rangle}{\langle description \rangle}
\end{docKey*}
```

Identical to `\docKey`<sup>P. 301</sup>, but without index entry.

```
\docValue{\langle name \rangle}
```

Documents a value with given  $\langle name \rangle$ . Typically, this is a value for a key. This value is automatically indexed.

A feasible value for `\refKey{/foo/footitle}` is `\docValue{foovalue}`.

A feasible value for `/foo/footitle`<sup>P. 301</sup> is `foovalue`.

```
\docValue*{\langle name \rangle}
```

Identical to `\docValue`, but without index entry.

```
\docAuxCommand{\langle name \rangle}
```

Documents an auxiliary or minor L<sup>A</sup>T<sub>E</sub>X macro with given  $\langle name \rangle$  where  $\langle name \rangle$  is written without backslash. This macro is automatically indexed.

The macro `\docAuxCommand{fooaux}` holds some interesting data.

The macro `\fooaux` holds some interesting data.

```
\docAuxCommand*{\langle name \rangle}
```

Identical to `\docAuxCommand`, but without index entry.

```
\docAuxEnvironment{\langle name \rangle}
```

Documents an auxiliary or minor L<sup>A</sup>T<sub>E</sub>X environment with given  $\langle name \rangle$ . This macro is automatically indexed.

The environment `\docAuxEnvironment{fooauxenv}` holds some interesting data.

The environment `fooauxenv` holds some interesting data.

```
\docAuxEnvironment*[\langle key path \rangle]{\langle name \rangle}
```

Identical to `\docAuxEnvironment`, but without index entry.

```
\docAuxKey[\langle key path \rangle]{\langle name \rangle}
```

Documents an auxiliary key with given  $\langle name \rangle$  and an optional  $\langle key path \rangle$ . It is automatically indexed.

The key `\docAuxKey[foo]{fooaux}` holds some interesting data.

The key `/foo/fooaux` holds some interesting data.

```
\docAuxKey*[\langle key path \rangle]{\langle name \rangle}
```

Identical to `\docAuxKey`, but without index entry.



**`\docColor{<name>}`**

Documents a color with given *<name>*. The color is automatically indexed.

The color `\docColor{foocolor}` is available.

The color `foocolor` is available.

**`\docColor*{<name>}`**

Identical to `\docColor`, but without index entry.

**`\cs{<name>}`**

Macro from `ltxdoc` [3] to typeset a command word *<name>* where the backslash is prefixed. The library overwrites the original macro.

This is a `\cs{foocommand}`.

This is a `\foocommand`.

**`\meta{<text>}`**

Macro from `doc` [8] to typeset a meta *<text>*. The library overwrites the original macro.

This is a `\meta{text}`.

This is a *<text>*.

**`\marg{<text>}`**

Macro from `ltxdoc` [3] to typeset a *<text>* with curly brackets as a mandatory argument. The library overwrites the original macro.

This is a mandatory `\marg{argument}`.

This is a mandatory `{<argument>}`.

**`\oarg{<text>}`**

Macro from `ltxdoc` [3] to typeset a *<text>* with square brackets as an optional argument. The library overwrites the original macro.

This is an optional `\oarg{argument}`.

This is an optional `[<argument>]`.

**`\brackets{<text>}`**

Sets the given *<text>* with curly brackets.

Here we use `\brackets{some text}`.

Here we use `{some text}`.



```
\begin{dispExample}
  <environment content>
\end{dispExample}
```

Creates a colored box based on a `tcolorbox`<sup>→P.9</sup>. It displays the environment content as source code in the upper part and as compiled text in the lower part of the box. The appearance is controlled by `/tcb/documentation listing style`<sup>→P.308</sup> and the style `/tcb/docexample`<sup>→P.308</sup>. It may be changed by redefining this style.

```
\begin{dispExample}
This is a \LaTeX\ example.
\end{dispExample}
```

This is a \LaTeX\ example.

This is a L<sup>A</sup>T<sub>E</sub>X example.

```
\begin{dispExample*}[<options>]
  <environment content>
\end{dispExample*}
```

The starred version of `dispExample` takes `tcolorbox`<sup>→P.9</sup> `<options>` as parameter. These `<options>` are executed after `/tcb/docexample`<sup>→P.308</sup>.

```
\begin{dispExample*}[sidebyside]
This is a \LaTeX\ example.
\end{dispExample*}
```

This is a \LaTeX\ example.

This is a L<sup>A</sup>T<sub>E</sub>X example.



```
\begin{dispListing}
  <environment content>
\end{dispListing}
```

Creates a colored box based on a `tcolorbox`<sup>→P.9</sup>. It displays the environment content as source code. The appearance is controlled by `/tcb/documentation listing style`<sup>→P.308</sup> and the style `/tcb/docexample`<sup>→P.308</sup>. It may be changed by redefining this style.

```
\begin{dispListing}
This is a \LaTeX\ example.
\end{dispListing}
```

This is a `\LaTeX` example.

```
\begin{dispListing*}[<options>]
  <environment content>
\end{dispListing*}
```

The starred version of `dispListing` takes `tcolorbox`<sup>→P.9</sup> `<options>` as parameter. These `<options>` are executed after `/tcb/docexample`<sup>→P.308</sup>.

```
\begin{dispListing*}[title=My listing]
This is a \LaTeX\ example.
\end{dispListing*}
```

My listing

This is a `\LaTeX` example.

```
\begin{absquote}
  <environment content>
\end{absquote}
```

Used to typeset an abstract as quoted and small text.

```
\begin{absquote}
|tcolorbox| provides an environment for colored and framed text boxes with a
heading line. Optionally, such a box can be split in an upper and a lower part.
\end{absquote}
```

`tcolorbox` provides an environment for colored and framed text boxes with a heading line. Optionally, such a box can be split in an upper and a lower part.



### `\tcbmakedocSubKey{⟨name⟩}{⟨key path⟩}`

Creates a new environment  $\langle name \rangle$  based on `docKey`<sup>→ P. 301</sup> for the documentation of keys with the given  $\langle key path \rangle$  as default. The new environment  $\langle name \rangle$  takes the same parameters as `docKey`<sup>→ P. 301</sup> itself. A second starred environment  $\langle name \rangle$  is also created, which is identical to  $\langle name \rangle$  but without index entry.

```
\tcbmakedocSubKey{docFooKey}{foo}

\begin{docFooKey}{foodummy}{=\meta{nothing}}{no default, initially empty}
Some key.
\end{docFooKey}

\begin{docFooKey*}{foo another dummy}{=\meta{nothing}}{no default, initially empty}
Some key (not indexed).
\end{docFooKey*}
```

`/foo/foodummy=⟨nothing⟩` (no default, initially empty)  
Some key.

`/foo/foo another dummy=⟨nothing⟩` (no default, initially empty)  
Some key (not indexed).

### `\refCom{⟨name⟩}`

References a documented L<sup>A</sup>T<sub>E</sub>X macro with given  $\langle name \rangle$  where  $\langle name \rangle$  is written without backslash. The page reference is suppressed if it links to the same page.

We have created `\refCom{foomakedocSubKey}` as an example.

We have created `\foomakedocSubKey`<sup>→ P. 300</sup> as an example.

### `\refCom*{⟨name⟩}`

References a documented L<sup>A</sup>T<sub>E</sub>X macro with given  $\langle name \rangle$  where  $\langle name \rangle$  is written without backslash. There is no page reference.

We have created `\refCom*{foomakedocSubKey}` as an example.

We have created `\foomakedocSubKey` as an example.

### `\refEnv{⟨name⟩}`

References a documented L<sup>A</sup>T<sub>E</sub>X environment with given  $\langle name \rangle$ . The page reference is suppressed if it links to the same page.

We have created `\refEnv{foocolorbox}` as an example.

We have created `foocolorbox`<sup>→ P. 301</sup> as an example.

### `\refEnv*{⟨name⟩}`

References a documented L<sup>A</sup>T<sub>E</sub>X environment with given  $\langle name \rangle$ . There is no page reference.

We have created `\refEnv*{foocolorbox}` as an example.

We have created `foocolorbox` as an example.



### **\refKey**{⟨name⟩}

References a documented key with given ⟨name⟩ where ⟨name⟩ is the full path name of the key. The page reference is suppressed if it links to the same page.

We have created `\refKey{/foo/footitle}` as an example.

We have created `/foo/footitle`<sup>→ P. 301</sup> as an example.

### **\refKey\***{⟨name⟩}

References a documented key with given ⟨name⟩ where ⟨name⟩ is the full path name of the key. There is no page reference.

We have created `\refKey*/foo/footitle` as an example.

We have created `/foo/footitle` as an example.

### **\refAux**{⟨name⟩}

References some auxiliary environment, key, value, or color. The hyperlink color is used, but there is no real link.

Some pages back, one can see `\refAux{/foo/footitle}` as an example.

Some pages back, one can see `/foo/footitle` as an example.

### **\refAuxcs**{⟨name⟩}

References some auxiliary macro ⟨name⟩ where ⟨name⟩ is written without backslash. The hyperlink color is used, but there is no real link.

Some pages back, one can see `\refAuxcs{fooaux}` as an example.

Some pages back, one can see `\fooaux` as an example.

### **\colDef**{⟨text⟩}

Sets ⟨text⟩ with the command color, see `/tcb/color command`<sup>→ P. 308</sup>.

This is my `\colDef{text}`.

This is my `text`.

### **\colOpt**{⟨text⟩}

Sets ⟨text⟩ with the option color, see `/tcb/color option`<sup>→ P. 308</sup>.

This is my `\colOpt{text}`.

This is my `text`.



## 15.2 Option Keys of the Library

- /tcb/docexample** (style, no value)  
 Sets the style for `dispExample`<sup>→ P. 304</sup> and `dispListing`<sup>→ P. 305</sup> with the colors `ExampleBack` and `ExampleFrame`. To change the appearance of the examples, this style can be redefined.
- /tcb/documentation listing options**=*<key list>* (no default, initially `style=tcbdocumentation`)  
 Sets the options from the package `listings` [6]. They are used inside `dispExample`<sup>→ P. 304</sup> and `dispListing`<sup>→ P. 305</sup> to typeset the listings. Note that this is not identical to the key `/tcb/listing options`<sup>→ P. 200</sup> which is used for 'normal' listings.  
 Used for `/tcb/listing engine`<sup>→ P. 205</sup>=`listings` only.
- /tcb/documentation listing style**=*<listing style>* (no default, initially `tcbdocumentation`)  
 Abbreviation for `documentation listing options={style=...}`. This key sets a *<style>* for the `listings` package, see [6]. Note that this is not identical to the key `/tcb/listing style`<sup>→ P. 200</sup> which is used for 'normal' listings.  
 Used for `/tcb/listing engine`<sup>→ P. 205</sup>=`listings` only.
- /tcb/documentation minted style**=*<key list>* (no default, initially unset)  
 Sets a *<style>* known to `Pygments` [12] for the package `minted` [14], if used. Note that this is not identical to the key `/tcb/minted style`<sup>→ P. 204</sup> which is used for 'normal' listings.  
 Used for `/tcb/listing engine`<sup>→ P. 205</sup>=`minted` only.
- /tcb/documentation minted options**=*<minted style>* (no default, initially `tabsize=2, fontsize=\small`)  
 Sets the options from the package `minted` [14] which are used during typesetting of the listing, if used. Note that this is not identical to the key `/tcb/minted options`<sup>→ P. 203</sup> which is used for 'normal' listings.  
 Used for `/tcb/listing engine`<sup>→ P. 205</sup>=`minted` only.
- /tcb/color command**=*<color>* (no default, initially `Definition`)  
 Sets the highlight color used by macro definitions.
- /tcb/color environment**=*<color>* (no default, initially `Definition`)  
 Sets the highlight color used by environment definitions.
- /tcb/color key**=*<color>* (no default, initially `Definition`)  
 Sets the highlight color used by key definitions.
- /tcb/color value**=*<color>* (no default, initially `Definition`)  
 Sets the highlight color used by value definitions.
- /tcb/color color**=*<color>* (no default, initially `Definition`)  
 Sets the highlight color used by color definitions.
- /tcb/color definition**=*<color>* (no default, initially `Definition`)  
 Sets the highlight color for `/tcb/color command`, `/tcb/color environment`, `/tcb/color key`, `/tcb/color value`, and `/tcb/color color`.
- /tcb/color option**=*<color>* (no default, initially `Option`)  
 Sets the color used for optional arguments.
- /tcb/color hyperlink**=*<color>* (no default, initially `Hyperlink`)  
 Sets the color for all hyper-links, i. e. all internal and external links.
- /tcb/before example**=*<macros>* (no default, initially `\par\smallskip`)  
 Sets the *<macros>* which are executed before `dispExample`<sup>→ P. 304</sup> and `dispListing`<sup>→ P. 305</sup> additional to `/tcb/before`<sup>→ P. 62</sup>.



- /tcb/after example**= $\langle macros \rangle$  (no default, initially empty)  
 Sets the  $\langle macros \rangle$  which are executed after `dispExample`<sup>→ P.304</sup> and `dispListing`<sup>→ P.305</sup> additional to `/tcb/after`<sup>→ P.62</sup>.
- /tcb/index format**= $\langle format \rangle$  (no default, initially pgf)  
 Determines the basic  $\langle format \rangle$  of the generated index. Feasible values are:
- **pgfsection**: The index is formatted like in the **pgf** documentation (as a section).
  - **pgfchapter**: The index is formatted like in the **pgf** documentation (as a chapter).
  - **pgf**: Alias for **pgfsection**.
  - **doc**: The index is assumed to be formatted by **doc** or **ltxdoc**. The usage of `makeindex` with `-s gind.ist` is assumed. The package **hypdoc** has to be loaded *before* **tcolorbox**.
  - **off**: The index is not formatted by **tcolorbox**.
- /tcb/index actual**= $\langle character \rangle$  (no default, initially @)  
 Sets the character for 'actual' in automatic indexing.
- /tcb/index quote**= $\langle character \rangle$  (no default, initially ")  
 Sets the character for 'quote' in automatic indexing.
- /tcb/index level**= $\langle character \rangle$  (no default, initially !)  
 Sets the character for 'level' in automatic indexing.
- /tcb/index default settings** (style, no value)  
 Sets the `makeindex` default values for `/tcb/index actual`, `/tcb/index quote`, and `/tcb/index level`.
- /tcb/index german settings** (style, no value)  
 Sets the `makeindex` values recommended for German language texts. This is identical to setting the following:
- ```
\tcbset{index actual={=},index quote={!},index level={>}}
```
- /tcb/index annotate**=`true|false` (default true, initially true)  
 If set to `true`, the index entries are annotated with short descriptions given by `/tcb/doclang/environment`<sup>→ P.310</sup>, `/tcb/doclang/key`<sup>→ P.310</sup>, and others.
- /tcb/index colorize**=`true|false` (default true, initially false)  
 If set to `true`, the index entries colorized according to the color settings given by `/tcb/color environment`<sup>→ P.308</sup>, `/tcb/color key`<sup>→ P.308</sup>, and others.



The following keys are provided for language specific settings. The English language is predefined.

|                                                                                 |                                             |
|---------------------------------------------------------------------------------|---------------------------------------------|
| <code>/tcb/english language</code>                                              | (style, no value)                           |
| Sets all language specific settings to English.                                 |                                             |
| <code>/tcb/doclang/color=<math>\langle text \rangle</math></code>               | (no default, initially color)               |
| Text used in the index for colors.                                              |                                             |
| <code>/tcb/doclang/colors=<math>\langle text \rangle</math></code>              | (no default, initially Colors)              |
| Heading text in the index for colors.                                           |                                             |
| <code>/tcb/doclang/environment content=<math>\langle text \rangle</math></code> | (no default, initially environment content) |
| Text used in docEnvironment <sup>→ P. 301</sup> .                               |                                             |
| <code>/tcb/doclang/environment=<math>\langle text \rangle</math></code>         | (no default, initially environment)         |
| Text used in the index for environments.                                        |                                             |
| <code>/tcb/doclang/environments=<math>\langle text \rangle</math></code>        | (no default, initially Environments)        |
| Heading text in the index for environments.                                     |                                             |
| <code>/tcb/doclang/key=<math>\langle text \rangle</math></code>                 | (no default, initially key)                 |
| Text used in the index for keys.                                                |                                             |
| <code>/tcb/doclang/keys=<math>\langle text \rangle</math></code>                | (no default, initially Keys)                |
| Heading text used in the index for keys.                                        |                                             |
| <code>/tcb/doclang/value=<math>\langle text \rangle</math></code>               | (no default, initially value)               |
| Text used in the index for values.                                              |                                             |
| <code>/tcb/doclang/values=<math>\langle text \rangle</math></code>              | (no default, initially Values)              |
| Heading text in the index for values.                                           |                                             |
| <code>/tcb/doclang/index=<math>\langle text \rangle</math></code>               | (no default, initially Index)               |
| Heading text for the index.                                                     |                                             |
| <code>/tcb/doclang/pageshort=<math>\langle text \rangle</math></code>           | (no default, initially P.)                  |
| Short text for page references.                                                 |                                             |



`/tcb/doc left=<length>` (no default, initially 2em)

Sets the left hand offset of the documentation texts from `docCommand`<sup>→ P. 300</sup>, `docEnvironment`<sup>→ P. 301</sup>, `docKey`<sup>→ P. 301</sup>, etc, to `<length>`.

```
\begin{docCommand*}[doc left=2cm,doc left indent=-2cm]{myCommandA}{\marg{argument}}
  This is the documentation of \refCom{myCommandA} which takes one \meta{argument}.
  \refCom{myCommandA} does some funny things with its \meta{argument}.
\end{docCommand*}
```

```
\myCommandA{<argument>}
  This is the documentation of \myCommandA which takes one <argument>. \myCommandA
  does some funny things with its <argument>.
```

`/tcb/doc right=<length>` (no default, initially 0em)

Sets the right hand offset of the documentation texts from `docCommand`<sup>→ P. 300</sup>, `docEnvironment`<sup>→ P. 301</sup>, `docKey`<sup>→ P. 301</sup>, etc, to `<length>`.

```
\begin{docCommand*}[doc right=2cm]{myCommandB}{\marg{argument}}
  This is the documentation of \refCom{myCommandB} which takes one \meta{argument}.
  \refCom{myCommandB} does some funny things with its \meta{argument}.
\end{docCommand*}
```

```
\myCommandB{<argument>}
  This is the documentation of \myCommandB which takes one <argument>.
  \myCommandB does some funny things with its <argument>.
```

`/tcb/doc left indent=<length>` (no default, initially -2em)

Sets the left hand indent of documentation heads from `docCommand`<sup>→ P. 300</sup>, `docEnvironment`<sup>→ P. 301</sup>, `docKey`<sup>→ P. 301</sup>, etc, to `<length>`.

```
\begin{docCommand*}[doc left indent=2cm]{myCommandC}{\marg{argument}}
  This is the documentation of \refCom{myCommandC} which takes one \meta{argument}.
  \refCom{myCommandC} does some funny things with its \meta{argument}.
\end{docCommand*}
```

```
    \myCommandC{<argument>}
  This is the documentation of \myCommandC which takes one <argument>. \myCommandC does some
  funny things with its <argument>.
```

`/tcb/doc right indent=<length>` (no default, initially 0pt)

Sets the right hand indent of documentation heads from `docCommand`<sup>→ P. 300</sup>, `docEnvironment`<sup>→ P. 301</sup>, `docKey`<sup>→ P. 301</sup>, etc, to `<length>`.

```
\begin{docCommand*}[doc right indent=-10mm,doc right=10mm,
  doc description=test value]{myCommandD}{\marg{argument}}
  This is the documentation of \refCom{myCommandD} which takes one \meta{argument}.
  \refCom{myCommandD} does some funny things with its \meta{argument}.
\end{docCommand*}
```

```
\myCommandD{<argument>} (test value)
  This is the documentation of \myCommandD which takes one <argument>. \myCommandD
  does some funny things with its <argument>.
```



The head lines of the main documentation environments `docCommand`<sup>→ P. 300</sup>, `docEnvironment`<sup>→ P. 301</sup>, `docKey`<sup>→ P. 301</sup>, etc, are set inside `tcolorboxes`. Options to these `tcolorboxes` can be given using the following keys.

**/tcb/doc head command**=*<options>* (no default, initially empty)

Sets *<options>* for the head line of `docCommand`<sup>→ P. 300</sup> and `docCommand*`<sup>→ P. 301</sup>.

```
\tcbset{doc head command={interior style={fill,left color=red!20!white,
right color=blue!20!white}}}

\begin{docCommand*}{myCommandE}{\marg{argument}}
  This is the documentation of \refCom{myCommandE} which takes one \meta{argument}.
  \refCom{myCommandE} does some funny things with its \meta{argument}.
\end{docCommand*}
```

---

```
\myCommandE{<argument>}
  This is the documentation of \myCommandE which takes one <argument>. \myCommandE does some
  funny things with its <argument>.
```

**/tcb/doc head environment**=*<options>* (no default, initially empty)

Sets *<options>* for the head line of `docEnvironment`<sup>→ P. 301</sup> and `docEnvironment*`<sup>→ P. 301</sup>.

```
\tcbset{doc head environment={beamer,boxsep=2pt,arc=2pt,colback=green!20!white,
after=\par\smallskip}}

\begin{docEnvironment*}{myEnvironment}{\marg{argument}}
  This is the documentation of \refEnv{myEnvironment} which
  takes one \meta{argument}.
\end{docEnvironment*}
```

---

```
\begin{myEnvironment}{<argument>}
  <environment content>
\end{myEnvironment}
```

This is the documentation of `myEnvironment` which takes one *<argument>*.

**/tcb/doc head key**=*<options>* (no default, initially empty)

Sets *<options>* for the head line of `docKey`<sup>→ P. 301</sup> and `docKey*`<sup>→ P. 302</sup>.

```
\tcbset{doc head key={boxsep=4pt,arc=4pt,boxrule=0.6pt,
frame style=fill,interior style=fill,colframe=green!50!black}}

\begin{docKey*}{/foo/myKey}{\no value}
  This is the documentation of \refKey{/foo/myKey}.
\end{docKey*}
```

---

```
/foo/myKey (no value)
```

This is the documentation of `/foo/myKey`.

**/tcb/doc head**=*<options>* (no default, initially empty)

Shortcut for setting the same *<options>* for `/tcb/doc head command`, `/tcb/doc head environment`, and `/tcb/doc head key`.



`/tcb/doc description=<text>` (no default, initially empty)  
 Sets a (short!) additional description *<text>* for `docCommand`<sup>→ P. 300</sup> or `docEnvironment`<sup>→ P. 301</sup>.  
 Such a description is mandatory for `docKey`<sup>→ P. 301</sup>.

```
\begin{docCommand*}[doc description=my description]{myCommandF}{\marg{argument}}
  This is the documentation of \refCom{myCommandF} which takes one \meta{argument}.
  \refCom{myCommandF} does some funny things with its \meta{argument}.
\end{docCommand*}
```

```
\myCommandF{<argument>} (my description)
  This is the documentation of \myCommandF which takes one <argument>. \myCommandF does some
  funny things with its <argument>.
```

Note that the description *<text>* may overlap with the text on the left hand side if too long. Linebreaks can be used inside the *<text>*.

`/tcb/doc into index=true|false` (default `true`, initially `true`)  
 If set to `false`, no index entries are written for the main documentation environments. The same effect is achieved by using e. g. `docCommand*`<sup>→ P. 301</sup> instead of `docCommand`<sup>→ P. 300</sup>.

### 15.3 Predefined Colors of the Library

The following colors are predefined. They are used as default colors in some library commands.


**Option** ■ , **Definition** ■ , **ExampleFrame** ■ , **ExampleBack** ■ , **Hyperlink** ■ .



## A Picture Credits

The following pictures were used inside this documentation.

Basilica\_5.png

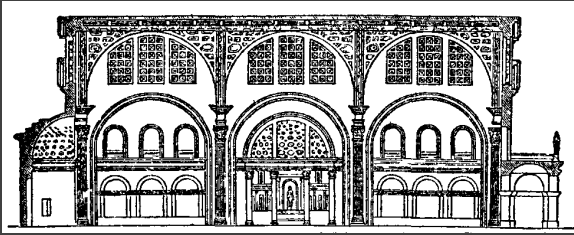

[http://commons.wikimedia.org/wiki/File:Basilica\\_5.png](http://commons.wikimedia.org/wiki/File:Basilica_5.png)

lichtspiel.jpg




Photograph taken by Thomas F. Sturm.

crinklepaper.png




Created with GIMP.  
<http://www.gimp.org>

pink\_marble.png

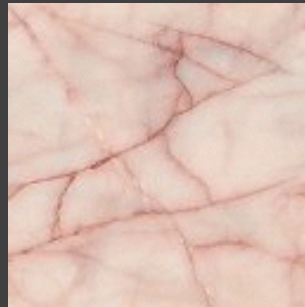


Created with GIMP.  
<http://www.gimp.org>

blueshade.png

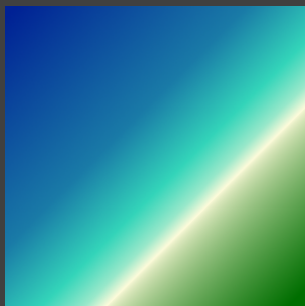

Created with GIMP.  
<http://www.gimp.org>

goldshade.png

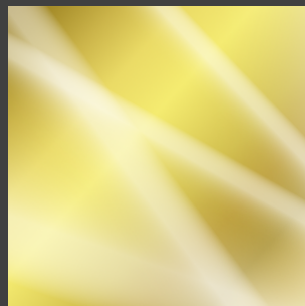

Created with GIMP.  
<http://www.gimp.org>



## References

- [1] Donald Arseneau. *The varwidth package*. Sept. 26, 2011.  
[mirrors.ctan.org/macros/latex/contrib/varwidth/varwidth-doc.pdf](http://mirrors.ctan.org/macros/latex/contrib/varwidth/varwidth-doc.pdf).
- [2] Peter Breitenlohner. *The  $\varepsilon$ -T<sub>E</sub>X manual*. Version 2. Feb. 1998.  
[http://ftp.gwdg.de/pub/ctan/systems/e-tex/v2/doc/etex\\_man.pdf](http://ftp.gwdg.de/pub/ctan/systems/e-tex/v2/doc/etex_man.pdf).
- [3] David Carlisle. *The file ltxdoc.dtx for use with L<sup>A</sup>T<sub>E</sub>X 2<sub>ε</sub>*. Nov. 11, 2007.  
<http://mirror.ctan.org/macros/latex/base/ltxdoc.dtx>.
- [4] David Carlisle. *The tabularx package*. May 13, 2014.  
<http://mirror.ctan.org/macros/latex/required/tools/tabularx.pdf>.
- [5] Toby Cubitt. *The cleveref Package*. Mar. 22, 2013.  
<http://mirror.ctan.org/macros/latex/contrib/cleveref/cleveref.pdf>.
- [6] Carsten Heinz, Brooks Moses, and Jobst Hoffmann. *The Listings Package*. Version 1.5b. Aug. 26, 2013.  
<http://mirror.ctan.org/macros/latex/contrib/listings/listings.pdf>.
- [7] Philipp Lehman. *The etoolbox Package*. Jan. 3, 2011.  
<http://mirror.ctan.org/macros/latex/contrib/etoolbox/etoolbox.pdf>.
- [8] Frank Mittelbach. *The doc and shortvrb Packages*. June 30, 2011.  
<http://mirror.ctan.org/macros/latex/base/doc.dtx>.
- [9] Frank Mittelbach. *An environment for multicolumn output*. June 21, 2014.  
<http://mirror.ctan.org/macros/latex/required/tools/multicol.pdf>.
- [10] Heiko Oberdiek. *The listingsutf8 package*. Nov. 10, 2011.  
<http://mirror.ctan.org/macros/latex/contrib/oberdiek/listingsutf8.pdf>.
- [11] The L<sup>A</sup>T<sub>E</sub>X3 Project. *The xparse Package*. Dec. 31, 2013.  
<http://mirror.ctan.org/macros/latex/contrib/l3packages/xparse.pdf>.
- [12] *Pygments. Python syntax highlighter*. 2013.  
<http://pygments.org/>.
- [13] Will Robertson. *A couple of things involving environments*. Apr. 1, 2013.  
<http://mirror.ctan.org/macros/latex/contrib/envron/envron.pdf>.
- [14] Konrad Rudolph. *The minted package. Highlighted source code in L<sup>A</sup>T<sub>E</sub>X*. Sept. 17, 2011.  
<http://mirror.ctan.org/macros/latex/contrib/minted/minted.pdf>.
- [15] Rainer Schöpf, Bernd Raichle, and Chris Rowley. *A New Implementation of L<sup>A</sup>T<sub>E</sub>X's verbatim and verbatim\* Environments*. Mar. 12, 2001.  
<http://mirror.ctan.org/macros/latex/required/tools/verbatim.pdf>.
- [16] Thomas F. Sturm. *Mathematik 1 (B.Eng.) Vorlesungs-Skriptum*. Neubiberg: Universität der Bundeswehr München, 2007.  
<http://www.unibw.de/bw/sturm>.
- [17] Thomas F. Sturm. *Mathematik 2 (B.Eng.) Vorlesungs-Skriptum*. Neubiberg: Universität der Bundeswehr München, 2008.  
<http://www.unibw.de/bw/sturm>.
- [18] Thomas F. Sturm. *Höhere Mathematik: Fortgeschrittene mathematische Methoden (M.Eng.) Vorlesungs-Skriptum*. Neubiberg: Universität der Bundeswehr München, 2010.  
<http://www.unibw.de/bw/sturm>.
- [19] Thomas F. Sturm. *L<sup>A</sup>T<sub>E</sub>X – Einführung in das Textsatzsystem*. 10th edition. RRZN-Handbücher. Hannover: Regionales Rechenzentrum für Niedersachsen (RRZN), Mar. 2014.  
<http://www.rrzn.uni-hannover.de/buch.html?&titel=latex>.
- [20] Till Tantau. *The TikZ and PGF Packages. Manual for version 3.0.0*. Dec. 20, 2013.  
<http://sourceforge.net/projects/pgf/>.



- [21] Kresten Krab Thorub, Frank Jensen, and Chris Rowley. *The calc package – Infix notation arithmetic in L<sup>A</sup>T<sub>E</sub>X*. Aug. 22, 2007.  
<http://mirror.ctan.org/macros/latex/required/tools/>.



# Index

**absquote** environment, 305  
**add to list** key, 76  
**adjust text** key, 14  
**adjusted title** key, 14  
**adjusted title after break** key, 250  
**after** key, 62  
**after app** key, 279  
**after example** key, 309  
**after lower** key, 45  
**after lower app** key, 279  
**after lower pre** key, 279  
**after pre** key, 279  
**after title** key, 44  
**after title app** key, 278  
**after title pre** key, 278  
**after upper** key, 45  
**after upper app** key, 278  
**after upper pre** key, 278  
**all** key, 8  
**all** value, 33, 34, 254  
**ams align** key, 236  
**ams align lower** key, 236  
**ams align upper** key, 236  
**ams align\*** key, 236  
**ams align\* lower** key, 236  
**ams align\* upper** key, 236  
**ams equation** key, 235  
**ams equation lower** key, 235  
**ams equation upper** key, 235  
**ams equation\*** key, 235  
**ams equation\* lower** key, 235  
**ams equation\* upper** key, 235  
**ams gather** key, 237  
**ams gather lower** key, 237  
**ams gather upper** key, 237  
**ams gather\*** key, 237  
**ams gather\* lower** key, 237  
**ams gather\* upper** key, 237  
**ams nodisplayskip** key, 238  
**ams nodisplayskip lower** key, 238  
**ams nodisplayskip upper** key, 238  
**arc** key, 24  
**areaseize** value, 275  
**at begin tikz** key, 133  
**at begin tikz reset** key, 133  
**at end tikz** key, 133  
**at end tikz reset** key, 133  
**attach boxed title to bottom center** key, 102  
**attach boxed title to bottom left** key, 102  
**attach boxed title to bottom right** key, 102  
**attach boxed title to top center** key, 102  
**attach boxed title to top left** key, 102  
**attach boxed title to top right** key, 102  
**attach title** key, 15  
**attach title to upper** key, 15  
**auto counter** key, 78  
**auto outer arc** key, 24  
**autoparskip** key, 62  
**baseline** key, 62  
**beamer** key, 163  
**beamer** Skin, 163  
**beamerfirst** Skin, 165  
**beamerlast** Skin, 167  
**beamermiddle** Skin, 166  
**before** key, 62  
**before app** key, 279  
**before example** key, 308  
**before lower** key, 45  
**before lower app** key, 279  
**before lower pre** key, 279  
**before pre** key, 279  
**before title** key, 44  
**before title app** key, 278  
**before title pre** key, 278  
**before upper** key, 44  
**before upper app** key, 278  
**before upper pre** key, 278  
**bicolor** key, 158  
**bicolor** Skin, 158  
**bicolorfirst** Skin, 160  
**bicolorlast** Skin, 162  
**bicolormiddle** Skin, 161  
**blank** key, 147  
**blanker** key, 173  
**borderline** key, 121  
**bottom** key, 28  
**bottom** value, 59  
**bottomrule** key, 22  
**bottomrule at break** key, 253  
**bottomsep at break** key, 253  
**bottomtitle** key, 28  
**boxed title style** key, 104  
**boxrule** key, 23  
**boxsep** key, 24  
**\brackets**, 303  
**break** value, 240  
**break at** key, 251  
**breakable** key, 7, 249  
**broken** value, 109–111  
**capture** key, 72  
**center** value, 59  
**center lower** key, 46  
**center title** key, 46  
**center upper** key, 46  
**change** value, 240  
**change apart** value, 240  
**change break** value, 240  
**change standard** value, 239  
**check odd page** key, 76



- `clip lower` key, 120
- `clip title` key, 119
- `clip upper` key, 119
- `clip watermark` key, 115
- `code` key, 52
- `colback` key, 19
- `colbacklower` key, 159
- `colbacktitle` key, 19
- `\colDef`, 307
- `colframe` key, 19
- `collower` key, 20
- `\colOpt`, 307
- `color` key, 310
- `color color` key, 308
- `color command` key, 308
- `color definition` key, 308
- `color environment` key, 308
- `color hyperlink` key, 308
- `color key` key, 308
- `color option` key, 308
- `color value` key, 308
- Colors
  - `Definition`, 313
  - `ExampleBack`, 313
  - `ExampleFrame`, 313
  - `foocolor`, 303
  - `Hyperlink`, 313
  - `Option`, 313
- `colors` key, 310
- `coltext` key, 20
- `coltitle` key, 20
- `colupper` key, 20
- `comment` key, 206
- `comment above listing` key, 211
- `comment and listing` key, 207
- `comment outside listing` key, 209
- `comment side listing` key, 209
- `Crefname` key, 81
- `crefname` key, 81
- `\cs`, 303
- `\DeclareTCBInputListing`, 297
- `\DeclareTCBListing`, 295
- `\DeclareTCBox`, 292
- `\DeclareTCBoxFit`, 298
- `\DeclareTColorBox`, 289
- `\DeclareTotalTCBox`, 293
- `\DeclareTotalTCBoxFit`, 299
- `\DeclareTotalTColorBox`, 291
- `Definition` color, 313
- `description color` key, 230
- `description delimiters` key, 230
- `description delimiters none` key, 230
- `description delimiters parenthesis` key, 230
- `description font` key, 231
- `description formatter` key, 231
- `detach title` key, 15
- `dispExample` environment, 304
- `dispExample*` environment, 304
- `dispListing` environment, 305
- `dispListing*` environment, 305
- `doc` value, 309
- `doc description` key, 313
- `doc head` key, 312
- `doc head command` key, 312
- `doc head environment` key, 312
- `doc head key` key, 312
- `doc into index` key, 313
- `doc left` key, 311
- `doc left indent` key, 311
- `doc right` key, 311
- `doc right indent` key, 311
- `\docAuxCommand`, 302
- `\docAuxCommand*`, 302
- `\docAuxEnvironment`, 302
- `\docAuxEnvironment*`, 302
- `\docAuxKey`, 302
- `\docAuxKey*`, 302
- `\docColor`, 303
- `\docColor*`, 303
- `docCommand` environment, 300
- `docCommand*` environment, 301
- `docEnvironment` environment, 301
- `docEnvironment*` environment, 301
- `docexample` key, 308
- `docKey` environment, 301
- `docKey*` environment, 302
- `documentation` key, 7
- `documentation listing options` key, 308
- `documentation listing style` key, 308
- `documentation minted options` key, 308
- `documentation minted style` key, 308
- `\docValue`, 302
- `\docValue*`, 302
- `downhill` value, 33, 34
- `draft` key, 182
- `draft Skin`, 182
- `draftmode` key, 142
- `drop fuzzy midday shadow` key, 126
- `drop fuzzy shadow` key, 126
- `drop fuzzy shadow east` key, 130
- `drop fuzzy shadow north` key, 130
- `drop fuzzy shadow northeast` key, 130
- `drop fuzzy shadow northwest` key, 130
- `drop fuzzy shadow south` key, 129
- `drop fuzzy shadow southeast` key, 129
- `drop fuzzy shadow southwest` key, 129
- `drop fuzzy shadow west` key, 129
- `drop large lifted shadow` key, 132
- `drop lifted shadow` key, 131
- `drop midday shadow` key, 126
- `drop shadow` key, 126
- `drop shadow east` key, 129
- `drop shadow north` key, 128
- `drop shadow northeast` key, 129
- `drop shadow northwest` key, 128
- `drop shadow south` key, 128
- `drop shadow southeast` key, 128



drop shadow southwest key, 128  
 drop shadow west key, 128  
 drop small lifted shadow key, 131

east value, 33, 34  
 empty key, 172  
 empty Skin, 172  
 empty value, 85, 86  
 emptyfirst Skin, 174  
 emptylast Skin, 176  
 emptymiddle Skin, 175  
 enforce breakable key, 250  
 english language key, 310  
 enhanced key, 145  
 enhanced Skin, 145  
 enhanced jigsaw key, 152  
 enhanced jigsaw Skin, 152  
 enhanced standard key, 147  
 enhancedfirst Skin, 149  
 enhancedfirst jigsaw Skin, 153  
 enhancedlast Skin, 151  
 enhancedlast jigsaw Skin, 157  
 enhancedmiddle Skin, 150  
 enhancedmiddle jigsaw Skin, 154  
 enlarge bottom at break by key, 64  
 enlarge bottom by key, 64  
 enlarge bottom finally by key, 63  
 enlarge by key, 65  
 enlarge left by key, 64  
 enlarge right by key, 64  
 enlarge top at break by key, 64  
 enlarge top by key, 64  
 enlarge top initially by key, 63  
 enlargepage key, 251  
 enlargepage flexible key, 252  
 environment key, 310  
 environment content key, 310

Environments
 

- absquote, 305
- dispExample, 304
- dispExample\*, 304
- displisting, 305
- displisting\*, 305
- docCommand, 300
- docCommand\*, 301
- docEnvironment, 301
- docEnvironment\*, 301
- docKey, 301
- docKey\*, 302
- fooauxenv, 302
- foocolorbox, 301
- foocolorbox\*, 301
- tcbclipframe, 116
- tcbclipinterior, 118
- tcbcliptitle, 118
- tcbinvclipframe, 117
- tcblisting, 194
- tcboutputlisting, 196
- tcbverbatimwrite, 83
- tcbwritetemp, 83
- tcolorbox, 9
- environments key, 310
- equal height group key, 42
- evenpage value, 31, 66
- every box key, 69
- every box on higher layers key, 70
- every box on layer n key, 70
- every listing line key, 201
- every listing line\* key, 201
- ExampleBack color, 313
- ExampleFrame color, 313
- extend freelance key, 184
- extend freelancefirst key, 184
- extend freelancelast key, 184
- extend freelancemiddle key, 184
- external key, 77
- extrude bottom by key, 68
- extrude by key, 68
- extrude left by key, 67
- extrude right by key, 67
- extrude top by key, 68
- false value, 249
- fbox value, 29
- fill image opacity key, 191
- fill image options key, 191
- fill image scale key, 191
- fill overzoom image key, 187
- fill overzoom image\* key, 187
- fill overzoom picture key, 187
- fill plain image key, 185
- fill plain image\* key, 185
- fill plain picture key, 185
- fill shrink image key, 189
- fill shrink image\* key, 189
- fill shrink picture key, 189
- fill stretch image key, 186
- fill stretch image\* key, 186
- fill stretch picture key, 186
- fill tile image key, 190
- fill tile image\* key, 190
- fill tile picture key, 190
- fill tile picture\* key, 190
- fill zoom image key, 188
- fill zoom image\* key, 188
- fill zoom picture key, 188
- final value, 276
- finish key, 138
- finish broken key, 139
- finish broken pre key, 285
- finish first key, 139
- finish first pre key, 285
- finish last key, 139
- finish last pre key, 285
- finish middle key, 139
- finish middle and last key, 139
- finish middle and last pre key, 285
- finish middle pre key, 285
- finish pre key, 285
- finish unbroken key, 139



finish unbroken and first key, 139  
 finish unbroken and first pre key, 285  
 finish unbroken and last key, 139  
 finish unbroken and last pre key, 285  
 finish unbroken pre key, 285  
 first value, 109–111, 254  
 first and middle value, 254  
 fit key, 269  
 fit algorithm key, 275  
 fit basedim key, 270  
 fit fontsize macros key, 271  
 fit height from key, 274  
 fit height plus key, 272  
 fit maxfontdiff key, 276  
 fit maxfontdiffgap key, 276  
 fit maxstep key, 276  
 fit maxwidthdiff key, 276  
 fit maxwidthdiffgap key, 276  
 fit skip key, 270  
 fit to key, 270  
 fit to height key, 270  
 fit warning key, 276  
 fit width from key, 273  
 fit width plus key, 272  
 fitbox value, 72  
 fitting key, 7  
 float key, 58  
 float\* key, 58  
 floatplacement key, 58  
 flushleft lower key, 47  
 flushleft title key, 47  
 flushleft upper key, 47  
 flushright lower key, 48  
 flushright title key, 48  
 flushright upper key, 48  
 fontlower key, 21  
 fontsize value, 275  
 fonttitle key, 21  
 fontupper key, 21  
 \foaux, 302  
 foaux key, 302  
 foauxenv environment, 302  
 foocolor color, 303  
 foocolorbox environment, 301  
 foocolorbox\* environment, 301  
 foodummy key, 306  
 \foomakedocSubKey, 300  
 \foomakedocSubKey\*, 300  
 footitle key, 301  
 foovalue value, 302  
 forced value, 31, 66  
 frame code key, 88  
 frame code app key, 285  
 frame code pre key, 285  
 frame empty key, 88  
 frame engine key, 85  
 frame hidden key, 97  
 frame style key, 96  
 frame style image key, 96

frame style tile key, 97  
 freelance key, 184  
 freelance Skin, 184  
 freelance value, 85, 86  
 freelancefirst Skin, 184  
 freelancelast Skin, 184  
 freelancemiddle Skin, 184  
 fuzzy halo key, 127  
 fuzzy shadow key, 125  
  
 geometry nodes key, 87  
 graphical environment key, 84  
 grow to left by key, 65  
 grow to right by key, 65

halo key, 127  
 hbox key, 72  
 hbox value, 72  
 hbox boxed title key, 107  
 height key, 38  
 height fixed for key, 254  
 height from key, 39  
 height plus key, 38  
 highlight math key, 234  
 highlight math style key, 234  
 hooks key, 7  
 hybrid value, 275  
 Hyperlink color, 313  
 hyphenationfix key, 74

IfBooleanTF key, 288  
 IfNoValueTF key, 287  
 IfValueTF key, 288  
 ignored value, 16  
 image comment key, 206  
 index key, 310  
 index actual key, 309  
 index annotate key, 309  
 index colorize key, 309  
 index default settings key, 309  
 index format key, 309  
 index german settings key, 309  
 index level key, 309  
 index quote key, 309  
 interior code key, 89  
 interior code app key, 286  
 interior code pre key, 286  
 interior empty key, 89  
 interior engine key, 86  
 interior hidden key, 98  
 interior style key, 97  
 interior style image key, 98  
 interior style tile key, 98  
 interior titled code key, 88  
 interior titled code app key, 285  
 interior titled code pre key, 286  
 interior titled empty key, 88  
 interior titled engine key, 85  
 invisible value, 16



key key, 310

## Keys

### /foo/

fooaux, 302  
foodummy, 306  
footitle, 301

### /tcb/

add to list, 76  
adjust text, 14  
adjusted title, 14  
adjusted title after break, 250  
after, 62  
after app, 279  
after example, 309  
after lower, 45  
after lower app, 279  
after lower pre, 279  
after pre, 279  
after title, 44  
after title app, 278  
after title pre, 278  
after upper, 45  
after upper app, 278  
after upper pre, 278  
ams align, 236  
ams align lower, 236  
ams align upper, 236  
ams align\*, 236  
ams align\* lower, 236  
ams align\* upper, 236  
ams equation, 235  
ams equation lower, 235  
ams equation upper, 235  
ams equation\*, 235  
ams equation\* lower, 235  
ams equation\* upper, 235  
ams gather, 237  
ams gather lower, 237  
ams gather upper, 237  
ams gather\*, 237  
ams gather\* lower, 237  
ams gather\* upper, 237  
ams nodisplayskip, 238  
ams nodisplayskip lower, 238  
ams nodisplayskip upper, 238  
arc, 24  
at begin tikz, 133  
at begin tikz reset, 133  
at end tikz, 133  
at end tikz reset, 133  
attach boxed title to bottom  
center, 102  
attach boxed title to bottom left,  
102  
attach boxed title to bottom right,  
102  
attach boxed title to top center,  
102  
attach boxed title to top left, 102

attach boxed title to top right,  
102

attach title, 15  
attach title to upper, 15  
auto outer arc, 24  
autoparskip, 62  
baseline, 62  
beamer, 163  
before, 62  
before app, 279  
before example, 308  
before lower, 45  
before lower app, 279  
before lower pre, 279  
before pre, 279  
before title, 44  
before title app, 278  
before title pre, 278  
before upper, 44  
before upper app, 278  
before upper pre, 278  
bicolor, 158  
blank, 147  
blanker, 173  
borderline, 121  
bottom, 28  
bottomrule, 22  
bottomrule at break, 253  
bottomsep at break, 253  
bottomtitle, 28  
boxed title style, 104  
boxrule, 23  
boxsep, 24  
break at, 251  
breakable, 249  
capture, 72  
center lower, 46  
center title, 46  
center upper, 46  
check odd page, 76  
clip lower, 120  
clip title, 119  
clip upper, 119  
clip watermark, 115  
code, 52  
colback, 19  
colbacklower, 159  
colbacktitle, 19  
colframe, 19  
collower, 20  
color color, 308  
color command, 308  
color definition, 308  
color environment, 308  
color hyperlink, 308  
color key, 308  
color option, 308  
color value, 308  
coltext, 20



- coltitle, 20
- colupper, 20
- comment, 206
- comment above listing, 211
- comment and listing, 207
- comment outside listing, 209
- comment side listing, 209
- description color, 230
- description delimiters, 230
- description delimiters none, 230
- description delimiters parenthesis, 230
- description font, 231
- description formatter, 231
- detach title, 15
- doc description, 313
- doc head, 312
- doc head command, 312
- doc head environment, 312
- doc head key, 312
- doc into index, 313
- doc left, 311
- doc left indent, 311
- doc right, 311
- doc right indent, 311
- docexample, 308
- documentation listing options, 308
- documentation listing style, 308
- documentation minted options, 308
- documentation minted style, 308
- draft, 182
- draftmode, 142
- drop fuzzy midday shadow, 126
- drop fuzzy shadow, 126
- drop fuzzy shadow east, 130
- drop fuzzy shadow north, 130
- drop fuzzy shadow northeast, 130
- drop fuzzy shadow northwest, 130
- drop fuzzy shadow south, 129
- drop fuzzy shadow southeast, 129
- drop fuzzy shadow southwest, 129
- drop fuzzy shadow west, 129
- drop large lifted shadow, 132
- drop lifted shadow, 131
- drop midday shadow, 126
- drop shadow, 126
- drop shadow east, 129
- drop shadow north, 128
- drop shadow northeast, 129
- drop shadow northwest, 128
- drop shadow south, 128
- drop shadow southeast, 128
- drop shadow southwest, 128
- drop shadow west, 128
- drop small lifted shadow, 131
- empty, 172
- enforce breakable, 250
- english language, 310
- enhanced, 145
- enhanced jigsaw, 152
- enhanced standard, 147
- enlarge bottom at break by, 64
- enlarge bottom by, 64
- enlarge bottom finally by, 63
- enlarge by, 65
- enlarge left by, 64
- enlarge right by, 64
- enlarge top at break by, 64
- enlarge top by, 64
- enlarge top initially by, 63
- enlargepage, 251
- enlargepage flexible, 252
- equal height group, 42
- every box, 69
- every box on higher layers, 70
- every box on layer n, 70
- every listing line, 201
- every listing line\*, 201
- extend freelance, 184
- extend freelancefirst, 184
- extend freelancelast, 184
- extend freelancemiddle, 184
- external, 77
- extrude bottom by, 68
- extrude by, 68
- extrude left by, 67
- extrude right by, 67
- extrude top by, 68
- finish, 138
- finish broken, 139
- finish broken pre, 285
- finish first, 139
- finish first pre, 285
- finish last, 139
- finish last pre, 285
- finish middle, 139
- finish middle and last, 139
- finish middle and last pre, 285
- finish middle pre, 285
- finish pre, 285
- finish unbroken, 139
- finish unbroken and first, 139
- finish unbroken and first pre, 285
- finish unbroken and last, 139
- finish unbroken and last pre, 285
- finish unbroken pre, 285
- fit, 269
- fit algorithm, 275
- fit basedim, 270
- fit fontsize macros, 271
- fit height from, 274
- fit height plus, 272
- fit maxfontdiff, 276
- fit maxfontdiffgap, 276
- fit maxstep, 276
- fit maxwidthdiff, 276
- fit maxwidthdiffgap, 276
- fit skip, 270



fit to, 270  
 fit to height, 270  
 fit warning, 276  
 fit width from, 273  
 fit width plus, 272  
 float, 58  
 float\*, 58  
 floatplacement, 58  
 flushleft lower, 47  
 flushleft title, 47  
 flushleft upper, 47  
 flushright lower, 48  
 flushright title, 48  
 flushright upper, 48  
 fontlower, 21  
 fonttitle, 21  
 fontupper, 21  
 frame code, 88  
 frame code app, 285  
 frame code pre, 285  
 frame empty, 88  
 frame engine, 85  
 frame hidden, 97  
 frame style, 96  
 frame style image, 96  
 frame style tile, 97  
 freelance, 184  
 fuzzy halo, 127  
 fuzzy shadow, 125  
 geometry nodes, 87  
 graphical environment, 84  
 grow to left by, 65  
 grow to right by, 65  
 halo, 127  
 hbox, 72  
 hbox boxed title, 107  
 height, 38  
 height fixed for, 254  
 height from, 39  
 height plus, 38  
 highlight math, 234  
 highlight math style, 234  
 hyphenationfix, 74  
 IfBooleanTF, 288  
 IfNoValueTF, 287  
 IfValueTF, 288  
 image comment, 206  
 index actual, 309  
 index annotate, 309  
 index colorize, 309  
 index default settings, 309  
 index format, 309  
 index german settings, 309  
 index level, 309  
 index quote, 309  
 interior code, 89  
 interior code app, 286  
 interior code pre, 286  
 interior empty, 89  
 interior engine, 86  
 interior hidden, 98  
 interior style, 97  
 interior style image, 98  
 interior style tile, 98  
 interior titled code, 88  
 interior titled code app, 285  
 interior titled code pre, 286  
 interior titled empty, 88  
 interior titled engine, 85  
 label, 75  
 label type, 75  
 left, 25  
 lefthand ratio, 61  
 lefthand width, 60  
 leftlower, 25  
 leftrule, 22  
 lefttitle, 25  
 leftupper, 25  
 lifted shadow, 131  
 lines before break, 250  
 list entry, 76  
 listing above comment, 211  
 listing above text, 210  
 listing and comment, 207  
 listing and text, 205  
 listing engine, 205  
 listing file, 205  
 listing inputencoding, 201  
 listing only, 205  
 listing options, 200  
 listing outside comment, 209  
 listing outside text, 208  
 listing remove caption, 201  
 listing side comment, 209  
 listing side text, 208  
 listing style, 200  
 listing utf8, 202  
 lower separated, 17  
 lowerbox, 16  
 marker, 154  
 math, 234  
 math lower, 234  
 math upper, 234  
 middle, 28  
 minimum for equal height group, 43  
 minipage, 72  
 minipage boxed title, 107  
 minipage boxed title\*, 107  
 minted language, 203  
 minted options, 203  
 minted style, 204  
 natural height, 38  
 no borderline, 123  
 no finish, 139  
 no finish first, 139  
 no finish last, 139  
 no finish middle, 139  
 no finish unbroken, 139



- no label type, 75
- no listing options, 200
- no overlay, 54
- no shadow, 124
- no underlay, 136
- no underlay boxed title, 137
- no underlay first, 137
- no underlay last, 137
- no underlay middle, 137
- no underlay unbroken, 137
- no watermark, 111
- nobeforeafter, 62
- nofloat, 58
- noparskip, 62
- nophantom, 75
- notitle, 14
- notitle after break, 250
- on line, 74
- opacityback, 36
- opacitybacktitle, 36
- opacityfill, 36
- opacityframe, 36
- opacitylower, 37
- opacitytext, 37
- opacitytitle, 37
- opacityupper, 37
- outer arc, 24
- overlay, 53
- overlay app, 280
- overlay broken, 54
- overlay broken app, 281
- overlay broken pre, 281
- overlay first, 54
- overlay first app, 280
- overlay first pre, 280
- overlay last, 54
- overlay last app, 281
- overlay last pre, 281
- overlay middle, 54
- overlay middle and last, 54
- overlay middle and last app, 281
- overlay middle and last pre, 281
- overlay middle app, 281
- overlay middle pre, 281
- overlay pre, 280
- overlay unbroken, 54
- overlay unbroken and first, 54
- overlay unbroken and first app, 281
- overlay unbroken and first pre, 281
- overlay unbroken and last, 54
- overlay unbroken and last app, 281
- overlay unbroken and last pre, 281
- overlay unbroken app, 280
- overlay unbroken pre, 280
- oversize, 30
- pad after break, 253
- pad at break, 253
- pad at break\*, 254
- pad before break, 253
- pad before break\*, 253
- parbox, 73
- parskip, 62
- phantom, 75
- remake, 77
- remember, 134
- remember as, 135
- reset, 77
- right, 26
- righthand ratio, 61
- righthand width, 60
- rightlower, 27
- rightrule, 23
- righttitle, 26
- rightupper, 26
- rotate, 134
- rounded corners, 34
- savedelimiter, 18
- savelowerto, 16
- scale, 134
- segmentation code, 89
- segmentation code app, 286
- segmentation code pre, 286
- segmentation empty, 89
- segmentation engine, 86
- segmentation hidden, 99
- segmentation style, 99
- separator sign, 229
- separator sign colon, 229
- separator sign dash, 229
- separator sign none, 229
- shadow, 124
- sharp corners, 33
- sharpish corners, 34
- shield externalize, 77
- show bounding box, 123
- shrink break goal, 252
- shrink tight, 67
- sidebyside, 59
- sidebyside align, 59
- sidebyside gap, 60
- size, 29
- skin, 84
- skin first, 84
- skin first is subskin of, 91
- skin last, 84
- skin last is subskin of, 91
- skin middle, 84
- skin middle is subskin of, 91
- space, 40
- space to both, 40
- space to lower, 40
- space to upper, 40
- spartan, 181
- split, 41
- standard, 143
- standard jigsaw, 144
- step, 75
- step and label, 75



- tabularx, 49
- tabularx\*, 49
- tcbox raise, 74
- tcbox raise base, 74
- tempfile, 74
- terminator sign, 231
- terminator sign colon, 232
- terminator sign dash, 232
- terminator sign none, 232
- text above listing, 210
- text and listing, 205
- text only, 206
- text outside listing, 208
- text side listing, 208
- theorem, 233
- theorem name, 233
- theorem name and number, 232
- theorem number and name, 233
- theorem style, 239
- tikz, 133
- tikz lower, 50
- tikz reset, 133
- tikz upper, 50
- tikznode, 51
- tikznode boxed title, 108
- tikznode lower, 51
- tikznode upper, 51
- title, 14
- title after break, 250
- title code, 90
- title code app, 286
- title code pre, 286
- title empty, 90
- title engine, 86
- title filled, 19
- title hidden, 100
- title style, 99
- title style image, 100
- title style tile, 100
- titlerule, 23
- toggle enlargement, 66
- toggle left and right, 31
- top, 27
- toprule, 22
- toprule at break, 253
- topsep at break, 253
- toptitle, 27
- unbreakable, 250
- underlay, 136
- underlay boxed title, 137
- underlay boxed title pre, 284
- underlay broken, 137
- underlay broken pre, 284
- underlay first, 137
- underlay first pre, 284
- underlay last, 137
- underlay last pre, 284
- underlay middle, 137
- underlay middle and last, 137
- underlay middle and last pre, 284
- underlay middle pre, 284
- underlay pre, 284
- underlay unbroken, 137
- underlay unbroken and first, 137
- underlay unbroken and first pre, 284
- underlay unbroken and last, 137
- underlay unbroken and last pre, 284
- underlay unbroken pre, 284
- valign, 41
- valign lower, 41
- varwidth boxed title, 108
- varwidth boxed title\*, 108
- varwidth upper, 51
- verbatim, 287
- vfill before first, 254
- watermark color, 114
- watermark graphics, 110
- watermark graphics app, 283
- watermark graphics app on, 283
- watermark graphics on, 110
- watermark graphics pre, 283
- watermark graphics pre on, 283
- watermark opacity, 112
- watermark overzoom, 113
- watermark shrink, 113
- watermark stretch, 114
- watermark text, 109
- watermark text app, 282
- watermark text app on, 282
- watermark text on, 109
- watermark text pre, 282
- watermark text pre on, 282
- watermark tikz, 111
- watermark tikz app, 283
- watermark tikz app on, 283
- watermark tikz on, 111
- watermark tikz pre, 283
- watermark tikz pre on, 283
- watermark zoom, 112
- widget, 168
- width, 22
- /tcb/boxtitle/
  - xshift, 103
  - yshift, 103
  - yshift\*, 103
  - yshifttext, 103
- /tcb/doclang/
  - color, 310
  - colors, 310
  - environment, 310
  - environment content, 310
  - environments, 310
  - index, 310
  - key, 310
  - keys, 310
  - pageshort, 310
  - value, 310



- values, 310
- /tcb/library/
  - all, 8
  - breakable, 7
  - documentation, 7
  - fitting, 7
  - hooks, 7
  - listings, 7
  - listingsutf8, 7
  - many, 8
  - minted, 7
  - most, 8
  - skins, 7
  - theorems, 7
  - xparse, 7
- /tcb/new/
  - auto counter, 78
  - Crefname, 81
  - crefname, 81
  - list inside, 82
  - list type, 82
  - no counter, 79
  - number format, 80
  - number freestyle, 80
  - number within, 80
  - use counter, 79
  - use counter from, 79
- /tikz/
  - fill image opacity, 191
  - fill image options, 191
  - fill image scale, 191
  - fill overzoom image, 187
  - fill overzoom image\*, 187
  - fill overzoom picture, 187
  - fill plain image, 185
  - fill plain image\*, 185
  - fill plain picture, 185
  - fill shrink image, 189
  - fill shrink image\*, 189
  - fill shrink picture, 189
  - fill stretch image, 186
  - fill stretch image\*, 186
  - fill stretch picture, 186
  - fill tile image, 190
  - fill tile image\*, 190
  - fill tile picture, 190
  - fill tile picture\*, 190
  - fill zoom image, 188
  - fill zoom image\*, 188
  - fill zoom picture, 188
  - tcb fill frame, 101
  - tcb fill interior, 101
  - tcb fill title, 101
- keys key, 310
- label key, 75
- label type key, 75
- last value, 109–111, 254
- left key, 25
- lefthand ratio key, 61
- lefthand width key, 60
- leftlower key, 25
- leftrule key, 22
- lefttitle key, 25
- leftupper key, 25
- lifted shadow key, 131
- lines before break key, 250
- list entry key, 76
- list inside key, 82
- list type key, 82
- listing above comment key, 211
- listing above text key, 210
- listing and comment key, 207
- listing and text key, 205
- listing engine key, 205
- listing file key, 205
- listing inputencoding key, 201
- listing only key, 205
- listing options key, 200
- listing outside comment key, 209
- listing outside text key, 208
- listing remove caption key, 201
- listing side comment key, 209
- listing side text key, 208
- listing style key, 200
- listing utf8 key, 202
- listings key, 7
- listings value, 205
- listingsutf8 key, 7
- lower separated key, 17
- lowerbox key, 16
- many key, 8
- \marg, 303
- margin value, 241
- margin apart value, 241
- margin break value, 241
- marker key, 154
- math key, 234
- math lower key, 234
- math upper key, 234
- \meta, 303
- middle key, 28
- middle value, 109–111, 254
- middle and last value, 109–111, 254
- minimal value, 29
- minimum for equal height group key, 43
- minipage key, 72
- minipage value, 72
- minipage boxed title key, 107
- minipage boxed title\* key, 107
- minted key, 7
- minted value, 205
- minted language key, 203
- minted options key, 203
- minted style key, 204
- most key, 8
- natural height key, 38
- \NewTCBInputListing, 297



- `\newtcbinputlisting`, 199
- `\NewTCBListing`, 295
- `\newtcblisting`, 197
- `\NewTCBox`, 292
- `\newtcbox`, 13
- `\NewTCBoxFit`, 298
- `\newtcboxfit`, 268
- `\newtcbtheorem`, 225
- `\NewTColorBox`, 290
- `\newtcolorbox`, 12
- `\NewTotalTCBox`, 294
- `\NewTotalTCBoxFit`, 299
- `\NewTotalTColorBox`, 291
- `no borderline` key, 123
- `no counter` key, 79
- `no finish` key, 139
- `no finish first` key, 139
- `no finish last` key, 139
- `no finish middle` key, 139
- `no finish unbroken` key, 139
- `no label type` key, 75
- `no listing options` key, 200
- `no overlay` key, 54
- `no shadow` key, 124
- `no underlay` key, 136
- `no underlay boxed title` key, 137
- `no underlay first` key, 137
- `no underlay last` key, 137
- `no underlay middle` key, 137
- `no underlay unbroken` key, 137
- `no watermark` key, 111
- `nobeforeafter` key, 62
- `nofloat` key, 58
- `none` value, 31, 66, 254
- `noparskip` key, 62
- `nophantom` key, 75
- `normal` value, 29
- `north` value, 33, 34
- `northeast` value, 33, 34
- `northwest` value, 33, 34
- `notitle` key, 14
- `notitle after break` key, 250
- `number format` key, 80
- `number freestyle` key, 80
- `number within` key, 80
- 
- `\oarg`, 303
- `off` value, 276, 309
- `on` value, 276
- `on line` key, 74
- `opacityback` key, 36
- `opacitybacktitle` key, 36
- `opacityfill` key, 36
- `opacityframe` key, 36
- `opacitylower` key, 37
- `opacitytext` key, 37
- `opacitytitle` key, 37
- `opacityupper` key, 37
- `Option` color, 313
- `outer arc` key, 24
- 
- `overlay` key, 53
- `overlay app` key, 280
- `overlay broken` key, 54
- `overlay broken app` key, 281
- `overlay broken pre` key, 281
- `overlay first` key, 54
- `overlay first app` key, 280
- `overlay first pre` key, 280
- `overlay last` key, 54
- `overlay last app` key, 281
- `overlay last pre` key, 281
- `overlay middle` key, 54
- `overlay middle and last` key, 54
- `overlay middle and last app` key, 281
- `overlay middle and last pre` key, 281
- `overlay middle app` key, 281
- `overlay middle pre` key, 281
- `overlay pre` key, 280
- `overlay unbroken` key, 54
- `overlay unbroken and first` key, 54
- `overlay unbroken and first app` key, 281
- `overlay unbroken and first pre` key, 281
- `overlay unbroken and last` key, 54
- `overlay unbroken and last app` key, 281
- `overlay unbroken and last pre` key, 281
- `overlay unbroken app` key, 280
- `overlay unbroken pre` key, 280
- `oversize` key, 30
- 
- `pad after break` key, 253
- `pad at break` key, 253
- `pad at break*` key, 254
- `pad before break` key, 253
- `pad before break*` key, 253
- `pageshort` key, 310
- `parbox` key, 73
- `parskip` key, 62
- `path` value, 85, 86
- `pathfirst` value, 85, 86
- `pathfirstjigsaw` value, 85
- `pathjigsaw` value, 85
- `pathlast` value, 85, 86
- `pathlastjigsaw` value, 85
- `pathmiddle` value, 85, 86
- `pathmiddlejigsaw` value, 85
- `pgf` value, 309
- `pgfchapter` value, 309
- `pgfsection` value, 309
- `phantom` key, 75
- `plain` value, 239
- `plain apart` value, 240
- `\ProvideTCBInputListing`, 297
- `\ProvideTCBListing`, 295
- `\ProvideTCBox`, 292
- `\ProvideTCBoxFit`, 298
- `\ProvideTColorBox`, 290
- `\ProvideTotalTCBox`, 294
- `\ProvideTotalTCBoxFit`, 299
- `\ProvideTotalTColorBox`, 291



- `\refAux`, 307
- `\refAuxcs`, 307
- `\refCom`, 306
- `\refCom*`, 306
- `\refEnv`, 306
- `\refEnv*`, 306
- `\refKey`, 307
- `\refKey*`, 307
- `remake` key, 77
- `remember` key, 134
- `remember as` key, 135
- `\RenewTCBInputListing`, 297
- `\renewtcbinputlisting`, 199
- `\RenewTCBListing`, 295
- `\renewtcblisting`, 198
- `\RenewTCBox`, 292
- `\renewtcbox`, 13
- `\RenewTCBoxFit`, 298
- `\renewtcboxfit`, 268
- `\renewtcbtheorem`, 226
- `\RenewTColorBox`, 290
- `\renewtcolorbox`, 12
- `\RenewTotalTCBox`, 294
- `\RenewTotalTCBoxFit`, 299
- `\RenewTotalTColorBox`, 291
- `reset` key, 77
- `right` key, 26
- `righthand ratio` key, 61
- `righthand width` key, 60
- `rightlower` key, 27
- `rightrule` key, 23
- `righttitle` key, 26
- `rightupper` key, 26
- `rotate` key, 134
- `rounded corners` key, 34
- 
- `savedelimiter` key, 18
- `savelowerto` key, 16
- `scale` key, 134
- `segmentation code` key, 89
- `segmentation code app` key, 286
- `segmentation code pre` key, 286
- `segmentation empty` key, 89
- `segmentation engine` key, 86
- `segmentation hidden` key, 99
- `segmentation style` key, 99
- `separator sign` key, 229
- `separator sign colon` key, 229
- `separator sign dash` key, 229
- `separator sign none` key, 229
- `shadow` key, 124
- `sharp corners` key, 33
- `sharpish corners` key, 34
- `shield externalize` key, 77
- `show bounding box` key, 123
- `shrink break goal` key, 252
- `shrink tight` key, 67
- `sidebyside` key, 59
- `sidebyside align` key, 59
- `sidebyside gap` key, 60

- `size` key, 29
- `skin` key, 84
- `skin first` key, 84
- `skin first is subskin of` key, 91
- `skin last` key, 84
- `skin last is subskin of` key, 91
- `skin middle` key, 84
- `skin middle is subskin of` key, 91
- Skins
  - `beamer`, 163
  - `beamerfirst`, 165
  - `beamerlast`, 167
  - `beamermiddle`, 166
  - `bicolor`, 158
  - `bicolorfirst`, 160
  - `bicolorlast`, 162
  - `bicolormiddle`, 161
  - `draft`, 182
  - `empty`, 172
  - `emptyfirst`, 174
  - `emptylast`, 176
  - `emptymiddle`, 175
  - `enhanced`, 145
  - `enhanced jigsaw`, 152
  - `enhancedfirst`, 149
  - `enhancedfirst jigsaw`, 153
  - `enhancedlast`, 151
  - `enhancedlast jigsaw`, 157
  - `enhancedmiddle`, 150
  - `enhancedmiddle jigsaw`, 154
  - `freelance`, 184
  - `freelancefirst`, 184
  - `freelancelast`, 184
  - `freelancemiddle`, 184
  - `spartan`, 181
  - `standard`, 143
  - `standard jigsaw`, 144
  - `widget`, 168
  - `widgetfirst`, 169
  - `widgetlast`, 171
  - `widgetmiddle`, 170
- `skins` key, 7
- `small` value, 29
- `south` value, 33, 34
- `southeast` value, 33, 34
- `southwest` value, 33, 34
- `space` key, 40
- `space to both` key, 40
- `space to lower` key, 40
- `space to upper` key, 40
- `spartan` key, 181
- `spartan Skin`, 181
- `spartan` value, 85, 86
- `split` key, 41
- `squeeze` value, 275
- `standard` key, 143
- `standard Skin`, 143
- `standard` value, 85, 86, 239
- `standard jigsaw` key, 144



standard jigsaw Skin, 144  
 step key, 75  
 step and label key, 75  
  
 tabularx key, 49  
 tabularx\* key, 49  
 tcb fill frame key, 101  
 tcb fill interior key, 101  
 tcb fill title key, 101  
 tcbclipframe environment, 116  
 tcbclipinterior environment, 118  
 tcbcliptitle environment, 118  
 \tcbcontinuedraftmode, 142  
 \tcbcounter, 78  
 \tcbfitdim, 268–271  
 \tcbfitsteps, 269  
 \tcbfontsize, 268  
 \tcbhighmath, 227  
 \tcbinputlisting, 196  
 \tcbinterruptdraftmode, 142  
 tcbinvclipframe environment, 117  
 \tcbline, 148  
 \tcbline\*, 148  
 tcblisting environment, 194  
 \tcblistof, 82  
 \tcblower, 9  
 \tcbmakedocSubKey, 306  
 \tcbmaketheorem, 226  
 tcboutputlisting environment, 196  
 \tcbox, 11  
 tcbox raise key, 74  
 tcbox raise base key, 74  
 \tcboxedtitleheight, 103  
 \tcboxedtitlewidth, 103  
 \tcboxfit, 267  
 \tcboxmath, 227  
 \tcboxverb, 294  
 \tcbset, 10  
 \tcbsetforeverylayer, 10  
 \tcbsetmanagedlayer, 70  
 \tcbstartdraftmode, 142  
 \tcbstopdraftmode, 142  
 \tcbsubskin, 91  
 \tcbtitle, 15  
 \tcbtitletext, 15  
 \tcbuselibrary, 7  
 \tcbuselistinglisting, 196  
 \tcbuselistingtext, 196  
 \tcbusetemp, 83  
 \tcbusetemplisting, 196  
 tcbverbatimwrite environment, 83  
 tcbwritetemp environment, 83  
 tcolorbox environment, 9  
 tempfile key, 74  
 terminator sign key, 231  
 terminator sign colon key, 232  
 terminator sign dash key, 232  
 terminator sign none key, 232  
 text above listing key, 210  
 text and listing key, 205  
  
 text only key, 206  
 text outside listing key, 208  
 text side listing key, 208  
 theorem key, 233  
 theorem name key, 233  
 theorem name and number key, 232  
 theorem number and name key, 233  
 theorem style key, 239  
 theorems key, 7  
 \thetcbcounter, 78, 79  
 tight value, 29  
 tikz key, 133  
 tikz lower key, 50  
 tikz reset key, 133  
 tikz upper key, 50  
 tikznode key, 51  
 tikznode boxed title key, 108  
 tikznode lower key, 51  
 tikznode upper key, 51  
 title key, 14  
 title value, 29  
 title after break key, 250  
 title code key, 90  
 title code app key, 286  
 title code pre key, 286  
 title empty key, 90  
 title engine key, 86  
 title filled key, 19  
 title hidden key, 100  
 title style key, 99  
 title style image key, 100  
 title style tile key, 100  
 titlerule key, 23  
 toggle enlargement key, 66  
 toggle left and right key, 31  
 top key, 27  
 top value, 59  
 toprule key, 22  
 toprule at break key, 253  
 topsep at break key, 253  
 toptitle key, 27  
 true value, 249  
  
 unbreakable key, 250  
 unbroken value, 109–111  
 unbroken and first value, 109–111  
 underlay key, 136  
 underlay boxed title key, 137  
 underlay boxed title pre key, 284  
 underlay broken key, 137  
 underlay broken pre key, 284  
 underlay first key, 137  
 underlay first pre key, 284  
 underlay last key, 137  
 underlay last pre key, 284  
 underlay middle key, 137  
 underlay middle and last key, 137  
 underlay middle and last pre key, 284  
 underlay middle pre key, 284  
 underlay pre key, 284



- underlay unbroken key, 137
- underlay unbroken and first key, 137
- underlay unbroken and first pre key, 284
- underlay unbroken and last key, 137
- underlay unbroken and last pre key, 284
- underlay unbroken pre key, 284
- unlimited value, 248, 249
- uphill value, 33, 34
- use counter key, 79
- use counter from key, 79
  
- valign key, 41
- valign lower key, 41
- value key, 310
- Values
  - all, 33, 34, 254
  - areaseize, 275
  - bottom, 59
  - break, 240
  - broken, 109–111
  - center, 59
  - change, 240
  - change apart, 240
  - change break, 240
  - change standard, 239
  - doc, 309
  - downhill, 33, 34
  - east, 33, 34
  - empty, 85, 86
  - evenpage, 31, 66
  - false, 249
  - fbox, 29
  - final, 276
  - first, 109–111, 254
  - first and middle, 254
  - fitbox, 72
  - fontsize, 275
  - foovalue, 302
  - forced, 31, 66
  - freelance, 85, 86
  - hbox, 72
  - hybrid, 275
  - ignored, 16
  - invisible, 16
  - last, 109–111, 254
  - listings, 205
  - margin, 241
  - margin apart, 241
  - margin break, 241
  - middle, 109–111, 254
  - middle and last, 109–111, 254
  - minimal, 29
  - minipage, 72
  - minted, 205
  - none, 31, 66, 254
  - normal, 29
  - north, 33, 34
  - northeast, 33, 34
  - northwest, 33, 34
  - off, 276, 309
  - on, 276
  - path, 85, 86
  - pathfirst, 85, 86
  - pathfirstjigsaw, 85
  - pathjigsaw, 85
  - pathlast, 85, 86
  - pathlastjigsaw, 85
  - pathmiddle, 85, 86
  - pathmiddlejigsaw, 85
  - pgf, 309
  - pgfchapter, 309
  - pgfsection, 309
  - plain, 239
  - plain apart, 240
  - small, 29
  - south, 33, 34
  - southeast, 33, 34
  - southwest, 33, 34
  - spartan, 85, 86
  - squeeze, 275
  - standard, 85, 86, 239
  - tight, 29
  - title, 29
  - top, 59
  - true, 249
  - unbroken, 109–111
  - unbroken and first, 109–111
  - unlimited, 248, 249
  - uphill, 33, 34
  - visible, 16
  - west, 33, 34
- values key, 310
- varwidth boxed title key, 108
- varwidth boxed title\* key, 108
- varwidth upper key, 51
- verbatim key, 287
- vfill before first key, 254
- visible value, 16
  
- watermark color key, 114
- watermark graphics key, 110
- watermark graphics app key, 283
- watermark graphics app on key, 283
- watermark graphics on key, 110
- watermark graphics pre key, 283
- watermark graphics pre on key, 283
- watermark opacity key, 112
- watermark overzoom key, 113
- watermark shrink key, 113
- watermark stretch key, 114
- watermark text key, 109
- watermark text app key, 282
- watermark text app on key, 282
- watermark text on key, 109
- watermark text pre key, 282
- watermark text pre on key, 282
- watermark tikz key, 111
- watermark tikz app key, 283
- watermark tikz app on key, 283
- watermark tikz on key, 111



`watermark tikz pre` key, 283  
`watermark tikz pre on` key, 283  
`watermark zoom` key, 112  
`west` value, 33, 34  
`widget` key, 168  
`widget` Skin, 168  
`widgetfirst` Skin, 169  
`widgetlast` Skin, 171  
`widgetmiddle` Skin, 170  
`width` key, 22  
  
`xparse` key, 7  
`xshift` key, 103  
  
`yshift` key, 103  
`yshift*` key, 103  
`yshifttext` key, 103